

		Type: SR674361P
		REV: 1.0
		Date: 2017-12-13

## Specification Approval Sheet

**Customer :**  
**Model : SR674361P**  
**Type : Li-polymer battery**  
**Specification: 3.7V/2000mAh**

<b>signed by client</b>	
<b>Confirmed</b>	
<b>Checked</b>	
<b>Approved</b>	

<b>signed by manufacturer</b>	
<b>Prepared :</b>	<b>He lu</b>
<b>Checked :</b>	
<b>Approved :</b>	<b>Li Jin Yong</b>

		Type: SR674361P
		REV: 1.0
		Date: 2017-12-13

**Content**

- 1. Battery type and scope -----3
- 2. Basic characteristic and components of battery-----3
  - 2.1: Basic performance parameter of battery -----3
  - 2.2: Main components and parts -----4
  - 2.3: Reliable performance test -----4
  - 2.4: Dimension -----7
- 3. Specification of parts -----8
  - 3.1: PCB-----8
    - 3.1.1: General electric characteristic-----8
  - 3.2: Electric schematic diagram -----9
  - 3.3: Specification of battery cell -----10
- 4. Attentions -----11

		Type: SR674361P
		REV: 1.0
		Date: 2017-12-13

## 1. Battery type and scope

This Specification Approval Sheet is for rechargeable Li-polymer battery provided by Cipem's factory.

1.1 model: SR674361P

1.2 scope:

## 2. Basic characteristic and components of the battery

### 2.1 Basic performance parameter

S/N	Details	Parameters		Remarks
1	Rated voltage	3.7V		
2	Rated capacity	2000mAh		discharge with 0.2C to 2.75V after fully charge within 1h, measuring the discharge time
3	Limited charge voltage	4.2V		
4	Internal resistance	≤160mΩ		
5	charge mode	C.C/C.V.		
6	Charge time	6H		Standard charging 0.2C 400mA
7	Max Charge Current	2000mA		
8	Max discharge current	Continuous: 2000mA		
9	Working temperature	charging	0~45℃	
		discharging	-10~60℃	
10	Storage temperature	1 Month	-10~35℃	Charge to 40%~50% of capacity when storage
		6 months	-10~30℃	
11	Storage humidity	≤75%		relative humidity
12	Weight	Approx.45g		
13	ESD ability	Touch discharge ≥ 20000V		
		Air discharge ≥20000V		
14	Cycle life	300 times		capacity ≥80%

**Note:1. If you need the battery protection parameters, please refer to PAGE 8.**

**2.This battery has UN38.3 certificate and it passed the test.**

		Type: SR674361P
		REV: 1.0
		Date: 2017-12-13

## 2.2 Main components and parts

Materials	Model	Quantity	Related technical parameters	Manufacturer
Li-Polymer battery cell	SR674361P	1PCS	Please refer to the battery cell specification	/
Protection board	674361	1PCS		
Wire	JST-XHP-2 UL1007AWG24 Length 50mm	1PCS		

## 2.3 Reliable performance test

S/N	Inspection item	Standard	Testing Method
1	High temperature	No deformation, no rust, no fire or explosion; Discharge time $\geq 100$ mins with 0.5C <sub>5</sub> A discharge	Place the battery in the environment of 55±2°C for 2 hours after fully charge, then discharge with 0.5C <sub>5</sub> A to cut-off voltage.
2	Low temperature	No deformation, no rust, no fire or explosion; Discharge time $\geq 3$ hours with 0.2C <sub>5</sub> A discharge at -20±2°C	After fully charge, place the battery in the environment of -20±2°C for 16-24h, then discharge with 0.2C <sub>5</sub> A to cut-off voltage. Then display the battery in 20±5°C for 2 hours, observe the appearance of the battery.
		No deformation, no rust, no fire or explosion; Discharge time $\geq 3.5$ hours with 0.2C <sub>5</sub> A discharge at -10±2°C	After fully charge, place the battery in the environment of -10±2°C for 16-24h, then discharge with 0.2C <sub>5</sub> A to cut-off voltage. Then display the battery in 20±5°C for 2 hours, observe the appearance of the battery.
3	Capability Retention	Discharge time $\geq 4.25$ h	After fully charged, store the battery at 20±5°C for 28 days, then discharge with 0.2C <sub>5</sub> A to cut-off voltage.

		Type: SR674361P
		REV: 1.0
		Date: 2017-12-13

4	Constant humidity and heat	No deformation, no rust, no smoke or explosion. Discharge time $\geq$ 36 mins	After fully charge, place the battery in the environment of $40\pm 2^{\circ}\text{C}$ and 90% - 95% Relative humidity for 48 hours, then place it in $20\pm 5^{\circ}\text{C}$ for 2 hours, later, discharge with $1\text{C}_5\text{A}$ to cut-off voltage.
5	Vibration	No deformation, no rust, no smoke or explosion. Battery voltage $\geq$ 3.6V	Batteries are vibrated 30 minutes in three mutually perpendicular directions of X, Y, Z with amplitude of 0.38mm (10~55Hz) and the scanning rage of 1oct per minute.
6	Shock	No deformation, no smoke or explosion. Battery voltage $\geq$ 3.6V	Vibration test ended, place the battery in the directions of X.Y.Z three mutually perpendicular axis, and set pulse peak acceleration as $100\text{m}/\text{s}^2$ . Then shock the battery with frequency of 40 ~ 80 per minute. The duration of pulse is 16ms, Shock times: $2000 \pm 10$ .
7	Free Drop	No leakage, no smoke or explosion, but a slight deformation. Discharge time $\geq$ 100mins at $0.5\text{C}_5\text{A}$ discharge	After shock test, the batteries are dropped on the 18-20mm hardwood on the concrete floor from 2000mm height as per positive and negative 6 direction of X, Y, Z. Each direction should drop one time. After test, batteries can be charged and discharged for at least three cycles.
8	Overcharge Protection	No explosion, no fire, no smoke or leakage	After fully charged, continue to charge the battery for 8 hours with C.C/C.V source. The constant voltage source sets to 2 times nominal voltage and constant current sets $2\text{C}_5\text{A}$ .
9	Over-discharge Protection	No explosion, no fire, no smoke or leakage.	At $20\pm 5^{\circ}\text{C}$ , discharge the battery discharge with $0.2\text{C}_5\text{A}$ to cut-off voltage. Then, continuously discharge the battery with a $30\Omega$ load resistance for 24 hours.
10	Short-circuit Protection	No explosion, no fire, no smoke or leakage; Batteries voltage is not less than $N*3.6\text{V}$ after instantaneous charge.	After fully charge, short-circuit positive and negative electrode with $0.1\Omega$ for 1 hour. Cut-off positive and negative electrode, then charge the battery at $0.5\text{C}_5\text{A}$ instantaneously for 5S.


		Type: SR674361P
		REV: 1.0
		Date: 2017-12-13

11	Thermal Shock	No fire, No explosion	Battery is heated in a circulating air oven at a rate of $(5\pm 2)^{\circ}\text{C}$ per minute to $130^{\circ}\text{C}$ , and then placed for 30 minutes at $130^{\circ}\text{C}$ .
12	Overcharge	No fire, No explosion	Place battery connected thermocouple in a ventilated cabinet, connect the positive and negative to CC/CV source, and adjust constant current to $3C_5A$ , and constant voltage to $N*10V$ . Charge the battery to $N*10V$ and current to 0 A. Then monitor the changes of temperature. If the temperature of battery drops to about $10^{\circ}\text{C}$ lower than the max temperature, test is finished.
13	Short circuit	No fire, No explosion. The outside temperature of the battery is less than $130^{\circ}\text{C}$ .	Place battery connected thermocouple in a ventilated cabinet, short-circuit the positive and negative, then monitor the changes of temperature. If the temperature of battery drops to about $10^{\circ}\text{C}$ lower than the max temperature, test is finished.
14	Nail	No fire, No explosion	Put battery in the nail test platform. then, use a diameter 8 mm steel tip to poke through into hole. Finally, use a heavy hammer to blow the battery
15	Cycle life	Cycle life $\geq 300$	At $20\pm 5^{\circ}\text{C}$ , charge battery with $0.5 C_5A$ to 4.2V and then charge it with constant voltage to the current less than 20mA. Stop charge and display for 0.5~1 hour. Then discharge it with $1 C_5A$ to cut-off voltage. Display for 0.5 ~1 hour, do next charge and discharge cycle. Repeat these steps. Stop it until the continuous two cycle discharge time is less than 48 minutes.

		Type: SR674361P
		REV: 1.0
		Date: 2017-12-13

16	Storage	When it is stored for 3 month, fully charge it, then discharge it at 0.2 C <sub>5</sub> A, discharge time is not less than 4 hours.	The storage test of battery should be selected a battery which is less than 3 month from production date to the date of experiment. Before storage, battery capacity should be full charged 40%~50% capacity, the ambient temperature is 20°C±5°C and relative humidity is 45%-85%. After the storage expiration of battery, battery should be charged and discharged according to fully charged and discharged.
----	---------	---	--

## 2.4 Dimension of the Battery

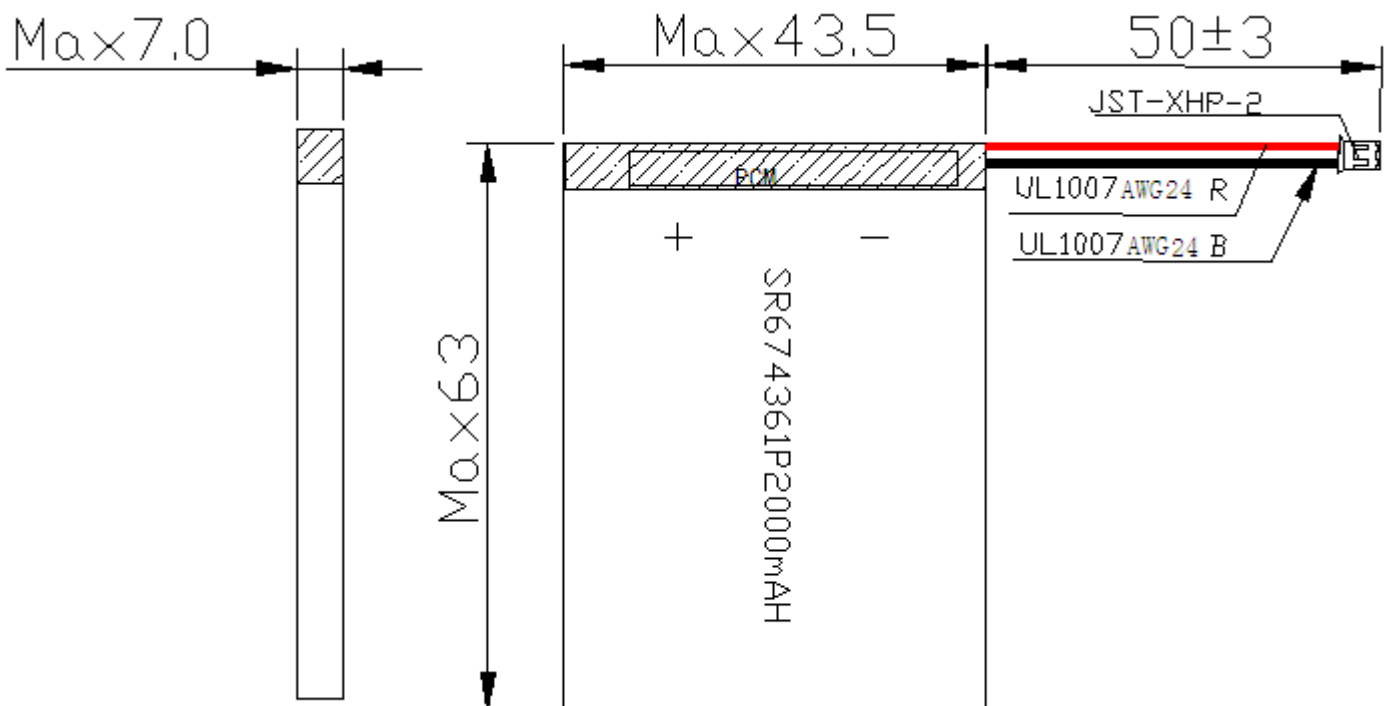

		Type: SR674361P
		REV: 1.0
		Date: 2017-12-13

### 3. Specifications of Parts

#### 3.1: PCB: DW01/BMB101B02, 8205A

##### 3.1. 1: General electric characteristic


##### Model of Protection IC:DW01/BMB101B02

Items	Specification	Remarks
Over-charging Protection Voltage	4.325V±0.1V	
Over-charging Return Voltage	4.1V±0.1V	
Over-discharge Protection Voltage	2.5V±0.1V	
Over-discharge Return Voltage	3.0V±0.1V	
Over-current Protection	2-5A	
Output short-circuit Protection Voltage	-1.2V~ -0.9V	
Detection Delay Time of Over-charging Protection	≤1.5S(Typical)	
Detection Delay Time of Over-discharging Protection	≤144mS(Typical)	
Detection Delay Time of Over-current Protection	≤9mS(Typical)	
Detection Delay Time of Output short-circuit Protection	≤320uS(Typical)	
Internal Resistance of Proper Functioning	≤2000mΩ	
Consume Current	≤6.0uA	
Operating Temperature	-20~70℃	



		Type: SR674361P
		REV: 1.0
		Date: 2017-12-13

### 3.2 Electric schematic diagram of battery

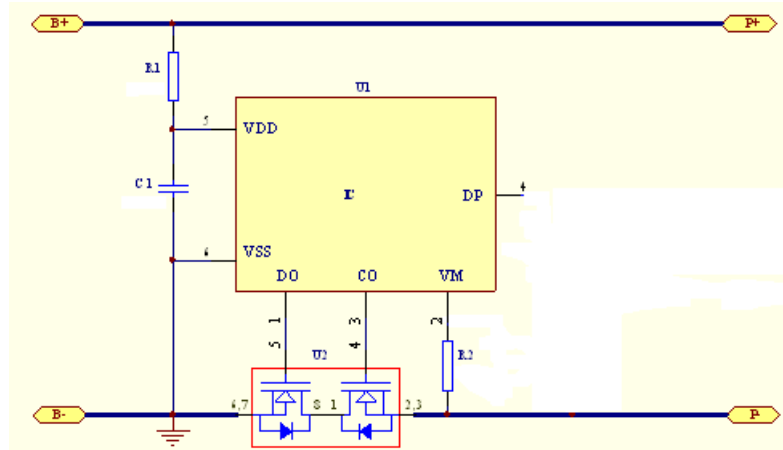

### 3.3 : Components of the Fender Lists

No.	Name of the components	Position	Specification	Precision%	Dosage	Supplier	Remarks
1	PCB		674361	Negative tolerance	1		Latten
2	Internal Resistance	R1	100Ω ±5%/0402	±5	1		470Ω
3	Internal Resistance	R2	1KΩ ±5%/0402	±5	1		2KΩ
4	Capacity	C1	0.1μ F/±10%/16V/0402	±20	1		0.1uF
5	Protect IC	U1	DW01/BMB101B02	/	1		SOT-23-6
6	MOS-FET	U2	8205A	/	1		

		Type: SR674361P
		REV: 1.0
		Date: 2017-12-13

#### 4 Specifications of the Cells

NO.	Items	Parameters	Tolerance	Term	Remark/ condition
1	Appearance	No mechanical damage, leakage , sink ,drum and so on	/	50cm distance under 40W daylight lamp	Visual
2	Dimensions	Length	61.0mm	Max 61.0mm	Digital caliper
		Width	43.0mm	Max 43.0mm	
		Thickness	6.7mm	Max 6.7mm	
3	Voltage	$\geq 3.80V$	/	Multimeter	VC9801
4	Capacity	$\geq 2000mAh$	/	0.2C	
5	Internal resistance	$\leq 80m\Omega$	/	1KHz	/
6	Consistency	Appearance quality is the same			
7	<b>Security</b>	<b>Correspond to related safety performance</b>			

		Type: SR674361P
		REV: 1.0
		Date: 2017-12-13

## Attentions

### Danger

To prevent battery from weeping, fever, exploding ,please obey the rules as follows:

Do not immerse the battery into the water or the sea, Guard against Damp;

Do not approach the heat source, like fire or heater;

Please use the appointed charger when charging;

Do not transposition the +.- poles of the battery to charge;

Do not direct-connected the battery to alternating current power supply, or autoignition of the vehicle;

Do not discard the battery to the fire or hyperpyretic objects;

Do not use the conductor to lead the short circuit of the + -poles of the battery. Do not put the battery with metallic conductors to transport or store, like necklace, hairpin and so on;

Do not beat or throw the battery;

Do not impale the battery with needle or some other sharp things, do not strike it with weight;

As installed safety device in the battery, please do not resolve or change any other sections of the battery to protect the inherent safety functions;

### Warnings

Do not put the battery to the microwave oven or pressure tank;

Do not use the battery with some chemical batteries (like dry battery) or different capacities and brands battery together, if the battery emits the smell, heat , changes color, be out of shape or appears any other abnormal phenomena during the charging or stored procedures, please get out the battery from the device or charger and stop using;

If can not recharge within the charging period, please not continue charging;

Put the battery to where the kids can not touch, if the kids swallow the battery , please seeing the doctor soon;

If the electrolyte of the battery into the eyes, do not rub ,should wash the eyes first ,then see the doctor;

		Type: SR674361P
		REV: 1.0
		Date: 2017-12-13

## **Announcements**

Do not put the battery under the high temperature places (like sunshine irradiation or car in the hot weather), or it will catch fire for the heat , reduce the performance and loss the life;

To insure the safety, the battery should install the safety device, please not use when the static electricity is more than we need when produce, or the safety device will lose efficacy and lead the overheating ,fracture, exploding and catching fire;

Please use the battery in normal as follows, or it will be overheating, caught fire , reduced performance and shorten the life;

Environment condition

(Temperature) Charging: 0~+45<sup>0</sup>C

Discharging: -10~+60<sup>0</sup>C

Store within 30 days: -10~+35<sup>0</sup>C

Store within 90 days : -10~+30<sup>0</sup>C

If the kids use the battery, they should use as the operation instruction manual and guarantee that it must be use in normal at any time;

If the battery weeps, the electrolytes stick on the skin or cloth, use the water to wash or running water to wash  
To insure not install the battery wrong or wastage of the battery, please read the instruction carefully to install and dismounting;

If the battery will not be used for a long time ,please take out of the battery from the device and store in dry and shady places;

If there is sludge on the surface of the battery, please wipe up clean before using, or it will lead bad contact with the device.

## **! Special Notice**

Keep the cells in **50% charged state** during long period storage. We recommend to charge the battery up to 50% of the total capacity every 3 months after receipt of the battery and maintain the voltage 3.7V~4.1V. And store the battery in cool and dry place.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А