


# TM Series Miniature Snap-acting Switches



## Features/Benefits

- Broad range of operating forces available
- Wide variety of actuator and terminal styles
- Cost-effective solution

## Typical Applications

- Pumps and motors
- White goods
- Consumer appliances



## Specifications

CONTACT RATING: From low level\* to 15 AMPS @ 250 V AC.  
ELECTRICAL LIFE: 150,000 cycles at 15 AMPS @ 250 V AC, models with 150 grams operating force. 350,000 cycles at 10 AMPS @ 250 V AC, models with 75 grams operating force.  
INSULATION RESISTANCE: 1,000 M ohms min.  
DIELECTRIC STRENGTH: 1,000 Vrms min. @ sea level.  
OPERATING TEMPERATURE: -67°F to 302°F (-55°C to 150°C).  
OPERATING FORCE: 50, 75 and 150 grams at actuator available; refer to chart for lever style forces.  
MOUNTING: Torque screws 2-5 in/lbs.

\* Low Level=conditions where no arcing occurs during switching, i.e., 0.4 VA max. @ 20 V AC or DC max.

## Materials

SWITCH HOUSING: Thermoplastic or general purpose phenolic (UL 94V-0).  
ACTUATOR BUTTON: Thermoplastic (UL 94V-0).  
SPRING: Copper alloy.  
PIVOT: Brass alloy.  
MOVABLE CONTACTS: Gold alloy for ratings 1 AMP @ 125 V AC or less. Fine silver for ratings greater than 1 AMP @ 125 V AC.  
STATIONARY CONTACTS: Gold alloy for ratings 1 AMP or less. Fine silver for ratings greater than 1 AMP.  
TERMINALS: Brass alloy for ratings up to 10 AMPS @ 250 V AC. Copper alloy for 15 AMPS @ 250 V AC ratings.

**NOTE:** Specifications and materials listed above are for switches with standard options. For information on specific and custom switches, consult Customer Service Center.

## Build-A-Switch

To order, simply select desired option from each category and place in the appropriate box. Available options are shown and described on pages J-12 through J-16. For additional options not shown in catalog, consult Customer Service Center.  
Available extended electrical life per UL 1054, rated for 100,000 operations, consult factory.

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                  |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|
| <div><div>T</div><div>M</div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                                                  |
| <b>Series</b><br>TM SP, Mom.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                                  |
| <b>Operating Force</b><br>CG 2.65 oz./75 grams<br>CJ 5.29 oz./150 grams<br>CF 1.76 oz./50 grams                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                  |
| <b>Electrical Rating</b><br>D6 10 A @ 125 & 250 V AC; 1/3 HP @ 125 & 250 V AC; 1/2 A @ 125 V DC; 1/4 A @ 250 V DC<br>G6 15 A @ 125 & 250 V AC; 1/4 A @ 250 V DC; 1/2 A @ 125 V DC; 1/2 HP @ 125 & 250 V AC; 3 A @ 125 V AC "L"<br>F5 1 A @ 125 V AC; 1 A @ 30 V DC<br>H3 5 A @ 250 V AC; 1/6 HP @ 125 & 250 V AC                                                                                                                                                                                                                                                                                                                                                              | <b>Mounting Style</b><br>S Standard<br>V Metric                                                  |
| <b>Actuator</b><br>P00 Pin plunger<br>A10 .81" lever roller, high force<br>A15 1.34" lever roller, high force<br>A20 1.02" lever roller, low force<br>A25 1.56" lever roller, low force<br>T10 .84" lever, high force<br>T13 1.34" simulated roller, high force<br>T14 1.29" simulated roller, high force<br>T15 1.40" lever, high force<br>T16 2.34" lever, high force<br>T17 2.00" lever, high force<br>T18 2.75" lever, high force<br>T20 1.06" lever, low force<br>T23 1.56" simulated roller, low force<br>T24 1.50" simulated roller, low force<br>T25 1.62" lever, low force<br>T26 2.56" lever, low force<br>T27 2.22" lever, low force<br>T28 2.97" lever, low force | <b>Terminations</b><br>40 .187" quick connect<br>10 Solder<br>4A .250" quick connect<br>60 Screw |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | <b>Circuitry</b><br>C SPDT<br>W SPST N.C.<br>Y SPST N.O.                                         |

\* All models




Dimensions are shown: Inches (mm)  
Specifications and dimensions subject to change

www.ck-components.com

## TM Series Miniature Snap-acting Switches

**SERIES** 

**TM** MINIATURE SNAP-ACTING SWITCHES – SP MOMENTARY

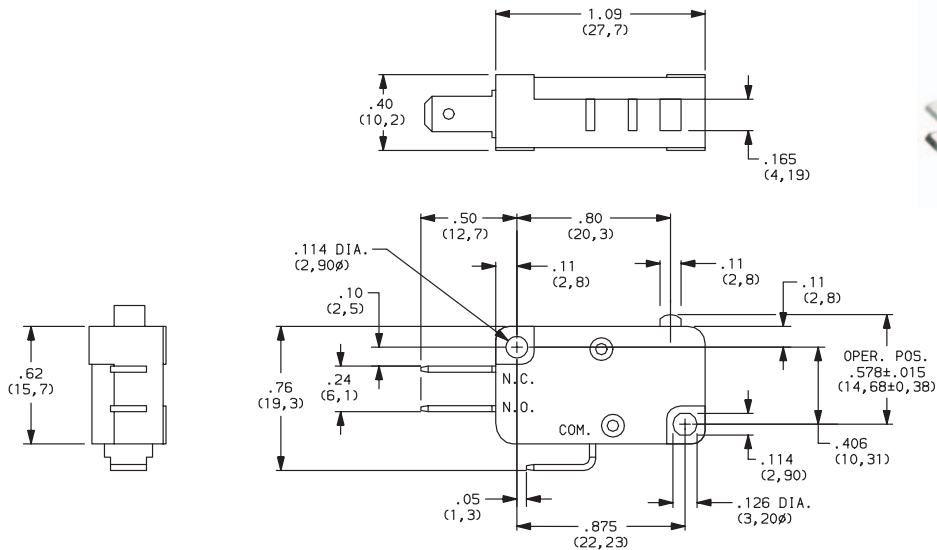

**OPERATING FORCE** 

| OPTION CODE | BASIC SWITCH<br>OPERATING FORCE<br>(OZ./GRAMS) |
|-------------|------------------------------------------------|
| <b>CG</b>   | 2.65<br>75                                     |
| <b>CJ</b>   | 5.29<br>150                                    |
| <b>CF</b>   | 1.76<br>50                                     |

Operating Force option 'CF' not available with 'T18, T27 and T28' actuator options. Operating force varies with actuator option, see ACTUATOR option section.

**ELECTRICAL RATING**

| OPTION CODE | RoHS COMPLIANT* | RoHS COMPATIBLE* | CONTACT MATERIAL |                    | ELECTRICAL RATING                                                                                                  |
|-------------|-----------------|------------------|------------------|--------------------|--------------------------------------------------------------------------------------------------------------------|
|             |                 |                  | MOVABLE CONTACT  | STATIONARY CONTACT |                                                                                                                    |
| D6          | Yes             | Yes              | Fine Silver      | Fine Silver        | 10 AMPS @ 125 & 250 V AC; 1/3 HP @ 125 & 250 V AC; 1/2 AMP @ 125 V DC; 1/4 AMP @ 250 V DC.                         |
| F5          | Yes             | Yes              | Gold alloy       | Gold alloy         | From low level* to 1 AMP @ 125 V AC, 1 AMP @ 30 V DC.                                                              |
| G6          | Yes             | Yes              | Fine Silver      | Fine Silver        | 15 AMPS @ 125 & 250 V AC; 0.25 AMP @ 250 V DC; 0.5 AMP @ 125 V DC; 1/2 HP @ 125 & 250 V AC; 3 AMPS @ 125 V AC "L". |
| H3          | Yes             | Yes              |                  |                    | 5 AMPS @ 250 V AC; 1/6 HP @ 125 & 250 V AC.                                                                        |

\* Note: See Technical Data section of this catalog for RoHS compliant and compatible definitions and specifications.

\* All models 

Contact Customer Service Center for availability and delivery of nonstandard ratings.

\* Low Level=conditions where no arcing occurs during switching, i.e., 0.4 VA max. @ 20 V AC or DC max.



*Dimensions are shown: Inch (mm)*

Specifications and dimensions subject to change

# TM Series Miniature Snap-acting Switches

## ELECTRICAL RATING

### AVAILABLE COMBINATIONS

| ELECTRICAL RATING | MAXIMUM OPERATING FORCE (OZ./GRAMS) |            |             |
|-------------------|-------------------------------------|------------|-------------|
|                   | 1.76/50 CF                          | 2.65/75 CG | 5.29/150 CJ |
| D6                | •                                   | •          | •           |
| F5                | •                                   | •          | •           |
| G6                | X                                   | X          | •           |
| H3                | •                                   | •          | •           |

• AVAILABLE  
X NOT AVAILABLE

\* All models 


Contact Customer Service Center for availability and delivery of nonstandard ratings.

\* Low Level=conditions where no arcing occurs during switching, i.e., 0.4 VA max. @ 20 V AC or DC max.


## MOUNTING STYLE

**S** Standard

**V** Metric

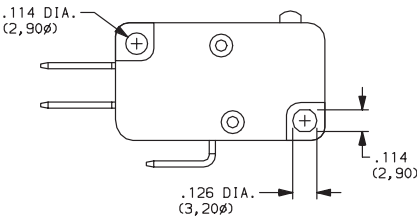

Recommended maximum screw size: 4-40.

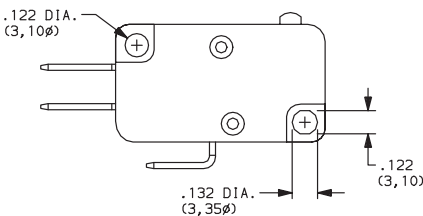

Recommended maximum screw size: 3 mm.

**NOTE:** Torque mounting screws 2-5 in/lbs.



Dimensions are shown: Inches (mm)  
Specifications and dimensions subject to change

# TM Series

## Miniature Snap-acting Switches

ACTUATOR 

| OPTION CODE | FIG. | DIM. A         | DIM. B        | DIM. C                        | DIM. D              |
|-------------|------|----------------|---------------|-------------------------------|---------------------|
| P00         | 2    | .80<br>(20,3)  | —             | .578 ± .015<br>(14,68 ± 0,38) | —                   |
| A10         | 1    | .81<br>(20,6)  | .36<br>(9,1)  | .810 ± .020<br>(20,57 ± 0,51) | .19 dia.<br>(4,80)  |
| A15         | 1    | 1.34<br>(34,0) | .36<br>(9,1)  | .810 ± .040<br>(20,57 ± 1,02) | .19 dia.<br>(4,80)  |
| A20         | 1    | 1.03<br>(26,2) | .58<br>(14,7) | .810 ± .050<br>(20,57 ± 1,27) | .19 dia.<br>(4,80)  |
| A25         | 1    | 1.56<br>(39,6) | .58<br>(14,7) | .810 ± .080<br>(20,57 ± 2,03) | .19 dia.<br>(4,80)  |
| T10         | 3    | .84<br>(21,3)  | .36<br>(9,1)  | .600 ± .020<br>(15,24 ± 0,51) | —                   |
| T13         | 4    | 1.34<br>(34,0) | .36<br>(9,1)  | .810 ± .040<br>(20,57 ± 1,02) | .19 dia.<br>(4,80)  |
| T14         | 4    | 1.28<br>(32,5) | .36<br>(9,1)  | .743 ± .050<br>(18,9 ± 1,3)   | .236 dia.<br>(6,00) |
| T15         | 3    | 1.40<br>(35,6) | .36<br>(9,1)  | .600 ± .040<br>(15,24 ± 1,02) | —                   |
| T16         | 3    | 2.34<br>(59,4) | .36<br>(9,1)  | .600 ± .062<br>(15,24 ± 1,57) | —                   |
| T17         | 3    | 2.00<br>(50,8) | .36<br>(9,1)  | .600 ± .052<br>(15,24 ± 1,33) | —                   |
| T18         | 3    | 2.75<br>(69,9) | .36<br>(9,1)  | .600 ± .093<br>(15,24 ± 2,36) | —                   |
| T20         | 3    | 1.06<br>(26,9) | .58<br>(14,7) | .600 ± .045<br>(15,24 ± 1,14) | —                   |
| T23         | 4    | 1.56<br>(39,6) | .58<br>(14,7) | .810 ± .065<br>(20,57 ± 1,65) | .19 dia.<br>(4,80)  |
| T24         | 4    | 1.50<br>(38,1) | .58<br>(14,7) | .743 ± .090<br>(18,80 ± 2,29) | .236 dia.<br>(6,00) |
| T25         | 3    | 1.62<br>(41,1) | .58<br>(14,7) | .600 ± .080<br>(15,24 ± 2,03) | —                   |
| T26         | 3    | 2.56<br>(65,0) | .56<br>(14,7) | .600 ± .125<br>(15,24 ± 3,18) | —                   |
| T27         | 3    | 2.22<br>(56,4) | .58<br>(14,7) | .600 ± .125<br>(15,24 ± 3,18) | —                   |
| T28         | 3    | 2.97<br>(75,4) | .58<br>(14,7) | .600 ± .187<br>(15,24 ± 4,75) | —                   |




FIG. 1  
Lever Roller

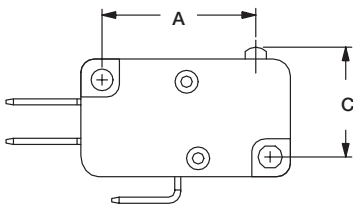


FIG. 2  
Pin Roller




FIG. 3  
Lever


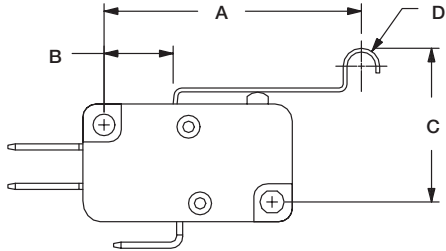



FIG. 4  
Simulated Roller

### HIGH FORCE, LOW MOTION PIVOT POSITION

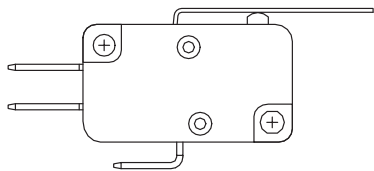


Available with actuators A10, A15, T10, T13, T14, T15, T16, T17 and T18.

### LOW FORCE, HIGH MOTION PIVOT POSITION

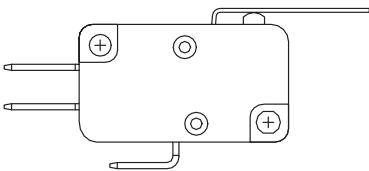

Available with actuators A20, A25, T20, T23, T24, T25, T26, T27 and T28.

**NOTE:** Lever actuator options are available in either of two pivot positions. Levers located in the forward pivot position have lower forces and higher motions. Levers located in the rear pivot position have higher forces and lower motions.



Dimensions are shown: Inch (mm)  
Specifications and dimensions subject to change

# TM Series Miniature Snap-acting Switches

ACTUATOR 


## SWITCH CHARACTERISTICS

| OPTION<br>CODE | MAXIMUM OPERATING FORCE<br>(OZ./GRAMS) |            |             | MINIMUM RELEASE<br>FORCE (OZ./GRAMS) |            |             | MINIMUM RETURN FORCE<br>(OZ./GRAMS) |            |             | MAXIMUM<br>DIFFERENTIAL<br>TRAVEL | MAXIMUM<br>PRETRAVEL | MINIMUM<br>OVERTRAVEL |
|----------------|----------------------------------------|------------|-------------|--------------------------------------|------------|-------------|-------------------------------------|------------|-------------|-----------------------------------|----------------------|-----------------------|
|                | CF<br>(50)                             | CG<br>(75) | CJ<br>(150) | CF<br>(50)                           | CG<br>(75) | CJ<br>(150) | CF<br>(50)                          | CG<br>(75) | CJ<br>(150) | ALL FORCES                        | ALL FORCES           | ALL FORCES            |
| T10            | 2.12<br>60                             | 3.17<br>90 | 6.35<br>180 | .49<br>14                            | .99<br>28  | 1.69<br>48  | .25<br>7                            | .53<br>15  | 1.06<br>30  | .013<br>(0,33)                    | .080<br>(2,03)       | .035<br>(0,89)        |
| T13            | 1.06<br>30                             | 1.59<br>45 | 2.82<br>80  | .21<br>6                             | .35<br>10  | .71<br>20   | .11<br>3                            | .14<br>4   | .35<br>10   | .030<br>(0,76)                    | .160<br>(4,06)       | .065<br>(1,65)        |
| T13            | 1.06<br>30                             | 1.76<br>50 | 3.17<br>90  | .25<br>7                             | .35<br>10  | .71<br>20   | .11<br>3                            | .14<br>4   | .35<br>10   | .050<br>(1,27)                    | .140<br>(3,56)       | .062<br>(1,57)        |
| T15            | 1.06<br>30                             | 1.59<br>45 | 2.28<br>80  | .21<br>6                             | .32<br>9   | .71<br>20   | .11<br>3                            | .14<br>4   | .35<br>10   | .032<br>(0,81)                    | .160<br>(4,06)       | .075<br>(1,90)        |
| T16            | .53<br>15                              | .71<br>20  | 1.41<br>40  | .11<br>3                             | .18<br>5   | .35<br>10   | .05<br>1.5                          | .07<br>2   | .18<br>5    | .090<br>(2,29)                    | .312<br>(7,92)       | .140<br>(3,56)        |
| T17            | .71<br>20                              | .88<br>25  | 1.76<br>50  | .14<br>4                             | .21<br>6   | .42<br>12   | .07<br>2                            | .07<br>2   | .21<br>6    | .062<br>(1,57)                    | .220<br>(5,59)       | .110<br>(2,79)        |
| T18            | N/A                                    | .71<br>20  | 1.23<br>35  | N/A                                  | .14<br>4   | .28<br>8    | N/A                                 | .04<br>1   | .14<br>4    | .078<br>(1,98)                    | .375<br>(9,52)       | .160<br>(4,06)        |
| T20            | 1.06<br>30                             | 1.59<br>45 | 3.17<br>90  | .21<br>6                             | .32<br>9   | .71<br>20   | .11<br>3                            | .18<br>5   | .35<br>10   | .030<br>(0,76)                    | .160<br>(4,06)       | .065<br>(1,65)        |
| T23            | .53<br>15                              | 1.06<br>30 | 1.59<br>45  | .11<br>3                             | .18<br>5   | .35<br>10   | .04<br>1                            | .07<br>2   | .18<br>5    | .070<br>(1,78)                    | .312<br>(7,92)       | .125<br>(3,18)        |
| T24            | .53<br>15                              | 1.23<br>35 | 1.76<br>50  | .11<br>3                             | .18<br>5   | .35<br>10   | .05<br>1.5                          | .07<br>2   | .18<br>5    | .080<br>(2,03)                    | .312<br>(7,92)       | .110<br>(2,79)        |
| T25            | .71<br>20                              | 1.06<br>30 | 1.41<br>40  | .07<br>2                             | .14<br>4   | .32<br>9    | .04<br>1                            | .07<br>2   | .16<br>4.5  | .070<br>(1,78)                    | .330<br>(8,38)       | .100<br>(2,54)        |
| T26            | N/A                                    | .35<br>10  | .71<br>20   | N/A                                  | .07<br>2   | .18<br>5    | N/A                                 | .04<br>1   | .07<br>2    | .110<br>(2,79)                    | .500<br>(12,7)       | .250<br>(6,35)        |
| T27            | N/A                                    | .60<br>17  | .88<br>25   | N/A                                  | .11<br>3   | .21<br>6    | N/A                                 | .04<br>1   | .11<br>3    | .125<br>(3,18)                    | .500<br>(12,70)      | .200<br>(5,08)        |
| T28            | N/A                                    | .42<br>12  | .63<br>18   | N/A                                  | .07<br>2   | .14<br>4    | N/A                                 | .04<br>1   | .07<br>2    | .187<br>(4,75)                    | .750<br>(19,05)      | .280<br>(7,11)        |
| A10            | 2.12<br>60                             | 3.17<br>90 | 6.35<br>180 | .49<br>14                            | .99<br>28  | 1.69<br>48  | .25<br>7                            | .53<br>15  | 1.06<br>30  | .013<br>(0,33)                    | .070<br>(1,78)       | .035<br>(0,89)        |
| A15            | 1.06<br>30                             | 1.59<br>45 | 2.82<br>80  | .21<br>6                             | .35<br>10  | .71<br>20   | .11<br>3                            | .14<br>4   | .35<br>10   | .030<br>(0,76)                    | .160<br>(4,06)       | .065<br>(1,65)        |
| A20            | 1.06<br>30                             | 1.76<br>50 | 3.17<br>90  | .25<br>7                             | .35<br>10  | .71<br>20   | .11<br>3                            | .18<br>5   | .35<br>10   | .025<br>(0,64)                    | .140<br>(3,56)       | .060<br>(1,52)        |
| A25            | .53<br>15                              | 1.06<br>30 | 1.59<br>45  | .11<br>3                             | .18<br>5   | .35<br>10   | .04<br>1                            | .07<br>2   | .18<br>5    | .070<br>(1,78)                    | .312<br>(7,92)       | .125<br>(3,18)        |
| P00            | 1.76<br>50                             | 2.65<br>75 | 5.29<br>150 | .71<br>20                            | .99<br>28  | 2.12<br>60  | .35<br>10                           | .53<br>15  | 1.06<br>30  | .013<br>(0,33)                    | .056<br>(1,42)       | .035<br>(0,89)        |

**NOTE:** For basic switch operating forces, see page J-12.



Snap-acting




Third Angle  
Projection

Dimensions are shown: Inches (mm)  
Specifications and dimensions subject to change


# TM Series Miniature Snap-acting Switches

## TERMINATIONS

**40** .187" QUICK CONNECT

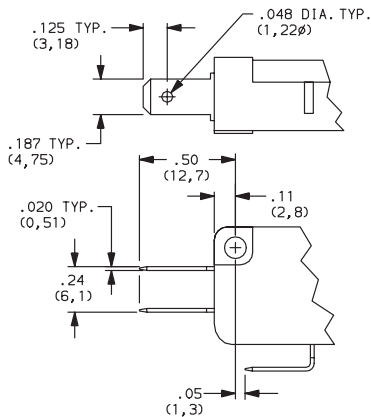


**60** SCREW TERMINALS

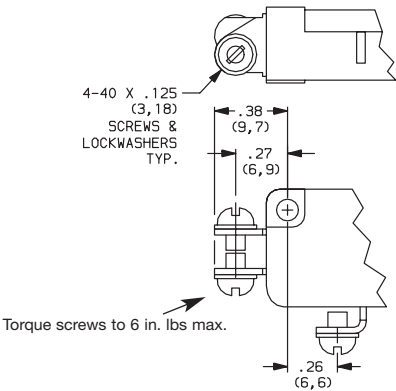


Not available with 'F5' rating option.

**10** SOLDER

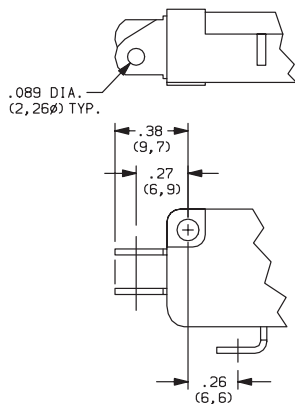

Not available with 'F5' rating option.


**4A** .250" QUICK CONNECT

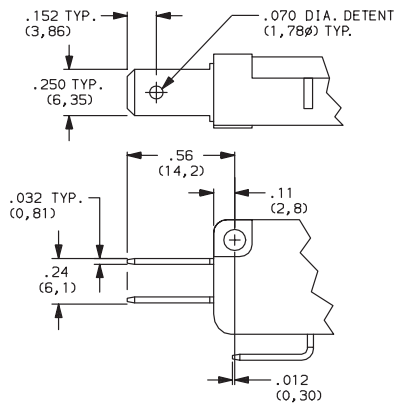

Not available with 'F5' rating option.

## CIRCUITRY

- C** SPDT (Single Pole, Double Throw)
- W** SPST N.C. (Single Pole, Single Throw, Normally Closed)
- Y** SPST N.O. (Single Pole, Single Throw, Normally Open)



Dimensions are shown: Inch (mm)  
Specifications and dimensions subject to change

[www.ck-components.com](http://www.ck-components.com)

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А