



### SJxx25xx Series

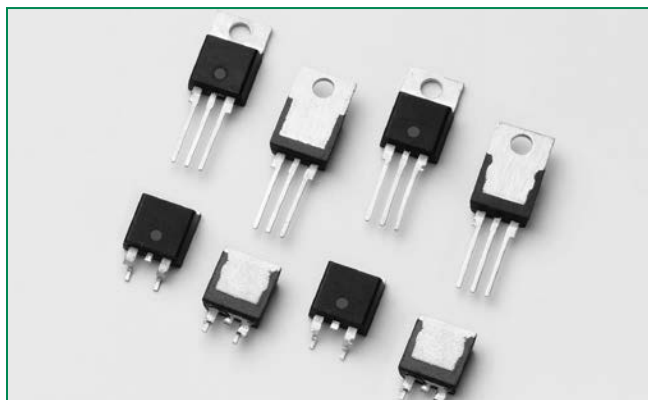

#### Schematic Symbol

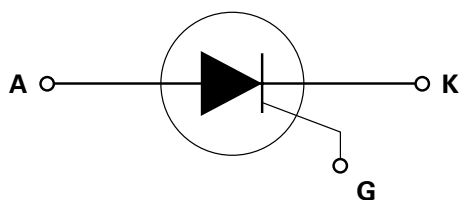

#### Description

This SJxx25xx high temperature SCR series is ideal for uni-directional switch applications such as phase control in heating, motor speed controls, converters/rectifiers and inrush current controllers. These SCRs have a low gate current trigger level of 6mA, 10mA or 35mA maximum at approximately 1.5V

#### Features & Benefits

- Halogen free and RoHS compliant
- Surge capability up to 350 A at 60 Hz half cycle
- 150°C maximum junction temperature

#### Applications

Typical applications include AC Generator (ACG) rectifiers, battery voltage regulators, generic converters, inrush current controller in various AC to DC applications and soft starter for low power AC motor. Additional applications include controls for power tools, home/brown good and white goods appliances.

Isolated packages offered for ease of heat sinking.

#### Agency Approval

| Agency                                                                              | Agency File Number |
|-------------------------------------------------------------------------------------|--------------------|
|  | L Packages: E71639 |

#### Main Features

| Symbol            | Value        | Unit |
|-------------------|--------------|------|
| $I_{T(RMS)}$      | 25           | A    |
| $V_{DRM}/V_{RRM}$ | 400 or 600   | V    |
| $I_{GT}$          | 6, 10, to 35 | mA   |

#### Absolute Maximum Ratings

| Symbol            | Parameter                                 | Test Conditions                                                                                                                        | Value                   | Unit             |
|-------------------|-------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|-------------------------|------------------|
| $V_{DRM}/V_{RSM}$ | Peak non-repetitive blocking voltage      | $P_w = 100 \mu s$                                                                                                                      | $V_{DRM}/V_{RRM} + 100$ | V                |
| $I_{T(RMS)}$      | RMS on-state current                      | SJxx25Lx<br>$T_c = 100^\circ C$<br>SJxx25Rx<br>$T_c = 125^\circ C$<br>SJxx25Nx                                                         | 25                      | A                |
| $I_{T(AV)}$       | Average on-state current                  | SJxx25Lx<br>$T_c = 100^\circ C$<br>SJxx25Rx<br>$T_c = 125^\circ C$<br>SJxx25Nx                                                         | 16                      | A                |
| $I_{TSM}$         | Peak non-repetitive surge current         | single half cycle; $f = 50Hz$ ;<br>$T_j$ (initial) = $25^\circ C$<br>single half cycle; $f = 60Hz$ ;<br>$T_j$ (initial) = $25^\circ C$ | 300<br>350              | A                |
| $I^2t$            | $I^2t$ Value for fusing                   | $t_p = 8.3 ms$                                                                                                                         | 510                     | A <sup>2</sup> s |
| $di/dt$           | Critical rate of rise of on-state current | $f = 60Hz$ ; $T_j = 150^\circ C$                                                                                                       | 125                     | A/ $\mu s$       |
| $I_{GM}$          | Peak gate current                         | $T_j = 150^\circ C$                                                                                                                    | 3                       | A                |
| $P_{G(AV)}$       | Average gate power dissipation            | $T_j = 150^\circ C$                                                                                                                    | 0.6                     | W                |
| $T_{stg}$         | Storage temperature range                 |                                                                                                                                        | -40 to 150              | $^\circ C$       |
| $T_j$             | Operating junction temperature range      |                                                                                                                                        | -40 to 150              | $^\circ C$       |

Note: xx=voltage/10, x=sensitivity

SJxx25xx Series



### Electrical Characteristics ( $T_J = 25^\circ\text{C}$ , unless otherwise specified)

| Symbol   | Test Conditions                                                                                                |      | Value   |          |          | Unit             |
|----------|----------------------------------------------------------------------------------------------------------------|------|---------|----------|----------|------------------|
|          |                                                                                                                |      | SJxx25x | SJxx25x1 | SJxx25x2 |                  |
| $I_{GT}$ | $V_D = 12\text{V}$ $R_L = 60\ \Omega$                                                                          | MAX. | 35      | 6        | 10       | mA               |
|          |                                                                                                                | MIN. | 8       | 2        | 5        |                  |
| $V_{GT}$ | $V_D = 12\text{V}$ $R_L = 60\ \Omega$                                                                          | MAX. | 1.5     |          |          | V                |
| $dv/dt$  | $V_D = 67\% V_{DRM}$ ; gate open; $T_J = 125^\circ\text{C}$                                                    | MIN. | 800     | 70       | 500      | V/ $\mu\text{s}$ |
|          | $V_D = 67\% V_{DRM}$ ; gate open; $T_J = 150^\circ\text{C}$                                                    |      | 400     | -        | 200      |                  |
| $V_{GD}$ | $V_D = V_{DRM}$ $R_L = 3.3\ \text{k}\Omega$ $T_J = 125^\circ\text{C}$                                          | MIN. | 0.2     |          |          | V                |
| $I_H$    | $I_T = 400\text{mA}$ (initial)                                                                                 | MAX. | 75      | 15       | 35       | mA               |
| $t_q$    | $I_T = 2\text{A}$ ; $t_p = 50\mu\text{s}$ ; $dv/dt = 5\text{V}/\mu\text{s}$ ; $di/dt = 30\text{A}/\mu\text{s}$ | MAX. | 40      |          |          | $\mu\text{s}$    |
| $t_{gt}$ | $I_G = 2 \times I_{GT}$ $PW = 15\mu\text{s}$ $I_T = 50\text{A}$                                                | TYP. | 2       |          |          | $\mu\text{s}$    |

Note: xx=voltage/10, x=package

### Static Characteristics


| Symbol                              | Test Conditions                                         |                        |      | Value | Unit |   |
|-------------------------------------|---------------------------------------------------------|------------------------|------|-------|------|---|
| V <sub>TM</sub>                     | Component I <sub>T</sub> = 50A; t <sub>p</sub> = 380 μs |                        |      | MAX.  | 1.6  | V |
| I <sub>DRM</sub> / I <sub>RRM</sub> | V <sub>DRM</sub> = V <sub>RRM</sub>                     | T <sub>J</sub> = 25°C  | MAX. | 10    | μA   |   |
|                                     |                                                         | T <sub>J</sub> = 125°C |      | 1000  |      |   |
|                                     |                                                         | T <sub>J</sub> = 150°C |      | 3000  |      |   |

### Thermal Resistances


| Symbol           | Parameter             |          | Value | Unit                      |
|------------------|-----------------------|----------|-------|---------------------------|
| $R_{\theta(JC)}$ | Junction to case (AC) | SJxx25Rx | 1.0   | $^\circ\text{C}/\text{W}$ |
|                  |                       | SJxx25Nx |       |                           |
|                  |                       | SJxx25Lx | 2.3   |                           |

Note: xx=voltage/10, x=sensitivity

**Figure 1: Normalized DC Gate Trigger Current vs. Junction Temperature**

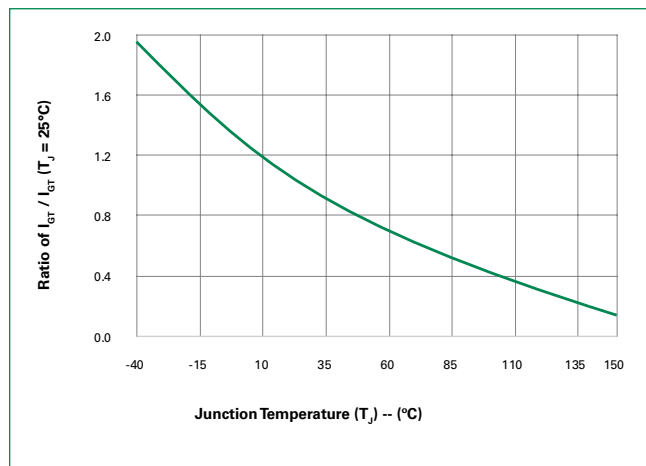

**Figure 2: Normalized DC Gate Trigger Voltage vs. Junction Temperature**

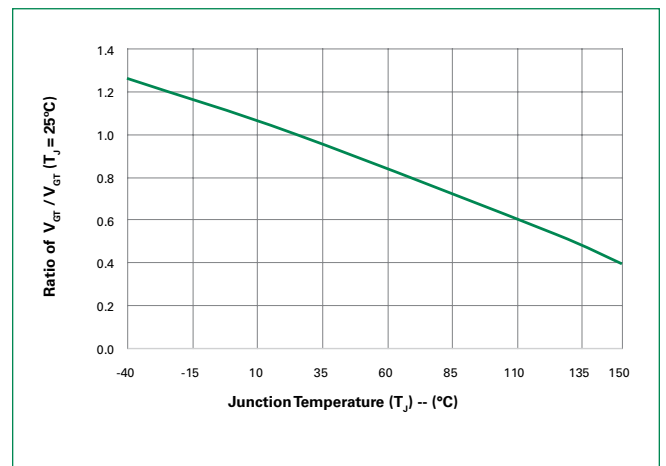




**Figure 3: Normalized DC Holding Current vs. Junction Temperature**




**Figure 4: On-State Current vs. On-State Voltage (Typical)**

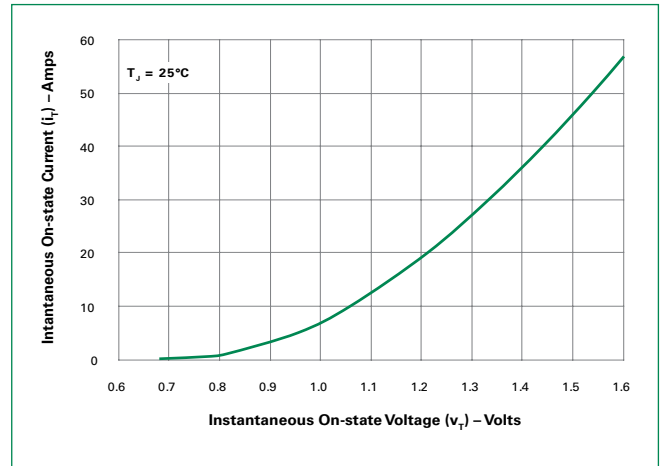

**Figure 5: Power Dissipation (Typical) vs. RMS On-State Current**




**Figure 6: Maximum Allowable Case Temperature vs. RMS On-State Current**

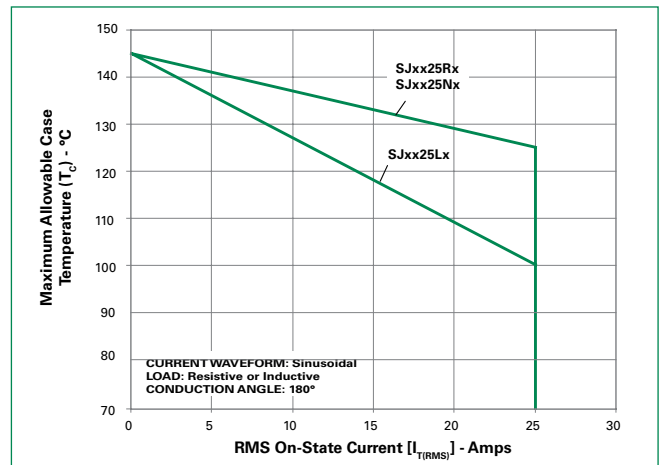

**Figure 7: Maximum Allowable Case Temperature vs. Average On-State Current**




**Figure 8: Peak Capacitor Discharge Current**

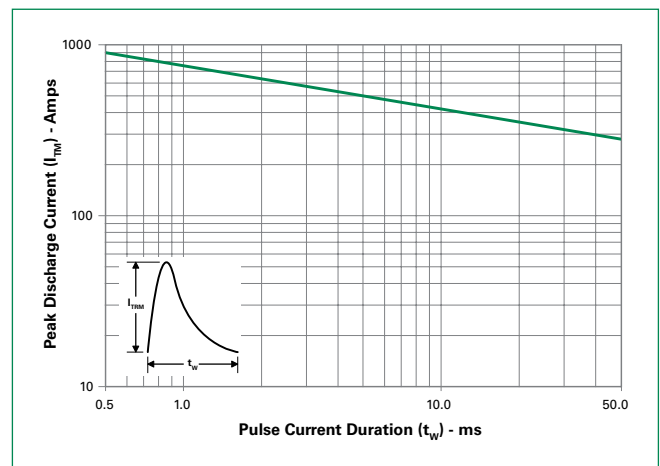



**Figure 9: Peak Capacitor Discharge Current Derating**

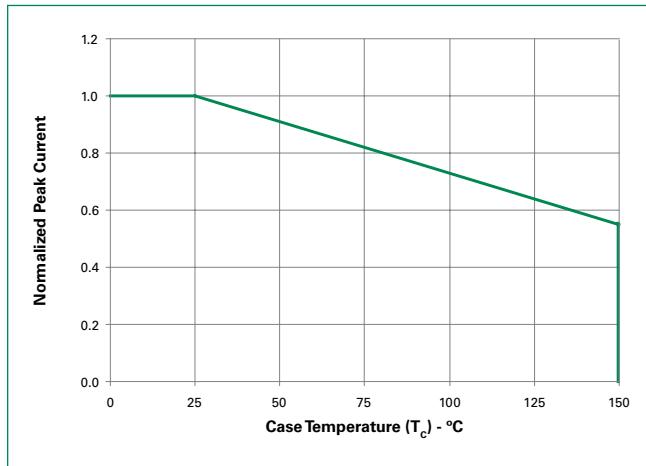


**Figure 10: Surge Peak On-State Current vs. Number of Cycles**



### Soldering Parameters

|                                                        |                                    |                         |
|--------------------------------------------------------|------------------------------------|-------------------------|
| Reflow Condition                                       |                                    | Pb – Free assembly      |
| Pre Heat                                               | - Temperature Min ( $T_{s(min)}$ ) | 150°C                   |
|                                                        | - Temperature Max ( $T_{s(max)}$ ) | 200°C                   |
|                                                        | - Time (min to max) ( $t_s$ )      | 60 – 180 secs           |
| Average ramp up rate (Liquidus Temp) ( $T_L$ ) to peak |                                    | 5°C/second max          |
| $T_{s(max)}$ to $T_L$ - Ramp-up Rate                   |                                    | 5°C/second max          |
| Reflow                                                 | - Temperature ( $T_L$ ) (Liquidus) | 217°C                   |
|                                                        | - Time ( $t_L$ )                   | 60 – 150 seconds        |
| Peak Temperature ( $T_P$ )                             |                                    | 260 <sup>+0/-5</sup> °C |
| Time within 5°C of actual peak Temperature ( $t_p$ )   |                                    | 20 – 40 seconds         |
| Ramp-down Rate                                         |                                    | 5°C/second max          |
| Time 25°C to peak Temperature ( $T_P$ )                |                                    | 8 minutes Max.          |
| Do not exceed                                          |                                    | 280°C                   |

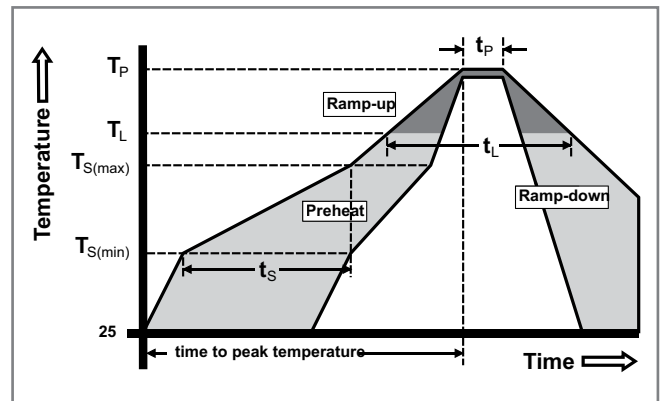

### Physical Specifications

|                        |                                                         |
|------------------------|---------------------------------------------------------|
| <b>Terminal Finish</b> | 100% Matte Tin-plated                                   |
| <b>Body Material</b>   | UL Recognized compound meeting flammability rating V-0. |
| <b>Lead Material</b>   | Copper Alloy                                            |


### Design Considerations

Careful selection of the correct component for the application's operating parameters and environment will go a long way toward extending the operating life of the Thyristor. Good design practice should limit the maximum continuous current through the main terminals to 75% of the component rating. Other ways to ensure long life for a power discrete semiconductor are proper heat sinking and selection of voltage ratings for worst case conditions. Overheating, overvoltage (including dv/dt), and surge currents are the main killers of semiconductors. Correct mounting, soldering, and forming of the leads also help protect against component damage.

### Environmental Specifications

| Test                              | Specifications and Conditions                                              |
|-----------------------------------|----------------------------------------------------------------------------|
| <b>AC Blocking</b>                | MIL-STD-750, M-1040, Cond A Applied Peak AC voltage @ 150°C for 1008 hours |
| <b>Temperature Cycling</b>        | MIL-STD-750, M-1051, 100 cycles; -55°C to +150°C; 15-min dwell-time        |
| <b>Temperature/Humidity</b>       | EIA / JEDEC, JESD22-A101 1008 hours; 160V - DC: 85°C; 85% rel humidity     |
| <b>High Temp Storage</b>          | MIL-STD-750, M-1031, 1008 hours; 150°C                                     |
| <b>Low-Temp Storage</b>           | 1008 hours; -40°C                                                          |
| <b>Resistance to Solder Heat</b>  | MIL-STD-750 Method 2031                                                    |
| <b>Solderability</b>              | ANSI/J-STD-002, category 3, Test A                                         |
| <b>Lead Bend</b>                  | MIL-STD-750, M-2036 Cond E                                                 |
| <b>Moisture Sensitivity Level</b> | Level 1, JEDEC-J-STD-020D                                                  |


### Dimensions — TO-220AB (R-Package) — Non-Isolated Mounting Tab Common with Center Lead

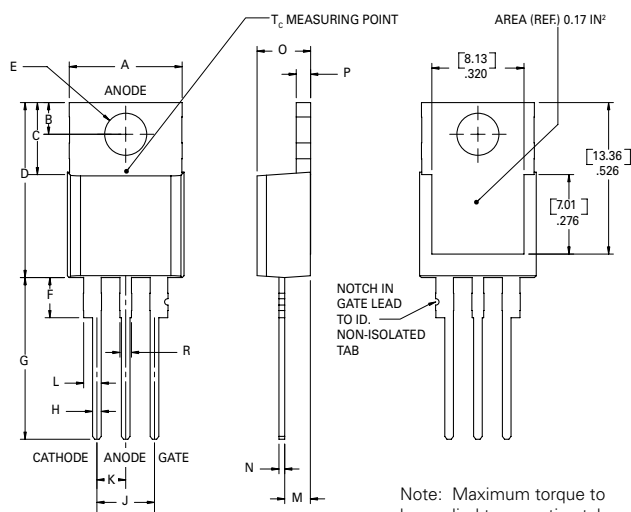

Note: Maximum torque to be applied to mounting tab is 8 in-lbs. (0.904 Nm).

| Dimension | Inches |       | Millimeters |       |
|-----------|--------|-------|-------------|-------|
|           | Min    | Max   | Min         | Max   |
| A         | 0.380  | 0.420 | 9.65        | 10.67 |
| B         | 0.105  | 0.115 | 2.67        | 2.92  |
| C         | 0.230  | 0.250 | 5.84        | 6.35  |
| D         | 0.590  | 0.620 | 14.99       | 15.75 |
| E         | 0.142  | 0.147 | 3.61        | 3.73  |
| F         | 0.110  | 0.130 | 2.79        | 3.30  |
| G         | 0.540  | 0.575 | 13.72       | 14.61 |
| H         | 0.025  | 0.035 | 0.64        | 0.89  |
| J         | 0.195  | 0.205 | 4.95        | 5.21  |
| K         | 0.095  | 0.105 | 2.41        | 2.67  |
| L         | 0.060  | 0.075 | 1.52        | 1.91  |
| M         | 0.085  | 0.095 | 2.16        | 2.41  |
| N         | 0.018  | 0.024 | 0.46        | 0.61  |
| O         | 0.178  | 0.188 | 4.52        | 4.78  |
| P         | 0.045  | 0.060 | 1.14        | 1.52  |
| R         | 0.038  | 0.048 | 0.97        | 1.22  |


### Dimensions — TO-220AB (L-Package) — Isolated Mounting Tab

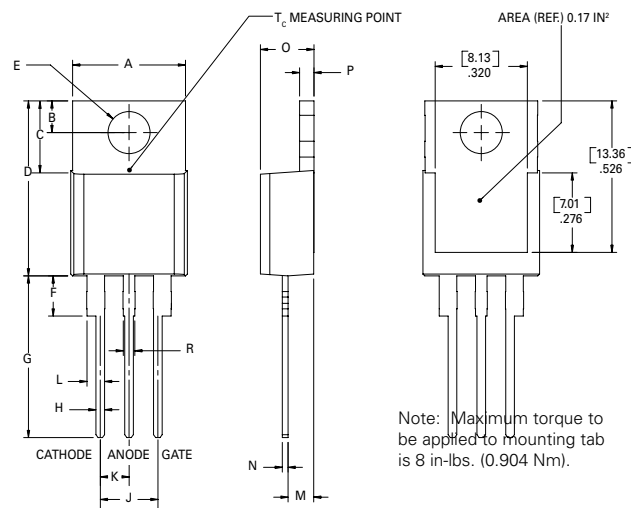

Note: Maximum torque to be applied to mounting tab is 8 in-lbs. (0.904 Nm).

| Dimension | Inches |       | Millimeters |       |
|-----------|--------|-------|-------------|-------|
|           | Min    | Max   | Min         | Max   |
| A         | 0.380  | 0.420 | 9.65        | 10.67 |
| B         | 0.105  | 0.115 | 2.67        | 2.92  |
| C         | 0.230  | 0.250 | 5.84        | 6.35  |
| D         | 0.590  | 0.620 | 14.99       | 15.75 |
| E         | 0.142  | 0.147 | 3.61        | 3.73  |
| F         | 0.110  | 0.130 | 2.79        | 3.30  |
| G         | 0.540  | 0.575 | 13.72       | 14.61 |
| H         | 0.025  | 0.035 | 0.64        | 0.89  |
| J         | 0.195  | 0.205 | 4.95        | 5.21  |
| K         | 0.095  | 0.105 | 2.41        | 2.67  |
| L         | 0.060  | 0.075 | 1.52        | 1.91  |
| M         | 0.085  | 0.095 | 2.16        | 2.41  |
| N         | 0.018  | 0.024 | 0.46        | 0.61  |
| O         | 0.178  | 0.188 | 4.52        | 4.78  |
| P         | 0.045  | 0.060 | 1.14        | 1.52  |
| R         | 0.038  | 0.048 | 0.97        | 1.22  |

### Dimensions –TO- 263AB (N-package) — D<sup>2</sup>-Pak Surface Mount

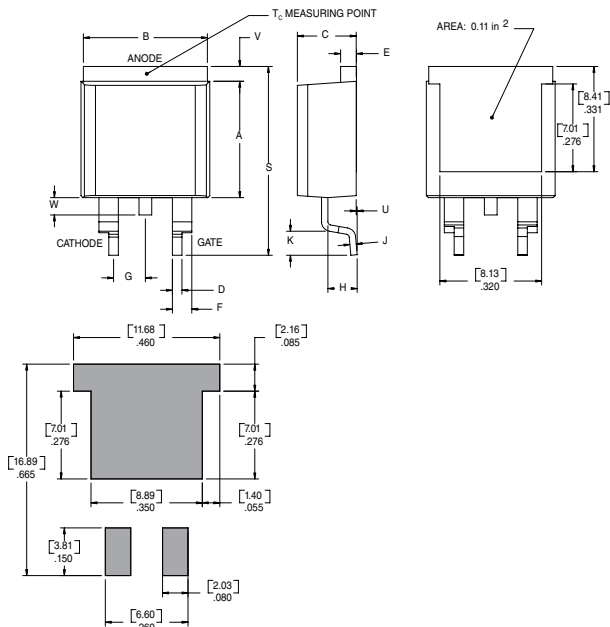

| Dimension | Inches |       | Millimeters |       |
|-----------|--------|-------|-------------|-------|
|           | Min    | Max   | Min         | Max   |
| A         | 0.360  | 0.370 | 9.14        | 9.40  |
| B         | 0.380  | 0.420 | 9.65        | 10.67 |
| C         | 0.178  | 0.188 | 4.52        | 4.78  |
| D         | 0.025  | 0.035 | 0.64        | 0.89  |
| E         | 0.045  | 0.060 | 1.14        | 1.52  |
| F         | 0.060  | 0.075 | 1.52        | 1.91  |
| G         | 0.095  | 0.105 | 2.41        | 2.67  |
| H         | 0.092  | 0.102 | 2.34        | 2.59  |
| J         | 0.018  | 0.024 | 0.46        | 0.61  |
| K         | 0.090  | 0.110 | 2.29        | 2.79  |
| S         | 0.590  | 0.625 | 14.99       | 15.88 |
| V         | 0.035  | 0.045 | 0.89        | 1.14  |
| U         | 0.002  | 0.010 | 0.05        | 0.25  |
| W         | 0.040  | 0.070 | 1.016       | 1.78  |

### Product Selector

| Part Number | Voltage |      | Gate Sensitivity | Type         | Package |
|-------------|---------|------|------------------|--------------|---------|
|             | 400V    | 600V |                  |              |         |
| SJxx25L     | X       | X    | 35mA             | Standard SCR | TO-220L |
| SJxx25R     | X       | X    | 35mA             | Standard SCR | TO-220R |
| SJxx25N     | X       | X    | 35mA             | Standard SCR | TO-263  |
| SJxx25L1    | X       | X    | 6mA              | Standard SCR | TO-220L |
| SJxx25R1    | X       | X    | 6mA              | Standard SCR | TO-220R |
| SJxx25N1    | X       | X    | 6mA              | Standard SCR | TO-263  |
| SJxx25L2    | X       | X    | 10mA             | Standard SCR | TO-220L |
| SJxx25R2    | X       | X    | 10mA             | Standard SCR | TO-220R |
| SJxx25N2    | X       | X    | 10mA             | Standard SCR | TO-263  |

Note: xx = Voltage/10


### Packing Options

| Part Number | Marking  | Weight | Packing Mode     | Base Quantity     |
|-------------|----------|--------|------------------|-------------------|
| SJxx25LxTP  | SJxx25Lx | 2.2g   | Tube             | 500 (50 per tube) |
| SJxx25RxTP  | SJxx25Rx | 2.2g   | Tube             | 500 (50 per tube) |
| SJxx25NxTP  | SJxx25Nx | 1.6g   | Tube             | 500 (50 per tube) |
| SJxx25NxRP  | SJxx25Nx | 1.6g   | Embossed Carrier | 500               |


Note: xx=voltage/10, x=sensitivity

### TO-263 Embossed Carrier Reel Pack (RP) Specifications

Meets all EIA-481-2 Standards

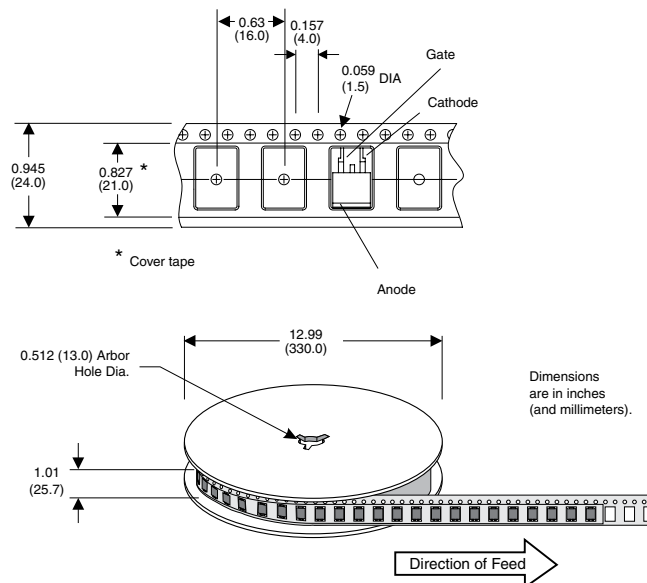


### Part Numbering System

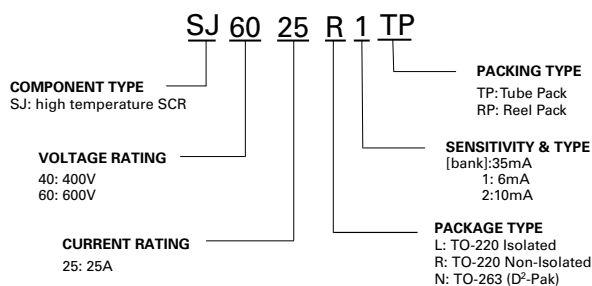

### Part Marking System

TO-220 AB - (L and R Package)  
TO-263 AB - (N Package)



Date Code Marking  
Y: Year Code  
M: Month Code  
XXX: Lot Trace Code

**Disclaimer Notice** - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at <http://www.littelfuse.com/disclaimer-electronics>.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А