


A Miniature Power Relay with 1-pole 10A Switching Capacity

- Compact single pole relay.
- Excellent switching performance for a variety of loads.
- Small, yet provide 8-kV impulse withstand voltage (between coil and contacts).

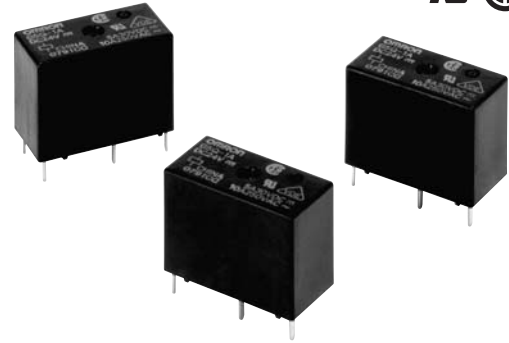

RoHS Compliant

Model Number Legend

G5Q-□□□
1 2 3

1. Number of Poles
1: 1-pole
2. Contact Form
None : SPDT (1c)
A : SPST-NO (1a)
3. Enclosure rating
None : Flux protection
4 : Fully-sealed

Application Examples

- Ideal for output applications of control equipments.

Ordering Information

Terminal Shape	Classification	Enclosure rating Contact form	Flux protection		Fully-sealed		Minimum packing unit
			Model	Rated coil voltage	Model	Rated coil voltage	
PCB terminals	Standard	SPST-NO (1a)	G5Q-1A	5 VDC	G5Q-1A4	5 VDC	40 pcs/tube
				9 VDC		9 VDC	
				12 VDC		12 VDC	
				24 VDC		24 VDC	
		SPDT (1c)	G5Q-1	5 VDC	G5Q-14	5 VDC	
				9 VDC		9 VDC	
				12 VDC		12 VDC	
				24 VDC		24 VDC	

Note. When ordering, add the rated coil voltage to the model number.

Example: G5Q-1A 5 VDC

Rated coil voltage

Ratings

Coil

Contact form	Rated voltage	Rated current (mA)	Coil resistance (Ω)	Must operate voltage (V)	Must release voltage (V)	Max. voltage (V)	Power consumption (mW)
				% of rated voltage			
SPST-NO (1a)	5 VDC	40	125	75% max.	5% min.	190% (at 23°C)	Approx. 200
	9 VDC	22.2	405				
	12 VDC	16.7	720				
	24 VDC	8.3	2880				
SPDT (1c)	5 VDC	80	63				Approx. 400
	9 VDC	44.4	202				
	12 VDC	33.3	360				
	24 VDC	16.7	1440				

Note 1. The rated current and coil resistance are measured at a coil temperature of 23°C with a tolerance of ±10%.

Note 2. The operating characteristics are measured at a coil temperature of 23°C.

Note 3. The "Max. voltage" is the maximum voltage that can be applied to the relay coil.

Contacts

Item	Load	Resistive load	
		SPST-NO (1a)	SPDT (1c)
Contact Type		Single	
Contact material		Ag-Alloy (Cd free)	
Rated load (resistive)		10 A at 125 VAC 3 A at 125 VAC 3 A at 250 VAC 5 A at 30 VDC	10 A at 125 VAC (NO) 3 A at 125 VAC (NO) 3 A at 250 VAC (NO) 5 A at 30 VDC (NO) 3 A at 125 VAC (NC) 3 A at 250 VAC (NC) 3 A at 30 VDC (NC)
Rated carry current		10 A (NO)/3 A (NC)	
Max. switching voltage		277 VAC, 30 VDC	
Max. switching current		AC: 10 A (NO)/3 A (NC) DC: 5 A (NO)/3 A (NC)	

Characteristics

Item		Classification	Standard model
Contact resistance *1			100 mΩ max.
Operate time			10 ms max.
Release time			5 ms max.
Insulation resistance *2			1,000 MΩ min.
Dielectric strength	Between coil and contacts		4,000 VAC, 50/60 Hz for 1 min
	Between contacts of the same polarity		1,000 VAC, 50/60 Hz for 1 min
Impulse withstand voltage (between coil and contacts)			8 kV (1.2 x 50 μs)
Vibration resistance	Destruction		10 to 55 to 10 Hz, 0.75 mm single amplitude (1.5 mm double amplitude)
	Malfunction		10 to 55 to 10 Hz, 0.75 mm single amplitude (1.5 mm double amplitude)
Shock resistance	Destruction		1,000 m/s ²
	Malfunction		100 m/s ²
Durability	Mechanical		10,000,000 operations (18,000 operations per hour)
	Electrical		• NO 50,000 operations: 10 A at 125 VAC resistive load (operation: ON for 1 sec, OFF for 3 sec) 200,000 operations: 3 A at 125 VAC resistive load (operation: ON for 1 sec, OFF for 1 sec) 100,000 operations: 3 A at 250 VAC resistive load (operation: ON for 1 sec, OFF for 1 sec) 100,000 operations: 5 A at 30 VDC resistive load (operation: ON for 1 sec, OFF for 1 sec) • NC 200,000 operations: 3 A at 125 VAC resistive load (operation: ON for 1 sec, OFF for 1 sec) 100,000 operations: 3 A at 250 VAC resistive load (operation: ON for 1 sec, OFF for 1 sec) 100,000 operations: 3 A at 30 VDC resistive load (operation: ON for 1 sec, OFF for 1 sec)
Failure rate (P level) (reference *3)			10 mA at 5 VDC
Ambient operating temperature			-40°C to 105°C (with no icing or condensation)
Ambient operating humidity			5% to 85%
Weight			Approx. 6.5 g

Note. The data shown above are initial values.


*1. The contact resistance is possible with 1 A applied at 5 VDC using a fall-of-potential method.

*2. Testing conditions: The insulation resistance was measured with a 500 VDC megohmmeter at the same locations as the dielectric strength was measured.


*3. This value was measured at a switching frequency of 120 operations/min.

Engineering Data


Maximum Switching Capacity

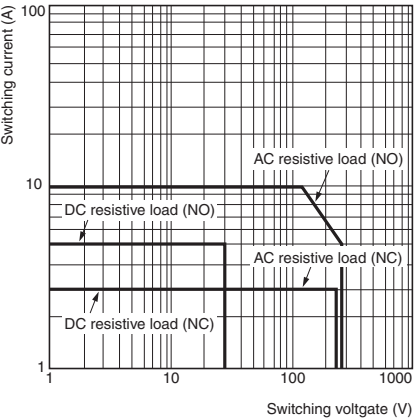

Ambient Temperature VS. Maximum Coil Voltage

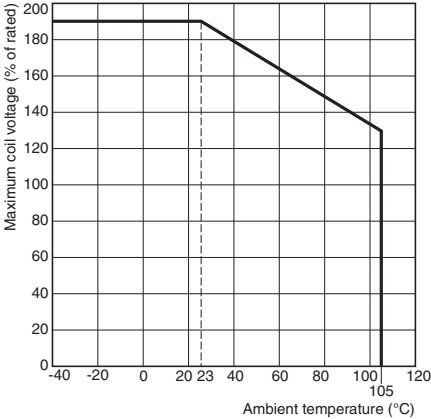



Shock Malfunction

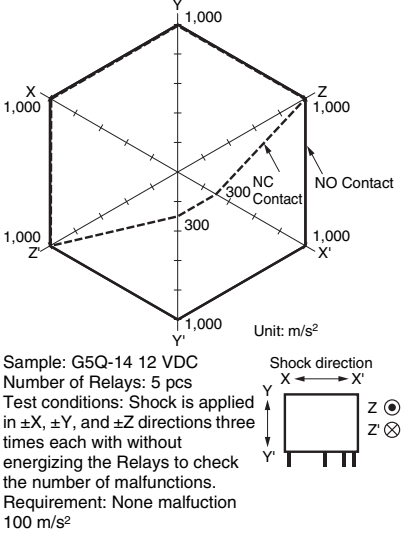

■Dimensions


(Unit: mm)

G5Q-1A G5Q-1A4




* Average value

PCB Mounting Holes (Bottom View) Tolerance: ±0.1 mm


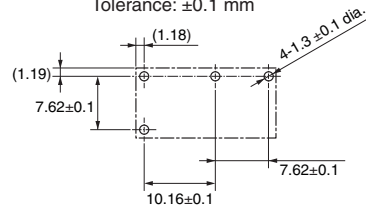


Terminal Arrangement/ Internal Connections (Bottom View)




(No coil polarity)

G5Q-1 G5Q-14




* Average value

PCB Mounting Holes (Bottom View) Tolerance: ±0.1 mm

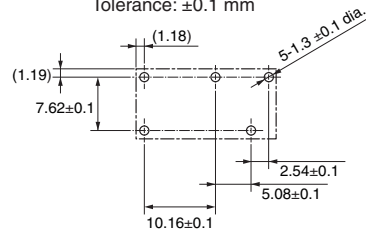

Terminal Arrangement/ Internal Connections (Bottom View)



(No coil polarity)

■Approved Standards

UL Recognized: (File No. E41515)

CSA Certified: (File No. LR31928)

Model	Contact form	Coil ratings	Contact ratings	Number of test operations
G5Q	SPST-NO (1a) SPDT (1c)	5 to 48 VDC	10 A 250 VAC N.O. only (Resistive) 40°C	6,000
			10 A 30 VDC N.O. only (Resistive) 40°C	
			4 A 120 VAC N.O. only (Resistive) 40°C	100,000
			3 A 250 VAC N.C. only (Resistive) 40°C	6,000
			3 A 30 VDC N.C. only (Resistive) 40°C	

EC/IEC, VDE (Certified/No.40009467)

Model	Contact form	Coil ratings	Contact ratings	Number of test operations
G5Q	SPST-NO (1a) SPDT (1c)	5, 9, 12, 24 VDC	10 A 250 VAC (cosφ=1) (N.O.) 105°C 5 A 30 VDC (0 ms) (N.O.) 105°C 3 A 30 VDC (0 ms) (N.C.) 105°C	10,000

■Precautions

●Please refer to “PCB Relays Common Precautions” for correct use.



• Application examples provided in this document are for reference only. In actual applications, confirm equipment functions and safety before using the product.
• Consult your OMRON representative before using the product under conditions which are not described in the manual or applying the product to nuclear control systems, railroad systems, aviation systems, vehicles, combustion systems, medical equipment, amusement machines, safety equipment, and other systems or equipment that may have a serious influence on lives and property if used improperly. Make sure that the ratings and performance characteristics of the product provide a margin of safety for the system or equipment, and be sure to provide the system or equipment with double safety mechanisms.

Note: Do not use this document to operate the Unit.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А