


1

2

3

4

FCI PART NO.	POWER TYPE	LENGTH "X"
10084089-Z0050YYLF	24V	500+25/-0
10084089-Z0100YYLF	24V	1000±15
10084089-Z0300YYLF	24V	3000±25
10084089-Z0500YYLF	24V	5000±25

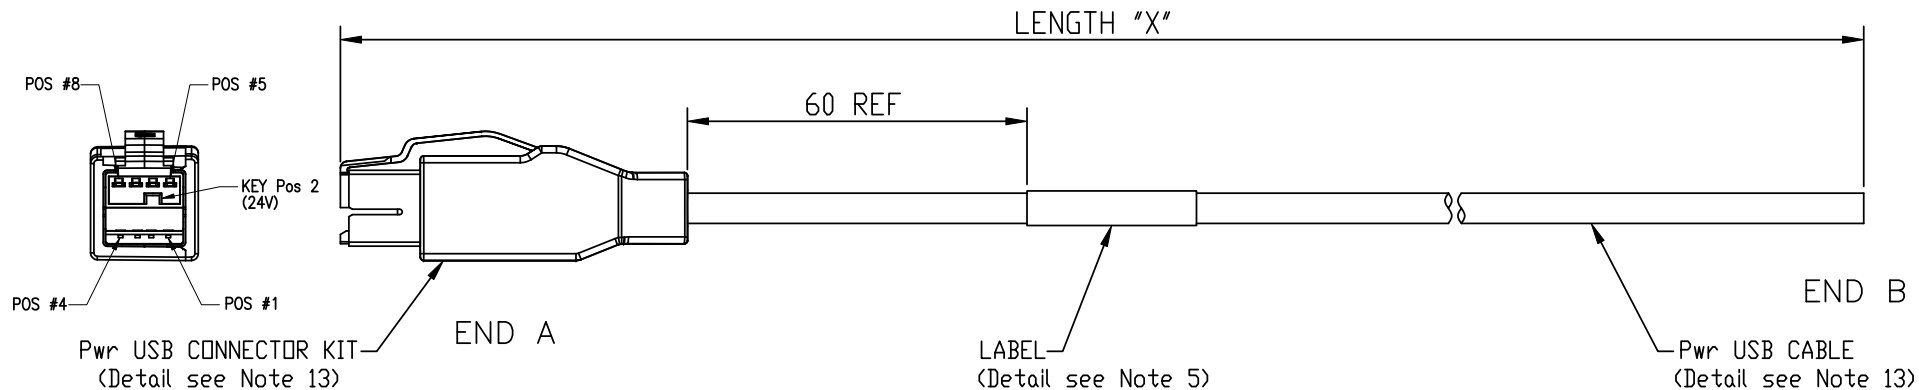

## PIN ASSIGNMENT

END A	SIGNAL NAME	WIRE COLOR	WIRE AWG	END B
1	VBUS (+5V)	RED	20	-
2	DATA -	WHITE	28	-
3	DATA +	GREEN	28	-
4	GND	BLACK	20	-
5	24V GND	BLUE	20	-
6	+24V	BROWN	20	-
7	+24V	ORANGE	20	-
8	24V GND	YELLOW	20	-
SHELL	FRAME GND	-	SHIELD	-

Mark with  
10075076001  
REV. proi\_revision  
in area indicated  
by X....

rev	ecn no	dr	date
A	N08-0120	ST	6/18/2008

TOLERANCES UNLESS OTHERWISE SPECIFIED

LINEAR	ANGULAR	0°	±2°	-	-	-	-
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-

Material	Spec ref	spec_ref	surface	tolerance	projection	MM	
Mat code	ISD 1302	ISO 406	ISO 1101	ISO 1302	ISO 1101	MM	
Heattreat	Dr Sunny Tsai	10/11/2007	Product family	CABLE ASS'Y	size	A3	
Plating/Finish	Eng Sunny Tsai	10/11/2007	Model Name	ECN	Scale	-	
Dr Sunny Tsai	Chr Jackson Wang	10/11/2007	Model Revision	REL Level			
Eng Sunny Tsai	Appr Jackson Wang	10/11/2007					
Chr Jackson Wang							
Appr Jackson Wang							
FCI	title	SINGLE END POWER USB 24V CABLE ASSEMBLY - BLACK		dwg no	10084089		Rev. A
Pro/E file	catalog no			CUSTOMER DWG	sheet 1 of 3		

REV F - 2006-04-17

2

3PDM: Rev:A

STATUS

Released

Printed: Jul 10, 2009

FCI CONFIDENTIAL



This document is the property of and embodies CONFIDENTIAL and PROPRIETARY information of FCI. No part of the information shown on this document may be used in any way or disclosed to others without the written consent of FCI. Copyright FCI.


FCI PART NO. SEE SHEET 1

NOTES:

- 1. MATES WITH FCI PART NUMBER: 55917/57496.
- 2. UNLESS OTHERWISE SPECIFIED ASSEMBLED LENGTH TOLERANCE=
  - =< 1 METER= ±15.0mm
  - > 1 METER TO 10 METER= ±2% OF L1 OR L2
  - > 10 METER= +0%/-4% OF L1 OR L2

3. PART NUMBER SCHEME FOR CABLE ASSEMBLY:

10084089 - Z X X X X Y Y LF

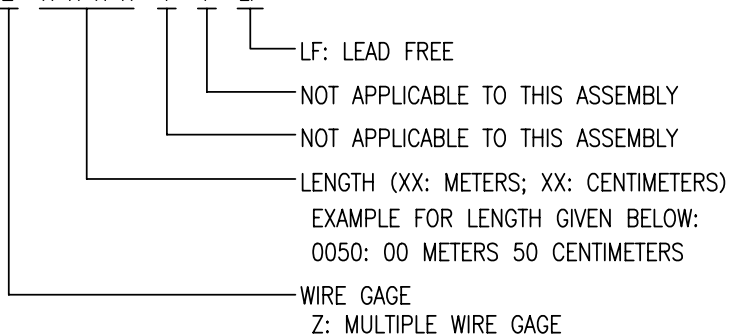

- 4. UNLESS OTHERWISE SPECIFIED LABEL POSITION SHALL BE APPROXIMATELY 60mm FROM REAR OF CONNECTOR.
- 5. UNLESS OTHERWISE SPECIFIED STANDARD LABEL SHALL BE BRADY LABEL P/N THT-10-427-30.

LABEL DETAILS:

FCI	---	MANUFACTURER CODE OR NAME
10084089-ZXXXXYYLF	---	FCI P/N
REV.A	---	REVISION
WWYY	---	DATE CODE WWYY FORMAT
MADE IN CHINA	---	COUNTRY ORIGIN

- 6. ALL CABLE ASSEMBLIES SHALL BE TESTED 100% FOR CONTINUITY AS DEFINED IN WIRING LIST.

- 7. UNLESS OTHERWISE SPECIFIED ALL CABLE ASSEMBLIES SHALL BE 100% HI-POT TESTED BY APPLYING 300V DC FOR MINIMUM OF 10ms, UNLESS ACTIVE COMPONENTS ARE USED IN THIS ASSEMBLY.
- 8. OTHER TESTING PERFORMED AS REQUIRED:
  - DIELECTRIC RESISTANCE: 50M Ohms MIN.
  - CONNECTION RESISTANCE: 0.8 Ohms MAX. (-Z0050YYLF, 0.5MR LENGTH)
  - 1.0 Ohms MAX. (-Z0100YYLF, 1.0MR LENGTH)
  - 1.2 Ohms MAX. (-Z0300YYLF, 3.0MR LENGTH)
  - 1.8 Ohms MAX. (-Z0500YYLF, 5.0MR LENGTH)
- 9. THIS DIMENSION IS A FINISHED PRODUCT LENGTH.
- 10. LEAD FREE PRODUCTS MEET EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
- 11. CONNECTOR ASSEMBLIES SHOWN ARE FOR REFERENCE ONLY AND MAY NOT SHOWN ALL PART DETAIL, REFERENCE CONNECTOR ASSEMBLY DRAWINGS FOR COMPLETE DETAILS.
- 12. PACKAGE: EACH CABLE ASSEMBLY IN CLDEAR ZIP-LOCK BPLY BAG, THEN BULK PACKED IN A BOX.

Mark with 10075076001 REV. prai_revision in area indicated by X....			
rev	ecn no	dr	date
-	See sheet 1	-	-
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-

Material			Spec ref		spec_ref	
Mat code			surface	tolerance	projection	MM
Heat/treat			ISO 1302	ISO 406		← →
Plating/Finish				ISO 1101		
Dr	Sunny Tsai	10/11/2007	Product family		size	Scale
Eng	Sunny Tsai	10/11/2007	CABLE ASS'Y		A3	-
Chr	Jackson Wang	10/11/2007	Model Name		ECN	
Appr	Jackson Wang	10/11/2007	Model Revision		REL Level	
FCI			title		dwg no	Rev.
			SINGLE END POWER USB 24V CABLE ASSEMBLY - BLACK		10084089	A
Pro/E file			catalog no		CUSTOMER DWG	sheet 2 of 3

TOLERANCES UNLESS OTHERWISE SPECIFIED			
LINEAR			
ANGULAR	0°	±2°	

FCI CONFIDENTIAL



This document is the property of and embodies CONFIDENTIAL and PROPRIETARY information of FCI. No part of the information shown on this document may be used in any way or disclosed to others without the written consent of FCI. Copyright FCI.

FCI PART NO. SEE SHEET 1

NOTES:

13. COMPONENT DETAIL

A) Pwr USB CONNECTOR KIT:

MATERIALS	SPECIFICATIONS
SHELLS	HIGH STRENGTH COPPER ALLOY
HOUSINGS	THERMOPLASTIC UL94V-0 RATED, COLOR: RED
TERMINALS	HIGH STRENGTH COPPER ALLOY
COVERS	THERMOPLASTIC UL94V-0 RATED PEBBLE GRAY
PLATING	
SHELL	UNDERPLATE; 40 MICROINCHES NI 100 MICROINCHES MIN BRIGHT TIN
TERMINALS	UNDERPLATE; 40 MICROINCHES NI CONTACT AREA; 30 MICROINCHES GXT TAIL AREA; 100 MICROINCHES MATTED TIN
ELECTRICAL	
VOLTAGE RATING	USB;5.25VDC,+POWER;24VDC
DIELECTRIC WITHSTANDING VOLTAGE	750 VAC
INSUL. RESISTANCE	1000 MEG OHMS AT 500 VDC
CURRENT RATING(NOTE 1)	1.50A USB SECTION 3.00A POWER SECTION

B) Pwr USB CABLE:

SPEC: 28AWG\*1P+20AWG\*6C+AL/MYLAR+DRAIN+BRAID

1) UL TYPE: CM  
CSA TYPE: CMG

2) CONSTRUCTION:

ITEM	SPECIFICATIONS		
CONDUCTOR	AWG	28AWG	20AWG
	MATERIAL	TINNED COPPER	TINNED COPPER
	COND.SIZE	7/0.127mm	19/0.20mm
INSULATION	MATERIAL	HD-PE	SR-PVC
	OD	0.80±0.05mm	1.5±0.05mm
	NO.	1PAIR	6C
AL/MYLAR	COVERAGE	100%	
	OVERLAP	25% Min.	
DRAIN	AWG	28AWG	
	MATERIAL	TINNED COPPER	
	COND.SIZE	7/0.127mm	
BRAID	MATERIAL	TINNED COPPER	
	SIZE	16/7/0.10mm	
JACKET	MATERIAL	PVC	
	OD	6.50±0.25mm	
	COLOR	BLACK (OTHER COLORS AVAILABLE ON REQUEST)	

ELECTRICAL CHARACTERISTICS	
RATING	RATING: TEMP 80°C VOLTAGE 30V
Conductor Resistance at 20°C (MAX)	28AWG < 237.25 Ohm/KM 20AWG < 34.6 Ohm/KM
IMPEDANCE (Differential)	90 Ohm±15%; at TDR
DELAY	< 26ns/Cable; at TDR
SKEW	100ps MAX.
ATTENUATION	Refer to USB 2.0 Specification

FCI CONFIDENTIAL



This document is the property of and embodies CONFIDENTIAL and PROPRIETARY information of FCI. No part of the information shown on this document may be used in any way or disclosed to others without the written consent of FCI. Copyright FCI.

Mark with 10075076001 REV. prai_revision in area indicated by X....			
rev	ecn no	dr	date
-	See Sheet 1	-	-
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
ANGULAR	0° ±2°	-	-

Material		Spec ref	spec_ref	
Mat code	surface	tolerance	projection	MM
Heat treat	ISO 1302	ISO 406		← →
Plating/Finish	ISO 1101	ISO 1101	size	Scale
Dr Sunny Tsai	10/11/2007	Product family	A3	-
Eng Sunny Tsai	10/11/2007	Model Name	ECN	
Chr Jackson Wang	10/11/2007	Model Revision	REL Level	
Appr Jackson Wang	10/11/2007			
FCI	title	cu dwg	Rev.	
	SINGLE END POWER USB 24V CABLE ASSEMBLY - BLACK	10084089	A	
Pro/E file	catalog no	CUSTOMER DWG	sheet 3 of 3	

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «**JONHON**», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «**FORSTAR**».



## JONHON

«**JONHON**» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«**FORSTAR**» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А