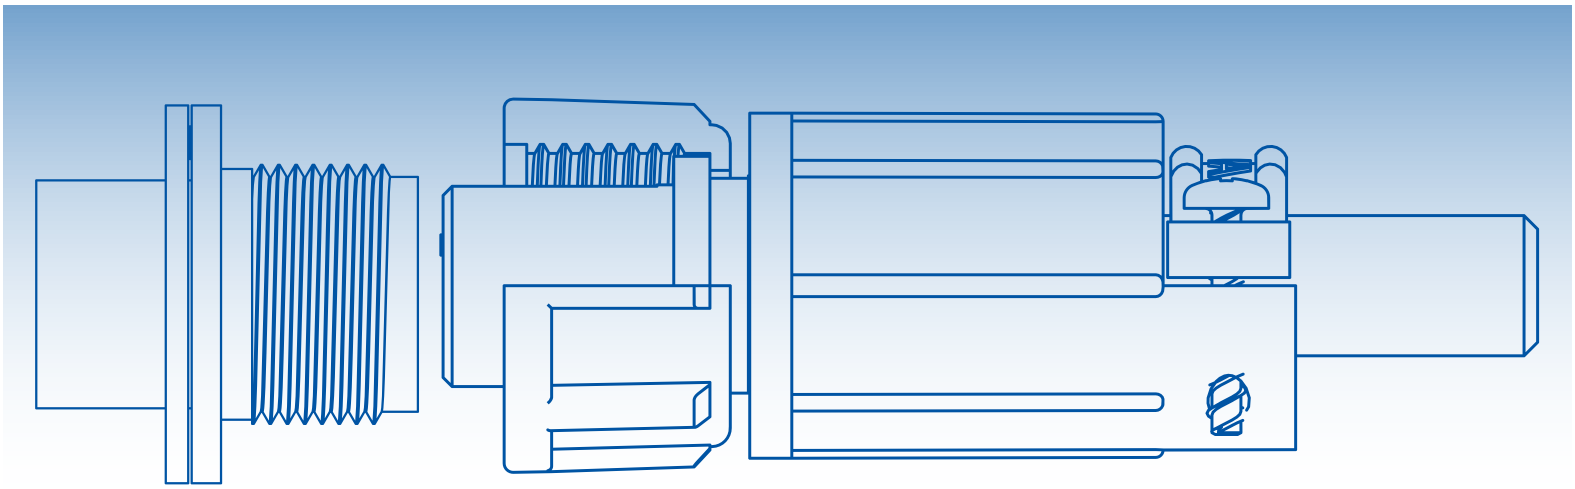

MIL-E-QUAL® FIRST MATE LAST BREAK CONTACT

NEW PRODUCT BULLETIN C707

FEATURES & BENEFITS

- First mate last break contact protects the electrical components around the connection
- Two contact sizes available: #12 size and #16 size standard
- Sturdy construction is IP-67 rated when overmolded
- Black thermoplastic with UV inhibitor for rugged outdoor applications

APPLICATIONS

- Lighting fixtures
- Power transmission for alternative energy

CONXALL®

A SWITCHCRAFT COMPANY

CONXALL • 601 E Wildwood • Villa Park, IL 60181 • 630-834-7504
Please visit conxall.com for the most up-to-date product specifications. Made in USA.

MIL-E-QUAL® FIRST MATE LAST BREAK CONTACT

NEW PRODUCT BULLETIN C707

CX X 310XA XXXX XX X XXXX

Conxall

Contact Style

S - Solder
C - Crimp

Shell Type

3101A - Cable Receptacle In-Line with Accessory Thread
3102A - Box Receptacle
3106A - Straight Plug

Insert Number / Arrangement per 5015

10SL-4	16S-1	18-19
10SL-3	16S-8	20-7
12S-3	16-10	20-16
14S-1	18-1	20-27
14S-2	18-4	20-29
14S-5	18-8	22-14
14S-6	18-10	24-2
14S-7	18-11	24-28
14S-9	18-12	28-2
		28-12
		28-21

No. & Type of Contacts

P - Pin
S - Socket

Options

300 - Weathertight Option adds O-Ring for plug (3106A)

Elastomer Gasket for Receptacle. (3102A)

010 - Receptacle with (4) mounting hole reinforcements. Consult factory.

310 - Same as -010 except with Elastomer Gasket.

320 - Gold plated contacts. (gold is optional)

30GX - Pin Insert Receptacle with ground pin. "X" is the letter position of the extended pin. Letter is left "Blank" for crimp contacts. Standard plating, silver.

32GX - Pin Insert Receptacle with ground pin. "X" is the letter position of the extended pin. Letter is left "Blank" for crimp contacts. Optional plating, gold.

SPECIFICATIONS

PRODUCT SPECIFICATIONS

Manufacturers ID	MIL-E-QUAL®
Description:	Field Installable Connector & Custom Cable Assemblies
Rating:	3.4 thru 23.0A, 600V DC
Contact Sizes:	#12 and #16 AWG
Conductor Sizes:	#12AWG, #14AWG, #16AWG #18AWG or #20AWG
Configuration:	Contacts per Mil-C-5015
Certification:	UL File E150822

ELECTRICAL SPECIFICATIONS

600V-AC for Shell Types 3101A and 3102A
500V-AC for Shell Type 3106A up to 28 positions
277V-AC for Shell Type 3106A from 29 or greater positions

ENVIRONMENTAL SPECIFICATIONS

Operating Temperature:	-40 °C to +75 °C(-40ºF to +167°F)
Corrosion:	48hr salt spray contacts (mated)
Durability:	300 mate/unmate cycles minimum
Weathertight:	Consult factory with specific application

FACTORY MOLDED CABLE ASSEMBLIES

Watertight:	NEMA 6P, 13: IEC IP67

NOTE

Gasket, O-Ring & Grommet materials are suitable for -40 °C to +75 °C(-40ºF to +167°F).

Consult factory for higher temperature requirements.

MATERIAL SPECIFICATIONS

Cable Pin/Socket:

Mechanical Backshell:	Thermoplastic, UL Recognized, Black with UV Inhibitor (Threaded)
Strap:	Thermoplastic, UL Recognized, Black with UV Inhibitor
Screws:	Stainless Steel
Grommet:	Elastomer, Black
Coupling Ring:	Thermoplastic, UL Recognized, Black with UV Inhibitor
Contacts:	Copper Alloy, Standard Silver Plated, Gold Plated Optional
Connector Body:	Thermoplastic, UL Recognized, Black with UV Inhibitor
O-Ring:	Elastomer
Optional	
Connector Cap:	Thermoplastic, UL Recognized, Black with UV Inhibitor
Gold Contacts:	Copper Alloy, Gold over Nickel
Alternate Key Positions Available	
Box Receptacle	
Contacts:	Copper Alloy, Standard Silver Plated, Gold Plated Optional
Receptacle Body:	Thermoplastic, UL Recognized, Black with UV Inhibitor
Optional	
Receptacle Cap:	Thermoplastic, UL Recognized, Black with UV Inhibitor
Gasket:	Elastomer, Black
Gold Contacts:	Copper Alloy, Gold over Nickel
Extended Bosses Alternate Key Positions Available	

OCEAN CHIPS
Океан Электроники
Поставка электронных компонентов

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения **«JONHON»**, а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов **«FORSTAR»**.

AVIC JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).

FORSTAR®

Телефон: 8 (812) 309-75-97 (многоканальный)
Факс: 8 (812) 320-03-32
Электронная почта: ocean@oceanchips.ru
Web: http://oceanchips.ru/
Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А