Microsemi
POWER PRODUCTS GROUP

Power MOS 8 Cooler!

APT9F100B
APT9F100S

1000V, 9A, 1.6Ω Max, t_{rr} ≤200ns

N-Channel FREDFET

POWER MOS 8® is a high speed, high voltage N-channel switch-mode power MOSFET. This 'FREDFET' version has a drain-source (body) diode that has been optimized for high reliability in ZVS phase shifted bridge and other circuits through reduced t_{rr}, soft recovery, and high recovery dv/dt capability. Low gate charge, high gain, and a greatly reduced ratio of C_{rss}/C_{iss} result in excellent noise immunity and low switching loss. The intrinsic gate resistance and capacitance of the poly-silicon gate structure help control di/dt during switching, resulting in low EMI and reliable paralleling, even when switching at very high frequency.



APT9F100B **APT9F100S**

Single die FREDFET



FEATURES

- **Fast switching with low EMI**
- **Low t_{rr} for high reliability**
- **Ultra low C_{rss} for improved noise immunity**
- **Low gate charge**
- **Avalanche energy rated**
- **RoHS compliant**

TYPICAL APPLICATIONS

- **ZVS phase shifted and other full bridge**
- **Half bridge**
- **PFC and other boost converter**
- **Buck converter**
- **Single and two switch forward**
- **Flyback**

Absolute Maximum Ratings

Symbol	Parameter	Ratings	Unit
I_D	Continuous Drain Current @ T_C = 25°C	9	A
	Continuous Drain Current @ T_C = 100°C	5	
I_{DM}	Pulsed Drain Current ①	37	
V_{GS}	Gate-Source Voltage	±30	V
E_{AS}	Single Pulse Avalanche Energy ②	574	mJ
I_{AR}	Avalanche Current, Repetitive or Non-Repetitive	5	A

Thermal and Mechanical Characteristics

Symbol	Characteristic	Min	Typ	Max	Unit
P_D	Total Power Dissipation @ T_C = 25°C			337	W
$R_{\theta JC}$	Junction to Case Thermal Resistance			0.37	°C/W
$R_{\theta CS}$	Case to Sink Thermal Resistance, Flat, Greased Surface		0.15		
T_J,T_{STG}	Operating and Storage Junction Temperature Range	-55		150	°C
T_L	Soldering Temperature for 10 Seconds (1.6mm from case)			300	
W_T	Package Weight		0.22		oz
			6.2		g
Torque	Mounting Torque (TO-247 Package), 6-32 or M3 screw			10	in·lbf
				1.1	N·m

Static Characteristics T_J = 25°C unless otherwise specified APT9F100B_S

Symbol	Parameter	Test Conditions		Min	Typ	Max	Unit
$V_{BR(DSS)}$	Drain-Source Breakdown Voltage	V_{GS} = 0V, I_D = 250µA		1000			V
$\Delta V_{BR(DSS)}/\Delta T_J$	Breakdown Voltage Temperature Coefficient	Reference to 25°C, I_D = 250µA			1.15		V/°C
$R_{DS(on)}$	Drain-Source On Resistance③	V_{GS} = 10V, I_D = 5A			1.28	1.6	Ω
$V_{GS(th)}$	Gate-Source Threshold Voltage	V_{GS} = V_{DS}, I_D = 1mA		2.5	4	5	V
$\Delta V_{GS(th)}/\Delta T_J$	Threshold Voltage Temperature Coefficient				-10		mV/°C
I_{DSS}	Zero Gate Voltage Drain Current	V_{DS} = 1000V	T_J = 25°C			250	µA
		V_{GS} = 0V	T_J = 125°C			1000	
I_{GSS}	Gate-Source Leakage Current	V_{GS} = ±30V				±100	nA

Dynamic Characteristics T_J = 25°C unless otherwise specified

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
g_{fs}	Forward Transconductance	V_{DS} = 50V, I_D = 5A		10.0		S
C_{iss}	Input Capacitance	V_{GS} = 0V, V_{DS} = 25V f = 1MHz		2606		pF
C_{rss}	Reverse Transfer Capacitance			35		
C_{oss}	Output Capacitance			219		
$C_{o(cr)}$ ④	Effective Output Capacitance, Charge Related	V_{GS} = 0V, V_{DS} = 0V to 670V		85		
$C_{o(er)}$ ⑤	Effective Output Capacitance, Energy Related			46		
Q_g	Total Gate Charge	V_{GS} = 0 to 10V, I_D = 5A, V_{DS} = 500V		80		nC
Q_{gs}	Gate-Source Charge			14		
Q_{gd}	Gate-Drain Charge			36		
$t_{d(on)}$	Turn-On Delay Time	**Resistive Switching** V_{DD} = 670V, I_D = 5A R_G = 10Ω⑥, V_{GG} = 15V		25		ns
t_r	Current Rise Time			27		
$t_{d(off)}$	Turn-Off Delay Time			84		
t_f	Current Fall Time			24		

Source-Drain Diode Characteristics

Symbol	Parameter	Test Conditions		Min	Typ	Max	Unit
I_S	Continuous Source Current (Body Diode)	MOSFET symbol showing the integral reverse p-n junction diode (body diode) 				9	A
I_{SM}	Pulsed Source Current (Body Diode)①					37	
V_{SD}	Diode Forward Voltage	I_{SD} = 5A, T_J = 25°C, V_{GS} = 0V				1.2	V
t_{rr}	Reverse Recovery Time	I_{SD} = 5A③ di_{SD}/dt = 100A/µs V_{DD} = 100V	T_J = 25°C		172	200	ns
			T_J = 125°C		286	345	
Q_{rr}	Reverse Recovery Charge		T_J = 25°C		.67		µC
			T_J = 125°C		1.5		
I_{rrm}	Reverse Recovery Current		T_J = 25°C		8		A
			T_J = 125°C		11		
dv/dt	Peak Recovery dv/dt	I_{SD} ≤ 5A, di/dt ≤1000A/µs, V_{DD} = 500V, T_J = 125°C				25	V/ns

① Repetitive Rating: Pulse width and case temperature limited by maximum junction temperature.

② Starting at T_J = 25°C, L = 53mH, R_G = 25Ω, I_{AS} = 4A.

③ Pulse test: Pulse Width < 380µs, duty cycle < 2%.

④ $C_{o(cr)}$ is defined as a fixed capacitance with the same stored charge as C_{OSS} with V_{DS} = 67% of $V_{(BR)DSS}$.

⑤ $C_{o(er)}$ is defined as a fixed capacitance with the same stored energy as C_{OSS} with V_{DS} = 67% of $V_{(BR)DSS}$. To calculate $C_{o(er)}$ for any value of V_{DS} less than $V_{(BR)DSS,}$ use this equation: $C_{o(er)}$ = -3.43E-8/V_{DS}^2 + 1.44E-8/V_{DS} + 5.38E-11.

⑥ R_G is external gate resistance, not including internal gate resistance or gate driver impedance. (MIC4452)

Microsemi reserves the right to change, without notice, the specifications and information contained herein.

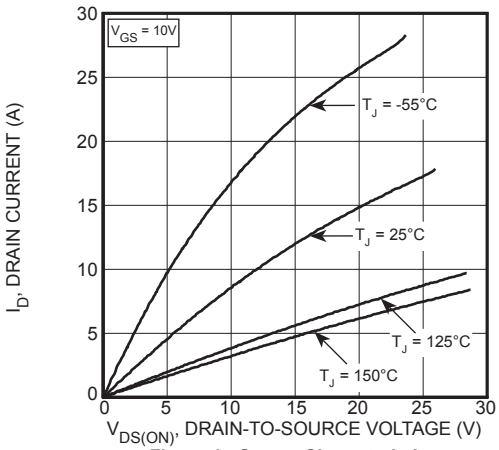

Figure 1, Output Characteristics

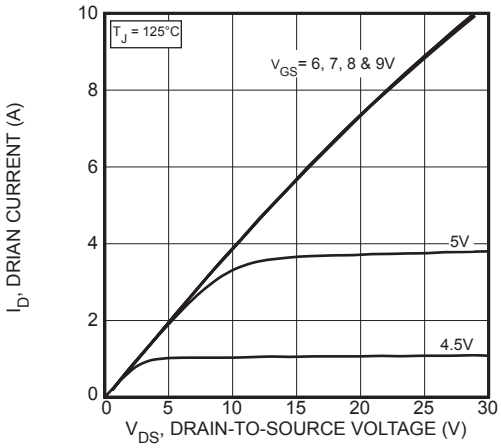

Figure 2, Output Characteristics

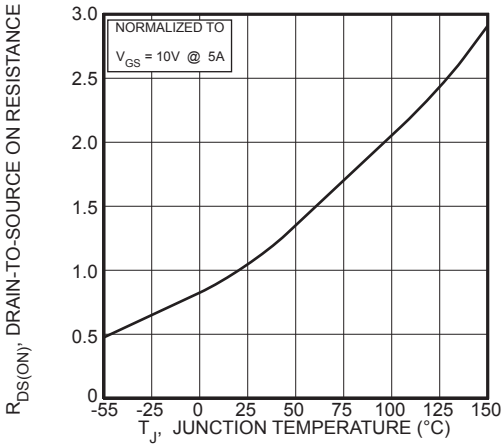

Figure 3, $R_{DS(ON)}$ vs Junction Temperature

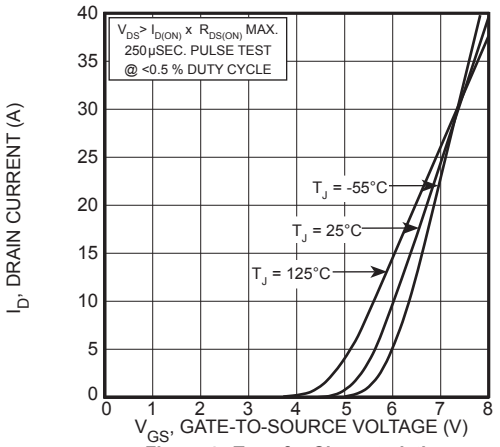

Figure 4, Transfer Characteristics

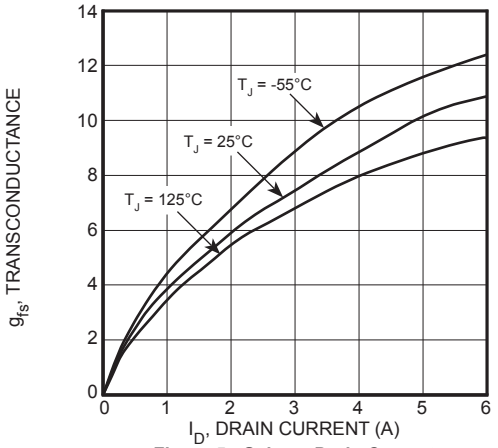

Figure 5, Gain vs Drain Current

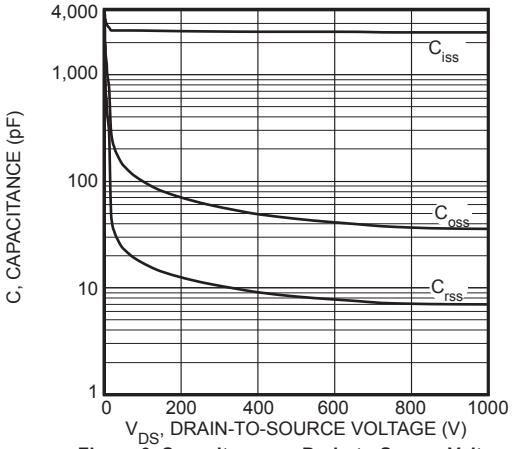

Figure 6, Capacitance vs Drain-to-Source Voltage

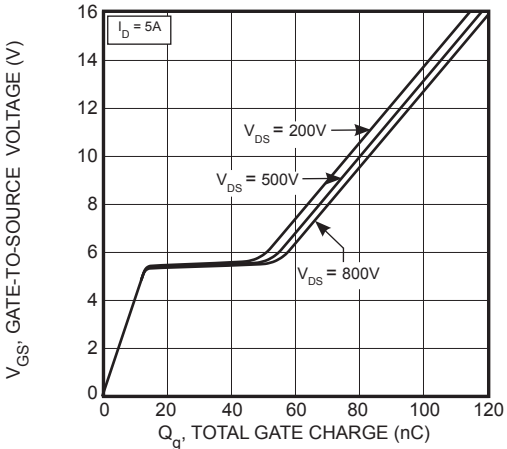

Figure 7, Gate Charge vs Gate-to-Source Voltage

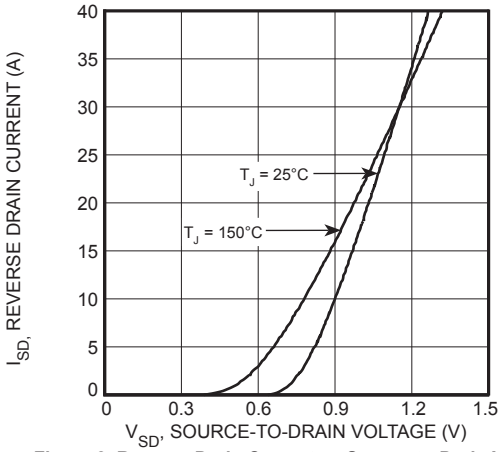

Figure 8, Reverse Drain Current vs Source-to-Drain Voltage

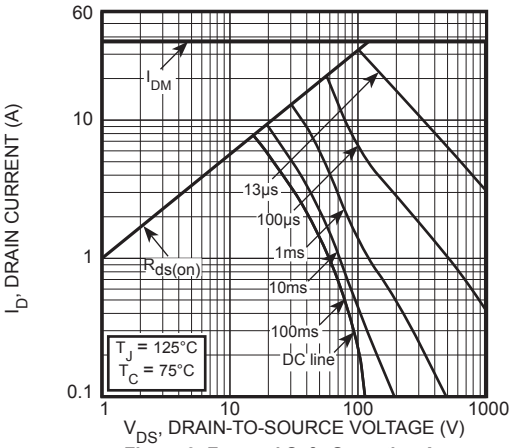

Figure 9, Forward Safe Operating Area

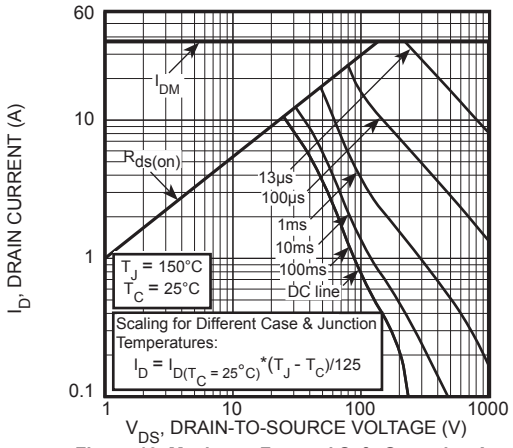

Figure 10, Maximum Forward Safe Operating Area

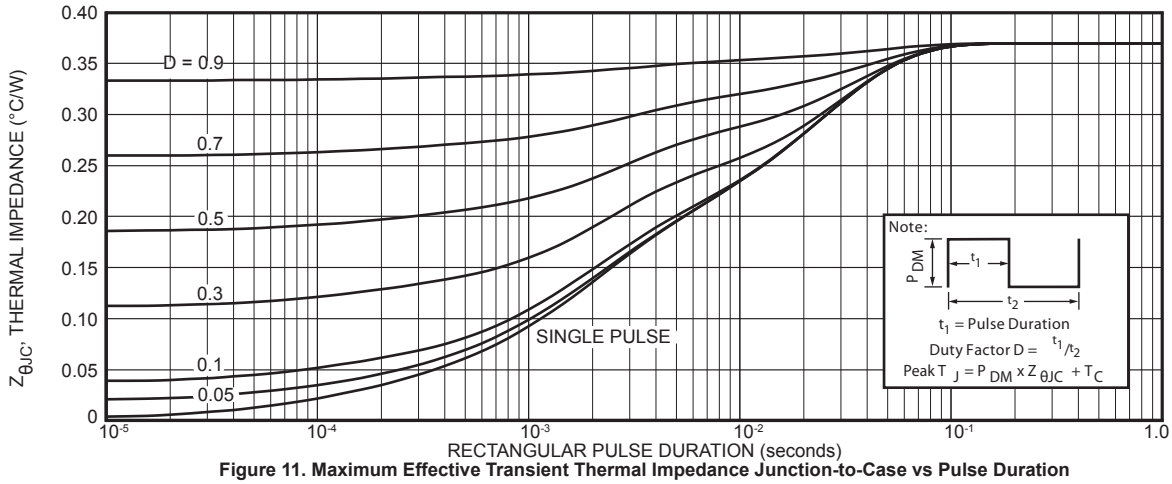

Figure 11. Maximum Effective Transient Thermal Impedance Junction-to-Case vs Pulse Duration

TO-247 (B) Package Outline

e1 SAC: Tin, Silver, Copper

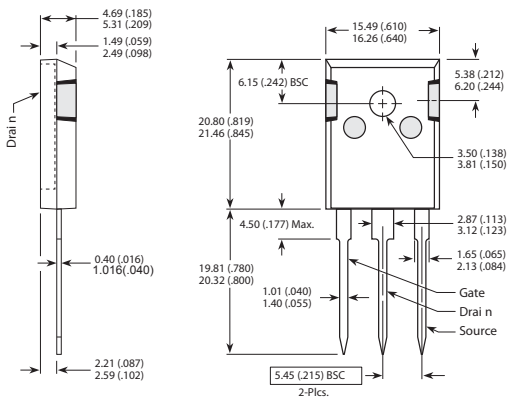

Dimensions in Millimeters (Inches)

D³PAK Package Outline

e3 100% Sn Plated

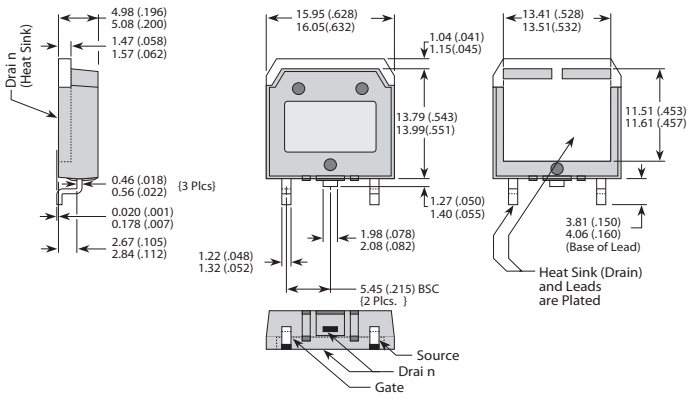

Dimensions in Millimeters (Inches)

OCEAN CHIPS
Океан Электроники
Поставка электронных компонентов

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «**JONHON**», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «**FORSTAR**».

AVIC JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).

FORSTAR®

Телефон: 8 (812) 309-75-97 (многоканальный)
Факс: 8 (812) 320-03-32
Электронная почта: ocean@oceanchips.ru
Web: http://oceanchips.ru/
Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А