January 7, 1998

TEL:805-498-2111 FAX:805-498-3804 WEB:http://www.semtech.com

AXIAL LEADED HERMETICALLY SEALED SUPERFAST RECTIFIER DIODE

- Very low reverse recovery time
- Hermetically sealed in Metoxilite fused metal oxide
- Low switching losses
- Low forward voltage drop
- Soft, non-snap off, recovery characteristics

QUICK REFERENCE DATA

- V_R = 50 - 150V
- I_F = 5.0A
- t_{rr} = 30nS
- V_F = 0.97V

ABSOLUTE MAXIMUM RATINGS (@ 25°C unless otherwise specified)

	Symbol	1N6079 5FF05	1N6080 5FF10	1N6081 5FF15	Unit
Working reverse voltage	V_{RWM}	50	100	150	V
Repetitive reverse voltage	V_{RRM}	50	100	150	V
Average forward current (@ 55°C, lead length 0.375")	$I_{F(av)}$	← 5.0 →			A
Repetitive surge current (@ 55°C in free air, lead length 0.375")	I_{FRM}	← 24 →			A
Non-repetitive surge current (t_p = 8.3mS, @ V_R & T_{jmax})	I_{FSM}	← 175 →			A
Storage temperature range	T_{STG}	← -65 to +150 →			°C
Operating temperature range	T_{OP}	← -65 to +150 →			°C

MECHANICAL

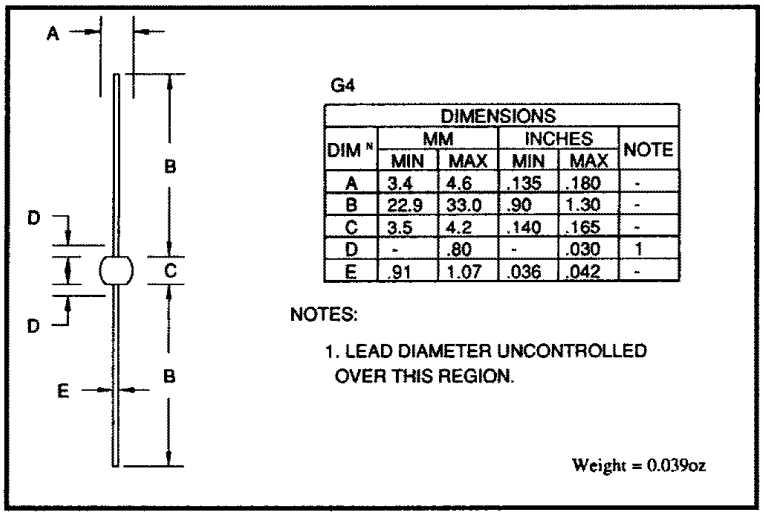

G4

DIMENSIONS					
DIM	MM		INCHES		NOTE
	MIN	MAX	MIN	MAX	
A	3.4	4.6	.135	.180	-
B	22.9	33.0	.90	1.30	-
C	3.5	4.2	.140	.165	-
D	-	.80	-	.030	1
E	.91	1.07	.036	.042	-

NOTES:

1. LEAD DIAMETER UNCONTROLLED OVER THIS REGION.

Weight = 0.039oz

These products are qualified to MIL-S-19500/503.
They can be supplied fully released as JAN, JANTX, and JANTXV versions.

These products are qualified in Europe to DEF STAN 59-61 (PART 80)/030 available to F and FX levels.

© 1997 SEMTECH CORP.

January 7, 1998

ELECTRICAL CHARACTERISTICS (@ 25°C unless otherwise specified)

	Symbol	1N6079 5FF05	1N6080 5FF10	1N6081 5FF15	Unit
Average forward current max. T_A = 55°C for sine wave	$I_{F(AV)}$	←	2.0	→	A
Average forward current max. T_L = 70°C; L = 0"	$I_{F(AV)}$	←	12.0	→	A
T_L = 55°C; L = 3/8" for sine wave	$I_{F(AV)}$	←	4.8	→	A
for square wave	$I_{F(AV)}$	←	5.0	→	A
I^2t for fusing (t = 8.3mS) max.	I^2t	←	127	→	A^2S
Forward voltage drop max. @ I_F = 5.0A, T_j = 25°C	V_F	←	0.97	→	V
Reverse current max. @ V_{RWM}, T_j = 25°C	I_R	←	10	→	µA
@ V_{RWM}, T_j = 100°C	I_R	←	500	→	µA
Reverse recovery time max. 0.5A I_F to 1.0A I_R. Recovers to 0.25A I_{RR}.	t_{rr}	←	30	→	nS
Junction capacitance typ. @ V_R = 5V , f = 1MHz	C_j	←	230	→	pF

THERMAL CHARACTERISTICS

	Symbol	1N6079 5FF05	1N6080 5FF10	1N6081 5FF15	Unit
Thermal resistance - junction to lead Lead length = 0.375"	$R_{\theta JL}$	←	23.5	→	°C/W
Lead length = 0.0"	$R_{\theta JL}$	←	5	→	°C/W
Thermal resistance - junction to amb. on 0.06" thick pcb. 1 oz. copper.	$R_{\theta JA}$	←	75	→	°C/W

© 1997 SEMTECH CORP.

January 7, 1998

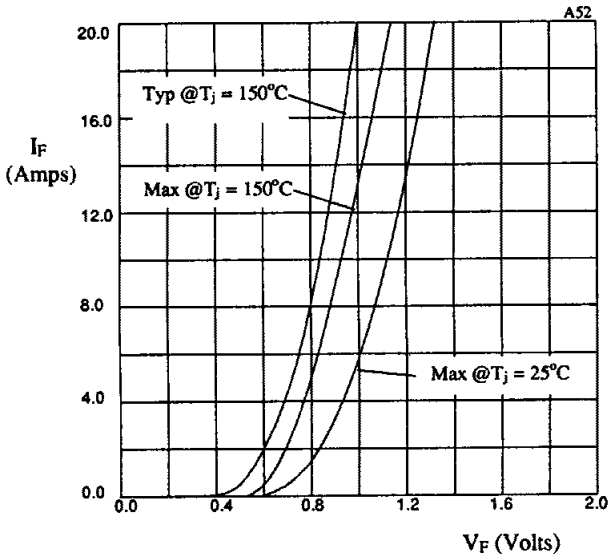

Fig 1. Forward voltage drop as a function of forward current

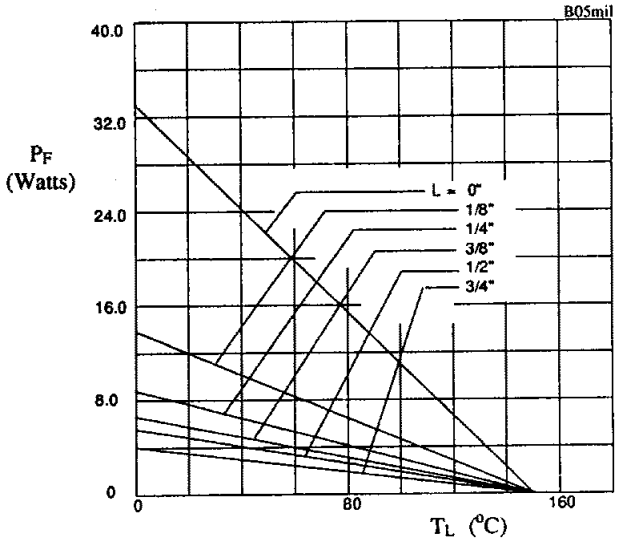

Fig 2. Maximum power versus lead temperature

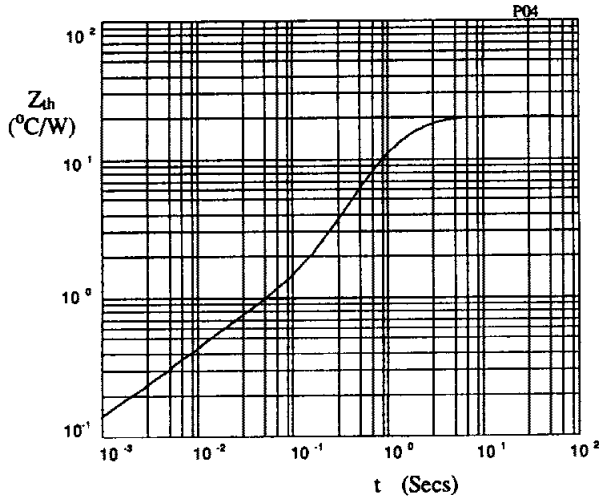

Fig 3. Transient thermal impedance characteristic.

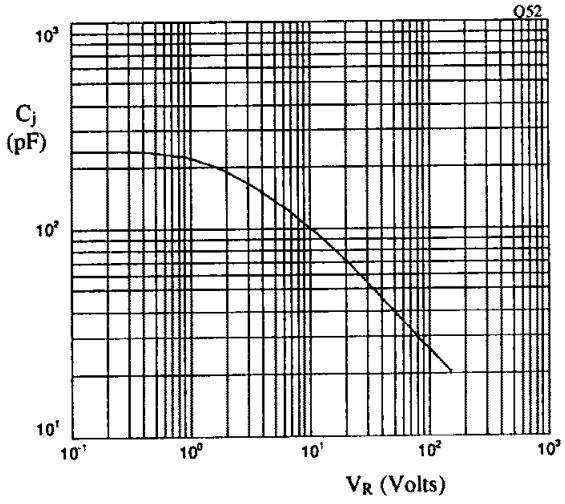

Fig 4. Typical junction capacitance as a function of reverse voltage.

© 1997 SEMTECH CORP.

January 7, 1998

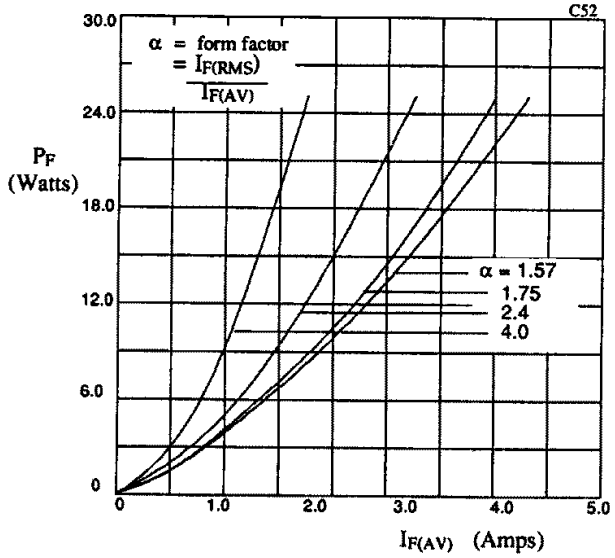

Fig 5. Forward power dissipation as a function of forward current, for sinusoidal operation.

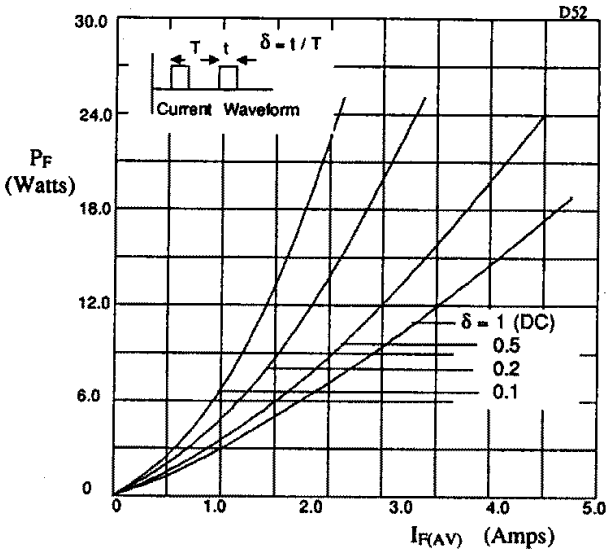

Fig 6. Forward power dissipation as a function of forward current, for square wave operation.

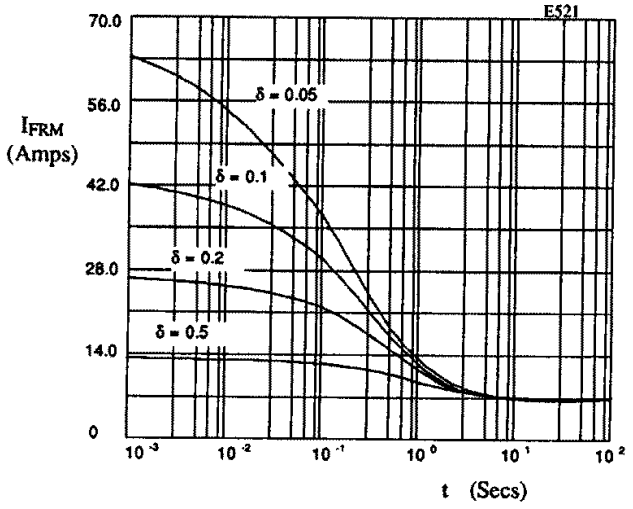

Fig 7. Maximum repetitive forward current as a function of pulse width at 55°C; $R_{\theta JL}$ = 20 °C/W; V_{RWM} during 1 - δ.

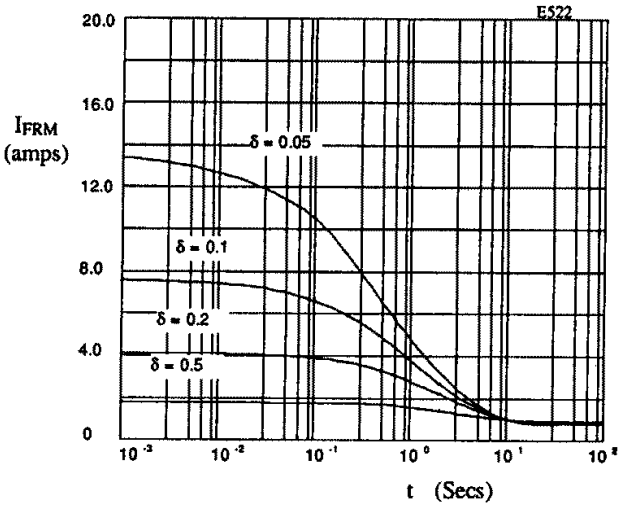

Fig 8. Maximum repetitive forward current as a function of pulse width at 100°C; $R_{\theta JL}$ = 80 °C/W; V_{RWM} during 1 - δ.

© 1997 SEMTECH CORP.

OCEAN CHIPS
Океан Электроники
Поставка электронных компонентов

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «**JONHON**», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «**FORSTAR**».

AVIC JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).

FORSTAR®

Телефон: 8 (812) 309-75-97 (многоканальный)
Факс: 8 (812) 320-03-32
Электронная почта: ocean@oceanchips.ru
Web: http://oceanchips.ru/
Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А