

# PLASTIC CONNECTORS



SERIES



REDEL®

## Precision modular connectors to suit your application

Since its creation in Switzerland in 1946 the LEMO Group has been recognized as a global leader of circular Push-Pull connectors and connector solutions. Today LEMO and its affiliated companies, REDEL and COELVER, are active in more than 80 countries with the help of over 40 subsidiaries and distributors.


## Over 5000 REDEL connectors




The modular design of the REDEL range provides over 5000 connectors from  $\varnothing$  14 mm to  $\varnothing$  21 mm, capable of handling cable diameters up to 9.5 mm and up to 32 contacts.

This vast portfolio enables you to select the ideal connector configuration to suit almost any specific requirement in most markets, including medical devices, test and measurement instruments, machinery, audio video broadcast, telecommunications and military.

## REDEL's Push-Pull Self-Latching Connection System

This self-latching system is renowned worldwide for its easy and quick mating and unmating features. It provides absolute security against vibration, shock or pull on the cable, and facilitates operation in a very limited space.

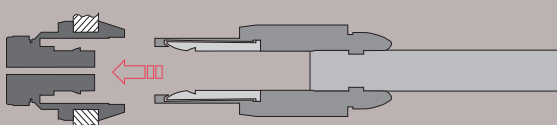

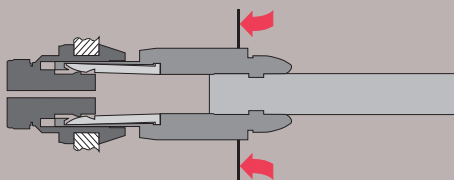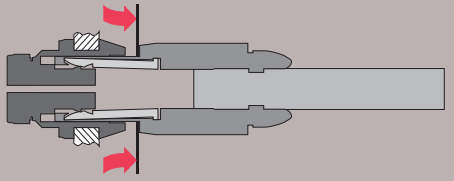
|                                                                                     |             |                                                                                                                                                                                      |
|-------------------------------------------------------------------------------------|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|   | $F_v$ 7 N   | <p>The REDEL self-latching system allows the connector to be mated by simply pushing the plug axially into the socket.</p>                                                           |
|  | $F_a$ 110 N | <p>Once firmly latched, connection cannot be broken by pulling on the cable or any other component part other than the outer release sleeve.</p>                                     |
|  | $F_d$ 9 N   | <p>When required, the connector is disengaged by a single axial pull on the outer release sleeve. This first disengages the latches and then withdraws the plug from the socket.</p> |

$F_v$ : average latching force (without contact)

$F_a$ : average retention force (without contact)

$F_d$ : average unmatting force (without contact)

## UL Recognition

REDEL connectors are recognized by the Underwriters Laboratories (UL). The approval of the complete system (REDEL connector, cable and your equipment) will be easier because REDEL connectors are recognized.

## CE Marking

CE marking  means that the appliance or equipment bearing it complies with the protection requirements of one or several European safety directives.


CE marking  applies to complete products or equipment, **but not to electromechanical components, such as connectors.**

## RoHS


REDEL connector specifications conforms the requirements of the RoHS directive (2011/65/EU) of the European Parliament and the latest amendments. This directive specifies the restrictions of the use of hazardous substances in electrical and electronic equipment marketed in Europe.

## Exploded view of the REDEL SP


### Straight plug

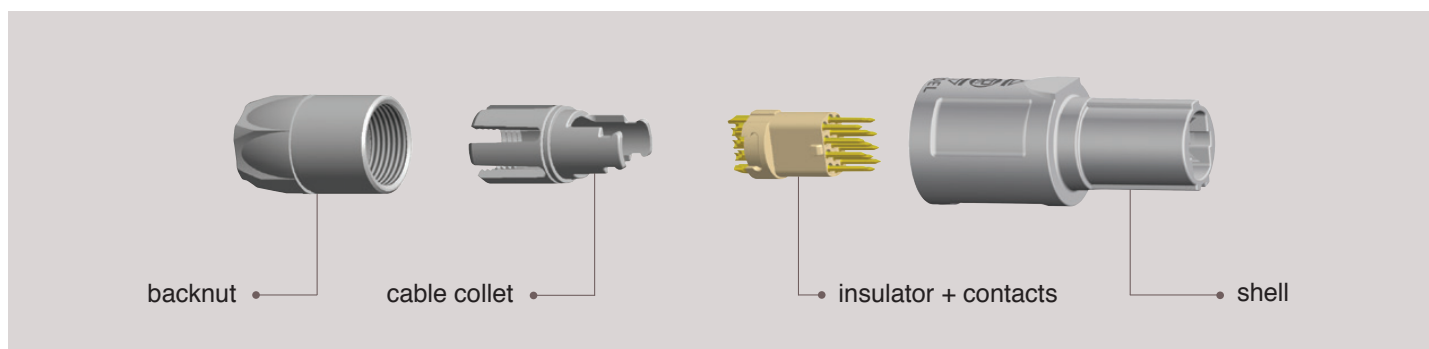


### Straight plug with bend relief

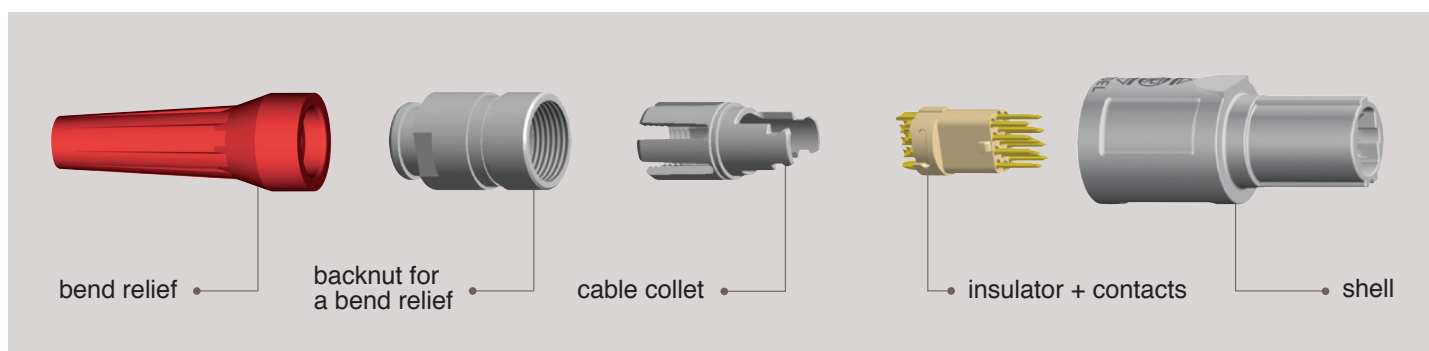

### Fixed socket

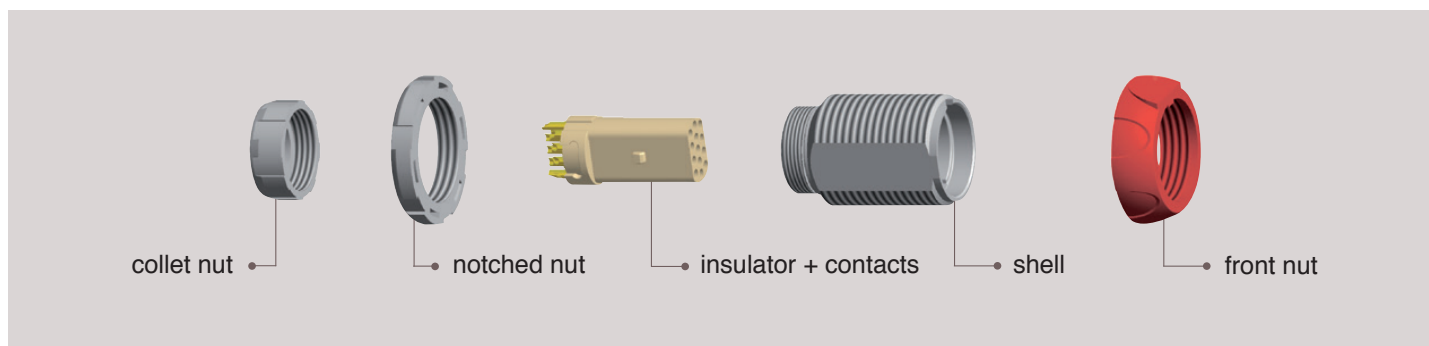

### Free socket

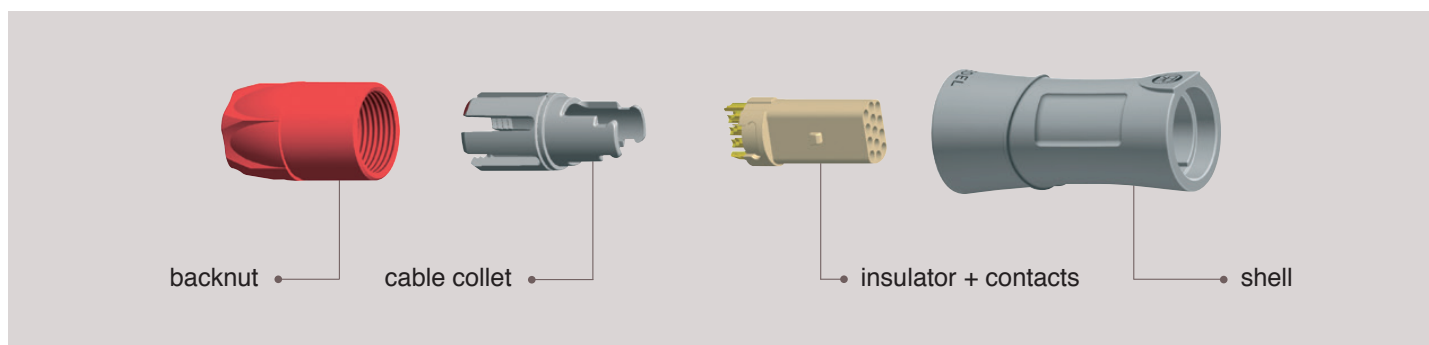

## SP Series

The REDEL SP connectors are plastic Push-Pull connectors. These circular plastic connectors are especially adapted for applications such as medical electronics and test & measurement. The SP series offer additional features: the latch sleeve is recessed into the connector body ensuring greater shock resistance of the product.

The complete connector can be assembled from spare parts (even the contact configuration) therefore offering good flexibility in stock keeping. The outer shell in Proprietary sulfone enables extensive sterilisation cycles of the product. A large choice of bend relief is available in different colour and size. REDEL SP series connectors are not compatible with the REDEL 1P or 2P series.

### Features & Benefits


- Plastic shell made of Proprietary sulfone
- Blind mating, scoop proof
- Extended resistance to sterilisation
- Enhanced ergonomics «hand grip»
- Increased resistance to shock
- New patented Push-Pull system

### Applications


- Medical electronics
- Test & measurement
- Industrial electronics
- Automotive

### Standard models


#### Straight plugs






#### Fixed sockets

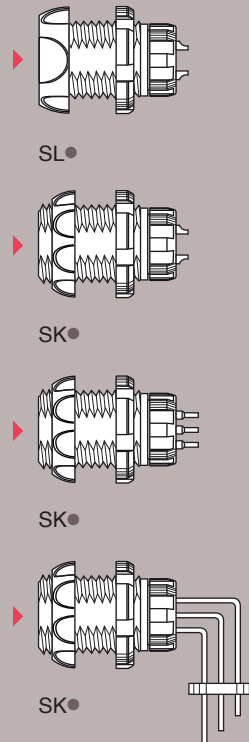

#### Free sockets



## Part numbering system

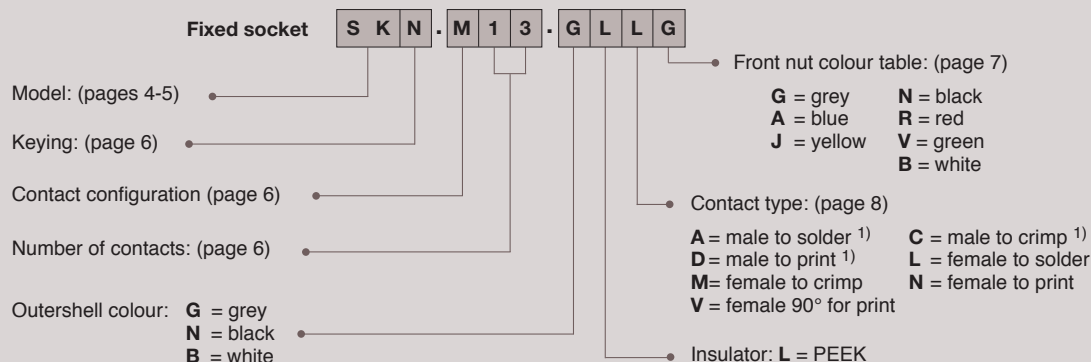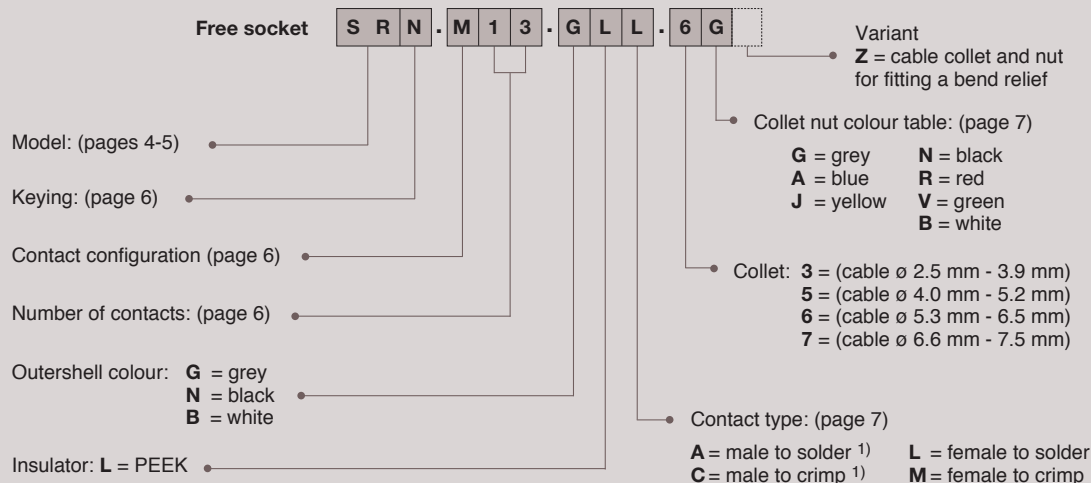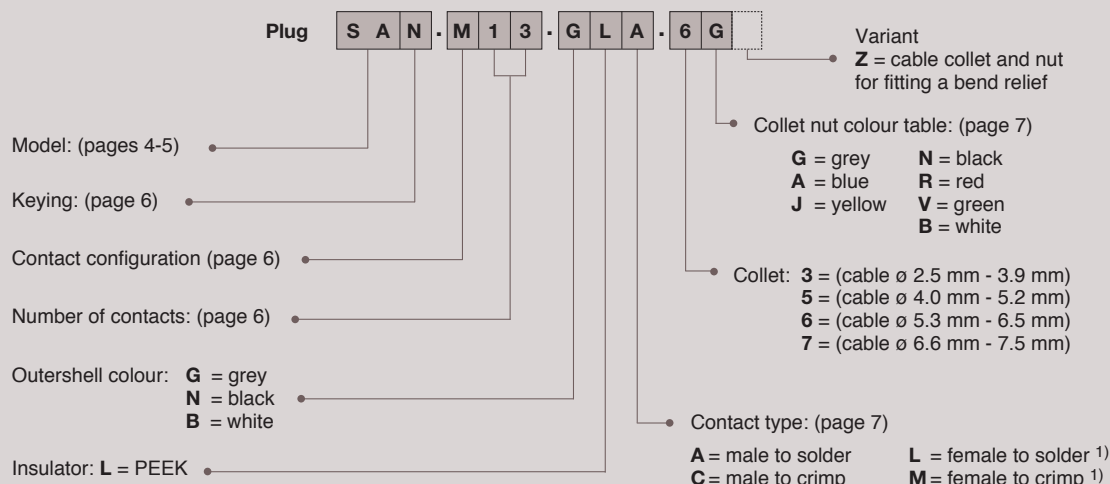

**SAN.M13.GLA.6G** Straight plug with cable collet and alignment key (N), multipole type with 13 male contacts to solder, grey Proprietary sulfone shell, PEEK insulator, collet for max cable ø 6.5 mm and grey collet nut.

**SRN.M13.GLL.6G** Free socket with cable collet and alignment key (N), multipole type with 13 female contacts to solder, grey Proprietary sulfone shell, PEEK insulator, collet for max cable ø 6.5 mm and grey collet nut.

**SKN.M13.GLLG** Fixed socket with two nuts and alignment key (N), multipole type with 13 female contacts to solder, grey Proprietary sulfone shell, PEEK insulator and grey plastic front nut.


**Note:** <sup>1)</sup> contacts delivered only with S or T keying (inverted contacts).

## Standard models (IP50)




### Fixed socket

- 1 Outershell
- 2 Insulator
- 3 Female contact
- 4 Notched nut
- 5 Front nut
- 6 Collet nut



### Straight plug


- 1 Outershell
- 2 Latch sleeve
- 3 Backnut
- 4 Insulator
- 5 Contact
- 6 Cable collet



| Characteristics                                                     | Value | Standards            |
|---------------------------------------------------------------------|-------|----------------------|
| Average retention force when pulling on the cable 1N = 0.102 kg     | 110   | IEC 60512-8 test 15f |
| Cable retention force (depends on cable construction) 1N = 0.102 kg | ~130  | IEC 60512-9 test 17c |
| Electrostatic Discharge (ESD)                                       | 15kV  | IEC 60601-1 (§20.1)  |

| Characteristics                                 | Value         | Standards           |
|-------------------------------------------------|---------------|---------------------|
| Endurance (latching)                            | > 2000 cycles | IEC 60512-5 test 9a |
| Working temperature range (Proprietary sulfone) | -50/+170°C    | —                   |
| Protection index (mated)                        | IP50          | IEC 60529           |


### SAN Straight plug, key (N) or keys (P, S and T), with cable collet

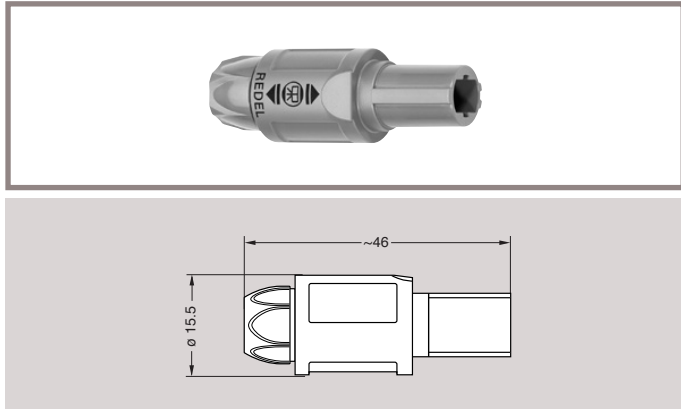

| Part Number    | Cable ø |     |
|----------------|---------|-----|
|                | min     | max |
| SAN.M**.GLA.3G | 2.5     | 3.9 |
| SAN.M**.GLA.5G | 4.0     | 5.2 |
| SAN.M**.GLA.6G | 5.3     | 6.5 |
| SAN.M**.GLA.7G | 6.6     | 7.5 |

**Note:** replace \*\*. by contact configuration (see page 6).


### SAN Straight plug, key (N) or keys (P, S and T), with cable collet and nut for fitting a bend relief

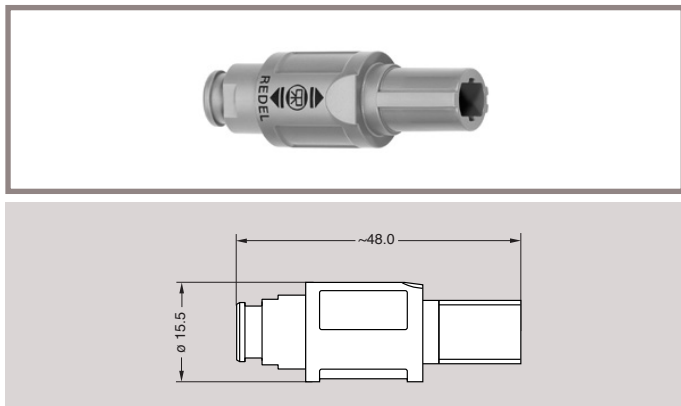

| Part Number     | Cable ø |     |
|-----------------|---------|-----|
|                 | min     | max |
| SAN.M**.GLA.3GZ | 2.5     | 3.9 |
| SAN.M**.GLA.5GZ | 4.0     | 5.2 |
| SAN.M**.GLA.6GZ | 5.3     | 6.5 |
| SAN.M**.GLA.7GZ | 6.6     | 7.5 |

**Note:** replace \*\*. by contact configuration (see page 6).  
The bend relief must be ordered separately (see page 10).

### SLN Fixed socket, key (N) or keys (P, S and T), nut fixing

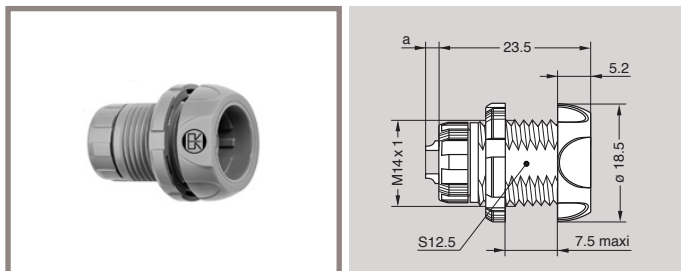


| Part Number  | Contact    |        |
|--------------|------------|--------|
|              | Solder     | Crimp  |
|              | a max (mm) | a (mm) |
| SLN.M**.GLLG | 2.2        | 0      |

**Note:** replace \*\*. by contact configuration (see page 6).

**Note:** all dimensions are in millimeters.


**SKN** Fixed socket, key (N) or keys (P, S and T) with two nuts (back panel mounting)



| Part Number  | Contact    |        |
|--------------|------------|--------|
|              | Solder     | Crimp  |
|              | a max (mm) | a (mm) |
| SKN.M*.G.LLG | 2.2        | 0      |

**Note:** replace \*. by contact configuration (see page 6).



**SKN** Fixed socket, key (N) or keys (P, S and T) with two nuts (back panel mounting) and with straight print contact



| Part Number  |
|--------------|
| SKN.M*.G.LNG |

**Note:** replace \*. by contact configuration (see page 6).


**SKN** Fixed socket, key (N) or key (P) with two nuts (back panel mounting) and with elbow print contact



| Part Number  |
|--------------|
| SKN.M*.G.LVG |

**Note:** replace \*. by contact configuration (see page 6).


**SRN** Free socket, key (N) or keys (P, S and T), with cable collet

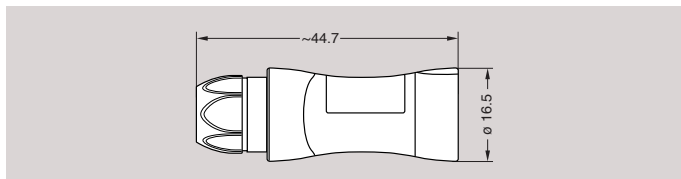

| Part Number    | Cable ø |     |
|----------------|---------|-----|
|                | min     | max |
| SRN.M*.G.LL.3G | 2.5     | 3.9 |
| SRN.M*.G.LL.5G | 4.0     | 5.2 |
| SRN.M*.G.LL.6G | 5.3     | 6.5 |
| SRN.M*.G.LL.7G | 6.6     | 7.5 |

**Note:** replace \*. by contact configuration (see page 6).

**SRN** Free socket, key (N) or keys (P, S and T), with cable collet and nut for fitting a bend relief

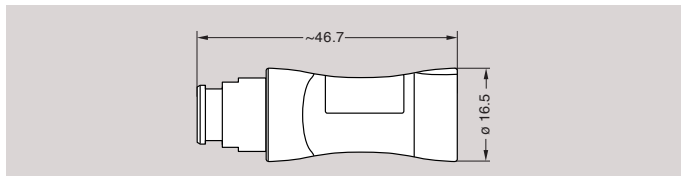

| Part Number     | Cable ø |     |
|-----------------|---------|-----|
|                 | min     | max |
| SRN.M*.G.LL.3GZ | 2.5     | 3.9 |
| SRN.M*.G.LL.5GZ | 4.0     | 5.2 |
| SRN.M*.G.LL.6GZ | 5.3     | 6.5 |
| SRN.M*.G.LL.7GZ | 6.6     | 7.5 |

**Note:** replace \*. by contact configuration (see page 6).  
The bend relief must be ordered separately (see page 10).

**Note:** all dimensions are in millimeters.

## Alignment key

S ☐ M ☐ ☐ ☐ ☐ ☐

Verify the third digit of the part number in order to select the right keying. The standard keying is «N» coded.

|                          |                                                                                   |                                                                                   |                                                                                   |                                                                                   |
|--------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|
| Keying (plug front view) |  |  |  |  |
| Reference                | N                                                                                 | P                                                                                 | S                                                                                 | T                                                                                 |
| Contact type for plug    | male                                                                              | male                                                                              | female                                                                            | female                                                                            |
| Contact type for socket  | female                                                                            | female                                                                            | male                                                                              | male                                                                              |

## Insert configuration

S ☐ M ☐ ☐ ☐ ☐ ☐

| Reference                                                      | Number of contacts | Contact $\phi$ A (mm)                                              | Solder bucket $\phi$ (mm) <sup>4)</sup> | Crimp bucket $\phi$ (mm) <sup>4)</sup> | AWG max-min | Contact type                      |               | Solder                                                 |                                                                                  |                   | Crimp                                                  |                                                                                  |                   |      |      |      |      |
|----------------------------------------------------------------|--------------------|--------------------------------------------------------------------|-----------------------------------------|----------------------------------------|-------------|-----------------------------------|---------------|--------------------------------------------------------|----------------------------------------------------------------------------------|-------------------|--------------------------------------------------------|----------------------------------------------------------------------------------|-------------------|------|------|------|------|
|                                                                |                    |                                                                    |                                         |                                        |             | Solder / Crimp / Print (straight) | Print (elbow) | Test voltage (kV rms) <sup>1)</sup><br>Contact-contact | Air clearance min <sup>2)</sup> (mm)<br>Creepage distance min <sup>3)</sup> (mm) | Rated current (A) | Test voltage (kV rms) <sup>1)</sup><br>Contact-contact | Air clearance min <sup>2)</sup> (mm)<br>Creepage distance min <sup>3)</sup> (mm) | Rated current (A) |      |      |      |      |
| <div>Male solder contacts</div> <div>Male crimp contacts</div> |                    | <div>Female solder contacts</div> <div>Female crimp contacts</div> |                                         | M04                                    | 4           | 1.3                               | 1.10          | 1.40                                                   | 18 <sup>4)</sup><br>20<br>22                                                     | •                 | •                                                      | 1.60                                                                             | 0.95              | 11.5 | 1.80 | 1.35 | 11.5 |
| Multipole                                                      | M06                | 6                                                                  | 0.9                                     | 0.80                                   | 1.10        | 20<br>22<br>24                    | •             | •                                                      | 1.50                                                                             | 1.20              | 8.5                                                    | 1.90                                                                             | 1.50              | 8.5  |      |      |      |
|                                                                | M08                | 8                                                                  | 0.9                                     | 0.80                                   | 1.10        | 20<br>22<br>24                    | •             | •                                                      | 1.50                                                                             | 0.75              | 5.0                                                    | 1.50                                                                             | 1.1               | 5.0  |      |      |      |
|                                                                | M10                | 10                                                                 | 0.7                                     | 0.80                                   | 0.80        | 22 <sup>4)</sup><br>24<br>26      | •             | •                                                      | 1.15                                                                             | 0.70              | 4.2                                                    | 1.50                                                                             | 1.1               | 4.2  |      |      |      |
|                                                                | M13                | 13                                                                 | 0.7                                     | 0.80                                   | 0.80        | 22 <sup>4)</sup><br>24<br>26      | •             | •                                                      | 1.05                                                                             | 0.50              | 4.0                                                    | 1.30                                                                             | 0.9               | 4.0  |      |      |      |
|                                                                | M16                | 16                                                                 | 0.5                                     | 0.45                                   | 0.45        | 28<br>30<br>32                    | •             | —                                                      | 0.75                                                                             | 0.47              | 3.0                                                    | 1.30                                                                             | 0.8               | 3.0  |      |      |      |
|                                                                | M18                | 18                                                                 | 0.5                                     | 0.45                                   | 0.45        | 28<br>30<br>32                    | •             | —                                                      | 0.75                                                                             | 0.47              | 2.5                                                    | 1.15                                                                             | 0.8               | 2.5  |      |      |      |
|                                                                | M22                | 22                                                                 | 0.5                                     | 0.45                                   | 0.45        | 28<br>30<br>32                    | •             | —                                                      | 0.60                                                                             | 0.48              | 2.0                                                    | 1.30                                                                             | 0.8               | 1.2  |      |      |      |

**Note:** 1) depending on specific application and related standard, more restrictive operating voltage may apply. We suggest operating voltage = 1/3 test voltage, see page 15.

2) shortest distance in air between two conductive parts.

3) shortest distance along the surface of the insulating material between two conductive parts.

4) for a given AWG, the diameter of some stranded conductor design is larger than the solder cup diameter (see page 14).

## Outer shell material

|   |  |   |  |  |  |  |  |
|---|--|---|--|--|--|--|--|
| S |  | M |  |  |  |  |  |
|---|--|---|--|--|--|--|--|

| Material            | Ref. | Colour | Temperature   |
|---------------------|------|--------|---------------|
| Proprietary sulfone | G    | Grey   | -50° / +170°C |
|                     | N    | Black  |               |
|                     | B    | White  |               |

**Note:** adapted for sterilisation saturated steam (120°C or 134°C).

## Contact type

|   |  |   |  |  |  |  |  |
|---|--|---|--|--|--|--|--|
| S |  | M |  |  |  |  |  |
|---|--|---|--|--|--|--|--|

Select the type of contact: solder or crimp?

Plug

| Type   | Male | Female          |
|--------|------|-----------------|
| solder | A    | L <sup>1)</sup> |
| crimp  | C    | M <sup>1)</sup> |

Socket

| Type      | Male            | Female |
|-----------|-----------------|--------|
| solder    | A <sup>1)</sup> | L      |
| crimp     | —               | M      |
| print     | D <sup>1)</sup> | N      |
| print 90° | —               | V      |

**Note:** 1) only for S or T keying.

When should I use crimp rather than solder contacts ?

### Soldering

- recommended for small volumes
- requires little amount of tooling (soldering iron)
- requires more time

### Crimping

- recommended for large volumes
- no heat is required to make the connection
- for contacts with high density
- for use in high temperature environment (max. 170°C)
- requires extra tooling (crimping tools)

## Colour coding

|   |  |   |  |  |  |  |  |
|---|--|---|--|--|--|--|--|
| S |  | M |  |  |  |  |  |
|---|--|---|--|--|--|--|--|


|           | Colours |      |        |       |      |       |       |
|-----------|---------|------|--------|-------|------|-------|-------|
|           | grey    | blue | yellow | black | red  | green | white |
| Reference | G       | A    | J      | N     | R    | V     | B     |
| RAL code  | 7001    | 5015 | 1016   | 9005  | 3020 | 6019  | 9003  |

**Note:** the RAL colours are indicative and depend on raw material and production process. Colour may differ.

Easy identification with the assistance of colour coding. Outershell is only available in grey, black or white.


Accessories

SAN / SLN Insulator and male or female crimp contacts

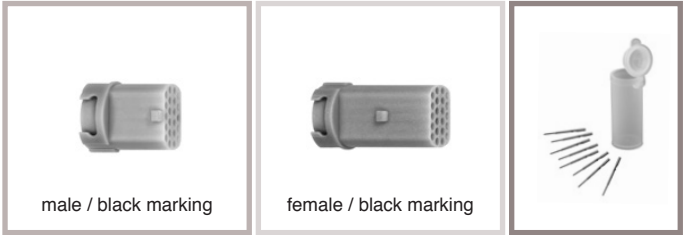


| Contact configuration | nb. of contacts | ø contact (mm) | Kit contact part number | Kit contact part number |
|-----------------------|-----------------|----------------|-------------------------|-------------------------|
|                       |                 |                | Male                    | Female                  |
| M04                   | 4               | 1.3            | SAN.M04.ZLC             | SLN.M04.ZLM             |
| M06                   | 6               | 0.9            | SAN.M06.ZLC             | SLN.M06.ZLM             |
| M08                   | 8               | 0.9            | SAN.M08.ZLC             | SLN.M08.ZLM             |
| M10                   | 10              | 0.7            | SAN.M10.ZLC             | SLN.M10.ZLM             |
| M13                   | 13              | 0.7            | SAN.M13.ZLC             | SLN.M13.ZLM             |
| M16                   | 16              | 0.5            | SAN.M16.ZLC             | SLN.M16.ZLM             |
| M18                   | 18              | 0.5            | SAN.M18.ZLC             | SLN.M18.ZLM             |
| M22                   | 22              | 0.5            | SAN.M22.ZLC             | SLN.M22.ZLM             |

SAN / SLN Insulator with male or female solder contacts

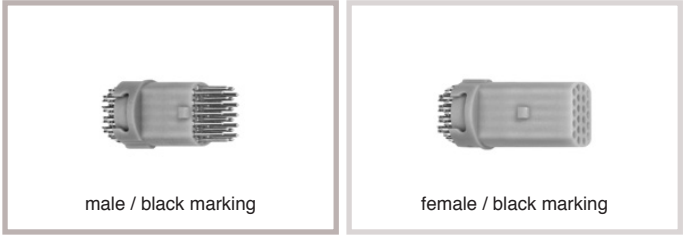

| Contact configuration | nb. of contacts | ø contact (mm) | Kit contact part number | Kit contact part number |
|-----------------------|-----------------|----------------|-------------------------|-------------------------|
|                       |                 |                | Male                    | Female                  |
| M04                   | 4               | 1.3            | SAN.M04.ZLA             | SLN.M04.ZLL             |
| M06                   | 6               | 0.9            | SAN.M06.ZLA             | SLN.M06.ZLL             |
| M08                   | 8               | 0.9            | SAN.M08.ZLA             | SLN.M08.ZLL             |
| M10                   | 10              | 0.7            | SAN.M10.ZLA             | SLN.M10.ZLL             |
| M13                   | 13              | 0.7            | SAN.M13.ZLA             | SLN.M13.ZLL             |
| M16                   | 16              | 0.5            | SAN.M16.ZLA             | SLN.M16.ZLL             |
| M18                   | 18              | 0.5            | SAN.M18.ZLA             | SLN.M18.ZLL             |
| M22                   | 22              | 0.5            | SAN.M22.ZLA             | SLN.M22.ZLL             |


SA\*.100.\*ZZ Plug outershell kit (no contacts)

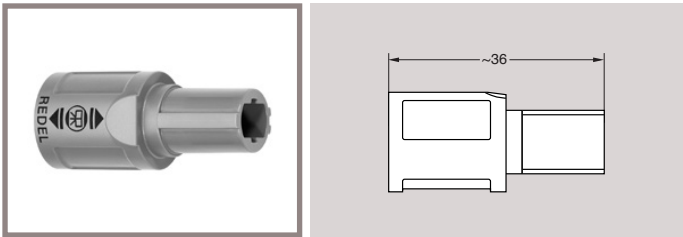

| Part Number | Colours |
|-------------|---------|
| SA*.100.GZZ | grey    |
| SA*.100.BZZ | white   |
| SA*.100.NZZ | black   |

Note: replace \* by alignment key (N, P, S or T).


SR\*.200.\* Free socket outershell kit (no contacts)

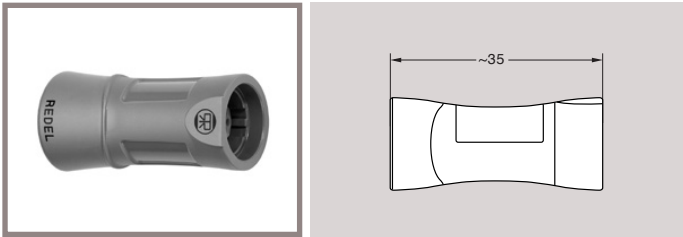

| Part Number | Colours |
|-------------|---------|
| SR*.200.RG  | grey    |
| SR*.200.RB  | white   |
| SR*.200.RN  | black   |

Note: replace \* by alignment key (N, P, S or T).


SL\*.200.\*ZZ Socket outershell kit (nut fixing), (no contacts)

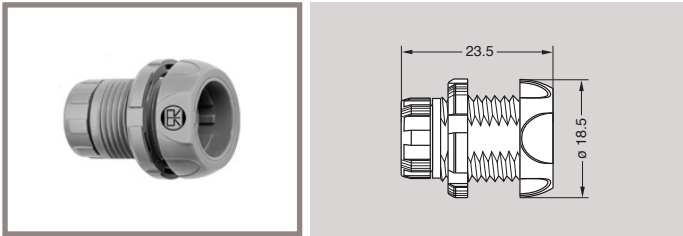

| Part Number  | Colours |
|--------------|---------|
| SL*.200.GZZG | grey    |
| SL*.200.BZZB | white   |
| SL*.200.NZZN | black   |

Note: replace \* by alignment key (N, P, S or T).


### SK•.200.●ZZ● Socket outershell kit (with two nuts), (no contacts)

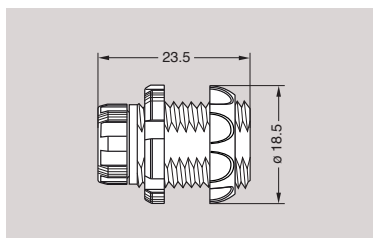

| Part Number  | Colours |
|--------------|---------|
| SK•.200.GZZG | grey    |
| SK•.200.BZZB | white   |
| SK•.200.NZZN | black   |


**Note:** replace • by alignment key (N, P, S or T).

### SAN Collet

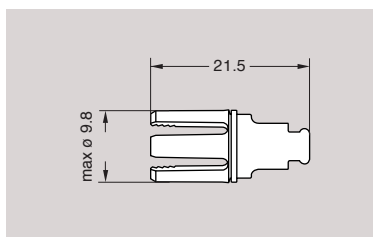

| Part Number | Cable ø (mm) |      |
|-------------|--------------|------|
|             | min.         | max. |
| SAN.739.RG  | 2.5          | 3.9  |
| SAN.752.RG  | 4.0          | 5.2  |
| SAN.765.RG  | 5.3          | 6.5  |
| SAN.775.RG  | 6.6          | 7.5  |


### SAM.130.●● Nut for fitting a GMA.1B bend relief

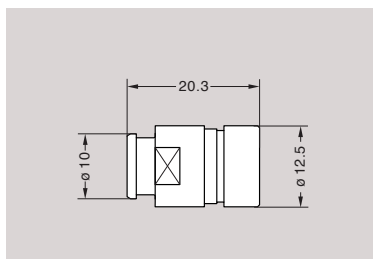

| Part Number | Colours |
|-------------|---------|
| SAM.130.RG  | grey    |
| SAM.130.RB  | white   |
| SAM.130.RR  | red     |
| SAM.130.RN  | black   |
| SAM.130.RA  | blue    |

**Note:** only for SA•, SR• models.


### SAN.130.●● Collet nut

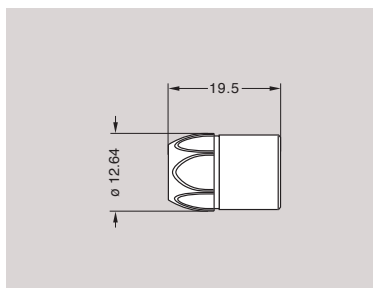

| Part Number | Colours |
|-------------|---------|
| SAN.130.RG  | grey    |
| SAN.130.RB  | white   |
| SAN.130.RR  | red     |
| SAN.130.RN  | black   |
| SAN.130.RJ  | yellow  |
| SAN.130.RA  | blue    |
| SAN.130.RV  | green   |



**Note:** only for SA•, SR• models.

### SLN Notched nut

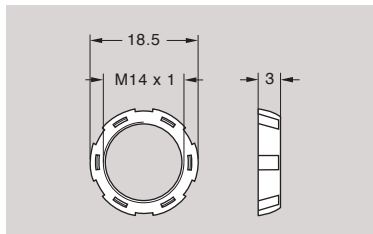

| Part Number | Colours |
|-------------|---------|
| SLN.240.RG  | grey    |


### SLN Collet nut

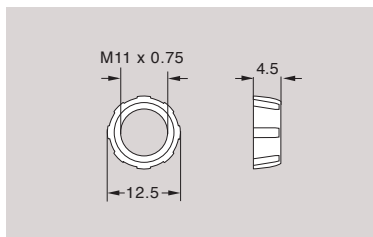

| Part Number | Colours |
|-------------|---------|
| SLN.230.RG  | grey    |


**Note:** all dimensions are in millimeters.

SKN Plastic front nut for SK● models

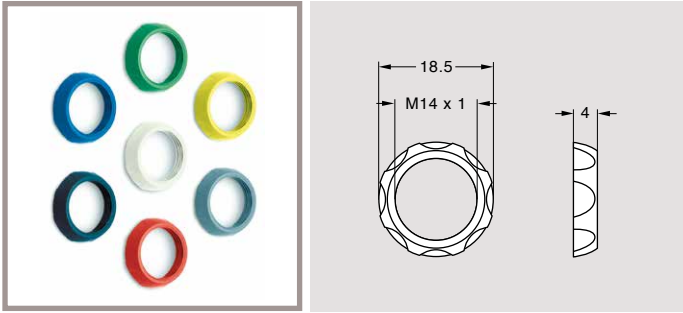

| Part Number | Colours |
|-------------|---------|
| SKN.220.RG  | grey    |
| SKN.220.RB  | white   |
| SKN.220.RR  | red     |
| SKN.220.RN  | black   |
| SKN.220.RJ  | yellow  |
| SKN.220.RA  | blue    |
| SKN.220.RV  | green   |

GMA.1B Bend relief

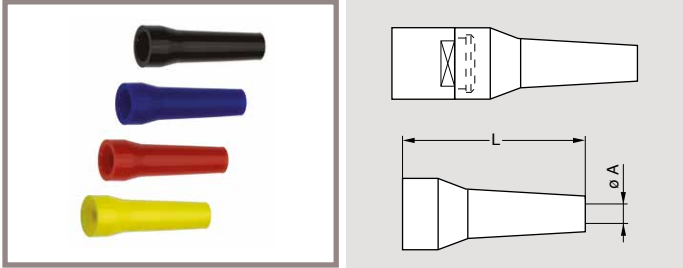

A bend relief absorbs the angular force that may be exerted on cables.  
These are designed for plugs and free sockets with cable collet and nut.  
The Colours of these bend reliefs are not identical to the RAL colours of the socket's front nut.

| Part Number   | Dimensions (mm) |    |         |      | Material               | Temperature range |                |
|---------------|-----------------|----|---------|------|------------------------|-------------------|----------------|
|               | Bend relief     |    | Cable ø |      |                        | in dry atmosphere | in water steam |
|               | A               | L  | max.    | min. |                        |                   |                |
| GMA.1B.025.RG | 2.5             | 34 | 2.9     | 2.5  | Silicone elastomer VMQ | -60°C, +200°C     | +140°C         |
| GMA.1B.030.RG | 3.0             | 34 | 3.4     | 3.0  |                        |                   |                |
| GMA.1B.035.RG | 3.5             | 34 | 3.9     | 3.5  |                        |                   |                |
| GMA.1B.040.RG | 4.0             | 34 | 4.4     | 4.0  |                        |                   |                |
| GMA.1B.045.RG | 4.5             | 34 | 5.0     | 4.5  |                        |                   |                |
| GMA.1B.051.RG | 5.1             | 34 | 5.6     | 5.1  |                        |                   |                |
| GMA.1B.057.RG | 5.7             | 34 | 6.2     | 5.7  |                        |                   |                |
| GMA.1B.063.RG | 6.3             | 34 | 7.0     | 6.3  |                        |                   |                |

**Note:** The last letter «G» of the part number indicates a grey colour, see the adjacent table and replace letter «G» by the letter of the colour required. All dimensions are in millimeters


| Reference | Colours |
|-----------|---------|
| A         | blue    |
| B         | white   |
| G         | grey    |
| J         | yellow  |
| M         | brown   |
| N         | black   |
| R         | red     |
| S         | orange  |
| V         | green   |

**Note:** the selection of pigments, which should remain stable at high temperature, is limited by the new regulations.  
The selected solutions represent the best possible compromise.

## Tooling

### SOP.019.HN


Spanners with notch for securing the notched nut

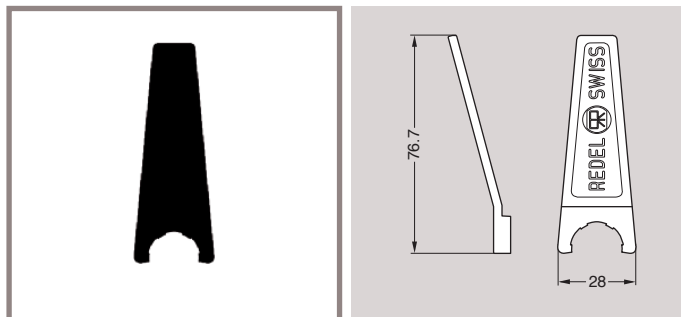

Material: Black polyamide. For notched nut SLN.240.RG.


### SOB.186.GN SOB.187.GN

Spanners for nut SLN.220R●  
Spanners for nut SKN.220R●

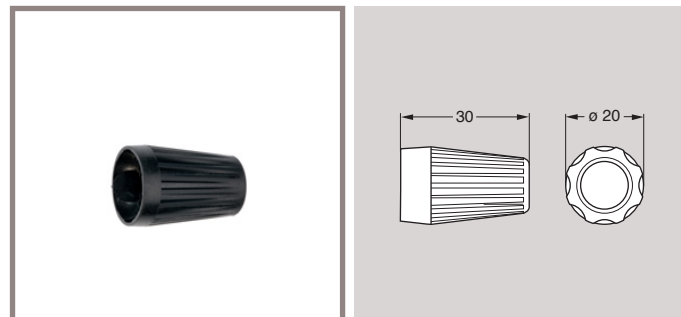

Material: Black polyamide



### DPC.91.701.V Crimping tool

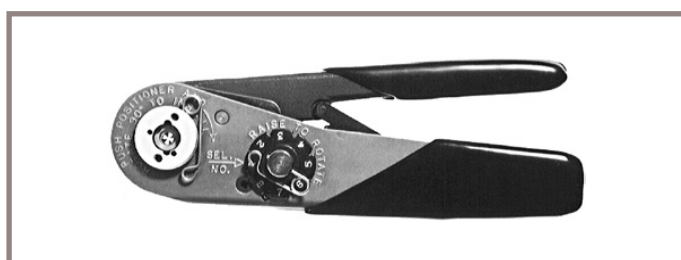

### SOE Positioners for crimp contacts



### DCF Automatic extraction tools for crimp contacts

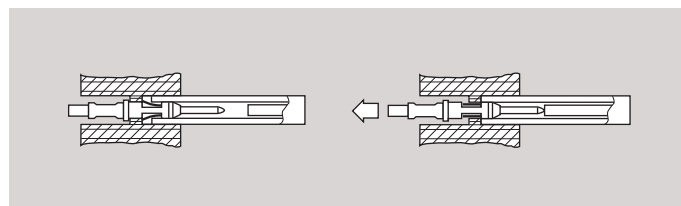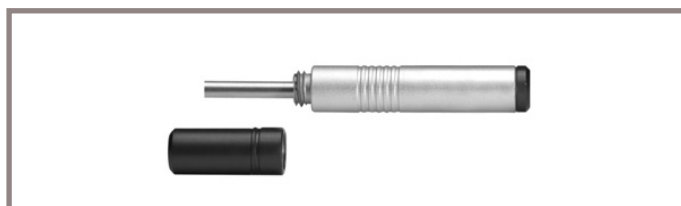


| Configuration | Contact ø (mm) | Conductor AWG | Positioner part number |                | Selector No Setting | Part number extractor       |                             |
|---------------|----------------|---------------|------------------------|----------------|---------------------|-----------------------------|-----------------------------|
|               |                |               | Male contact           | Female contact |                     | Male contact                | Female contact              |
| M04           | 1.3            | 18-20         | SOE.130.VC             | SOE.130.VM     | 8-7                 | DCF.93.131.4LT              | DCF.93.131.4LT              |
| M06/M08       | 0.9            | 20-22-24      | SOE.090.VC             | SOE.090.VM     | 6-5-5               | DCF.93.090.4LT              | DCF.93.090.4LT              |
| M10/M13       | 0.7            | 22-24-26      | SOE.070.VC             | SOE.070.VM     | 6-5-5               | DCF.93.070.4LT              | DCF.93.070.4LT              |
| M16/M18/M22   | 0.5            | 28-30-32      | SOE.050.VC             | SOE.050.VM     | 4-3-3               | DCF.91.050.2LT <sub>1</sub> | DCF.91.050.2LT <sub>1</sub> |

**Note:** the variance in conductor stranding diameter for the minimum AWG is such that some can have a cross section which is not sufficient to guarantee crimping as per IEC 60352-2 standard. 1) With this extractor, the user must remove the insulator from the outer shell.

## Panel hole


For SL● and SK●

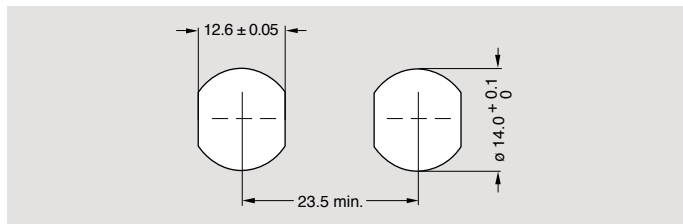


**Note:** Socket mounting nut torque = 1 Nm.  
All dimensions are in millimeters.

## PCB drilling pattern

For straight contacts

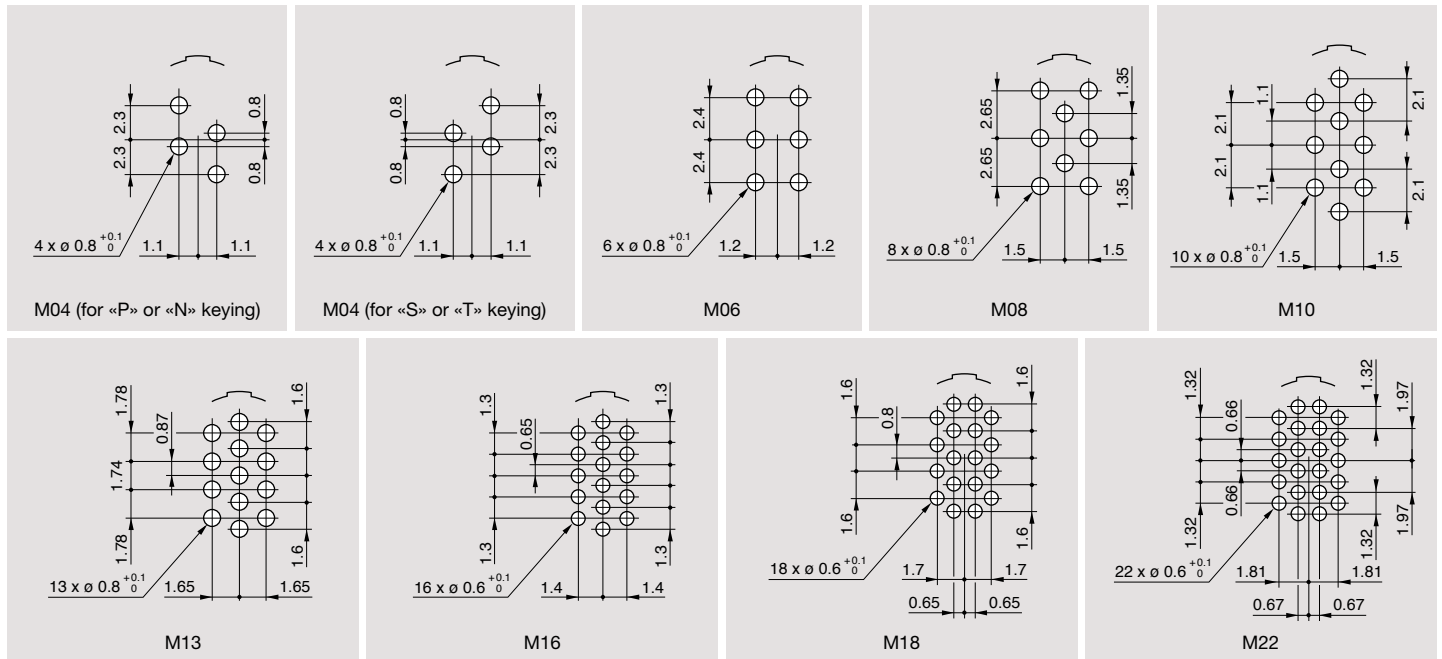


For elbow contacts

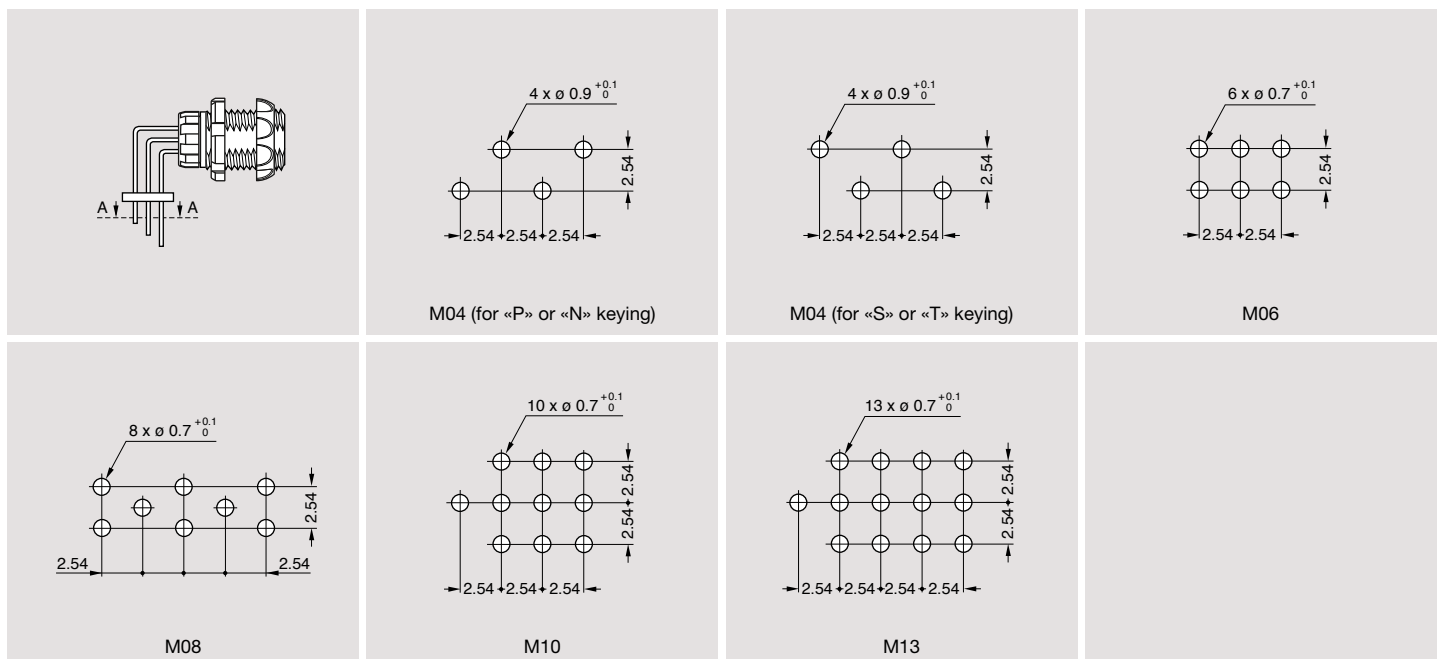

**Note:** all dimensions are in millimeters

## Assembly instructions

### Solder contacts / Crimp contacts

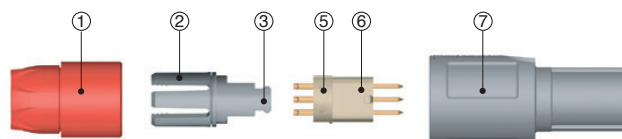

- Slide the collet nut ① and then the collet ② onto the cable.

| Configuration | Dimensions (mm) |     |                |     |
|---------------|-----------------|-----|----------------|-----|
|               | Solder contacts |     | Crimp contacts |     |
|               | L               | T   | L              | T   |
| M04           | 11.5            | 3.5 | 15.0           | 3.5 |
| M06, M08      | 13.0            | 3.0 | 15.0           | 3.5 |
| M10, M13      | 13.0            | 3.0 | 15.0           | 3.5 |
| M16 to M22    | 12.5            | 2.5 | 14.5           | 2.5 |

- Strip the cable according to the lengths given in the table. Tin the conductors.

- Solder conductors into contacts, starting with the center contacts, making sure that neither solder nor flux gets onto the insulator or cable insulation.

Fix the appropriate positioner in the crimping tool. Set selector to the number corresponding to the conductor AWG as indicated on the positioner label. Fit conductor into contact and make sure it is visible through the inspection hole in the crimp barrel. Slide conductor-contact combination into the open crimping tool; make sure that the contact is fully pushed into the positioner. Close the tool. Remove from crimping tool and check that conductor is secure in contact and shows in inspection hole.

- Slide the collet ② forward and locate both tags ③ in the slots ⑤ on the insulator ⑥. Push collet ② and insulator ⑥ assembly into the shell ⑦ whilst turning it to ensure that the tag ③ locates in the inside slot of the shell.

- Slide collet nut ① over collet ② and tighten the collet nut ① to the maximum torque of 0.3 Nm.

– Socket mounting nut torque = 1 Nm.

## Technical tables

**Table of American Wire Gauge**

| AWG              | Construction |            | ø wire max |       | Wire section       |                      |
|------------------|--------------|------------|------------|-------|--------------------|----------------------|
|                  | Strand nb    | AWG/strand | (mm)       | (in)  | (mm <sup>2</sup> ) | (sq in)              |
| 0                | 259          | 24         | 11.277     | 0.444 | 52.90              | 0.0820               |
| 1                | 817          | 30         | 9.702      | 0.382 | 41.40              | 0.0641               |
| 2                | 259          | 26         | 8.89       | 0.35  | 33.20              | 0.0514               |
| 4                | 133          | 25         | 6.9596     | 0.274 | 21.5925            | 0.0335               |
| 6                | 133          | 27         | 5.5118     | 0.217 | 13.5885            | 0.0211               |
| 8                | 168          | 30         | 4.4450     | 0.175 | 8.5127             | 0.0132               |
| 8                | 133          | 29         | 4.3942     | 0.173 | 8.6053             | 0.0133               |
| 10               | 105          | 30         | 3.3020     | 0.13  | 5.3204             | 0.0082               |
| 10               | 37           | 26         | 2.9210     | 0.115 | 4.7397             | 0.0073               |
| 10               | 1            | 10         | 2.6162     | 0.103 | 5.2614             | 0.0082               |
| 12               | 37           | 28         | 2.3114     | 0.091 | 2.9765             | 0.0046               |
| 12               | 19           | 25         | 2.3622     | 0.093 | 3.0847             | 0.0048               |
| 12 <sup>1)</sup> | 7            | 20         | 2.5400     | 0.10  | 3.6321             | 0.0056               |
| 12               | 1            | 12         | 2.0828     | 0.082 | 3.3081             | 0.0051               |
| 14               | 41           | 30         | 2.0574     | 0.081 | 2.0775             | 0.0032               |
| 14               | 19           | 27         | 1.8542     | 0.073 | 1.9413             | 0.0030               |
| 14 <sup>1)</sup> | 7            | 22         | 2.0828     | 0.082 | 2.2704             | 0.0035               |
| 14               | 1            | 14         | 1.6510     | 0.065 | 2.0820             | 0.0032               |
| 16 <sup>1)</sup> | 65           | 34         | 1.5748     | 0.062 | 1.3072             | 0.0020               |
| 16               | 26           | 30         | 1.5748     | 0.062 | 1.3174             | 0.0020               |
| 16               | 19           | 29         | 1.4986     | 0.059 | 1.2293             | 0.0019               |
| 16 <sup>1)</sup> | 7            | 24         | 1.5494     | 0.061 | 1.4330             | 0.0022               |
| 16               | 1            | 16         | 1.3208     | 0.052 | 1.3076             | 0.0020               |
| 18 <sup>1)</sup> | 65           | 36         | 1.2700     | 0.05  | 0.8234             | 0.0013               |
| 18 <sup>1)</sup> | 42           | 34         | 1.2700     | 0.05  | 0.8447             | 0.0013               |
| 18               | 19           | 30         | 1.3208     | 0.052 | 0.9627             | 0.0015               |
| 18               | 16           | 30         | 1.2954     | 0.051 | 0.8107             | 0.0013               |
| 18               | 7            | 26         | 1.2700     | 0.05  | 0.8967             | 0.0014               |
| 18               | 1            | 18         | 1.0414     | 0.041 | 0.8229             | 0.0013               |
| 20 <sup>1)</sup> | 42           | 36         | 1.0160     | 0.04  | 0.5320             | 8.2x10 <sup>-4</sup> |
| 20               | 19           | 32         | 1.0414     | 0.041 | 0.6162             | 0.0010               |
| 20               | 10           | 30         | 1.0160     | 0.04  | 0.5067             | 7.9x10 <sup>-4</sup> |
| 20               | 7            | 28         | 0.9906     | 0.039 | 0.5631             | 8.7x10 <sup>-4</sup> |
| 20               | 1            | 20         | 0.8382     | 0.033 | 0.5189             | 8.0x10 <sup>-4</sup> |
| 22               | 19           | 34         | 0.8382     | 0.033 | 0.3821             | 5.9x10 <sup>-4</sup> |
| 22               | 7            | 30         | 0.7874     | 0.031 | 0.3547             | 5.5x10 <sup>-4</sup> |
| 22               | 1            | 22         | 0.6604     | 0.026 | 0.3243             | 5.0x10 <sup>-4</sup> |
| 24 <sup>1)</sup> | 42           | 40         | 0.6604     | 0.026 | 0.2045             | 3.2x10 <sup>-4</sup> |
| 24               | 19           | 36         | 0.6858     | 0.027 | 0.2407             | 3.7x10 <sup>-4</sup> |
| 24               | 7            | 32         | 0.6350     | 0.025 | 0.2270             | 3.5x10 <sup>-4</sup> |
| 24               | 1            | 24         | 0.5588     | 0.022 | 0.2047             | 3.2x10 <sup>-4</sup> |
| 26               | 19           | 38         | 0.5588     | 0.022 | 0.1540             | 2.4x10 <sup>-4</sup> |
| 26               | 7            | 34         | 0.5080     | 0.02  | 0.1408             | 2.2x10 <sup>-4</sup> |
| 26               | 1            | 26         | 0.4318     | 0.017 | 0.1281             | 2.0x10 <sup>-4</sup> |
| 28 <sup>1)</sup> | 19           | 40         | 0.4318     | 0.017 | 0.0925             | 1.4x10 <sup>-4</sup> |
| 28               | 7            | 36         | 0.4064     | 0.016 | 0.0887             | 1.4x10 <sup>-4</sup> |
| 28               | 1            | 28         | 0.3302     | 0.013 | 0.0804             | 1.2x10 <sup>-4</sup> |
| 30               | 7            | 38         | 0.3302     | 0.013 | 0.0568             | 8.8x10 <sup>-5</sup> |
| 30               | 1            | 30         | 0.2794     | 0.011 | 0.0507             | 7.9x10 <sup>-5</sup> |
| 32               | 7            | 40         | 0.2794     | 0.011 | 0.0341             | 5.3x10 <sup>-5</sup> |
| 32               | 1            | 32         | 0.2286     | 0.009 | 0.0324             | 5.0x10 <sup>-5</sup> |
| 34               | 1            | 34         | 0.1693     | 0.007 | 0.0201             | 3.1x10 <sup>-5</sup> |
| 36               | 1            | 36         | 0.127      | 0.005 | 0.0127             | 2.0x10 <sup>-5</sup> |
| 38               | 1            | 38         | 0.1016     | 0.004 | 0.0081             | 1.3x10 <sup>-5</sup> |
| 40               | 1            | 40         | 0.078      | 0.003 | 0.0049             | 7.5x10 <sup>-6</sup> |

**Table of wire gauges according to IEC-60228 standard**

| Conductor no<br>x ø (mm) | Max ø<br>(mm) | Max ø<br>(in) | Section<br>(mm <sup>2</sup> ) | Section<br>(sq in)   |
|--------------------------|---------------|---------------|-------------------------------|----------------------|
| 196x0.40                 | 7.50          | 0.295         | 25.00                         | 0.0387               |
| 7x2.14                   | 6.10          | 0.240         | 25.00                         | 0.0387               |
| 125x0.40                 | 6.00          | 0.236         | 16.00                         | 0.0248               |
| 7x1.72                   | 4.90          | 0.192         | 16.00                         | 0.0248               |
| 1x4.50                   | 4.50          | 0.177         | 16.00                         | 0.0248               |
| 80x0.40                  | 4.70          | 0.155         | 10.00                         | 0.0155               |
| 7x1.38                   | 3.95          | 0.155         | 10.00                         | 0.0155               |
| 1x3.60                   | 3.60          | 0.141         | 10.00                         | 0.0155               |
| 84x0.30                  | 3.70          | 0.145         | 6.00                          | 0.0093               |
| 7x1.50                   | 3.15          | 0.124         | 6.00                          | 0.0093               |
| 1x2.76                   | 2.76          | 0.108         | 6.00                          | 0.0093               |
| 56x0.30                  | 2.80          | 0.110         | 4.00                          | 0.0062               |
| 7x0.86                   | 2.58          | 0.098         | 4.00                          | 0.0062               |
| 1x2.25                   | 2.25          | 0.082         | 4.00                          | 0.0062               |
| 50x0.25                  | 2.15          | 0.084         | 2.50                          | 0.0038               |
| 7x0.68                   | 2.04          | 0.080         | 2.50                          | 0.0038               |
| 1x1.78                   | 1.78          | 0.070         | 2.50                          | 0.0038               |
| 30x0.25                  | 1.60          | 0.062         | 1.50                          | 0.0023               |
| 7x0.52                   | 1.56          | 0.061         | 1.50                          | 0.0023               |
| 1x1.4                    | 1.40          | 0.055         | 1.50                          | 0.0023               |
| 32x0.20                  | 1.35          | 0.053         | 1.00                          | 0.0015               |
| 7x0.43                   | 1.29          | 0.050         | 1.00                          | 0.0015               |
| 1x1.15                   | 1.15          | 0.045         | 1.00                          | 0.0015               |
| 42x0.15                  | 1.20          | 0.047         | 0.75                          | 0.0011               |
| 28x0.20                  | 1.15          | 0.045         | 0.75                          | 0.0011               |
| 1x1.0                    | 1.00          | 0.039         | 0.75                          | 0.0011               |
| 28x0.15                  | 0.95          | 0.037         | 0.50                          | 7.7x10 <sup>-4</sup> |
| 16x0.20                  | 0.90          | 0.035         | 0.50                          | 7.7x10 <sup>-4</sup> |
| 1x0.80                   | 0.80          | 0.031         | 0.50                          | 7.7x10 <sup>-4</sup> |
| 7x0.25                   | 0.75          | 0.029         | 0.34                          | 5.2x10 <sup>-4</sup> |
| 1x0.60                   | 0.60          | 0.023         | 0.28                          | 4.3x10 <sup>-4</sup> |
| 14x0.15                  | 0.75          | 0.029         | 0.25                          | 3.8x10 <sup>-4</sup> |
| 7x0.20                   | 0.65          | 0.023         | 0.22                          | 3.4x10 <sup>-4</sup> |
| 18x0.10                  | 0.50          | 0.019         | 0.14                          | 2.1x10 <sup>-4</sup> |
| 14x0.10                  | 0.40          | 0.015         | 0.11                          | 1.7x10 <sup>-4</sup> |
| 21x0.07                  | 0.40          | 0.015         | 0.09                          | 1.3x10 <sup>-4</sup> |
| 14x0.10                  | 0.40          | 0.015         | 0.09                          | 1.3x10 <sup>-4</sup> |

**Note:** 1) not included in the standard

## Product safety notice

**PLEASE READ AND FOLLOW ALL INSTRUCTIONS CAREFULLY AND CONSULT ALL RELEVANT NATIONAL AND INTERNATIONAL SAFETY REGULATIONS FOR YOUR APPLICATION. IMPROPER HANDLING, CABLE ASSEMBLY, OR WRONG USE OF CONNECTORS CAN RESULT IN HAZARDOUS SITUATIONS.**

### 1. SHOCK AND FIRE HAZARD

Incorrect wiring, the use of damaged components, presence of foreign objects (such as metal debris), and / or residue (such as cleaning fluids), can result in short circuits, overheating, and / or risk of electric shock. Mated components should never be disconnected while live as this may result in an exposed electric arc and local overheating, resulting in possible damage to components.

### 2. HANDLING

Connectors and their components should be visually inspected for damage prior to installation and assembly. Suspect components should be rejected or returned to the factory for verification.

Connector assembly and installation should only be carried out by properly trained personnel. Proper tools must be used during installation and / or assembly in order to obtain safe and reliable performance.

### 3. USE

Connectors with exposed contacts should never be live (or on the current supply side of a circuit). Under general conditions voltages above 30 VAC and 42 VDC are considered hazardous and proper measures should be taken to eliminate all risk of transmission of such voltages to any exposed metal part of the connector.

### 4. TEST AND OPERATING VOLTAGES

The maximum admissible operating voltage depends upon the national or international standards in force for the application in question. Air and creepage distances impact the operating voltage; reference values are indicated in the catalog however these may be influenced by PC board design and / or wiring harnesses.

The test voltage indicated in the catalog is 75% of the mean breakdown voltage; the test is applied at 500 V/s and the test duration is 1 minute.

### 5. CE MARKING

CE marking  means that the appliance or equipment bearing it complies with the protection requirements of one or several European safety directives.

CE marking  applies to complete products or equipment, **but not to electromechanical components, such as connectors.**

### 6. PRODUCT IMPROVEMENTS

The LEMO Group reserves the right to modify and improve to our products or specifications without providing prior notification.

### 7. **WARNING (Prop 65 State of California)**

Proposition 65 requires businesses to provide warnings to Californians about significant exposures to chemicals that cause cancer, birth defects or other reproductive harm. LEMO products are exempt from proposition 65 warnings because they are manufactured, marketed, and sold solely for commercial and industrial use. For further information, please visit <https://www.lemo.com/quality/LEMO-Prop-65-compliance-declaration.pdf>.

## Disclaimers

LEMO works constantly to improve the quality of its products; the information and illustrations figuring in this document may therefore vary and are not binding. In any case, LEMO makes no specific warranty of merchantability, fitness for a particular purpose, third party components as such or included in assembly, non-infringement, title, accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO component.

In no event shall LEMO, its affiliates, officers, agents or employees be liable for any incidental, indirect, special or consequential damages in connection with the products or services provided by LEMO, including (without limitation) loss of profits or revenues, interruption of business, loss of use of the products or any associated equipment, materials, components or products, damages to associated equipment or in combination with other components, materials.


Reproduction of significant portions of LEMO information in LEMO data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. LEMO is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

## Notes

# LEMO complete product range

|                    | B | S | K | E | F | 00 | 01 | 0A | 3T | 4A | 4M | 3K.93C | 1D | Y | 05 | 5G | 2G | 2C | L | H | R | N | 03 | V | W | U | T7 | P | D | K/S | 01 | DIN |
|--------------------|---|---|---|---|---|----|----|----|----|----|----|--------|----|---|----|----|----|----|---|---|---|---|----|---|---|---|----|---|---|-----|----|-----|
| Unipole            |   |   |   |   |   |    |    |    |    |    |    |        |    |   |    |    |    |    |   |   |   |   |    |   |   |   |    |   |   |     |    |     |
| Multipole          |   |   |   |   |   |    |    |    |    |    |    |        |    |   |    |    |    |    |   |   |   |   |    |   |   |   |    |   |   |     |    |     |
| Coaxial 50 Ω       |   |   |   |   |   |    |    |    |    |    |    |        |    |   |    |    |    |    |   |   |   |   |    |   |   |   |    |   |   |     |    |     |
| Coaxial 75 Ω       |   |   |   |   |   |    |    |    |    |    |    |        |    |   |    |    |    |    |   |   |   |   |    |   |   |   |    |   |   |     |    |     |
| Multi Coaxial      |   |   |   |   |   |    |    |    |    |    |    |        |    |   |    |    |    |    |   |   |   |   |    |   |   |   |    |   |   |     |    |     |
| Mixed Coax + LV    |   |   |   |   |   |    |    |    |    |    |    |        |    |   |    |    |    |    |   |   |   |   |    |   |   |   |    |   |   |     |    |     |
| Triaxial 50 Ω      |   |   |   |   |   |    |    |    |    |    |    |        |    |   |    |    |    |    |   |   |   |   |    |   |   |   |    |   |   |     |    |     |
| Triaxial 75 Ω      |   |   |   |   |   |    |    |    |    |    |    |        |    |   |    |    |    |    |   |   |   |   |    |   |   |   |    |   |   |     |    |     |
| Mixed Triax + LV   |   |   |   |   |   |    |    |    |    |    |    |        |    |   |    |    |    |    |   |   |   |   |    |   |   |   |    |   |   |     |    |     |
| Quadrax            |   |   |   |   |   |    |    |    |    |    |    |        |    |   |    |    |    |    |   |   |   |   |    |   |   |   |    |   |   |     |    |     |
| High Voltage       |   |   |   |   |   |    |    |    |    |    |    |        |    |   |    |    |    |    |   |   |   |   |    |   |   |   |    |   |   |     |    |     |
| Multi High Voltage |   |   |   |   |   |    |    |    |    |    |    |        |    |   |    |    |    |    |   |   |   |   |    |   |   |   |    |   |   |     |    |     |
| Mixed HV + LV      |   |   |   |   |   |    |    |    |    |    |    |        |    |   |    |    |    |    |   |   |   |   |    |   |   |   |    |   |   |     |    |     |
| Fibre Optic        |   |   |   |   |   |    |    |    |    |    |    |        |    |   |    |    |    |    |   |   |   |   |    |   |   |   |    |   |   |     |    |     |
| Multi Fibre Optic  |   |   |   |   |   |    |    |    |    |    |    |        |    |   |    |    |    |    |   |   |   |   |    |   |   |   |    |   |   |     |    |     |
| Mixed FO + LV      |   |   |   |   |   |    |    |    |    |    |    |        |    |   |    |    |    |    |   |   |   |   |    |   |   |   |    |   |   |     |    |     |
| Thermocouple       |   |   |   |   |   |    |    |    |    |    |    |        |    |   |    |    |    |    |   |   |   |   |    |   |   |   |    |   |   |     |    |     |
| Fluidic            |   |   |   |   |   |    |    |    |    |    |    |        |    |   |    |    |    |    |   |   |   |   |    |   |   |   |    |   |   |     |    |     |
| Multi Fluidic      |   |   |   |   |   |    |    |    |    |    |    |        |    |   |    |    |    |    |   |   |   |   |    |   |   |   |    |   |   |     |    |     |
| Mixed Fluidic + LV |   |   |   |   |   |    |    |    |    |    |    |        |    |   |    |    |    |    |   |   |   |   |    |   |   |   |    |   |   |     |    |     |

Most frequently used in darker colour

|                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                      |                                                                                       |                                                                                       |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| B Series Keyed                                                                      | S Series                                                                            | K Series Keyed                                                                      | E Series                                                                            | F Series Keyed                                                                       | 00 Series                                                                             | 01 Series                                                                             |
|  |  |  |  |  |  |  |
| 0A Series                                                                           | 3T Series                                                                           | 4A Series                                                                           | 4M Series Keyed                                                                     | 3K.93C Series Keyed                                                                  | 1D Series                                                                             | Y Series                                                                              |
|  |  |  |  |  |  |  |
| 05 Series                                                                           | 5G Series Keyed                                                                     | 2G Series Keyed                                                                     | 2C Series                                                                           | L Series Keyed                                                                       | H Series                                                                              | M Series Keyed                                                                        |
|  |  |  |  |  |  |  |
| R Series Keyed                                                                      | N Series Keyed                                                                      | 03 Series Keyed                                                                     | V Series                                                                            | W Series Keyed                                                                       | Cable assembly                                                                        | K/S Series Keyed                                                                      |
|  |  |  |  |  |  |  |
| REDEL T7 Series                                                                     | REDEL P Series Keyed                                                                | REDEL D Series                                                                      | 01 Series Keyed                                                                     | VAA Series                                                                           | SAA Series                                                                            | TAA Series                                                                            |
|  |  |  |  |  |  |  |

No reproduction or use without express permission of editorial or pictorial content, in any manner.  
LEMO SA reserves the right to modify and improve specifications, at all times, without any notification.

## LEMO HEADQUARTERS

### SWITZERLAND

#### LEMO SA

Chemin des Champs-Courbes 28 - P.O. Box 194 - CH-1024 Ecublens  
Tel. (+41 21) 695 16 00 - Fax (+41 21) 695 16 02 - e-mail: info@lemo.com

## LEMO SUBSIDIARIES

### AUSTRIA

#### LEMO Elektronik GesmbH

Lemböckgasse 49/E6-3  
1230 Wien  
Tel: (+43 1) 914 23 20 0  
Fax: (+43 1) 914 23 20 11  
salesAT@lemo.at

### BRAZIL

#### LEMO Latin America Ltda

Av. José Rocha Bonfim,  
214 Salas 224 / 225  
Condomínio Praça Capital  
Ed. Chicago  
Campinas / SP - Brasil 13080-650  
Tel: +55 (11) 98689 4736  
info-la@lemo.com

### CANADA

#### LEMO Canada Inc

44 East Beaver Creek Road, unit 20  
Richmond Hill, Ontario L4B 1G8  
Tel: (+1 905) 889 56 78  
Fax: (+1 905) 889 49 70  
info-canada@lemo.com

### CHINA / HONG KONG

#### LEMO Electronics (Shanghai) Co., Ltd

First Floor, Block E,  
18 Jindian Road, Pudong  
Shanghai, China, 201206  
Tel: (+86 21) 5899 7721  
Fax: (+86 21) 5899 7727  
cn.sales@lemo.com

### DENMARK

#### LEMO Denmark A/S

Mandal Allé 16A  
5500 Middelfart  
Tel: (+45) 45 20 44 00  
Fax: (+45) 45 20 44 01  
info-dk@lemo.com

### FRANCE

#### LEMO France Sàrl

24/28 Avenue Graham Bell  
Bâtiment Balthus 4  
Bussy Saint Georges  
77607 Marne la Vallée Cedex 3  
Tel: (+33 1) 60 94 60 94  
Fax: (+33 1) 60 94 60 90  
info-fr@lemo.com

### GERMANY

#### LEMO Elektronik GmbH

Hanns-Schwindt-Str. 6  
81829 München  
Tel: (+49 89) 42 77 03  
Fax: (+49 89) 420 21 92  
info@lemo.de

### HUNGARY

#### REDEL Elektronika Kft

Nagysándor József u. 6-12  
1201 Budapest  
Tel: (+36 1) 421 47 10  
Fax: (+36 1) 421 47 57  
info-hu@lemo.com

### ITALY

#### LEMO Italia srl

Viale Lunigiana 25  
20125 Milano  
Tel: (+39 02) 66 71 10 46  
Fax: (+39 02) 37 90 80 46  
sales.it@lemo.com

### JAPAN

#### LEMO Japan Ltd

2-7-22, Mita,  
Minato-ku, Tokyo, 108-0073  
Tel: (+81 3) 54 46 55 10  
Fax: (+81 3) 54 46 55 11  
info-jp@lemo.com

### MIDDLE EAST

#### LEMO Middle East Connectors LLC

Concorde Tower 6th Floor,  
Dubai Media City, P.O. Box 126732  
Dubai, United Arab Emirates  
Tel: +971 55 222 36 77  
info-me@lemo.com

### NETHERLANDS / BELGIUM

#### LEMO Connectors Nederland B.V.

Jacques Meuwissenweg 6  
2031 AD Haarlem  
Tel: +31 23 206 07 01  
info-nl@lemo.com

### NORWAY / ICELAND

#### LEMO Norway A/S

Soerumsandvegen 69,  
1920 Soerumsand  
Tel: (+47) 22 91 70 40  
Fax: (+47) 22 91 70 41  
info-no@lemo.com

### SINGAPORE

#### LEMO Asia Pte Ltd

4 Leng Kee Road,  
#06-09 SiS Building  
Singapore 159088  
Tel: (+65) 6476 0672  
Fax: (+65) 6474 0672  
sg.sales@lemo.com

### SPAIN / PORTUGAL

#### IBERLEMO SAU

Brasil, 45, 08402 Granollers  
Barcelona  
Tel: (+34 93) 860 44 20  
Fax: (+34 93) 879 10 77  
info-es@lemo.com

### SWEDEN / FINLAND

#### LEMO Nordic AB

Gunnebogatan 30, Box 8201  
163 08 Spånga  
Tel: (+46 8) 635 60 60  
Fax: (+46 8) 635 60 61  
info-se@lemo.com

### SWITZERLAND

#### LEMO Verkauf AG

Grundstrasse 22 B, 6343 Rotkreuz  
Tel: (+41 41) 790 49 40  
ch.sales@lemo.com

### UNITED KINGDOM

#### LEMO UK Ltd

12-20 North Street, Worthing,  
West Sussex, BN11 1DU  
Tel: (+44 1903) 23 45 43  
lemouk@lemo.com

### USA

#### LEMO USA Inc

P.O. Box 2408  
Rohnert Park, CA 94927-2408  
Tel: (+1 707) 578 88 11  
(+1 800) 444 53 66  
Fax: (+1 707) 578 08 69  
info-US@lemo.com

## LEMO DISTRIBUTORS

ARGENTINA, AUSTRALIA, BRAZIL, CHILE, COLOMBIA, CZECH REPUBLIC,  
GREECE, INDIA, ISRAEL, NEW ZEALAND, PERU, POLAND, RUSSIA,  
SOUTH AFRICA, SOUTH KOREA, TAIWAN, TURKEY, UKRAINE

[www.lemo.com](http://www.lemo.com)

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[LEMO:](#)

[SAN.M08.GLA.6A](#) [SAN.M22.GLA.6GZ](#) [SRN.M22.GLL.6G](#) [SAN.M13.GLA.6A](#) [SRN.M13.GLL.6A](#) [SKN.M13.GLLG](#)

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А