

Table 1. CLA Series Absolute Maximum Ratings¹

Parameter	Symbol	Minimum	Typical	Maximum	Units
Power dissipation	P _{DIS}			$\frac{\text{Maximum } T_J - \text{Case Temp}}{\text{Thermal Resistance}_{\text{junction-to-case}}}$	W
Reverse voltage	V _R			Minimum rated breakdown voltage	V
Forward current	I _F			200	mA
Junction temperature	T _J	-65		+175	°C
Storage temperature	T _{STG}	-65		+200	°C
Electrostatic discharge:					
Charged Device Model (CDM), Class 4				1000	V
Human Body Model (HBM), Class 1C				1000	V
Machine Model (MM), Class A				150	V

¹ Exposure to maximum rating conditions for extended periods may reduce device reliability. There is no damage to device with only one parameter set at the limit and all other parameters set at or below their nominal value. Exceeding any of the limits listed here may result in permanent damage to the device.

ESD HANDLING: Although this device is designed to be as robust as possible, electrostatic discharge (ESD) can damage this device. This device must be protected at all times from ESD when handling or transporting. Static charges may easily produce potentials of several kilovolts on the human body or equipment, which can discharge without detection. Industry-standard ESD handling precautions should be used at all times.

Table 2. CLA Series Electrical Specifications^{1,2} (1 of 2)

Part Number	Breakdown Voltage (V)	I Region (µm)	Total Capacitance (C _T) @ 0 V (pF)	Total Capacitance (C _T) @ 6 V (pF)	Series Resistance (R _S) @ 10 mA (Ω)	Minority Carrier Lifetime (TL) @ 10 mA (ns)	Thermal Resistance (θ) ³ Average (°C/W)
	Min to Max	Nominal	Typical	Maximum	Typical	Typical	Maximum
CLA4601-203	15 to 30	1.0	0.37	0.35	2.0	5	150
CLA4601-210	15 to 30	1.0	0.37	0.35	2.0	5	140
CLA4601-219	15 to 30	1.0	0.37	0.35	2.0	5	200
CLA4601-240	15 to 30	1.0	0.37	0.35	2.0	5	200
CLA4602-203	15 to 30	1.0	0.45	0.40	1.5	5	110
CLA4602-210	15 to 30	1.0	0.45	0.40	1.5	5	100
CLA4602-219	15 to 30	1.0	0.45	0.35	1.5	5	160
CLA4602-240	15 to 30	1.0	0.45	0.40	1.5	5	160
CLA4603-203	20 to 45	1.5	0.45	0.35	1.5	5	130
CLA4603-210	20 to 45	1.5	0.45	0.40	1.5	5	120
CLA4603-219	20 to 45	1.5	0.45	0.40	1.5	5	180
CLA4603-240	20 to 45	1.5	0.45	0.35	1.5	5	180
CLA4604-203	30 to 60	2.0	0.37	0.30	2.0	7	130
CLA4604-210	30 to 60	2.0	0.37	0.35	2.0	7	120
CLA4604-219	30 to 60	2.0	0.37	0.30	2.0	7	160
CLA4604-240	30 to 60	2.0	0.37	0.30	2.0	7	180

Table 2. CLA Series Electrical Specifications^{1,2} (2 of 2)

Part Number	Breakdown Voltage (V)	I Region (μm)	Total Capacitance (C _T) @ 0 V (pF)	Total Capacitance (C _T) @ 6 V (pF)	Series Resistance (RS) @ 10 mA (Ω)	Minority Carrier Lifetime (TL) @ 10 mA (ns)	Thermal Resistance (θ) ³ Average (°C/W)
	Min to Max	Nominal	Typical	Maximum	Typical	Typical	Maximum
CLA4605-203	30 to 60	2.0	0.45	0.30	1.5	7	100
CLA4605-210	30 to 60	2.0	0.45	0.40	1.5	7	90
CLA4605-219	30 to 60	2.0	0.45	0.40	1.5	7	150
CLA4605-240	30 to 60	2.0	0.45	0.35	1.5	7	150
CLA4606-203	45 to 75	2.5	0.45	0.35	1.5	10	110
CLA4606-210	45 to 75	2.5	0.45	0.40	1.5	10	100
CLA4606-219	45 to 75	2.5	0.45	0.40	1.5	10	160
CLA4606-240	45 to 75	2.5	0.45	0.35	1.5	10	106
CLA4607-203	120 to 180	7.0	0.45	0.35 @ 38 V	1.5	50	70
CLA4607-210	120 to 180	7.0	0.45	0.40 @ 38 V	1.5	50	60
CLA4607-219	120 to 180	7.0	0.45	0.40 @ 38 V	1.5	50	120
CLA4607-240	120 to 180	7.0	0.45	0.35 @ 38 V	1.5	50	120
CLA4608-203	120 to 180	7.0	0.85	0.75 @ 38 V	0.5	100	45
CLA4608-210	120 to 180	7.0	0.85	0.75 @ 38 V	0.5	100	35
CLA4608-219	120 to 180	7.0	0.85	0.70 @ 38 V	0.5	100	100
CLA4608-240	120 to 180	7.0	0.85	0.70 @ 38 V	0.5	100	100
CLA4609-203	250 (Min)	20.0	0.51	0.40	1.0	1175	45
CLA4609-210	250 (Min)	20.0	0.51	0.45	1.0	1175	35
CLA4609-219	250 (Min)	20.0	0.51	0.40	1.0	1175	100
CLA4609-240	250 (Min)	20.0	0.51	0.40	1.0	1175	100
CLA4610-203	80 to 120	4.5	0.38	0.40	1.7	20	182
CLA4610-210	80 to 120	4.5	0.38	0.45	1.7	20	81
CLA4610-219	80 to 120	4.5	0.38	0.40	1.7	20	152
CLA4610-240	80 to 120	4.5	0.38	0.40	1.7	20	163

¹ Performance is guaranteed only under the conditions listed in this table and is not guaranteed over the full operating or storage temperature ranges. Operation at elevated temperatures may reduce reliability of the device.

² TOP = +25 °C, CJ measured at 1 MHz, RS measured at 500 MHz, CW thermal resistance for infinite heat sink, unless otherwise noted.

³ Thermal resistance is calculated from the measured power dissipation @ f = 2.6 GHz, T_J max = 175 °C and TCASE = 85 °C

Table 3. Typical Performance @ 25 °C @ 2.6 GHz, Z₀ = 50 Ω¹

Part Number	Insertion Loss @ -10 dBm (dB)	CW Input Power for 1 dB Insertion Loss (dBm)	Maximum CW Input Power (dBm)	Maximum Pulsed Input Power (dBm) ²	Output @ Maximum Pulsed Input (dBm) ²	Recovery Time (ns) ³	Spike Leakage (ergs) ⁴
CLA4601	0.1	12	36	65	21	5	Note 5
CLA4602	0.1	12	36	65	24	5	Note 5
CLA4603	0.1	10	38	67	22	5	Note 5
CLA4604	0.1	11	40	70	24	5	Note 5
CLA4605	0.1	12	40	70	27	5	0.08
CLA4606	0.1	14	41	71	27	5	0.03
CLA4607	0.1	26	43	73	39	5	0.21
CLA4608	0.2	26	43	73	44	5	0.15
CLA4609	0.3	37	44	74	50	5	25.77
CLA4610	0.1	24	40	57	32	5	Note 5

¹ Diode chip is mounted on a 0.5 oz Cu PC board using 1 to 2 mils of conductive epoxy. Bond wire connections are made with 0.8 mil Au wire. Limiter configured with shunt connected diode and 22 nH ground return and 100 pF DC blocking capacitors.

² Pulsed power measurements taken at 1 μs pulse width, @ f = 10 KHz, and 0.1% duty cycle.

³ Recovery time represents the transition time from the high-loss state to the low-loss state following the removal of a high-power input. It is defined as the time from the end of the high-power pulse to the time when insertion loss has returned to within 3 dB of the quiescent (low-power) state.

⁴ Spike Leakage (ergs) = t_s x P_s x 10⁷ where t_s is the spike width at the half-power point (in seconds) and P_s is the maximum spike amplitude in watts.

⁵ Not detectable under current test conditions described in Note 2.

Typical Performance Characteristics
(Tested at 25 °C, Board and Connector Loss Are Not De-Embedded)

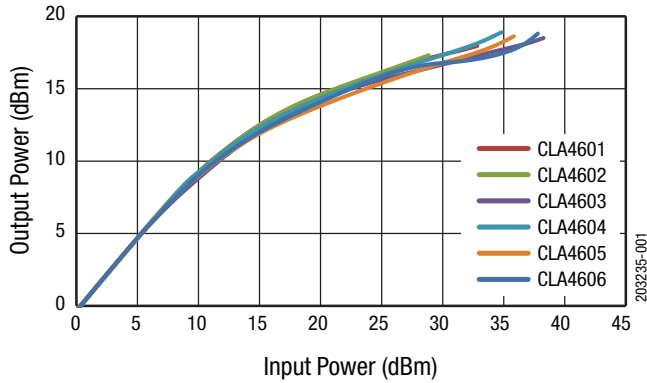


Figure 1. CLA4601 to CLA4606 CW Output vs Input Power

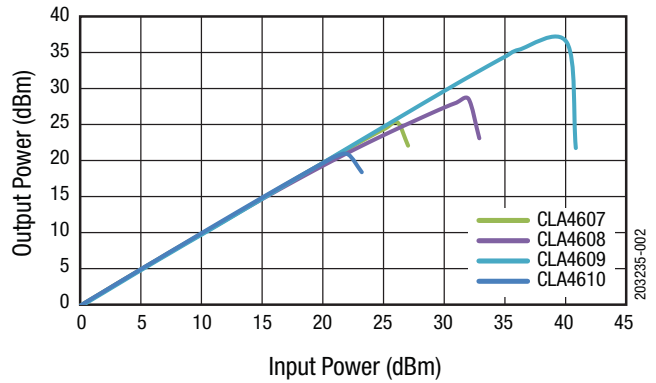


Figure 2. CLA4607 to CLA4610 CW Output vs Input Power

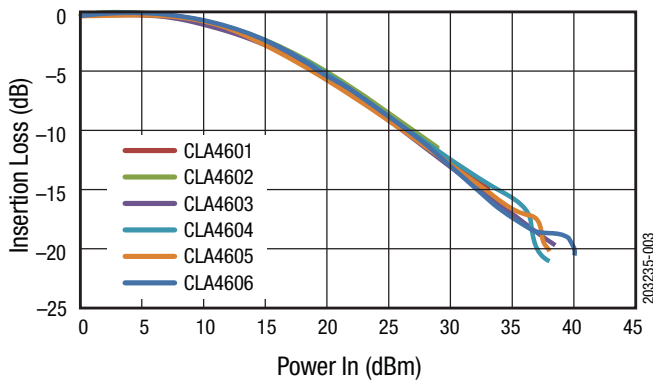


Figure 3. CLA4601 to CLA4606 Insertion Loss vs CW Input Power

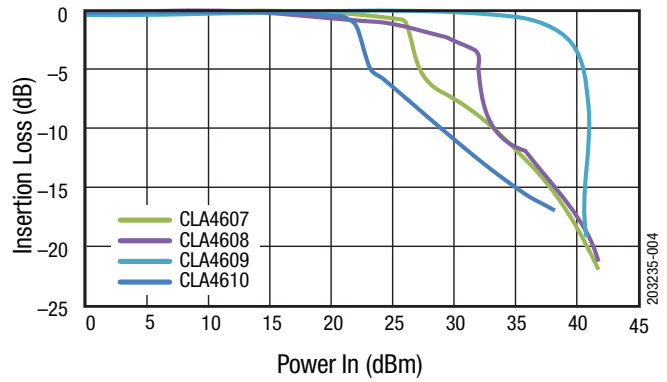


Figure 4. CLA4607 to CLA4610 Insertion Loss vs CW Input Power

Technical Description

The limiter can be used in various configurations to meet different application requirements. For example, in low-to-medium power applications, a single-stage limiter can be used. In this case, an inductor must be used in parallel with the limiter to create a DC return choke.

A dual-stage limiter design can handle much higher power. The first stage works as the coarse stage (CLA4607 through

CLA4610), and the second stage works as the cleanup stage (CLA4601 through CLA4606).

Package dimension drawings are provided in Figures 5 through 8.

For detailed application information, refer to the Skyworks Application Note: *PIN Limiter Diodes in Receiver Protectors* at www.skyworksinc.com.

Package Outline Drawings

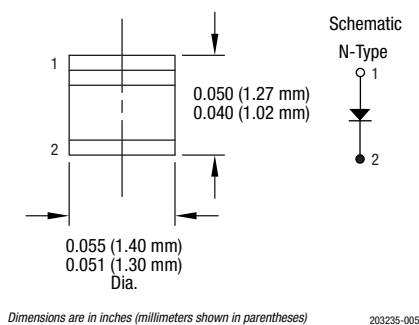


Figure 5. -203 Package



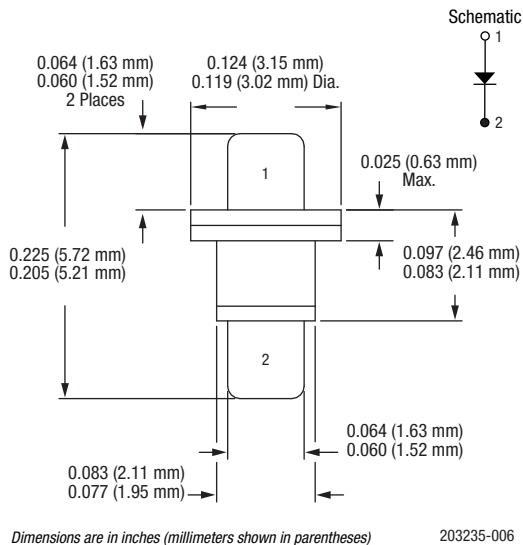


Figure 6. -210 Package

DATA SHEET • CLA SERIES: SILICON LIMITER DIODES AND CERAMIC HERMETIC PACKAGED DEVICES

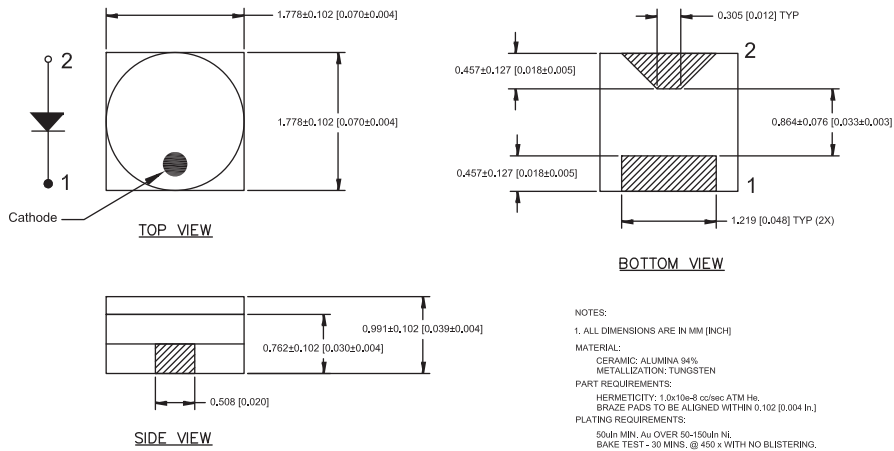

Version A

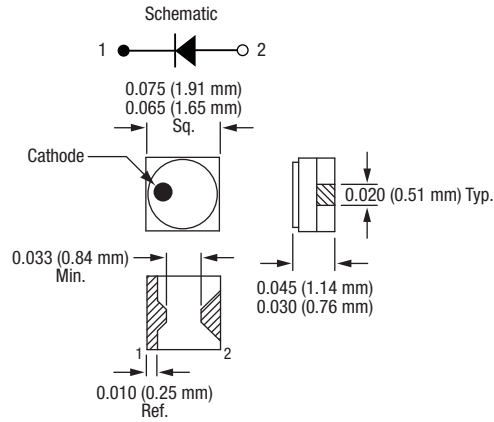


Dimensions are in inches (millimeters shown in parentheses)

Version B

203235-007

Figure 7. -219 Package

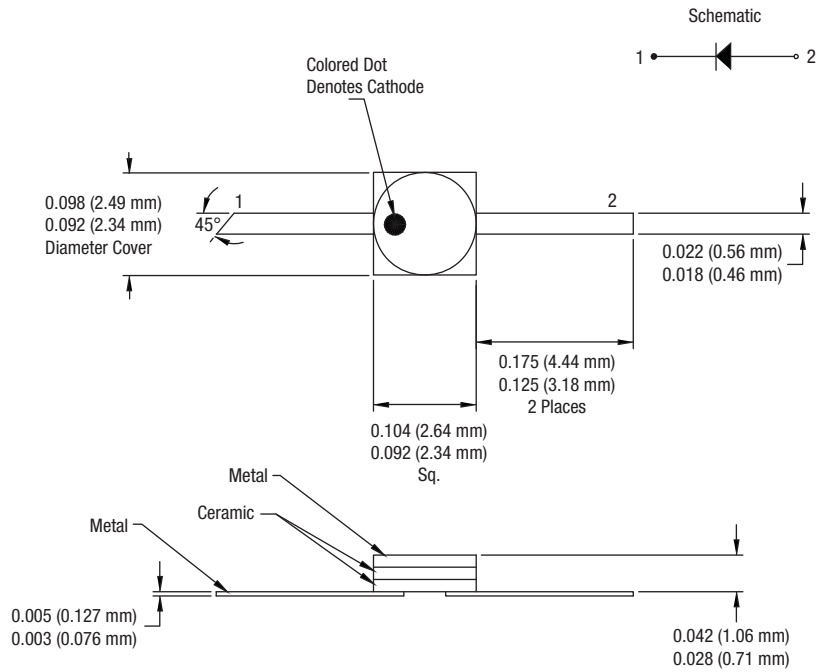

Dimensions are in inches (millimeters shown in parentheses)

203235-008

Figure 8. -240 Package

Copyright © 2014, 2017 Isolink, Inc. All Rights Reserved.

Information in this document is provided in connection with Isolink, Inc. ("Isolink"), a wholly-owned subsidiary of Skyworks Solutions, Inc. These materials, including the information contained herein, are provided by Isolink as a service to its customers and may be used for informational purposes only by the customer. Isolink assumes no responsibility for errors or omissions in these materials or the information contained herein. Isolink may change its documentation, products, services, specifications or product descriptions at any time, without notice. Isolink makes no commitment to update the materials or information and shall have no responsibility whatsoever for conflicts, incompatibilities, or other difficulties arising from any future changes.

No license, whether express, implied, by estoppel or otherwise, is granted to any intellectual property rights by this document. Isolink assumes no liability for any materials, products or information provided hereunder, including the sale, distribution, reproduction or use of Isolink products, information or materials, except as may be provided in Isolink Terms and Conditions of Sale.

THE MATERIALS, PRODUCTS AND INFORMATION ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, WHETHER EXPRESS, IMPLIED, STATUTORY, OR OTHERWISE, INCLUDING FITNESS FOR A PARTICULAR PURPOSE OR USE, MERCHANTABILITY, PERFORMANCE, QUALITY OR NON-INFRINGEMENT OF ANY INTELLECTUAL PROPERTY RIGHT; ALL SUCH WARRANTIES ARE HEREBY EXPRESSLY DISCLAIMED. ISOLINK DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. ISOLINK SHALL NOT BE LIABLE FOR ANY DAMAGES, INCLUDING BUT NOT LIMITED TO ANY SPECIAL, INDIRECT, INCIDENTAL, STATUTORY, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS THAT MAY RESULT FROM THE USE OF THE MATERIALS OR INFORMATION, WHETHER OR NOT THE RECIPIENT OF MATERIALS HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Customers are responsible for their products and applications using Isolink products, which may deviate from published specifications as a result of design defects, errors, or operation of products outside of published parameters or design specifications. Customers should include design and operating safeguards to minimize these and other risks. Isolink assumes no liability for applications assistance, customer product design, or damage to any equipment resulting from the use of Isolink products outside of stated published specifications or parameters.

Isolink is a trademark of Isolink Inc. in the United States and other countries. Skyworks and the Skyworks symbol are trademarks or registered trademarks of Skyworks Solutions, Inc., in the United States and other countries. Third-party brands and names are for identification purposes only, and are the property of their respective owners.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «**JONHON**», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «**FORSTAR**».



JONHON

«**JONHON**» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«**FORSTAR**» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А