

USB HIGH-SIDE POWER SWITCH

NO.EA-188-150402

OUTLINE

The R5524x is a CMOS-based high-side MOSFET switch IC which conforms to the universal serial bus (USB) standard. The device is suitable for protecting a USB power source.

By using an Nch MOSFET with low On-resistance (Typ. 100 mΩ) as a switching transistor, the device can provide low dropout voltage.

Internally, the device consists of an overcurrent limiting circuit, a thermal shutdown circuit, an undervoltage lockout (UVLO) circuit and a reverse current protection circuit. The device also consists of an internal delay circuit to prevent the output of false flag signals caused by inrush current.

To achieve simplification of layout design, the overcurrent detection accuracy has been improved.

The R5524x is offered in a 5-pin SOT-23-5 package and a 6-pin DFN(PLP)1820-6 package which achieve the smallest possible footprint solution on boards where area is limited.

FEATURES

- N-channel MOS High-Side Switch IC
- Switch ON Resistance Typ. 100 mΩ at 5 V Input
- Current Limit Threshold Min. 650 mA^{*1}, Min. 1.25 A^{*2}
- Overcurrent Limit Min. 550 mA
- Flag Delay Time Typ. 20 ms
- Under-voltage Lockout (UVLO) Circuit
- Thermal Shutdown Circuit
- Reverse Current Protection Circuit
- Package SOT-23-5, DFN(PLP)1820-6^{*3}

APPLICATIONS

- PCs and PC Peripherals
- Digital Televisions (DTV)
- Set Top Boxes (STB)
- Printers
- PDA
- Game Consoles


^{*1} only for R5524x001A/B, R5524x002A/B

^{*2} only for R5524N004A


^{*3} only for R5524K001x, R5524K002x

BLOCK DIAGRAMS

R5524xxxxA Block Diagram

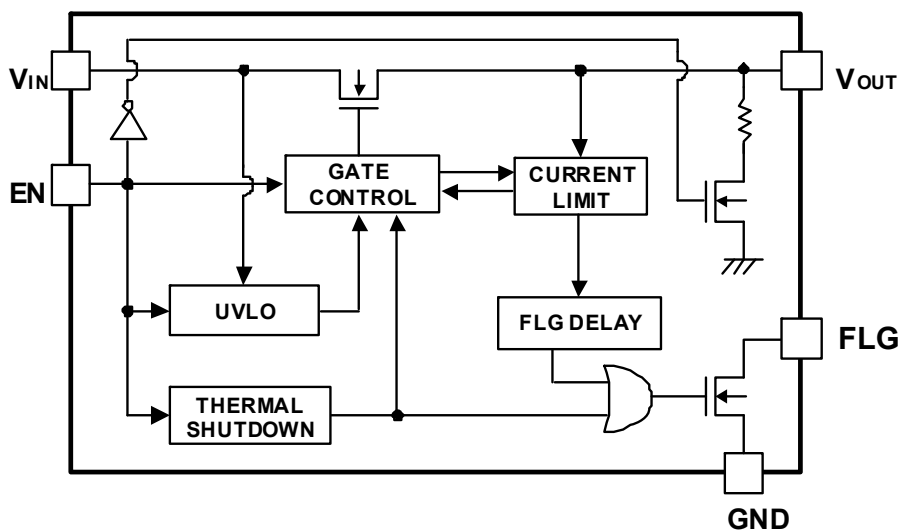

R5524xxxxB Block Diagram

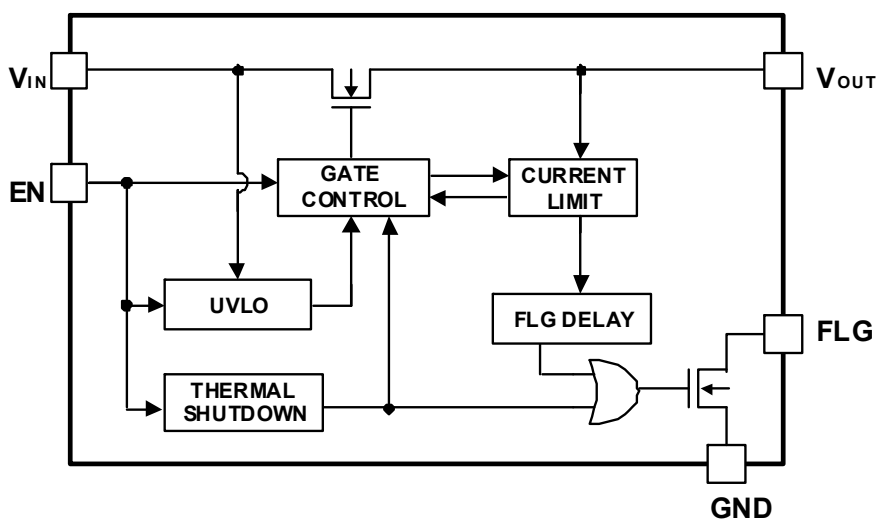

SELECTION GUIDE

The overcurrent limit protection type, the current limit threshold and the auto discharge options*¹ for the ICs are user-selectable options.

Selection Guide

Product Name	Package	Quantity per Reel	Pb Free	Halogen Free
R5524N00x*-TR-FE	SOT-23-5	3,000 pcs	Yes	Yes
R5524K00x*-TR	DFN(PLP)1820-6	5,000 pcs	Yes	Yes


x: Specify the combination of Overcurrent Limit Protection type and Current Limit Threshold.
 1: Latch-off Type, Current Limit Threshold: Min. 650 mA
 2: Constant Current Type, Current Limit Threshold: Min. 650 mA
 4: Constant Current Type, Current Limit Threshold: Min. 1.25 A*²

*: Specify auto-discharge options.
 A: Auto-discharge included
 B: Auto-discharge not included

*¹ Auto-discharge function quickly lowers the output voltage to 0 V, when the chip enable signal is switched from the active mode to the standby mode, by releasing the electrical charge accumulated in the external capacitor.

*² only for R5524N004A


PIN DESCRIPTIONS



SOT-23-5 Pin Configuration

SOT23-5 Pin Description

Pin No.	Symbol	Description
1	V _{IN}	Input Pin
2	GND	Ground Pin
3	EN	Chip Enable Pin, Active-high
4	FLG	Flag Pin, Open Drain Output
5	V _{OUT}	Output Pin

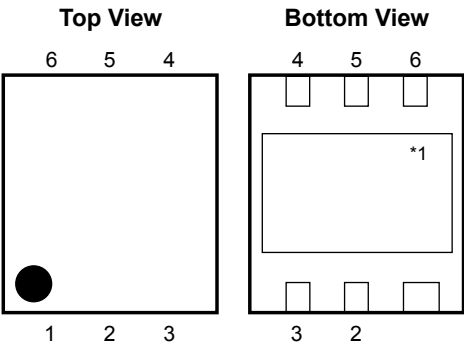

DFN(PLP)1820-6 Pin Configuration

DFN(PLP)1820-6 Pin Description

Pin No.	Symbol	Description
1	V_{OUT}	Output Pin
2	NC	No Connection
3	FLG	Flag Pin, Open Drain Output
4	EN	Enable Pin, Active-high
5	GND	Ground Pin
6	V_{IN}	Input Pin

*1 The tab on the bottom of the package enhances thermal performance and is electrically connected to GND (substrate level). It is recommended that the tab be connected to the ground plane on the board, or otherwise be left floating.

ABSOLUTE MAXIMUM RATINGS

Absolute Maximum Ratings

Symbol	Item		Rating	Unit
V_{IN}	Input Voltage		6.0	V
V_{EN}	Enable Pin Input Voltage		-0.3 to 6.0	V
V_{FLG}	Flag Pin Voltage		-0.3 to 6.0	V
I_{FLG}	Flag Pin Current		14	mA
V_{OUT}	Output Pin Voltage		-0.3 to 6.0	V
I_{OUT}	Output Current		Internally Controlled	
P_D	Power Dissipation (Standard Land Pattern)*1	SOT-23-5	420	mW
		DFN(PLP)1820-6	880	mW
T_a	Operating Temperature Range		-40 to 85	°C
T_{stg}	Storage Temperature Range		-55 to 125	°C

*1 Refer to *PACKAGE INFORMATION* for detailed information.

ABSOLUTE MAXIMUM RATINGS

Electronic and mechanical stress momentarily exceeded absolute maximum ratings may cause the permanent damages and may degrade the life time and safety for both device and system using the device in the field. The functional operation at or over these absolute maximum ratings is not assured.

ELECTRICAL CHARACTERISTICS

The specifications surrounded by are guaranteed by design engineering at $-40^{\circ}\text{C} \leq T_a \leq 85^{\circ}\text{C}$.

Electrical Characteristics

(Ta = 25°C)

Symbol	Item	Conditions	Min.	Typ.	Max.	Unit
V _{IN}	Input Voltage		2.7		5.5	V
I _{DD1}	Supply Current (Active Mode)	V _{OUT} = OPEN, EN = "H", V _{IN} = 5 V		110	180	μA
I _{DD2}	Supply Current (Standby Mode)	V _{OUT} = OPEN, EN = "L", V _{IN} = 5 V		0.1	1.0	μA
R _{ON}	Switch On Resistance	V _{IN} = 5 V, I _{OUT} = 500 mA		100	150	mΩ
t _{on}	Output Turn-on Delay	V _{IN} = 5 V, R _L = 60 Ω		400		μs
t _{off}	Output Turn-off Delay	V _{IN} = 5V, R _L = 60 Ω		50		μs
V _{UVLO}	UVLO Release Voltage	V _{IN} Rising	2.3	2.5	2.7	V
V _{HYS}	UVLO Hysteresis Range	V _{IN} Falling		0.1		V
I _{TH}	Current Limit Threshold	R5524x001A/ 001B R5524x002A/ 002B V _{IN} = 5 V	650	800	980	mA
		R5524N004A V _{IN} = 5 V	1.25	1.55	1.85	A
			1.2	1.55	1.9	
I _{LIM}	Overcurrent Limit	V _{IN} = 5 V, V _{OUT} = 0 V, after 5 ms	550	650	800	mA
t _{FD}	Flag Delay Time ^{*1}	V _{IN} = 5 V, starts when overcurrent is detected and ends when FLG = "L"	7	20	30	ms
T _{TSD}	Thermal Shutdown Temperature	Junction Temperature		135		°C
T _{TSR}	Thermal Shutdown Released Temperature	Junction Temperature		120		°C
I _{EN}	Enable Pin Input Current			0.01	1.0	μA
V _{EN1}	Enable Pin Input Voltage 1	V _{EN} Rising	2.0		6.0	V
V _{EN2}	Enable Pin Input Voltage 2	V _{EN} Falling	-0.3		0.8	V
I _{LO}	Output Leakage Current			0.1	1.0	μA
V _{LF}	Flag "L" Output Voltage	I _{SINK} = 1 mA			0.4	V
I _{FOF}	Flag Off Current	V _{FLG} = 5.5 V		0.01	1.0	μA
I _{REV}	Reverse Leakage Current	V _{IN} = 0 V, V _{OUT} = 5.5 V			50	μA
R _{LOW}	Nch. On-resistance for Auto Discharge (R5524x00xA)			450		Ω


All test items listed under Electrical Characteristics are done under the pulse load condition (T_j ≈ T_a = 25°C) except Thermal Shutdown Temperature and Thermal Shutdown Released Temperature.

^{*1} Flag Delay Time is dependent on Input Voltage.

RECOMMENDED OPERATING CONDITIONS (ELECTRICAL CHARACTERISTICS)

All of electronic equipment should be designed that the mounted semiconductor devices operate within the recommended operating conditions. The semiconductor devices cannot operate normally over the recommended operating conditions, even if when they are used over such conditions by momentary electronic noise or surge. And the semiconductor devices may receive serious damage when they continue to operate over the recommended operating conditions.

TYPICAL APPLICATION

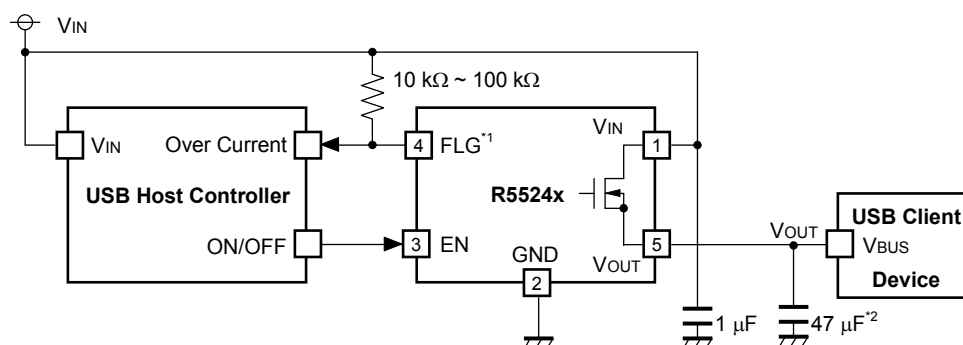

R5524x Typical Application

*1 FLG pin is Nch. Open Drain Output.

*2 A 47 μ F or more output capacitor is recommended. According to a USB standard, a 120 μ F or more output capacitor is required.

TECHNICAL NOTES

Bypass Capacitor

A 0.1 μ F to 1 μ F bypass capacitor between the V_{IN} pin and the GND pin, close to the device, is recommended. This precaution reduces power supply transients that may cause ringing on the input.

Pull-up Resistor of FLG Pin

A 10 k Ω to 100 k Ω pull-up resistor is recommended for the FLG pin.

R5524x001A/001B

The R5524x001A/001B is equipped with a latch-off function which requires initialization before start-up.

Case 1: Start-up by EN Pin Control


EN pin must be enabled with the delay of 10 μ s or more against 90% of V_{IN} voltage rising edge.

Case 2: Start-up by EN Pin Tied to V_{IN} Pin

Slew rate of V_{IN} must be 40 μ s/V or slower.


TIMING CHART

Output On-time and Output Off-time

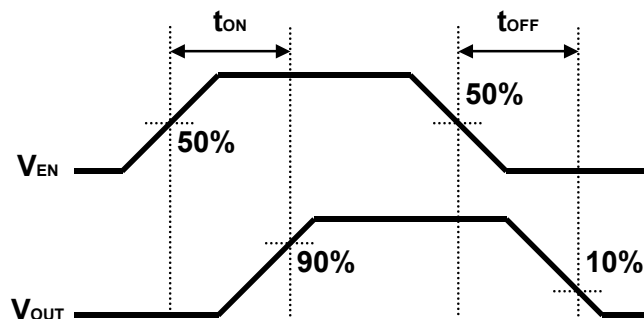


R5524x Timing Chart

Flag Delay Time

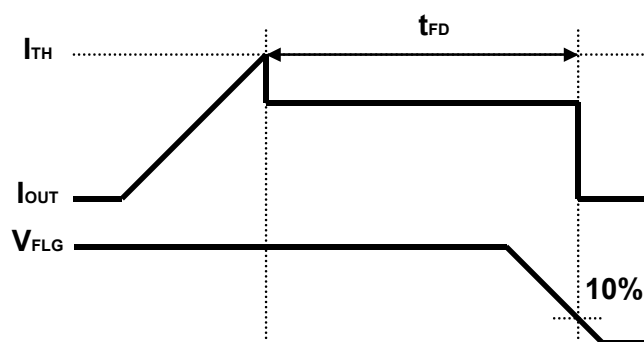

R5524x001A/001B Timing Chart (Latch-off Type)

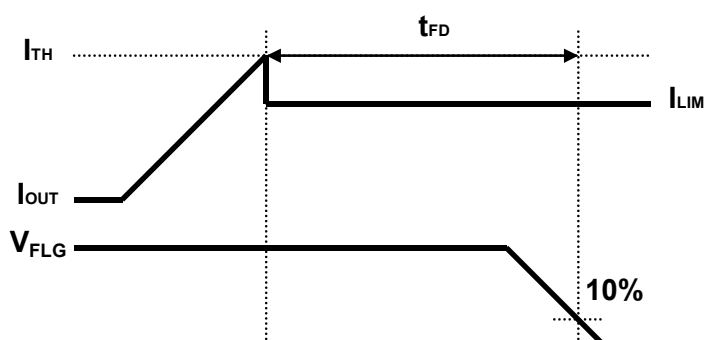

R5524x002A/002B and R5524N004A Timing Chart (Constant Current Type)

Overcurrent Limiting Function

The R5524x001A/001B has the built-in latch-off type over-current limit circuit. When the over-current is detected, the protection circuit becomes active and the switch-transistor is turned OFF. The latch function is released if the input voltage value is exceeded in the release threshold of the UVLO circuit value after when it became lower than the detection threshold of the UVLO circuit value; or the EN pin set to the enabling condition again after set to the disabling condition.

If the over current condition occurred when the input voltage value was close to the minimum operating input voltage value. Under this condition, the voltage descends by the parasitic impedance on the power supply side, and it might fall below the detection threshold of the UVLO circuit. In this case, the switch-transistor is turned OFF and because of that the voltage drop of power line's parasitic impedance stops; the latch function is released with the UVLO and it becomes the over current condition again. The switch transistor keeps continual ON and OFF until one of the following is done; increasing the input voltage value; the setting of EN pin is disabling; or reducing the value of load current.

Moreover, the supply-voltage changed by the load-current dramatically changed depends upon the parasitic impedance of the wiring on the load side or the power supply side. Due to this, decreasing the parasitic impedance by the wiring on board is recommended.

The switch transistor of the R5524x001A/001B is turned OFF when the latch-off-function operates under the condition of the load of the constant current as the load device, such as the electronic load and so on, connecting with the V_{OUT} pin of the R5524x001A/001B. Because the load device keeps the constant current, the V_{OUT} pin voltage may become negative potential. If the V_{OUT} pin is exceed the absolute maximum rating may cause the permanent damages to the device, please avoid using in this situation.

The R5524x002A/002B and R5524N004A have the built-in over current protection circuit as the constant current type. It detects as the over-current condition, if the current flows as the I_{TH} defined. Then operating the switch transistor to limit the output current to be the constant current defined by the I_{LIM} .

If the condition of the over-current limit caused by the V_{OUT} pin clamped to the GND were continued the temperature of the ICs would increase drastically. The switch-transistor is turned OFF if the temperature of the ICs becomes over 135°C (Typ.). And after this, the switch-transistor is turned ON again when the temperature of ICs decreased approximately 15°C. The switch-transistor keeps continual ON and OFF until either the switch is turned OFF or the V_{OUT} pin is removed from GND.

PACKAGE INFORMATION

Power Dissipation (SOT-23-5)


Power Dissipation (P_D) of the package is dependent on PCB material, layout, and environmental conditions. The following conditions are used in this measurement. This data is taken from a SOT-23-6 package data.

Measurement Conditions


	Standard Land Pattern
Environment	Mounting on Board (Wind Velocity = m/s)
Board Material	Glass Cloth Epoxy Plastic (Double-sided)
Board Dimensions	40 mm × 40 mm × 1.6 mm
Copper Ratio	Top-side: Approx. 50%, Back-side: Approx. 50%
Through-holes	φ 0.5 mm × 44 pcs

Measurement Result (Ta = 25°C, Tjmax = 125°C)

	Standard Land Pattern	Free Air
Power Dissipation	420 mW	250 mW
Thermal Resistance	$\Theta_{ja} = (125 - 25^{\circ}\text{C}) / 0.42\text{ W} = 238^{\circ}\text{C/W}$	400°C/W

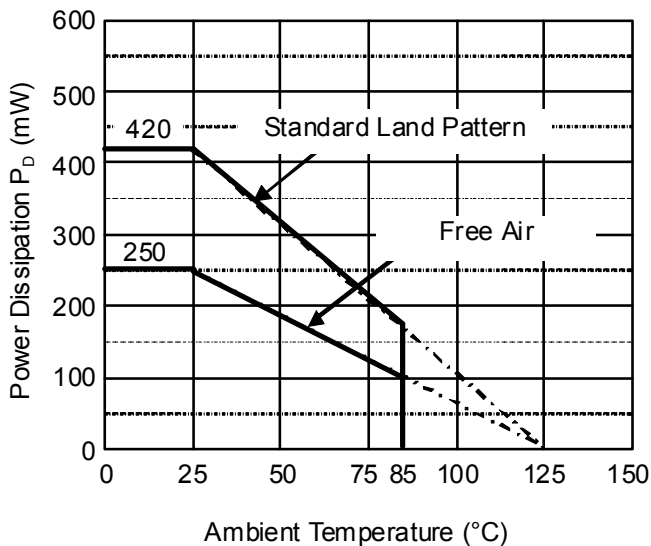


Power Dissipation vs. Ambient Temperature

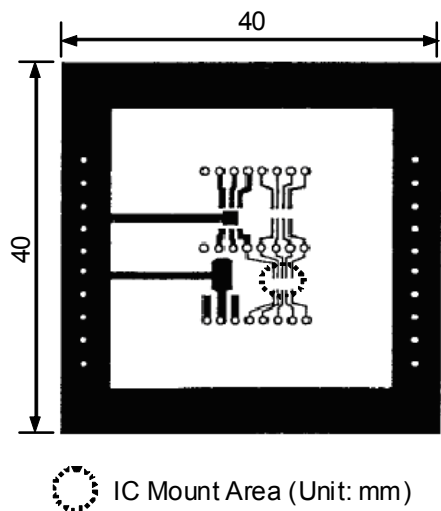

Measurement Board Pattern

PACKAGE DIMENSIONS (SOT-23-5)

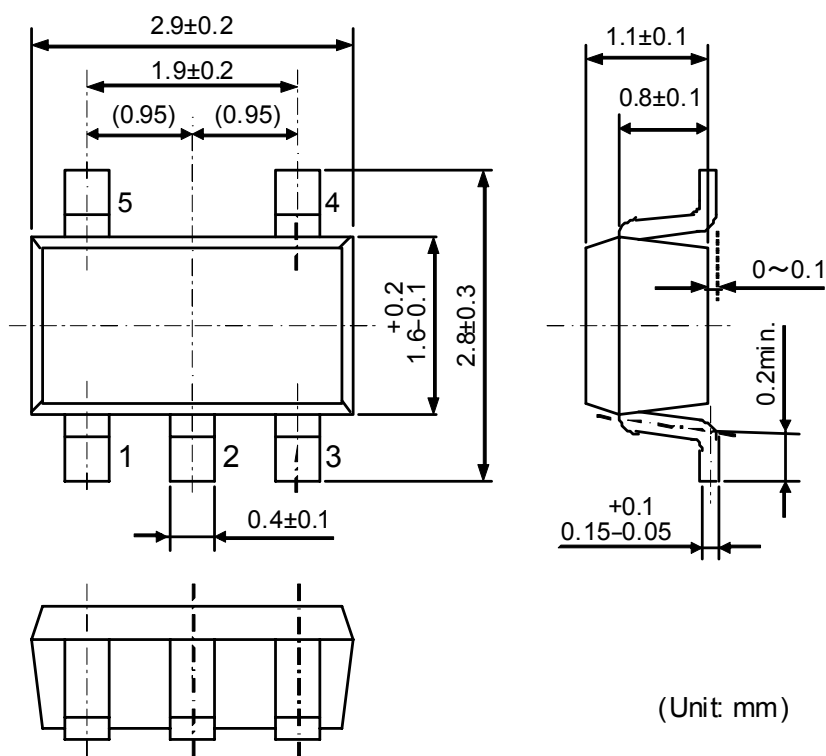


SOT-23-5 Package Dimensions

MARK SPECIFICATION (SOT-23-5)

①②③: Product Code ... **Refer to MARK SPECIFICATION TABLE (SOT-23-5)**

④⑤: Lot Number ... Alphanumeric Serial Number



SOT-23-5 Mark Specification

R5524xNO.EA-188-150402

MARK SPECIFICATION TABLE (SOT-23-5)**Mark Specification Table**

Product Name	①②③
R5524N001A	M A A
R5524N001B	M A B
R5524N002A	M A C
R5524N002B	M A D
R5524N004A	M A F

POWER DISSIPATION (DFN(PLP)1820-6)

Power Dissipation (P_D) of the package is dependent on PCB material, layout, and environmental conditions. The following conditions are used in this measurement.



Measurement Conditions

	Standard Land Pattern
Environment	Mounting on Board (Wind Velocity = 0 m/s)
Board Material	Glass Cloth Epoxy Plastic (Double-sided)
Board Dimensions	40 mm × 40 mm × 1.6 mm
Copper Ratio	Top-side: Approx. 50%, Back-side: Approx. 50%
Through-hole	φ 0.54 mm × 30 pcs


Measurement Result

(Ta = 25°C, Tjmax = 125°C)

	Standard Land Pattern
Power Dissipation	880 mW
Thermal Resistance	$\Theta_{ja} = (125 - 25^\circ\text{C}) / 0.88 \text{ W} = 114^\circ\text{C/W}$

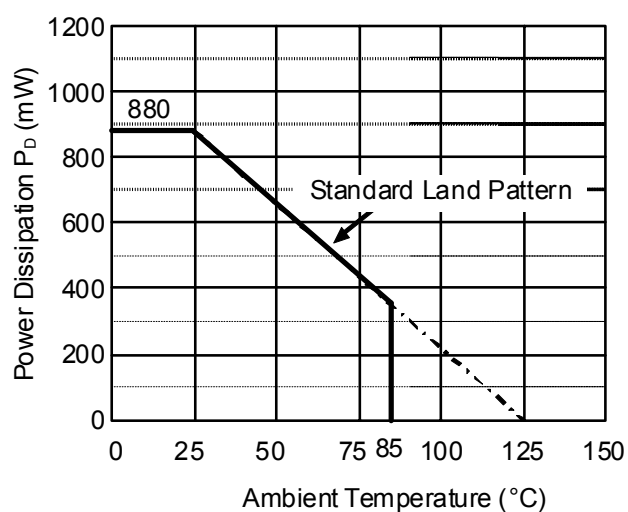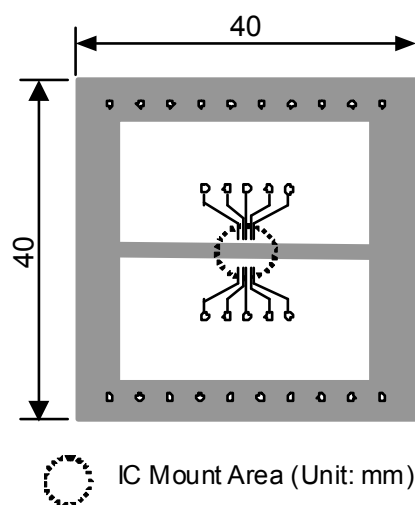**Power Dissipation vs. Ambient Temperature****Measurement Board Pattern**

PACKAGE DIMENSIONS (DFN(PLP)1820-6)

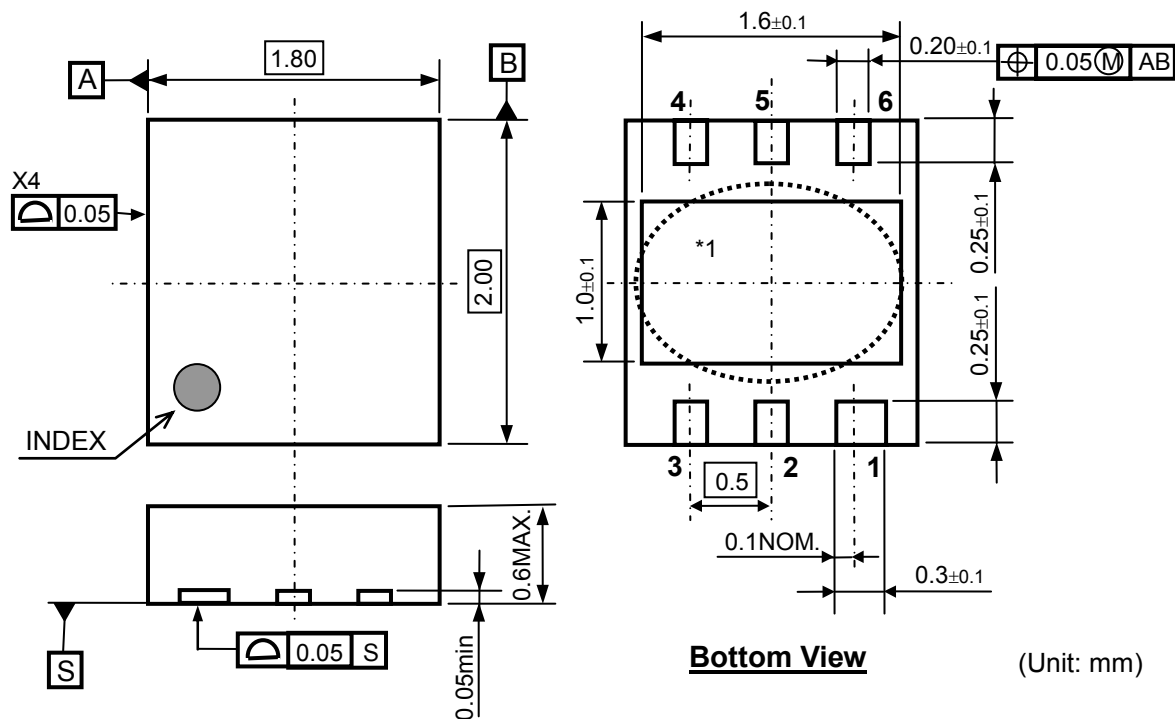


*1 The tab on the bottom of the package enhances thermal performance and is electrically connected to GND (substrate level). It is recommended that the tab be connected to the ground plane on the board, or otherwise be left floating.

DFN(PLP)1820-6 Package Dimensions

MARK SPECIFICATION (DFN(PLP)1820-6)

①②③④: Product Code ... **Refer to MARK SPECIFICATION TABLE (DFN(PLP)1820-6)**









⑤⑥: Lot Number ...Alphanumeric Serial Number

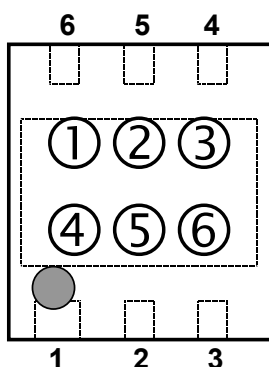

DFN(PLP)1820-6 Mark Specification

MARK SPECIFICATION TABLE (DFN(PLP)1820-6)**Mark Specification Table**


Product Name	①②③④
R5524K001A	E J 0 0
R5524K001B	E J 0 1
R5524K002A	E J 0 2
R5524K002B	E J 0 3

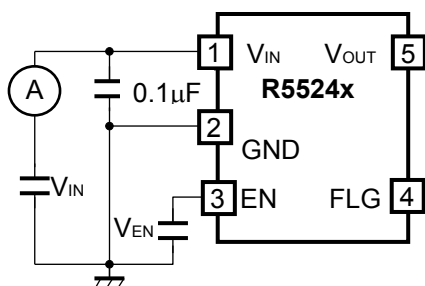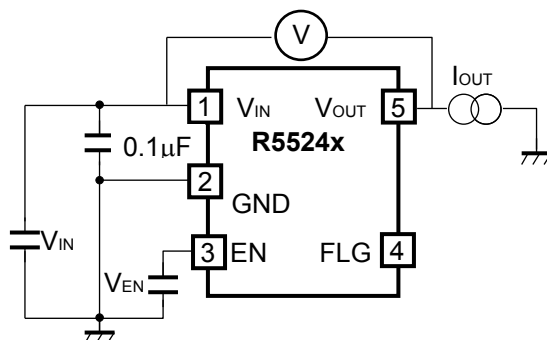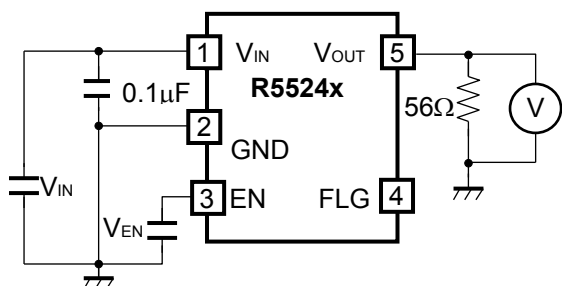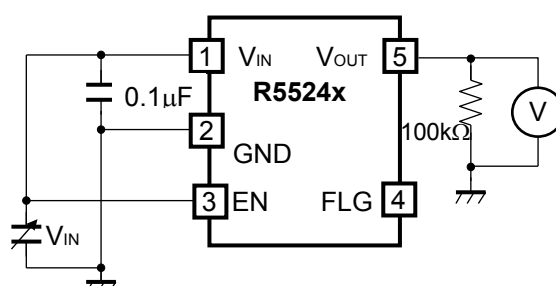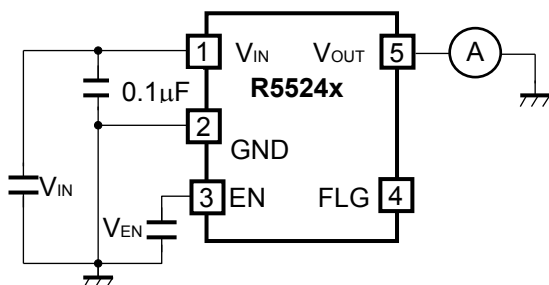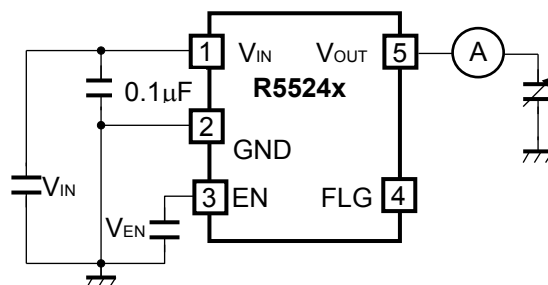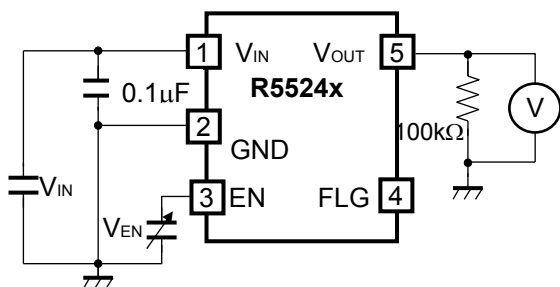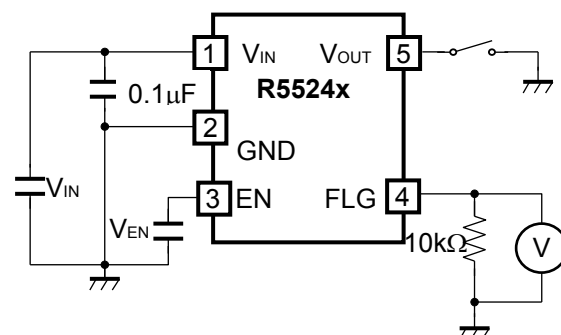TEST CIRCUITS**Supply Current Test Circuit****Switch ON Resistance Test Circuit****Output ON Time/Output OFF Time Test Circuit****UVLO Released Voltage Test Circuit****Over current Limit Test Circuit****Current Limit Threshold Test Circuit****Enable Input Voltage Test Circuit****Flag Output Delay Time Test Circuit**


TYPICAL CHARACTERISTICS

Note: Typical Characteristics are intended to be used as reference data; they are not guaranteed.


1) Supply Current vs. Temperature

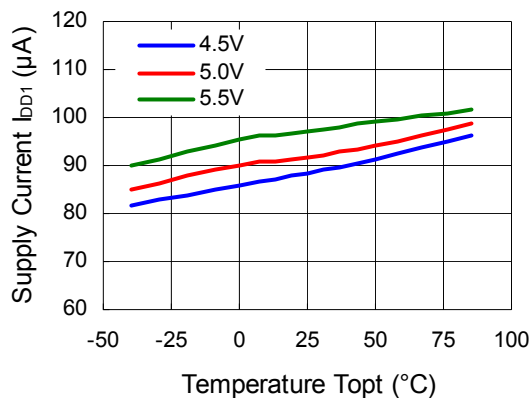


2) Supply Current vs. Input Voltage

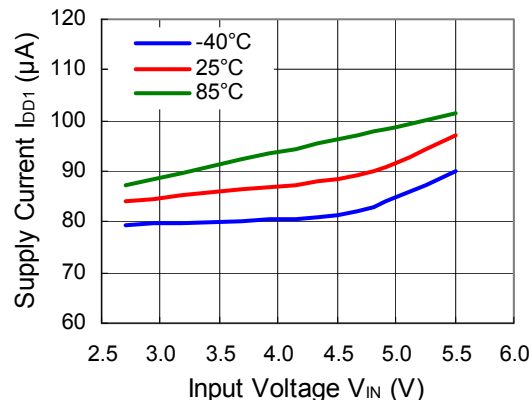



3) Switch ON Resistance vs. Temperature






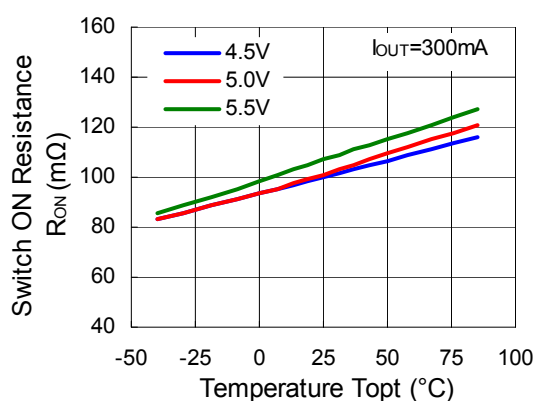


4) Switch ON Resistance vs. Input Voltage

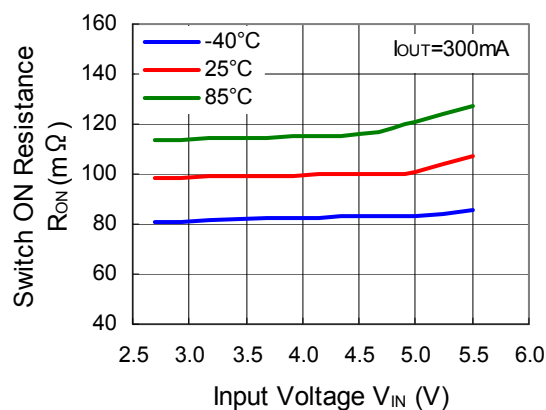


5) Output ON Time vs. Temperature ($R_L = 56 \Omega$) 6) Output ON Time vs. Input Voltage ($R_L = 56 \Omega$)

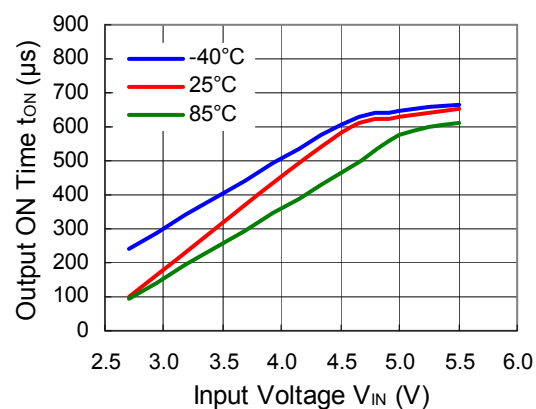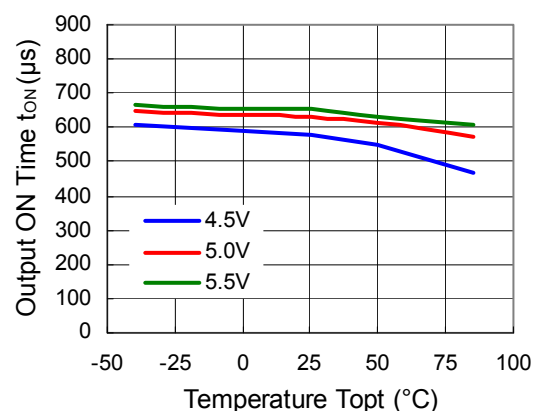


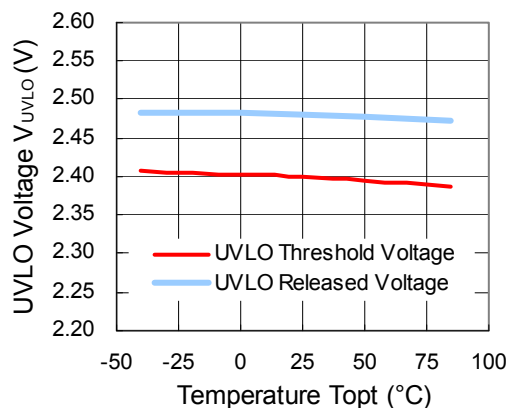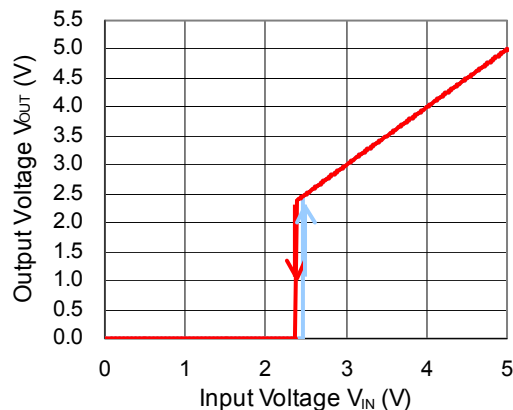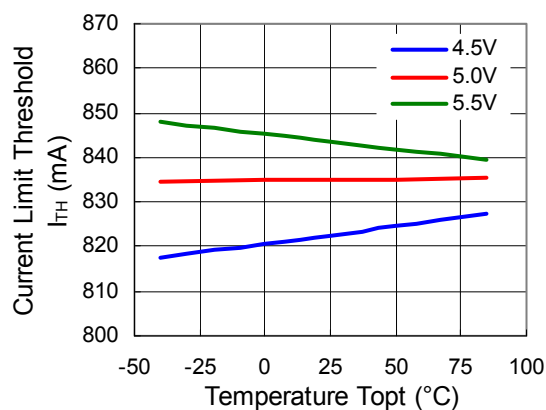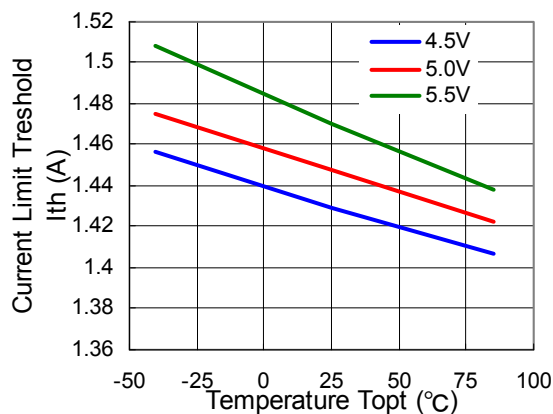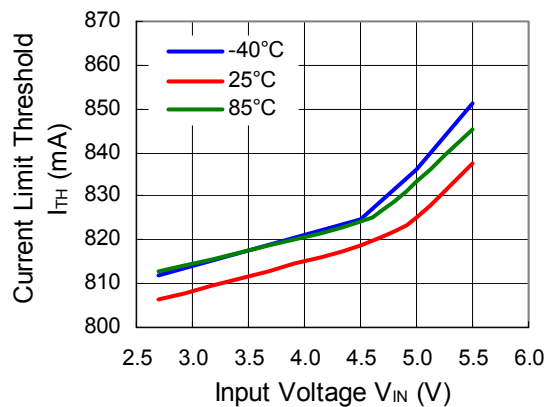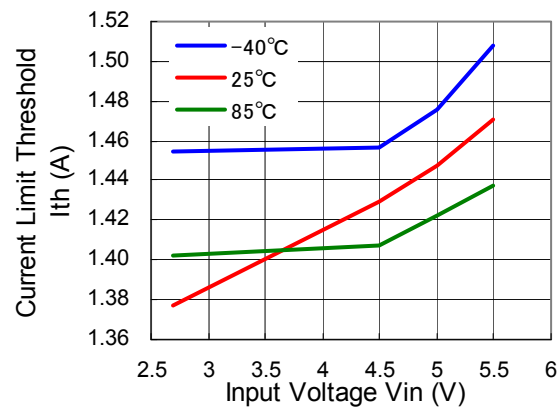7) UVLO Voltage vs. Temperature

8) Output Voltage vs. Input Voltage

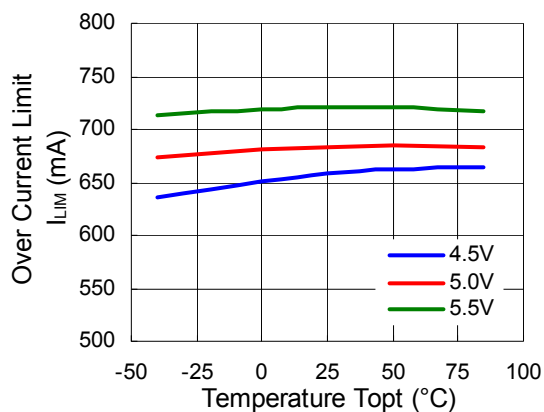9) Current Limit Threshold vs. Temperature (001x/ 002x)

10) Current Limit Threshold vs. Temperature (004A)

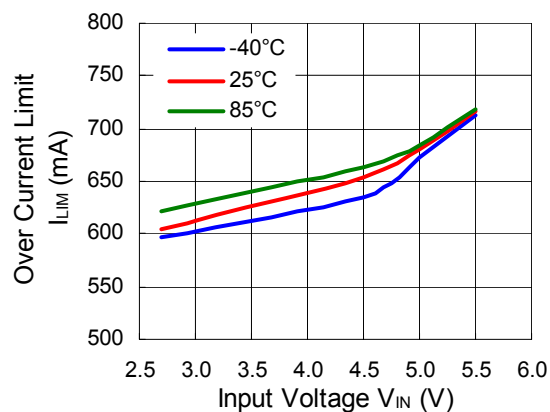11) Current Limit Threshold vs. Input Voltage (001x/ 002x)

12) Current Limit Threshold vs. Input Voltage (004A)


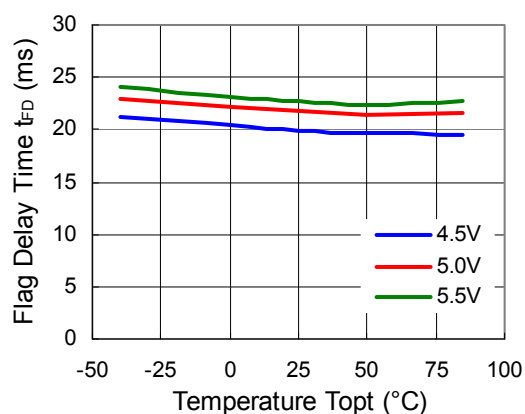
13) Overcurrent Limit vs. Temperature




14) Overcurrent Limit vs. Input Voltage




15) Flag Delay Time vs. Temperature




16) Flag Delay Time vs. Input Voltage





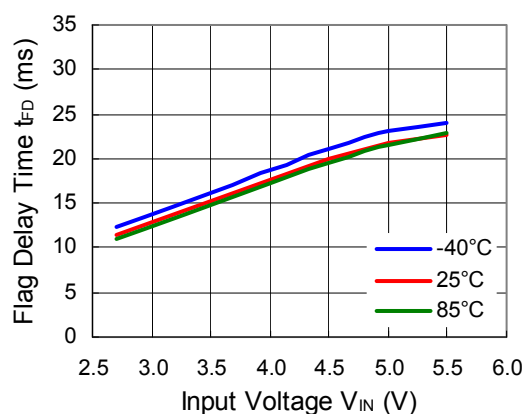


17) Enable Input Voltage vs. Temperature

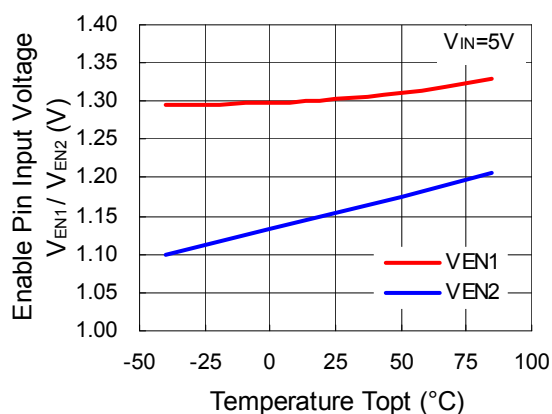


18) Enable Input Voltage vs. Input Voltage

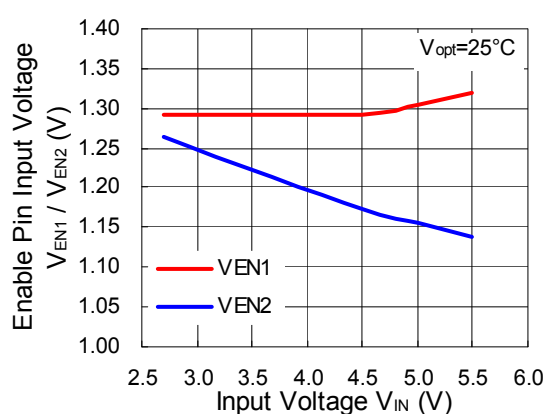


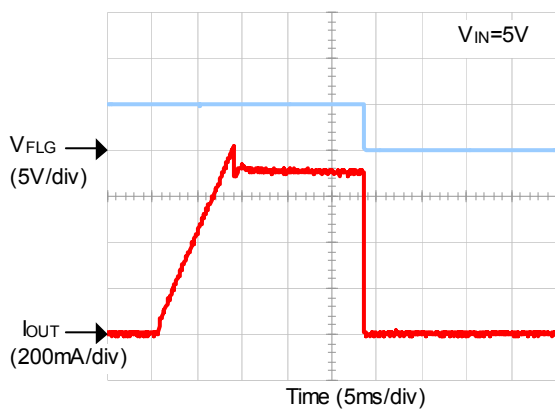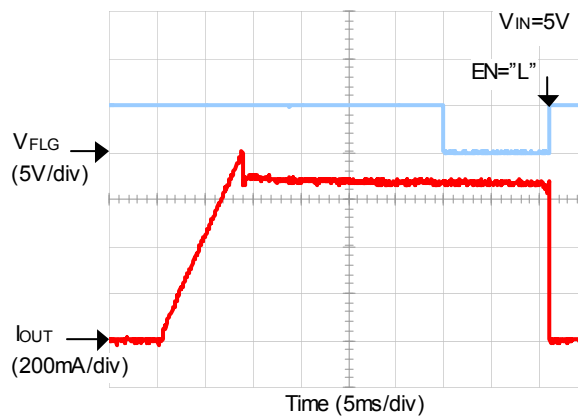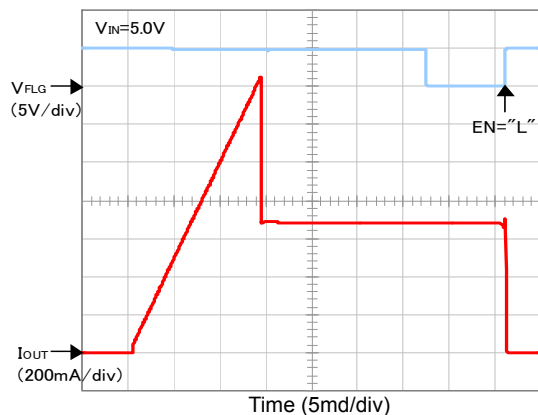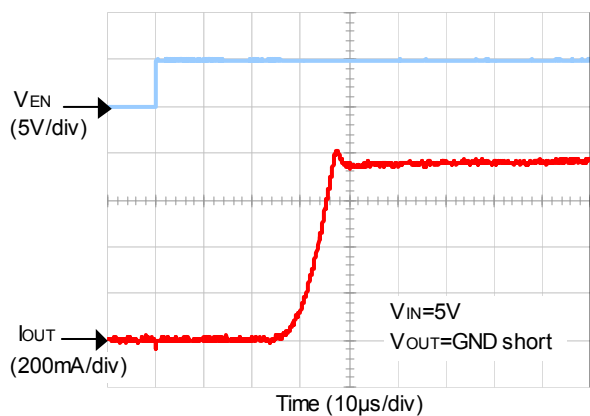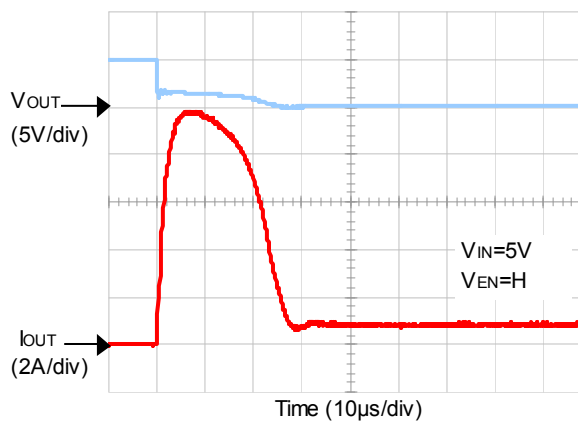19) Overcurrent Response with Ramped Load (R5524x001x)

20) Overcurrent Response with Ramped Load (R5524x002x)

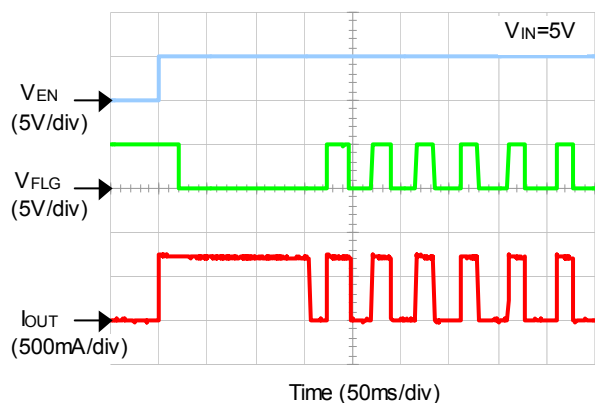21) Overcurrent Response with Ramped Load (R5524x004A)

22) Overcurrent Limit Transient Response (Output short during enable "H")

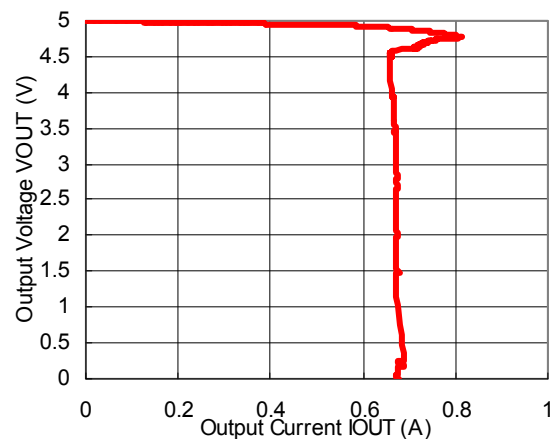(Enable "H" during Output Short)


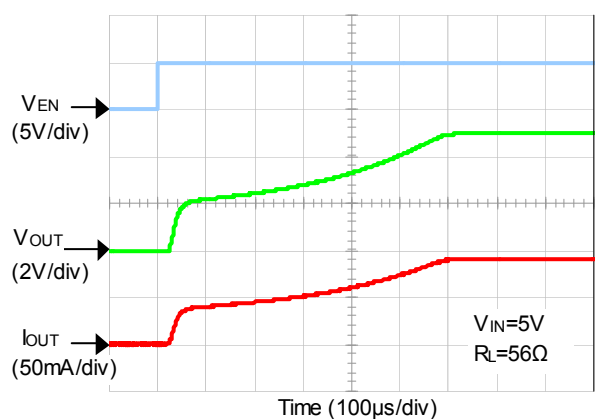
23) Thermal Shutdown Operation




24) Output Voltage vs. Output Current




25) Output ON Time Response



26) Output OFF Time Response

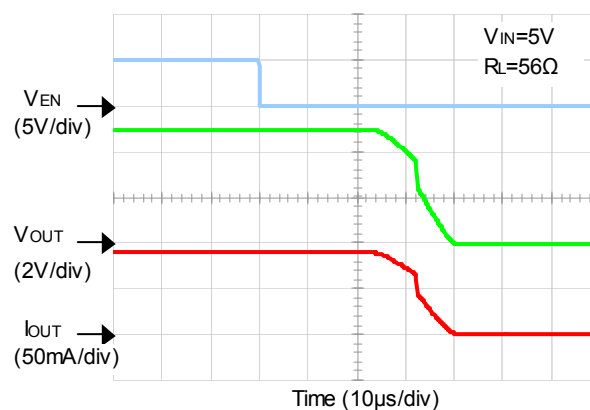

27) Inrush current Characteristic

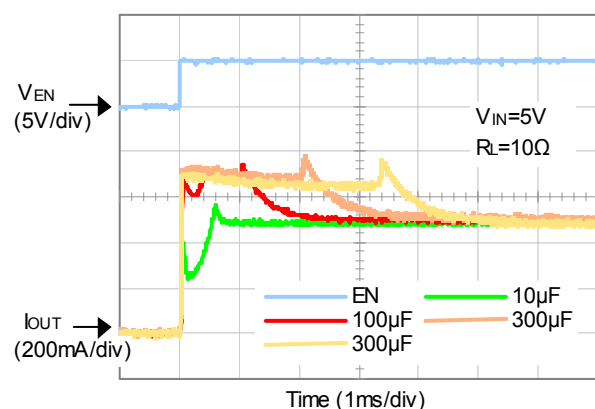



1. The products and the product specifications described in this document are subject to change or discontinuation of production without notice for reasons such as improvement. Therefore, before deciding to use the products, please refer to Ricoh sales representatives for the latest information thereon.
2. The materials in this document may not be copied or otherwise reproduced in whole or in part without prior written consent of Ricoh.
3. Please be sure to take any necessary formalities under relevant laws or regulations before exporting or otherwise taking out of your country the products or the technical information described herein.
4. The technical information described in this document shows typical characteristics of and example application circuits for the products. The release of such information is not to be construed as a warranty of or a grant of license under Ricoh's or any third party's intellectual property rights or any other rights.
5. The products listed in this document are intended and designed for use as general electronic components in standard applications (office equipment, telecommunication equipment, measuring instruments, consumer electronic products, amusement equipment etc.). Those customers intending to use a product in an application requiring extreme quality and reliability, for example, in a highly specific application where the failure or misoperation of the product could result in human injury or death (aircraft, spacevehicle, nuclear reactor control system, traffic control system, automotive and transportation equipment, combustion equipment, safety devices, life support system etc.) should first contact us.
6. We are making our continuous effort to improve the quality and reliability of our products, but semiconductor products are likely to fail with certain probability. In order to prevent any injury to persons or damages to property resulting from such failure, customers should be careful enough to incorporate safety measures in their design, such as redundancy feature, fire containment feature and fail-safe feature. We do not assume any liability or responsibility for any loss or damage arising from misuse or inappropriate use of the products.
7. Anti-radiation design is not implemented in the products described in this document.
8. Please contact Ricoh sales representatives should you have any questions or comments concerning the products or the technical information.



Ricoh is committed to reducing the environmental loading materials in electrical devices with a view to contributing to the protection of human health and the environment.

Ricoh has been providing RoHS compliant products since April 1, 2006 and Halogen-free products since April 1, 2012.

RICOH RICOH ELECTRONIC DEVICES CO., LTD.

<http://www.e-devices.ricoh.co.jp/en/>

Sales & Support Offices

RICOH ELECTRONIC DEVICES CO., LTD.

Higashi-Shinagawa Office (International Sales)

3-32-3, Higashi-Shinagawa, Shinagawa-ku, Tokyo 140-8655, Japan
Phone: +81-3-5479-2857 Fax: +81-3-5479-0502

RICOH EUROPE (NETHERLANDS) B.V.

Semiconductor Support Centre

Prof. W.H. Keesomlaan 1, 1183 DJ Amstelveen, The Netherlands
Phone: +31-20-5474-309

RICOH ELECTRONIC DEVICES KOREA CO., LTD.

3F, Haesung Bldg. 504, Teheran-ro, Gangnam-gu, Seoul, 135-725, Korea
Phone: +82-2-2135-5700 Fax: +82-2-2051-5713

RICOH ELECTRONIC DEVICES SHANGHAI CO., LTD.

Room 403, No.2 Building, No.690 Bilbo Road, Pu Dong New District, Shanghai 201203,
People's Republic of China
Phone: +86-21-5027-3200 Fax: +86-21-5027-3299

RICOH ELECTRONIC DEVICES CO., LTD.

Taipei office

Room 109, 10F-1, No.51, Hengyang Rd., Taipei City, Taiwan (R.O.C.)
Phone: +886-2-2313-1621/1622 Fax: +886-2-2313-1623

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Ricoh Electronics:](#)

[R5524N003A-TR-SE](#) [R5524N002B-TL-FE](#)

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А