

# KB CSLNM1.14

## OSRAM OSTAR® Projection Compact

Compact light source with isolated heat sink for improved heat dissipation and high current chip technology for increased light output.



### Applications

- Head-Up Display LED & Laser
- Projection Home LED & Laser

### Features:

- Package: white molded SMD ceramic package
- Chip technology: UX:3
- Typ. Radiation: 120° (Lambertian emitter)
- Color:  $\lambda_{\text{dom}} = 455 \text{ nm}$  (● blue)
- Corrosion Robustness Class: 3A
- ESD: 8 kV acc. to ANSI/ESDA/JEDEC JS-001 (HBM, Class 3B)

---

## Ordering Information

| Type                 | Total radiant flux <sup>1)</sup><br>$I_F = 1000 \text{ mA}$<br>$\Phi_E$ | Ordering Code |
|----------------------|---|---------------|
| KB CSLNM1.14-3V6A-46 | 900 ... 1400 mW   | Q65112A3602   |
| KB CSLNM1.14-5A8A-23 | 1120 ... 1800 mW  | Q65113A1588   |

## Maximum Ratings

| Parameter   | Symbol         |      | Values  |
|---|----------------|------|---------|
| <b>Surge Current</b>  |                |      |         |
| Operating Temperature   | $T_{op}$       | min. | -40 °C  |
|   |                | max. | 125 °C  |
| Storage Temperature   | $T_{stg}$      | min. | -40 °C  |
|   |                | max. | 125 °C  |
| Junction Temperature  | $T_j$          | max. | 150 °C  |
| Forward current<br>$T_s = 25\text{ °C}$                                 | $I_F$          | min. | 40 mA   |
|   |                | max. | 3000 mA |
| Forward current pulsed<br>$D = 0.5 ; T_s = 25\text{ °C}$                | $I_{F\ pulse}$ | max. | 4000 mA |
| ESD withstand voltage<br>acc. to ANSI/ESDA/JEDEC JS-001 (HBM, Class 3B) | $V_{ESD}$      |      | 8 kV    |

## Characteristics

$I_F = 1000 \text{ mA}$ ;  $T_S = 25 \text{ °C}$

| Parameter  | Symbol                  |                      | Values                     |
|--|-------------------------|----------------------|----------------------------|
| Peak Wavelength  | $\lambda_{\text{peak}}$ | typ.                 | 450 nm                     |
| Dominant Wavelength <sup>2)</sup><br>$I_F = 1000 \text{ mA}$   | $\lambda_{\text{dom}}$  | min.<br>typ.<br>max. | 445 nm<br>455 nm<br>465 nm |
| Viewing angle at 50% $I_V$   | $2\phi$                 | typ.                 | 120 °                      |
| Radiating surface  | $A_{\text{color}}$      | typ.                 | 1 x 1 mm <sup>2</sup>      |
| Partial Flux acc. CIE 127:2007   | $\Phi_{E/V, 120^\circ}$ | typ.                 | 0.76                       |
| Forward Voltage <sup>3)</sup><br>$I_F = 1000 \text{ mA}$   | $V_F$                   | min.<br>typ.<br>max. | 2.75 V<br>3.00 V<br>3.50 V |
| Real thermal resistance junction/solderpoint <sup>4)</sup>   | $R_{\text{thJS real}}$  | typ.<br>max.         | 4.1 K / W<br>4.9 K / W     |
| Electrical thermal resistance junction/solderpoint <sup>4)</sup><br>with efficiency $\eta_e = 33 \%$ | $R_{\text{thJS elec.}}$ | typ.<br>max.         | 2.7 K / W<br>3.3 K / W     |

## Brightness Groups

| Group | Total radiant flux <sup>1)</sup><br>$I_F = 1000 \text{ mA}$<br>min.<br>$\Phi_E$ | Total radiant flux <sup>1)</sup><br>$I_F = 1000 \text{ mA}$<br>max.<br>$\Phi_E$ |
|-------|---|---|
| 3V    | 900 mW  | 1000 mW   |
| 4V    | 1000 mW   | 1120 mW   |
| 5A    | 1120 mW   | 1250 mW   |
| 6A    | 1250 mW   | 1400 mW   |
| 7A    | 1400 mW   | 1590 mW   |
| 8A    | 1590 mW   | 1800 mW   |

## Wavelength Groups

| Group | Dominant Wavelength <sup>2)</sup><br>$I_F = 1000 \text{ mA}$<br>min.<br>$\lambda_{\text{dom}}$ | Dominant Wavelength <sup>2)</sup><br>$I_F = 1000 \text{ mA}$<br>max.<br>$\lambda_{\text{dom}}$ |
|-------|--|--|
| 2     | 445 nm   | 449 nm   |
| 3     | 449 nm   | 453 nm   |
| 4     | 453 nm   | 457 nm   |
| 5     | 457 nm   | 461 nm   |
| 6     | 461 nm   | 465 nm   |


## Group Name on Label

### Example: 3V-2

| Brightness | Wavelength |
|------------|------------|
| 3V         | 2          |


### Relative Spectral Emission <sup>5)</sup>

$\Phi_{rel} = f(\lambda); I_F = 1000 \text{ mA}; T_J = 25 \text{ }^\circ\text{C}$

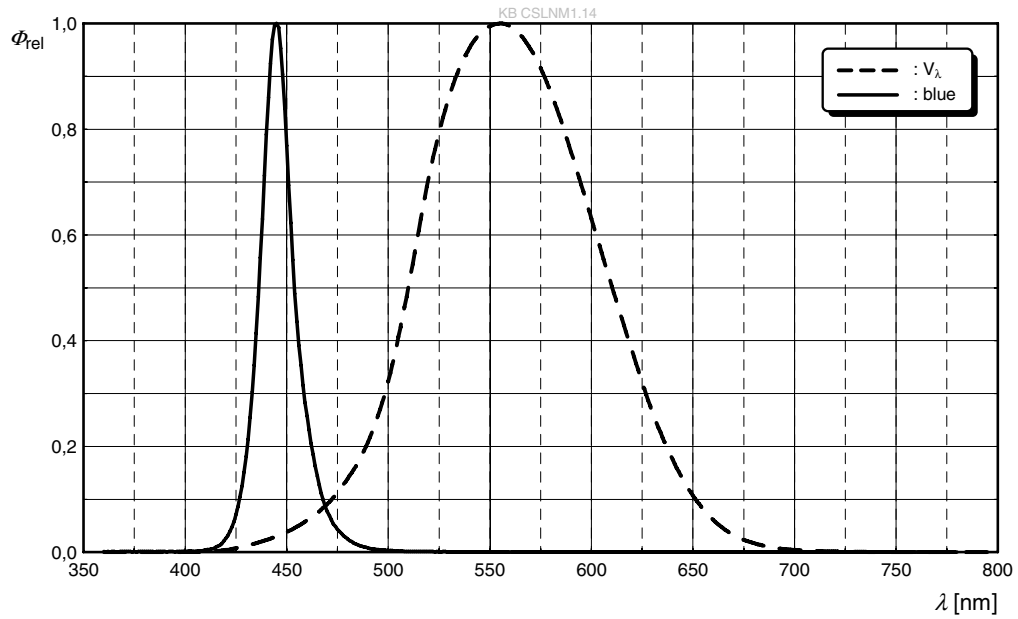


### Radiation Characteristics <sup>5)</sup>

$I_{rel} = f(\phi); T_J = 25 \text{ }^\circ\text{C}$

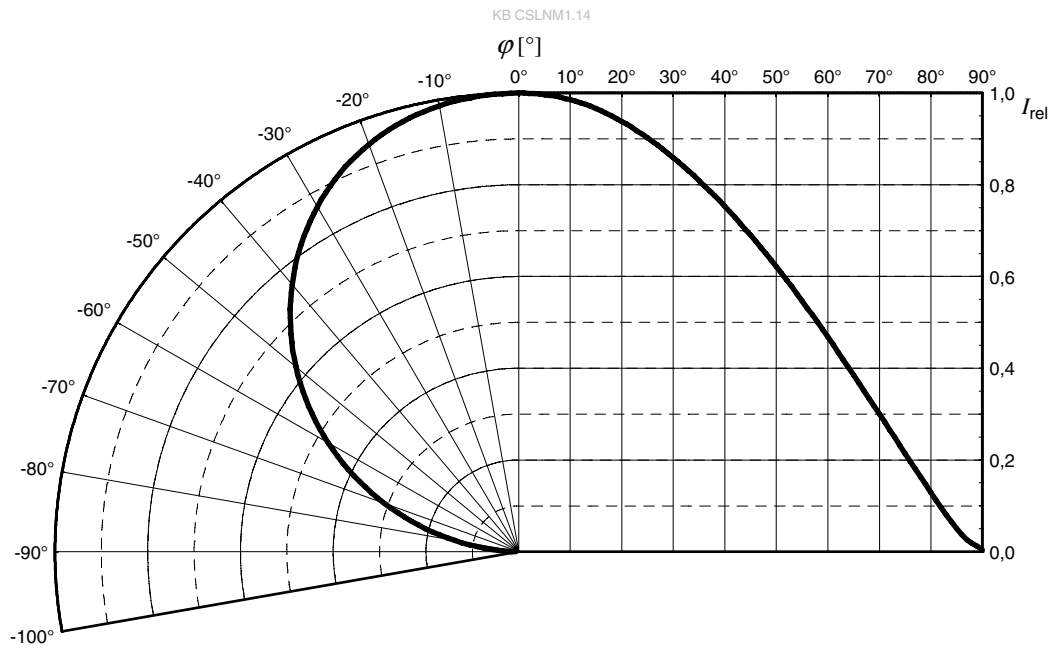


**Relative Partial Flux** 5)

$$\Phi_E(2\varphi)/\Phi_E(180^\circ) = f(\varphi); T_j = 25^\circ\text{C}$$

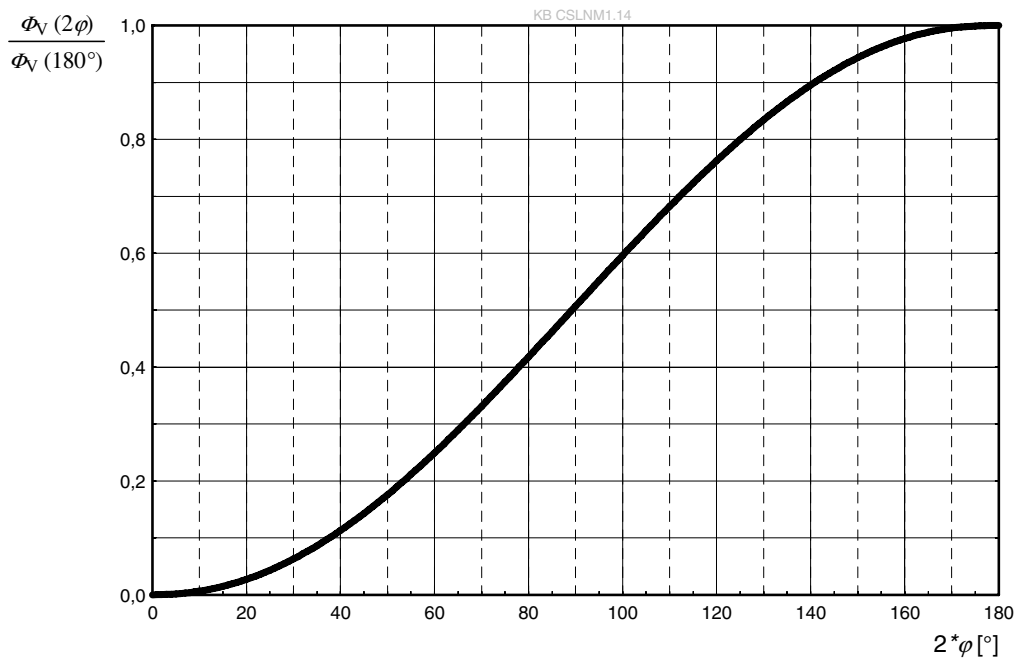


**Forward current** 5), 6)

$I_F = f(V_F); T_J = 25\text{ }^\circ\text{C}$

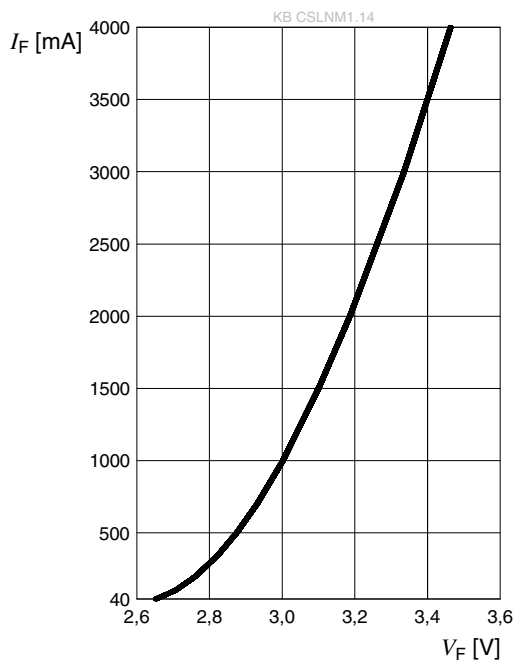


**Relative Radiant Power** 5), 6)

$\Phi_E / \Phi_E(1000\text{ mA}) = f(I_F); T_J = 25\text{ }^\circ\text{C}$

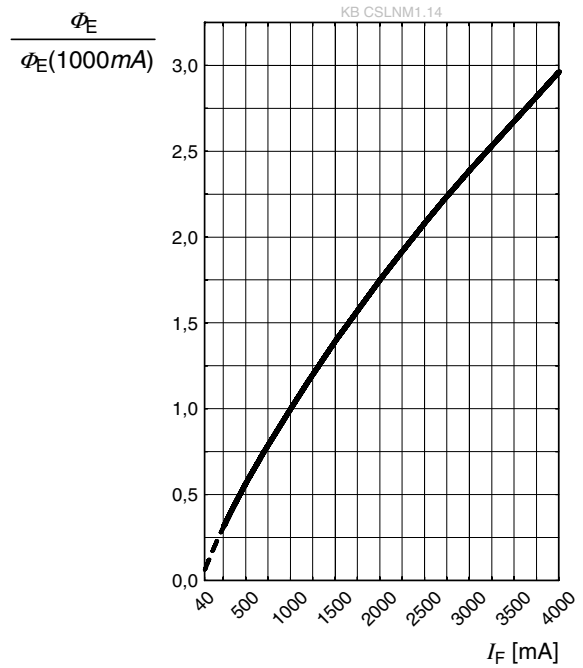

**Dominant Wavelength** 5)


$\Delta\lambda_{\text{dom}} = f(I_F); T_J = 25\text{ }^\circ\text{C}$

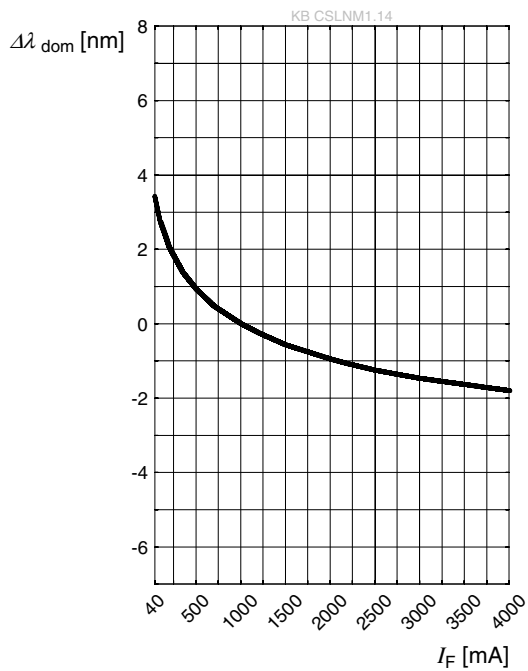




### Forward Voltage <sup>5)</sup>

$$\Delta V_F = V_F - V_F(25\text{ °C}) = f(T_j); I_F = 1000\text{ mA}$$

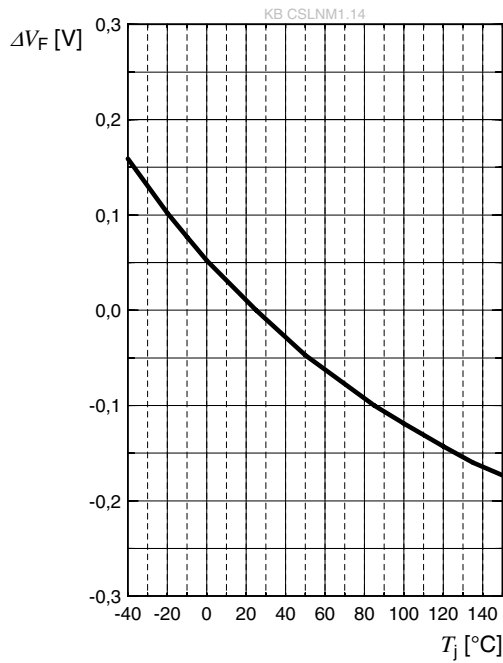


### Relative Radiant Power <sup>5)</sup>

$$\Phi_E / \Phi_E(25\text{ °C}) = f(T_j); I_F = 1000\text{ mA}$$

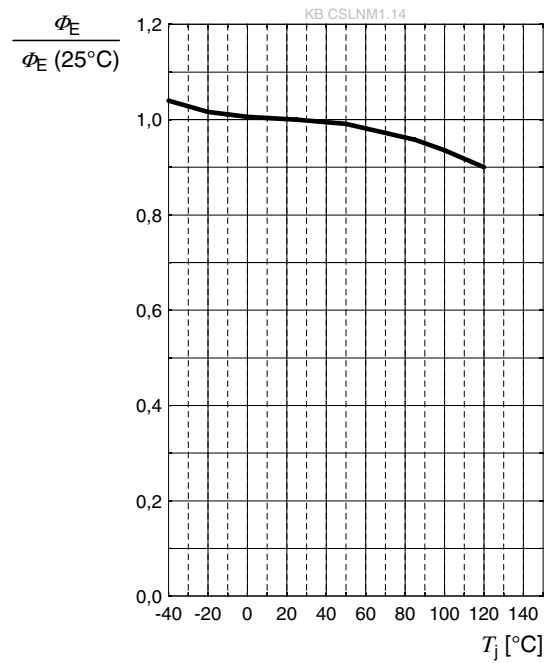


### Dominant Wavelength <sup>5)</sup>

$$\Delta \lambda_{\text{dom}} = \lambda_{\text{dom}} - \lambda_{\text{dom}}(25\text{ °C}) = f(T_j); I_F = 1000\text{ mA}$$

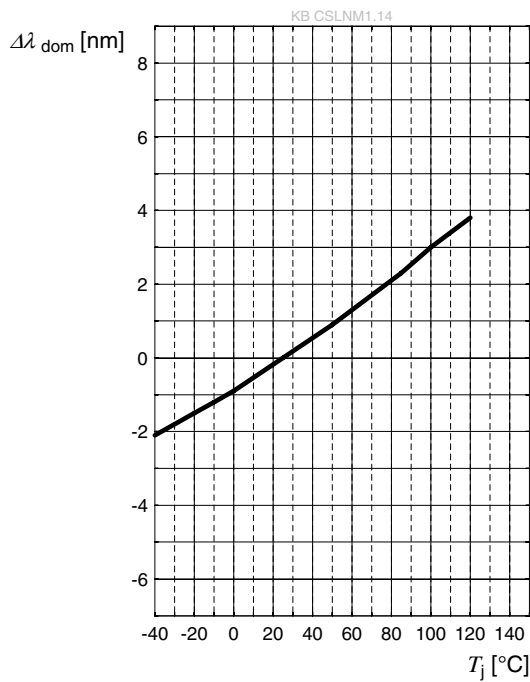


### Max. Permissible Forward Current

$I_F = f(T)$

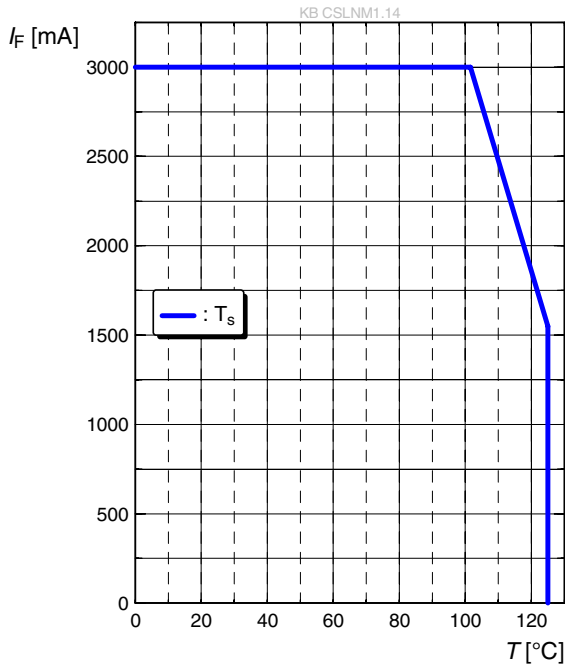


### Permissible Pulse Handling Capability

$I_F = f(t_p)$ ; D: Duty cycle

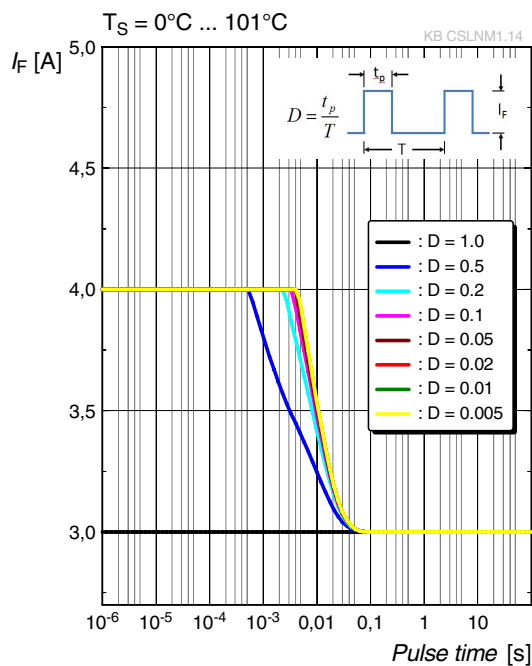


### Permissible Pulse Handling Capability

$I_F = f(t_p)$ ; D: Duty cycle

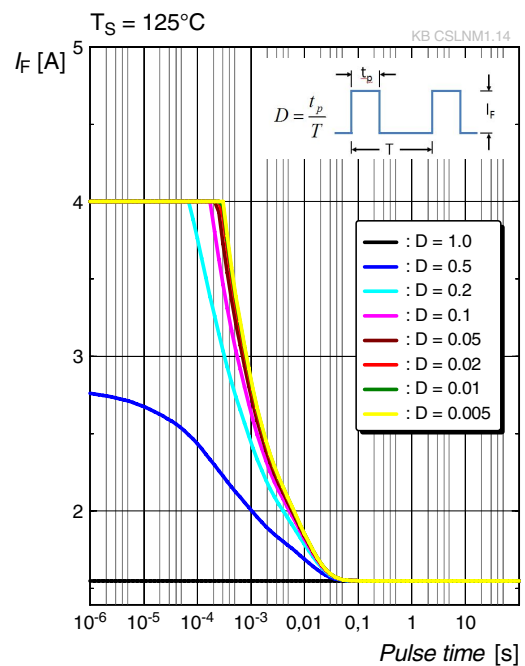


### Permissible F. Handling Capability

f: Frequency

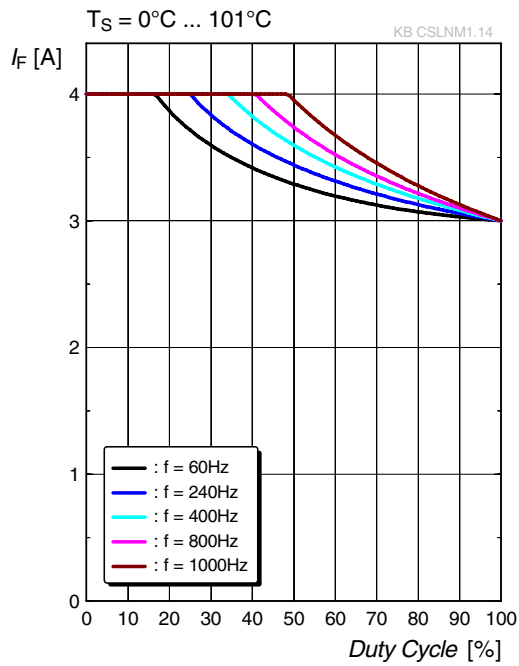



### Permissible F. Handling Capability

f: Frequency

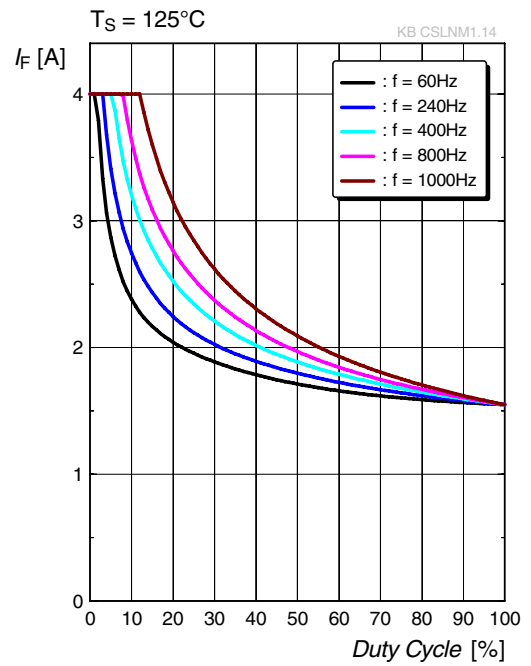

## Dimensional Drawing <sup>7)</sup>

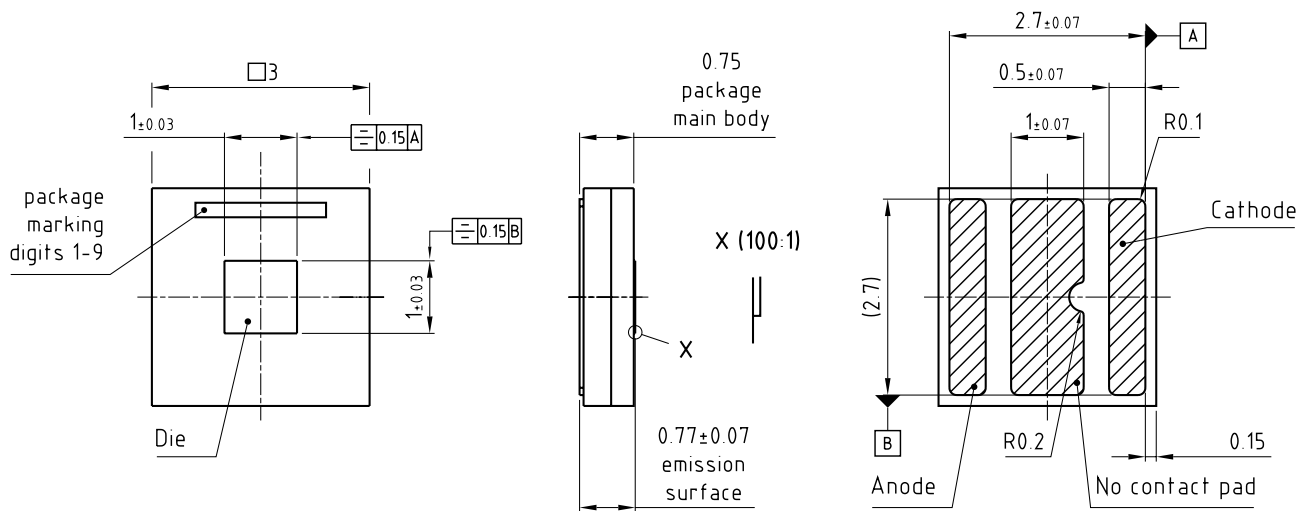

general tolerance  $\pm 0.1$   
 lead finish Au 

C63062-A4 312-A3 -04

### Further Information:

**Approximate Weight:** 36.0 mg


**Package marking:** Cathode

**Corrosion test:** Class: 3A


Test condition:  $40^{\circ}\text{C}$  / 90 % RH / 15 ppm  $\text{H}_2\text{S}$  / 14 days (stricter than IEC 60068-2-43)

Electrical Internal Circuit


# ESD Protection

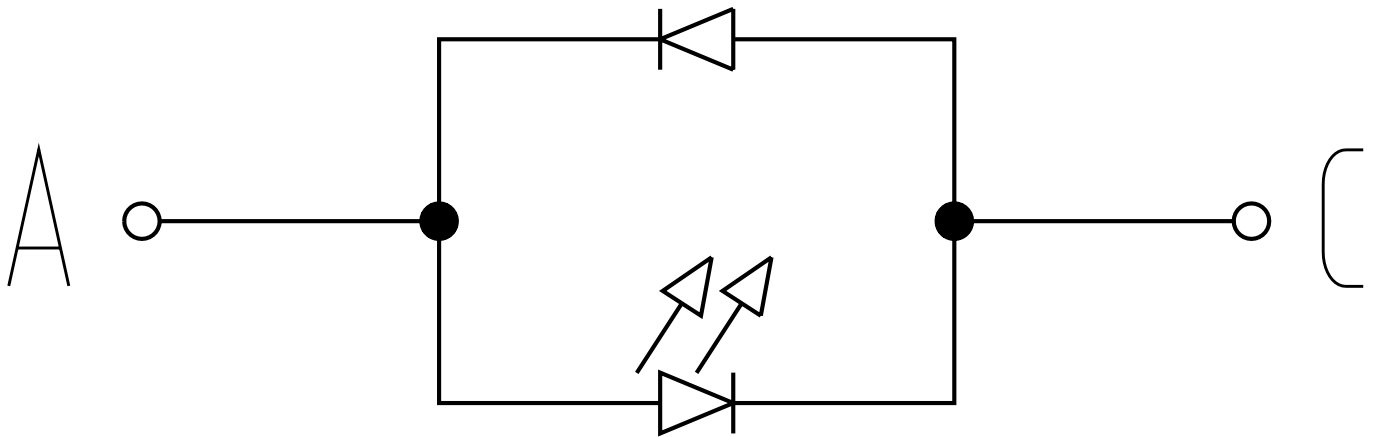

Recommended Solder Pad 7)

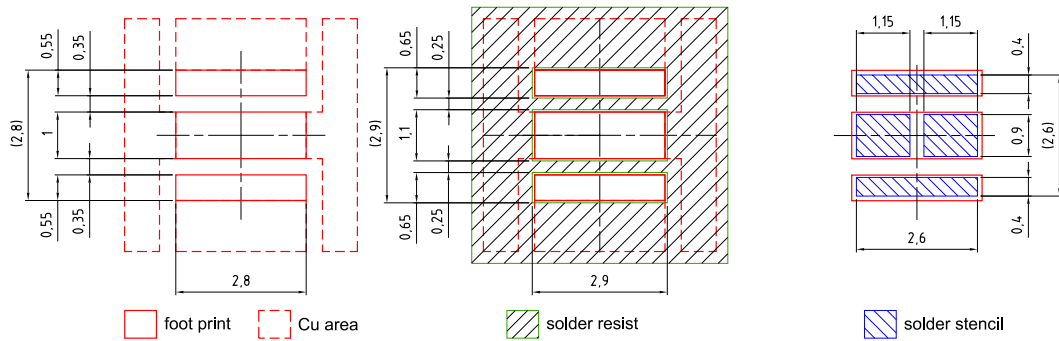

Component Location on Pad

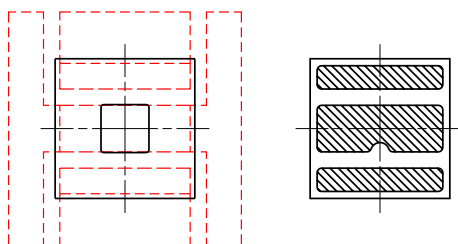


board material selection has high impact on system reliability

E062.3010.208 -02

## Recommended Solder Pad 7)


Alternative Solder pad design for pedestal MCPCB

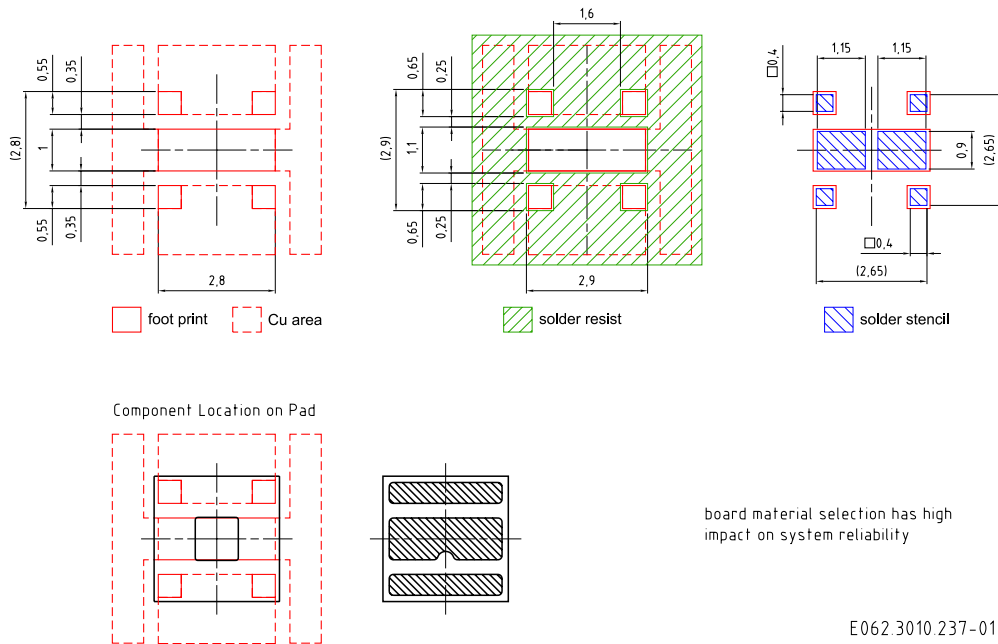

For superior solder joint connectivity results we recommend soldering under standard nitrogen atmosphere. Package not suitable for any kind of wet cleaning or ultrasonic cleaning.

## Reflow Soldering Profile

Product complies to MSL Level 2 acc. to JEDEC J-STD-020E

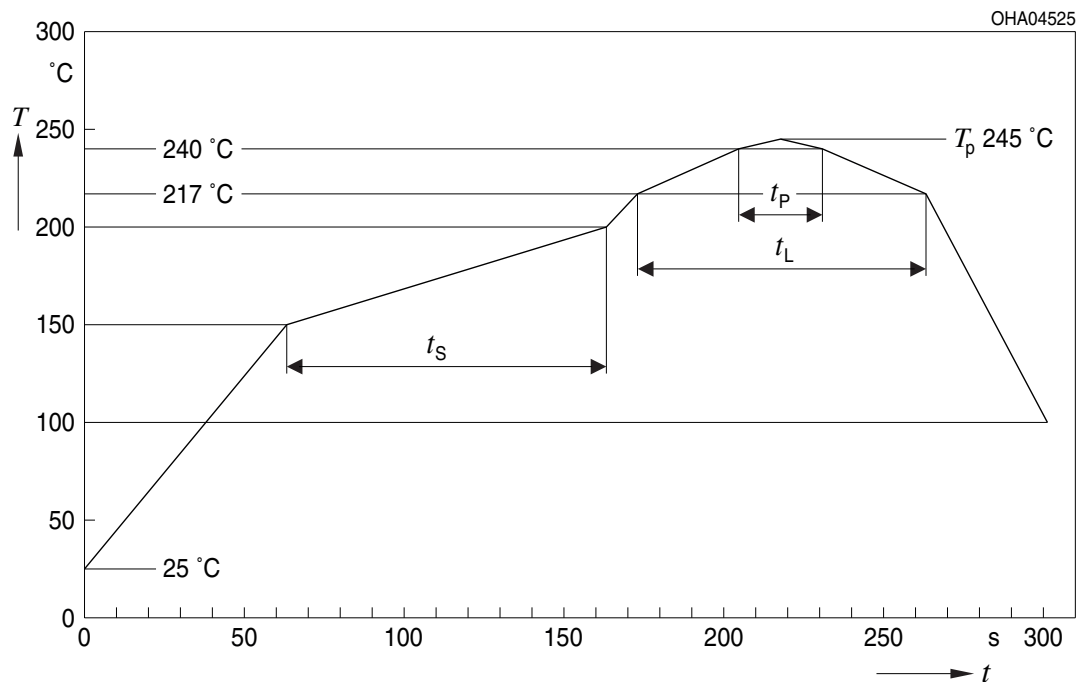


| Profile Feature   | Symbol | Pb-Free (SnAgCu) Assembly |                |         | Unit |
|---|--------|---------------------------|----------------|---------|------|
|   |        | Minimum                   | Recommendation | Maximum |      |
| Ramp-up rate to preheat <sup>*)</sup><br>25 °C to 150 °C          |        |                           | 2              | 3       | K/s  |
| Time $t_s$<br>$T_{Smin}$ to $T_{Smax}$                            | $t_s$  | 60                        | 100            | 120     | s    |
| Ramp-up rate to peak <sup>*)</sup><br>$T_{Smax}$ to $T_p$         |        |                           | 2              | 3       | K/s  |
| Liquidus temperature  | $T_L$  |                           | 217            |         | °C   |
| Time above liquidus temperature                                   | $t_L$  |                           | 80             | 100     | s    |
| Peak temperature  | $T_p$  |                           | 245            | 260     | °C   |
| Time within 5 °C of the specified peak<br>temperature $T_p - 5$ K | $t_p$  | 10                        | 20             | 30      | s    |
| Ramp-down rate*<br>$T_p$ to 100 °C                                |        |                           | 3              | 6       | K/s  |
| Time<br>25 °C to $T_p$  |        |                           |                | 480     | s    |

All temperatures refer to the center of the package, measured on the top of the component

\* slope calculation  $DT/Dt$ :  $Dt$  max. 5 s; fulfillment for the whole T-range

Taping <sup>7)</sup>

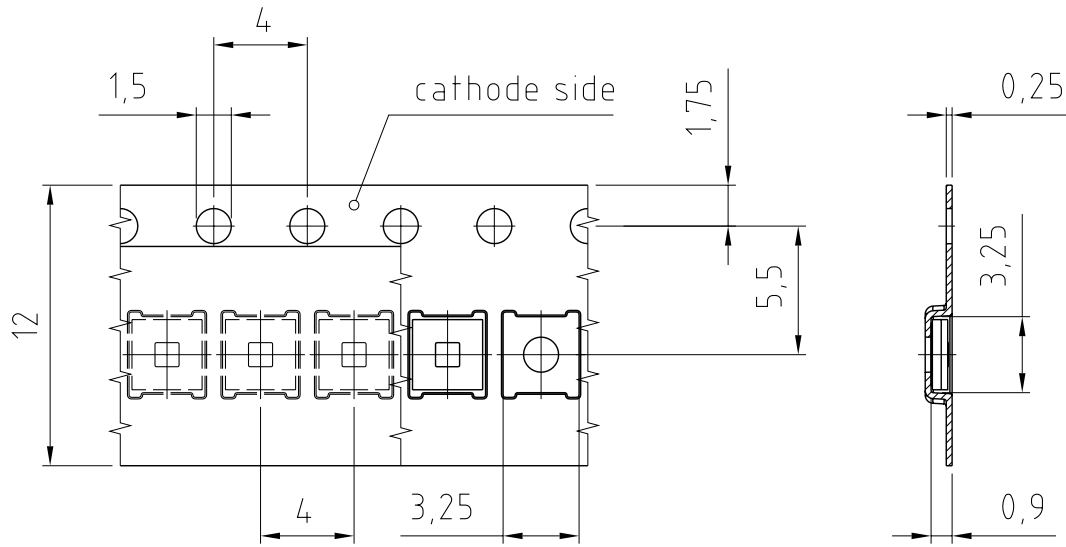

C63062-A4312-B3-03



**Tape and Reel** <sup>8)</sup>



**Reel Dimensions**

| A      | W                   | $N_{min}$ | $W_1$       | $W_{2max}$ | Pieces per PU |
|--------|---------------------|-----------|-------------|------------|---------------|
| 180 mm | 12 + 0.3 / - 0.1 mm | 60 mm     | 12.4 + 2 mm | 18.4 mm    | 1000          |

### Barcode-Product-Label (BPL)

**OSRAM Opto Semiconductors**      LX XXXX      BIN1: XX-XX-X-XXX-X

RoHS Compliant

(6P) BATCH NO: 1234567890      ML Temp    ST  
X    XXX °C X

(1T) LOT NO: 1234567890      (9D) D/C: 1234      Pack: RXX  
DEMY    XXX  
X\_X123\_1234.1234 X

(X) PROD NO: 123456789(Q)QTY: 9999      (G) GROUP: XX-XX-X-X

The diagram shows a rectangular label with rounded corners. It contains the OSRAM logo and name, a part number (LX XXXX), and a bin number (BIN1: XX-XX-X-XXX-X). It features three main barcode sections: a top one for batch number (6P), a middle one for lot number (1T) and date code (9D), and a bottom one for product number (X) and quantity (Q). A QR code is located on the right side. A 'No Moisture' symbol is placed above the QR code. The label also includes 'RoHS Compliant' and 'ML Temp' information. A large 'EXAMPLE' watermark is overlaid diagonally across the label.


OHA04563

### Dry Packing Process and Materials <sup>7)</sup>



Moisture-sensitive product is packed in a dry bag containing desiccant and a humidity card according JEDEC-STD-033.

## Type Designation System

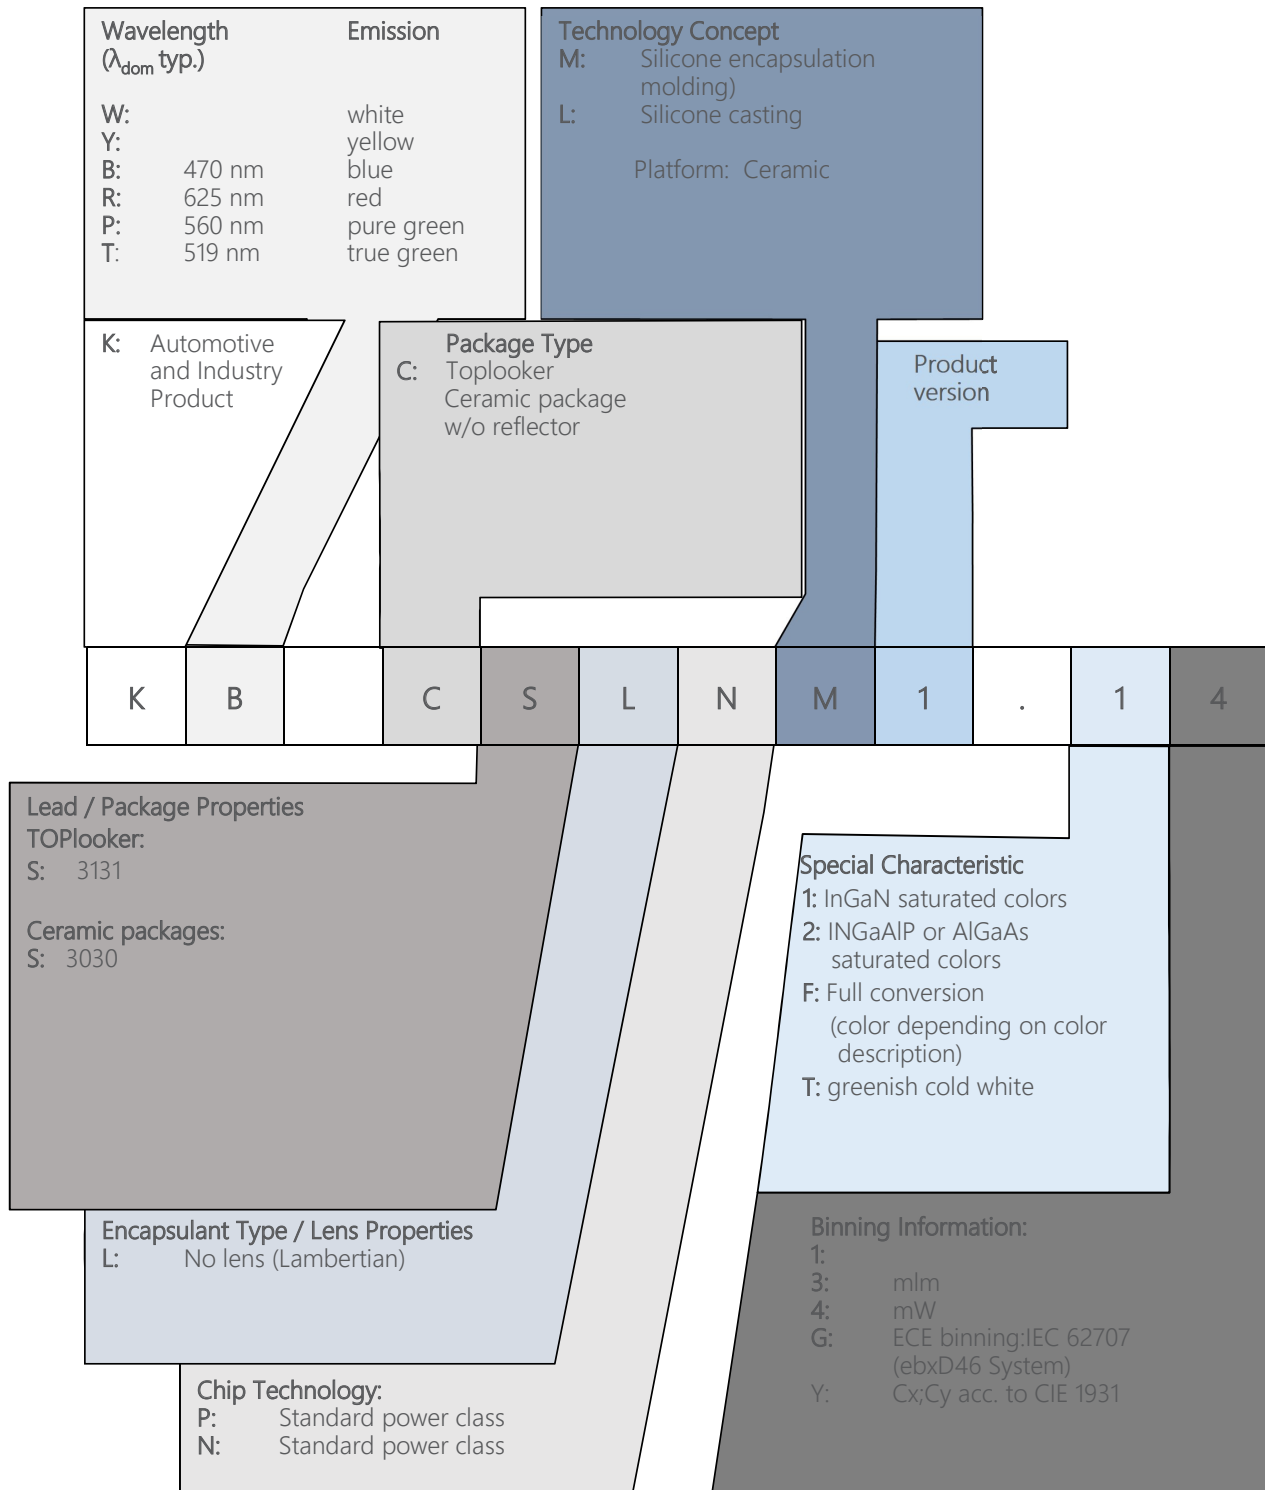

## Notes

The evaluation of eye safety occurs according to the standard IEC 62471:2006 (photo biological safety of lamps and lamp systems). Within the risk grouping system of this IEC standard, the device specified in this data sheet falls into the class **moderate risk (exposure time 0.25 s)**. Under real circumstances (for exposure time, conditions of the eye pupils, observation distance), it is assumed that no endangerment to the eye exists from these devices. As a matter of principle, however, it should be mentioned that intense light sources have a high secondary exposure potential due to their blinding effect. When looking at bright light sources (e.g. headlights), temporary reduction in visual acuity and afterimages can occur, leading to irritation, annoyance, visual impairment, and even accidents, depending on the situation.

Subcomponents of this device contain, in addition to other substances, metal filled materials. Metal filled materials can be affected by environments that contain traces of aggressive substances. Therefore, we recommend that customers avoid device exposure to aggressive substances during storage, production, and use.

For further application related information please visit [www.osram-os.com/appnotes](http://www.osram-os.com/appnotes)

## Disclaimer

### **Attention please!**

The information describes the type of component and shall not be considered as assured characteristics. Terms of delivery and rights to change design reserved. Due to technical requirements components may contain dangerous substances.

For information on the types in question please contact our Sales Organization.

If printed or downloaded, please find the latest version on the OSRAM OS website.

### **Packing**

Please use the recycling operators known to you. We can also help you – get in touch with your nearest sales office. By agreement we will take packing material back, if it is sorted. You must bear the costs of transport. For packing material that is returned to us unsorted or which we are not obliged to accept, we shall have to invoice you for any costs incurred.

### **Product and functional safety devices/applications or medical devices/applications**

OSRAM OS components are not developed, constructed or tested for the application as safety relevant component or for the application in medical devices.

OSRAM OS products are not qualified at module and system level for such application.

In case buyer – or customer supplied by buyer – considers using OSRAM OS components in product safety devices/applications or medical devices/applications, buyer and/or customer has to inform the local sales partner of OSRAM OS immediately and OSRAM OS and buyer and /or customer will analyze and coordinate the customer-specific request between OSRAM OS and buyer and/or customer.

---

## Glossary

- 1) **Brightness:** Brightness values are measured during a current pulse of typically 25 ms, with an internal reproducibility of  $\pm 8\%$  and an expanded uncertainty of  $\pm 11\%$  (acc. to GUM with a coverage factor of  $k = 3$ ).
- 2) **Wavelength:** The wavelength is measured at a current pulse of typically 25 ms, with an internal reproducibility of  $\pm 0.5$  nm and an expanded uncertainty of  $\pm 1$  nm (acc. to GUM with a coverage factor of  $k = 3$ ).
- 3) **Forward Voltage:** The forward voltage is measured during a current pulse of typically 8 ms, with an internal reproducibility of  $\pm 0.05$  V and an expanded uncertainty of  $\pm 0.1$  V (acc. to GUM with a coverage factor of  $k = 3$ ).
- 4) **Thermal Resistance:**  $R_{th\ max}$  is based on statistic values ( $6\sigma$ ).
- 5) **Typical Values:** Due to the special conditions of the manufacturing processes of semiconductor devices, the typical data or calculated correlations of technical parameters can only reflect statistical figures. These do not necessarily correspond to the actual parameters of each single product, which could differ from the typical data and calculated correlations or the typical characteristic line. If requested, e.g. because of technical improvements, these typ. data will be changed without any further notice.
- 6) **Characteristic curve:** In the range where the line of the graph is broken, you must expect higher differences between single devices within one packing unit.
- 7) **Tolerance of Measure:** Unless otherwise noted in drawing, tolerances are specified with  $\pm 0.1$  and dimensions are specified in mm.
- 8) **Tape and Reel:** All dimensions and tolerances are specified acc. IEC 60286-3 and specified in mm.

## Revision History

| Version | Date       | Change                 |
|---------|------------|------------------------|
| 1.7     | 2019-01-07 | Additional Information |
| 1.8     | 2020-07-17 | Ordering Information   |

Published by OSRAM Opto Semiconductors GmbH EU RoHS and China RoHS compliant product  
Leibnizstraße 4, D-93055 Regensburg  
www.osram-os.com © All Rights Reserved.



此产品符合欧盟 RoHS 指令的要求；  
按照中国的相关法规和标准，不含有毒有害物质或元素。



Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А