



har-flex® straight female connector



RoHS
compliant

GENERAL INFORMATION

No. of contacts	from 6 to 100poles, all even numbers
Contact spacing	1,27mm x 1,27mm [0,050"x0,050"]
Test Voltage	500V
Contact resistance	< 25 mOhm
Insulation resistance	≥ 10x10 ⁹ Ω
Working current acc. to IEC 60512, at 70°C, 80% derating	see derating diagram
Working temperature range	-55°C ... +125°C
Termination technology	SMT
Reflow processing temperature (acc. to ECA/IPC/JEDEC J-STD-075 Level PSL R0)	min. 150s >217°C min. 30s >240°C
Clearance & creepage distance	0,4mm min.
Insertion force (depending on mating connector)	approximately 0,5N/contact
Withdrawal force (depending on mating connector)	approximately 0,5N/contact
Mating cycles	PL1 : 500 mating cycles PL2 : 250 mating cycles
RoHS - compliant	Yes
Leadfree	Yes
Working voltage acc. to IEC 60664-1	100V / 150V (depending on installation category)
UL file acc. UL 1977	ECBT2.E102079
UL file acc. CSA-C22.2 (for Canada)	ECBT8.E102079
PSL level acc. ECA/IPC/JEDEC J-STD-075	PSL R0
MSL level acc. ECA/IPC/JEDEC J-STD-020D	MSL 1

INSULATOR MATERIAL

Material	LCP (liquid crystalline polymer)
Color	Black
UL classification	UL94-V0
Material group acc. IEC 60664-1	IIIa (175 ≤ CTI < 400)

CONTACT MATERIAL

Contact material	Copper alloy
Plating termination zone	Sn
Plating contact sliding side	Au over PdNi (acc. to Performance level)


DERATING DIAGRAM acc. to IEC 60512-5 (Current carrying capacity)

The current carrying capacity is limited by maximum temperature of materials for inserts and contacts including terminals.

The current capacity curve is valid for continuous, non interrupted current loaded contacts of connectors when simultaneous power on all contacts is given, without exceeding the maximum temperature.

Control and test procedures according to DIN IEC 60512-5

derating curve at I_{max}*0,8 (IEC 60512-5-2)

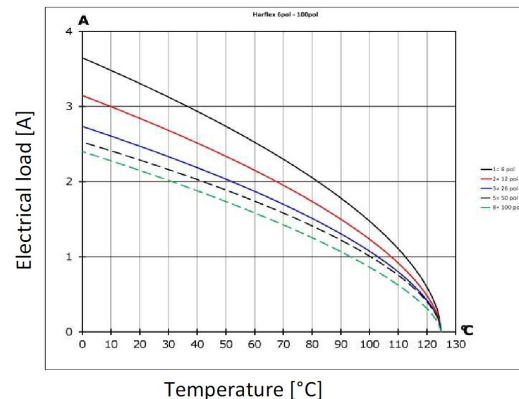

RECOMMENDATION FOR SOLDER PROCESSING

Solder paste recommendation

The har-flex connectors are solderable with established lead-free SAC / SnNi solder but also leaded solder e.g. SnPb40

PCB pad plating

The har-flex connectors are solderable on lead-free pad surfaces like HAL, NiAu, Immersion Sn.

Stencil recommendation

The solder deposition has to be placed on the pad area of the contact solder tines. Ideally, the solder deposition has the same length-to-width ratio and center point like the PCB pads. The size of the solder stencil apertures is depending on the thickness of the stencil. In general, the thinner stencils will need larger apertures to result in the required volume of solder paste. The minimum required solder paste volume for the signal pins is 0,094mm³, for the hold down it is 0,33mm³. For example, this can be achieved with the following stencil data :

Stencil thickness	Signal pins		
	PCB pad size	proposal stencil aperture size	calculated solder paste volume
120 µm	1,1 x 0,8 mm	1,05 x 0,75 mm	0,095 mm ³
150 µm	1,1 x 0,8 mm	0,99 x 0,72 mm	0,107 mm ³

Stencil thickness	Hold-downs		
	PCB pad size	proposal stencil aperture size	calculated solder paste volume
120 µm	2,5 x 1,2 mm	2,45 x 1,15 mm	0,338 mm ³
150 µm	2,5 x 1,2 mm	2,25 x 1,08 mm	0,365 mm ³

If a stencil with lower thickness shall be used, please insure the minimum required solder paste volume by enlarging the stencil aperture. Depending on the PCB design, the solder depostion may protrude the PCB pads. But to achieve a good sealing during solder paste printing and to reduce the cleaning interval of the stencil, the aperture should be smaller than the PCB pad about 10% or 25µm encircling.

Coplanarity of contacts

All connectors are tested for coplanarity of contacts and are in the range of 6 pin to 80 pin: ≤ 0,1mm
82 pin to 100 pin: ≤ 0,15mm

Performance level

Performance level 1 (recommended for majority of applications)
Initial 250 mating cycles, 10 days gas test (25°C / 75% r.h.) using H2S 10 ppb, NO2 200 ppb, CL2 10 ppb, SO2 200 ppb. Measurement of contact resistance. The remaining 250 mating cycles are subject to measurement of contact resistance and visual inspection.

Visual inspection. No abrasion of the contact finish through to the base material. No functional impairment.

Part number definition : 15 2

Performance level 2

Initial 125 mating cycles, 4 days gas test (25°C / 75% r.h.) using H2S 10 ppb, NO2 200 ppb, CL2 10 ppb, SO2 200 ppb. Measurement of contact resistance. The remaining 125 mating cycles are subject to measurement of contact resistance and visual inspection.

Visual inspection. No abrasion of the contact finish through to the base material. No functional impairment.

Part number definition : 15 6

Performance level S4

Defined contact surface of min. 0,06 µm Au over 0,7+0,2µm PdNi

Part number definition : 15 5

		All Dimensions in mm		Scale		Free size tol.		Ref.					
		Original Size DIN A3		1:1				Sub.					
		All rights reserved		Created by		Inspected by		Standardisation		Date		State	
		Department EC PD - CN		ZHUANGJ		LUOK		HOFFMANN		2018-05-21		Final Release	
HARTING Electronics GmbH D-32339 Espelkamp				Title								Doc-Key / ECM-Nr.	
				har flex female stacking height 6.25 and 9.05mm								100578057/UGD/000/B 500000135280	
				Type		Number				Rev.		Page	
				DS		15211100301				B		1/2	




har-flex® straight female connector



TAPE LAYOUT & PACKAGING


Tape acc. to IEC 60286-3

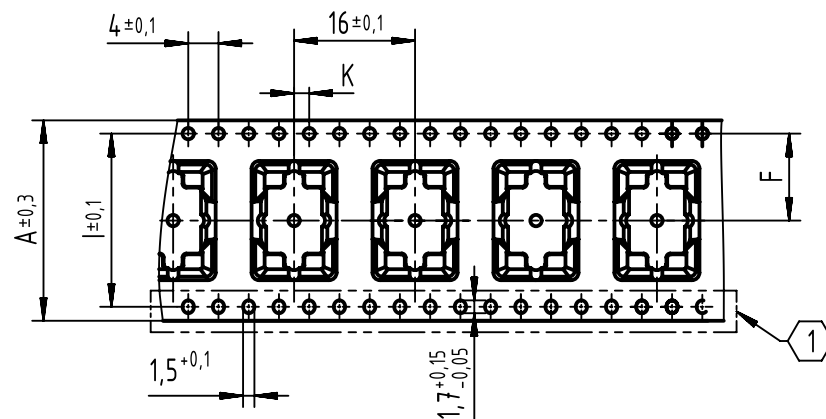

Tape dimensions:	A	F	I	K
poles 06 to 12	24,0	11,5±0,1	-	2±0,1
poles 14 to 20	32,0	14,2±0,1	28,4	2±0,1
poles 22 to 40	44,0	20,2±0,15	40,4	2±0,15
poles 42 to 56	56,0	26,2±0,15	52,4	2±0,15
poles 58 to 80	72,0	34,2±0,3	68,4	2±0,2
poles 82 to 100	88,0	42,2±0,3	84,4	2±0,2


1 NO DOUBLE SPROCKET HOLES FOR 06, 08, 10 AND 12 POLE NUMBERS (TAPE SIZE 24)

Pick & place pad 6,4 ± 0,1 x 4,5 ± 0,1

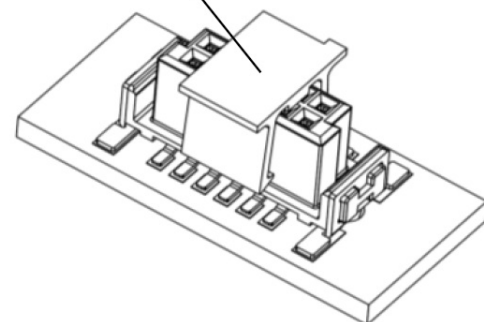

Packaging indices ("XXX" in part number)		
Index	Packaging unit	Packaging
000	280	Tape & reel
333	1	Tape



REEL DIMENSIONS

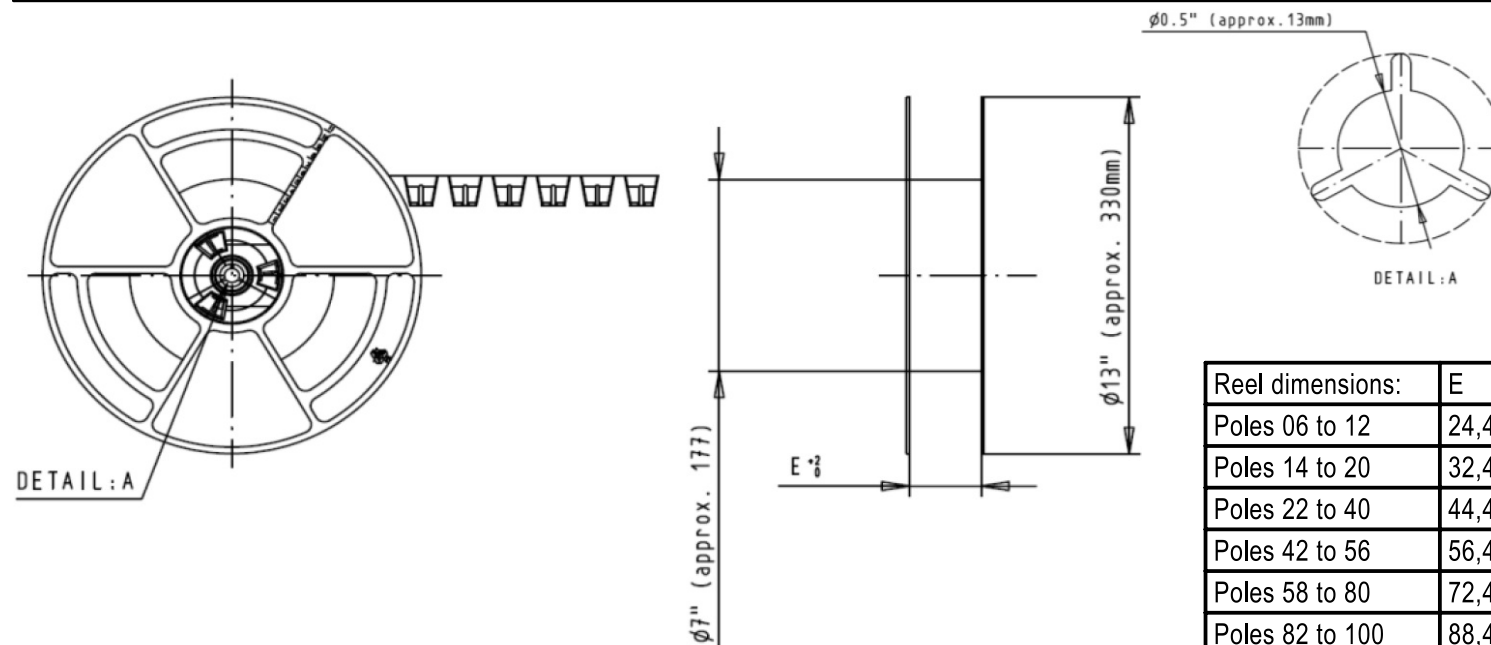

Reel dimensions:	E
Poles 06 to 12	24,4
Poles 14 to 20	32,4
Poles 22 to 40	44,4
Poles 42 to 56	56,4
Poles 58 to 80	72,4
Poles 82 to 100	88,4

APPLICATION INFORMATION

S	14mm				
	13mm				
	12mm				
	11mm				
	10mm				
	9mm				
	8mm				
X & Y	stacking heights	male 1.75mm female 6.25mm	male 3.25mm female 6.25mm	male 1.75mm female 9.05mm	male 3.25mm female 9.05mm
S	PCB distance	8mm - 9.5mm	9.5mm - 11mm	10.8mm - 12.3mm	12.3mm - 13.8mm
	part numbers	15 11 ... 15 21 ...	15 12 ... 15 21 ...	15 11 ... 15 22 ...	15 12 ... 15 22 ...

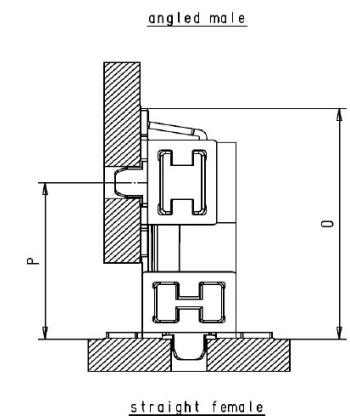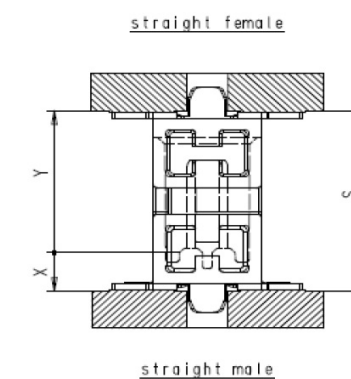


3,25	9,05	12,3	13,8
1,75	9,05	10,8	12,3
3,25	6,25	9,5	11
1,75	6,25	8	9,5
X	Y	Smin	* Smax


9,05	10,5	14,33
6,25	7,7	11,53
Y	P min.	0

*Smax = Smin + 1.5 wiping length with additional contact overlap security

Admissible inclination

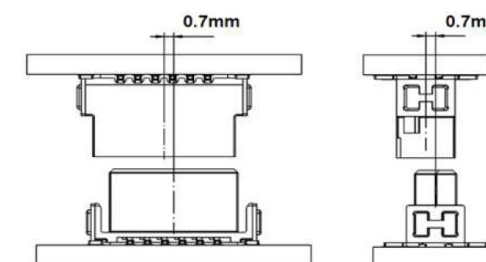

Admissible mismatching

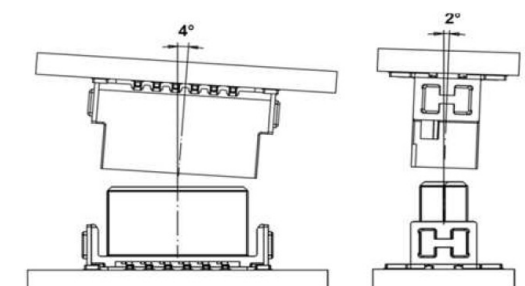

	All Dimensions in mm Original Size DIN A3		Scale 1:1		Free size tol.		Ref.	
							Sub.	
	All rights reserved		Created by ZHUANGJ	Inspected by LUOK	Standardisation HOFFMANN	Date 2018-05-21	State Final Release	
	Department EC PD - CN		Title har flex female stacking height 6.25 and 9.05mm					Doc-Key / ECM-Nr. 100578057/UGD/000/B 500000135280
HARTING Electronics GmbH D-32339 Espelkamp			Type DS	Number 15211100301			Rev. B	Page 2/2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

HARTING:

<u>15211002601000</u>	<u>15221002601000</u>	<u>15210062601000</u>	<u>15210082601000</u>	<u>15210102601000</u>	<u>15210122601000</u>
<u>15210142601000</u>	<u>15210162601000</u>	<u>15210182601000</u>	<u>15210202601000</u>	<u>15210222601000</u>	<u>15210242601000</u>
<u>15210262601000</u>	<u>15210282601000</u>	<u>15210302601000</u>	<u>15210322601000</u>	<u>15210362601000</u>	<u>15210382601000</u>
<u>15210402601000</u>	<u>15210422601000</u>	<u>15210442601000</u>	<u>15210462601000</u>	<u>15210502601000</u>	<u>15210522601000</u>
<u>15210542601000</u>	<u>15210562601000</u>	<u>15210582601000</u>	<u>15210602601000</u>	<u>15210622601000</u>	<u>15210642601000</u>
<u>15210662601000</u>	<u>15210682601000</u>	<u>15210702601000</u>	<u>15210722601000</u>	<u>15210742601000</u>	<u>15210762601000</u>
<u>15210782601000</u>	<u>15210802601000</u>	<u>15210822601000</u>	<u>15210842601000</u>	<u>15210862601000</u>	<u>15210882601000</u>
<u>15210902601000</u>	<u>15210922601000</u>	<u>15210942601000</u>	<u>15210962601000</u>	<u>15210982601000</u>	<u>15220062601000</u>
<u>15220082601000</u>	<u>15220102601000</u>	<u>15220122601000</u>	<u>15220142601000</u>	<u>15220162601000</u>	<u>15220182601000</u>
<u>15220202601000</u>	<u>15220222601000</u>	<u>15220242601000</u>	<u>15220262601000</u>	<u>15220282601000</u>	<u>15220302601000</u>
<u>15220322601000</u>	<u>15220342601000</u>	<u>15220362601000</u>	<u>15220382601000</u>	<u>15220402601000</u>	<u>15220422601000</u>
<u>15220442601000</u>	<u>15220462601000</u>	<u>15220482601000</u>	<u>15220502601000</u>	<u>15220522601000</u>	<u>15220542601000</u>
<u>15220562601000</u>	<u>15220582601000</u>	<u>15220602601000</u>	<u>15220622601000</u>	<u>15220662601000</u>	<u>15220682601000</u>
<u>15220702601000</u>	<u>15220722601000</u>	<u>15220742601000</u>	<u>15220762601000</u>	<u>15220782601000</u>	<u>15220802601000</u>
<u>15220822601000</u>	<u>15220842601000</u>	<u>15220862601000</u>	<u>15220882601000</u>	<u>15220902601000</u>	<u>15220922601000</u>
<u>15220942601000</u>	<u>15220962601000</u>	<u>15220982601000</u>			

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А