

ILLUMINATED VANDAL RESISTANT PUSHBUTTONS

LP3-V
ILLUMINATED
VANDAL RESISTANT
PUSHBUTTONS

MOMENTARY ACTION RING ILLUMINATED, VANDAL RESISTANT CASE & BUTTON



High Profile
Curved Button

The LP3-V is a momentary switch designed to provide attractive, lighted position indication for applications in harsh environments, where security and reliability are paramount. The series features both aluminum and stainless steel cases watertight to IP68S. Alternate action is available in the LP5-V series.

This high reliability switch offers the durability and ruggedness our customers have come to expect with the added benefit of illumination. They are ideal for marine, off-highway and industrial control applications that require an illuminated switch.

This switch offers positive tactile feedback and a variety of LED colors available in both flat and domed actuator bezel shapes.

Features:

- Security (aluminum) or vandal resistant (stainless steel) case & button
- Ring illuminated
- Watertight to IP68S option
- Variety of button options and LED colors
- Drop in replacement to the P8-V series
- RoHS compliant

Standard Characteristics/Ratings:

ELECTRICAL RATINGS:

| Load | Sea Level @ 28VDC or 115VAC, 60/400Hz |
|-------------|---------------------------------------|
| Resistive | 5A |
| Inductive | 3A |
| Lamp | 1A |
| Motor | 3A |
| DWV | 1000Vrms through switch contacts only |
| Logic Level | 10mA @ 5VDC |

Electrical Life: 25,000 cycles

LIGHTING:

| Light Source Voltage (DC) | Actual Voltage Nominal (DC) | Voltage Max (DC) |
|---------------------------|-----------------------------|------------------|
| 2 | 2 | 2.6 |
| 6 | 7 | 8 |
| 12 | 13.5 | 14.5 |
| 24 | 28 | 28.6 |

Mechanical Life: 250,000 cycles @ ambient and +85°C
25,000 cycles @ -55°C

Seal: IP64 or IP68S

Operating Temp Range: -55°C to +85°C

Operating Force: 2.5 +/- 0.5 lb. or 5.0 +/- 1.0 lb.

Total Travel: 0.080 inches max

Overtravel: 0.010 inches min

MATERIALS:

Case: Stainless steel (316) or anodized aluminum alloy

Button: Thermoplastic

Center Cap: Stainless steel (316) or anodized aluminum alloy

Terminals: Standard silver plate with optional gold plate for logic level applications

Mounting Hardware: Hex or knurl nut, lockwasher and panel gasket

LP3-V PART NUMBER CODE

| Type | Case Style | Circuit Rating | Light Source Type** w/ Rev. Pol Protection | Seal Level | Operating Force | Case/Center Cap Color | Button Profile |
|--------------|---------------------------------|-------------------------------|--|---------------|-----------------|-----------------------|-------------------------------|
| A. Aluminum | 1. 5/8-24 & Hex Nut | 1. SPST N.O./Std. | A. 2V Red LED | 2. Dusttight | 2. 2.5 lbs. | 1. Silver | 1. High Profile Flat Button |
| V. Stainless | 2. 5/8-24 & Knurl Nut* | 2. SPST N.C./Std. | B. 2V Green LED | 3. Watertight | 5. 5.0 lbs. | 2. Black*** | 2. High Profile Curved Button |
| | 3. 5/8-24 W/D-Flat & Hex Nut | 3. SPDT 2 Circuit/Std. | C. 2V Amber LED | | | | 3. Low Profile Flat Button |
| | 4. 5/8-24 W/D-Flat & Knurl Nut* | 4. SPST N.O./Logic Level | D. 6V Red LED | | | | 4. Low Profile Curved Button |
| | 5. 3/4-20 & Hex Nut | 5. SPST N.C./Logic Level | E. 6V Green LED | | | | 5. Flush Profile Flat Button |
| | 6. 3/4-20 & Knurl Nut* | 6. SPDT 2 Circuit/Logic Level | F. 6V Amber LED | | | | |
| | 7. 3/4-20 W/D-Flat & Hex Nut | | G. 12V Red LED | | | | |
| | 8. 3/4-20 W/D-Flat & Knurl Nut* | | H. 12V Green LED | | | | |
| | | | J. 12V Amber LED | | | | |
| | | | K. 24V Red LED | | | | |
| | | | L. 24V Green LED | | | | |
| | | | M. 24V Amber LED | | | | |
| | | | N. 2V Blue LED | | | | |
| | | | P. 6V Blue LED | | | | |
| | | | Q. 12V Blue LED | | | | |
| | | | R. 24V Blue LED | | | | |
| | | | S. 2V Deep Green LED | | | | |
| | | | T. 6V Deep Green LED | | | | |
| | | | U. 12V Deep Green LED | | | | |
| | | | V. 24V Deep Green LED | | | | |

| CASE STYLE | | |
|---------------|----------------|----------------|
| DIMENSION | 1 - 4 | 5 - 8 |
| (BUTTON DIA.) | 0.525 | 0.590 |
| (THREAD) | 5/8-24 UNEF-2A | 3/4-20 UNEF-2A |
| FLAT | 0.594 | 0.718 |

* Contact factory for Knurl Nut option



**2V LED's are intended for use with an external resistor.

See appendix for complete voltage/ratings table. For additional LED lighting options, contact factory.



*** Only available on LP3-A styles.

MOMENTARY ACTION RING ILLUMINATED, VANDAL RESISTANT CASE & BUTTON



LP3-XXXXXXX1
High Profile Flat Button

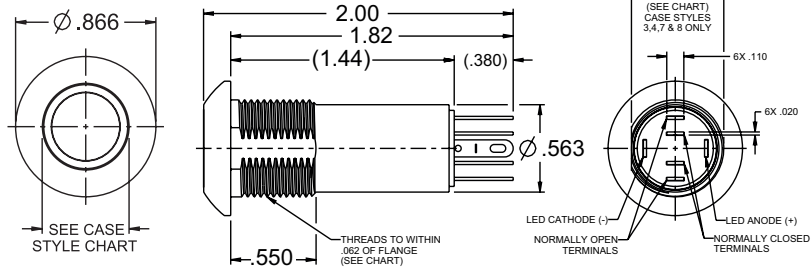



LP3-XXXXXXX2
High Profile Curved Button

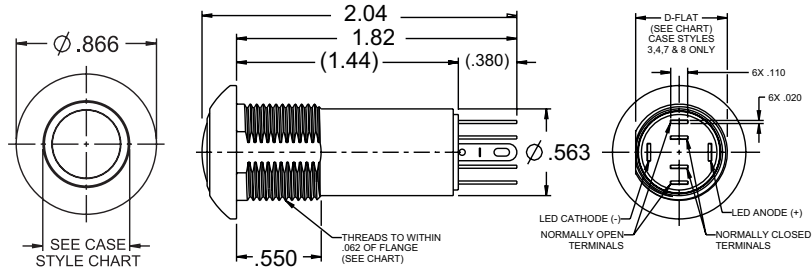




LP3-XXXXXXX3
Low Profile Flat Button

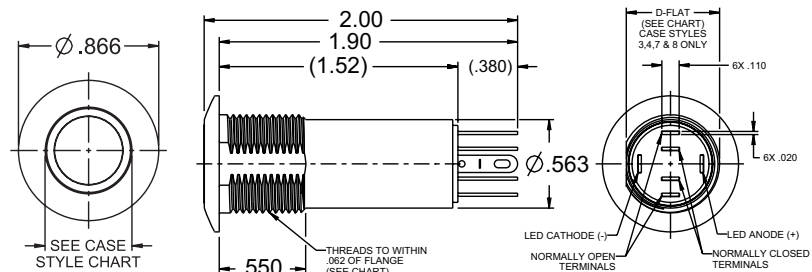

LP3-XXXXXXX4
Low Profile Curved Button

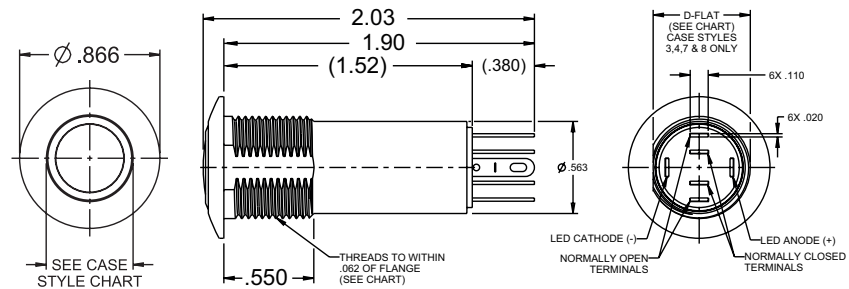

LP3-XXXXXXX5
Flush Profile Flat Button

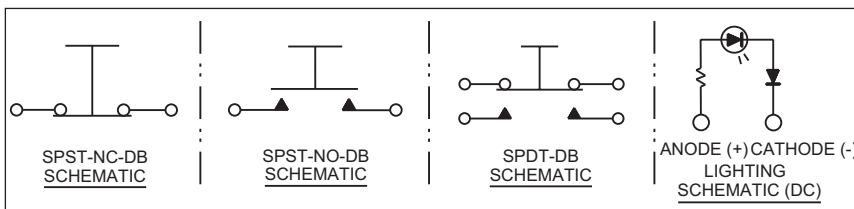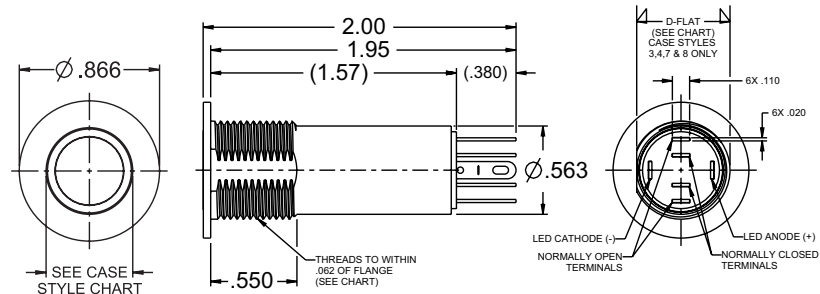

LED VOLTAGE/CURRENT RATINGS TABLE

ROCKER AND ROTARY SWITCH VOLTAGE/CURRENT RATINGS TABLES

K1, K2, K3P and K4 LIGHTING VOLTAGE/CURRENT COMPONENTS RATINGS

| LIGHT SOURCE VOLTAGE CATEGORY | LIGHT SOURCE COLOR | FORWARD CURRENT | TYPICAL FORWARD/NOMINAL VOLTAGE | MAX. FORWARD VOLTAGE |
|-------------------------------|--------------------|-----------------|---------------------------------|----------------------|
| 6 VDC INCANDESCENT | WHITE | .2 AMPS | 6 VDC | 8 VDC |
| 12 VDC INCANDESCENT | WHITE | .08 AMPS | 12 VDC | 14 VDC |
| 24 VDC INCANDESCENT | WHITE | .04 AMPS | 24 VDC | 28 VDC |
| 125 VAC NEON | AMBER | 1.9 mA | 125 VAC | 125 VAC |
| 250 VAC NEON | AMBER | 1.9 mA | 250 VAC | 250 VAC |
| 2 V LED PRODUCTS* | RED | 20 mA | 1.9 VDC | 2.5 VDC |
| | GREEN | 20 mA | 2.15 VDC | 2.5 VDC |
| | AMBER | 20 mA | 1.95 VDC | 2.5 VDC |
| | BLUE | 20 mA | 3.5 VDC | 4.0 VDC |
| 6 V LED PRODUCTS | SEE CHART | 20 mA | 6 VDC | 8 VDC |
| 12 V LED PRODUCTS | SEE CHART | 20 mA | 12 VDC | 14 VDC |
| 24 V LED PRODUCTS | SEE CHART | 20 mA | 24 VDC | 28 VDC |

K3/K5 LIGHTING VOLTAGE/CURRENT COMPONENTS RATINGS

| LIGHT SOURCE VOLTAGE CATEGORY | LIGHT SOURCE COLOR | FORWARD CURRENT | TYPICAL FORWARD/NOMINAL VOLTAGE | MAX. FORWARD VOLTAGE |
|-------------------------------|--------------------|-----------------|---------------------------------|----------------------|
| 6 VDC INCANDESCENT | WHITE | .2 AMPS | 6 VDC | 8 VDC |
| 12 VDC INCANDESCENT | WHITE | .08 AMPS | 12 VDC | 14 VDC |
| 24 VDC INCANDESCENT | WHITE | .04 AMPS | 24 VDC | 28 VDC |
| 125 VAC NEON | AMBER | 1.9 mA | 125 VAC | 125 VAC |
| 250 VAC NEON | AMBER | 1.9 mA | 250 VAC | 250 VAC |
| 2 V LED PRODUCTS* | RED | 20 mA | 2.0 VDC | 2.5 VDC |
| | GREEN | 20 mA | 2.2 VDC | 2.6 VDC |
| | AMBER | 20 mA | 2.1 VDC | 2.5 VDC |
| 6 V LED PRODUCTS | SEE CHART | 20 mA | 6 VDC | 8 VDC |
| 12 V LED PRODUCTS | SEE CHART | 20 mA | 12 VDC | 14 VDC |
| 24 V LED PRODUCTS | SEE CHART | 20 mA | 24 VDC | 28 VDC |

R2 LIGHTING VOLTAGE/CURRENT COMPONENTS RATINGS

| LIGHT SOURCE VOLTAGE CATEGORY | LIGHT SOURCE COLOR | FORWARD CURRENT | TYPICAL FORWARD/NOMINAL VOLTAGE | MAX. FORWARD VOLTAGE |
|-------------------------------|--------------------|-----------------|---------------------------------|----------------------|
| 2 V LED PRODUCTS* | RED | 20 mA | 2.0 VDC | 2.5 VDC |
| | GREEN | 20 mA | 2.2 VDC | 2.6 VDC |
| | AMBER | 20 mA | 2.1 VDC | 2.5 VDC |
| 6 V LED PRODUCTS | SEE CHART | 20 mA | 6 VDC | 8 VDC |
| 12 V LED PRODUCTS | SEE CHART | 20 mA | 12 VDC | 14 VDC |
| 24 V LED PRODUCTS | SEE CHART | 20 mA | 24 VDC | 28 VDC |

*Intended for use with external resistor. The "2 volt" switches are intended to have a resistor added in series into the lighting circuit by the customer. To determine the approximate value of the resistor, use the equation below:

$$\text{RESISTOR SIZE} = \frac{\text{POWER SUPPLY VOLTAGE} - \text{LED FORWARD VOLTAGE}}{\text{LED FORWARD CURRENT}}$$

LED VOLTAGE/CURRENT RATINGS TABLE

ILLUMINATED PUSHBUTTON SWITCH & INDICATOR LIGHTS VOLTAGE/CURRENT RATINGS TABLES

LP3, LP5 AND LPL SERIES LIGHTING VOLTAGE/CURRENT COMPONENTS RATINGS

| LIGHT SOURCE VOLTAGE CATEGORY | LED COLOR | FORWARD CURRENT | TYP. FORWARD VOLTAGE (DC) | MAX. FORWARD VOLTAGE DC |
|-------------------------------|------------|-----------------|---------------------------|-------------------------|
| 2V* PRODUCTS | RED | 20 mA | 1.9V | 2.5V |
| | GREEN | 20 mA | 2.2V | 2.6V |
| | AMBER | | | |
| | BLUE | 20 mA | 3.3V | 4V |
| | DEEP GREEN | | | |
| 6V PRODUCTS | ALL COLORS | 20 mA | 6V | 8V |
| 12V PRODUCTS | ALL COLORS | 20 mA | 12V | 14.5V |
| 24V PRODUCTS | ALL COLORS | 20 mA | 24 V | 28.6 V |

LP3S LIGHTING VOLTAGE/CURRENT COMPONENTS RATINGS

| LIGHT SOURCE VOLTAGE CATEGORY | LED COLOR | FORWARD CURRENT | TYP. FORWARD VOLTAGE | MAX. FORWARD VOLTAGE |
|-------------------------------|------------|-----------------|----------------------|----------------------|
| 2V* PRODUCTS | RED | 20 mA | 2 V | 2.5 V |
| | GREEN | | | |
| | AMBER | | | |
| | BLUE | 20 mA | 3.2 V | 4 V |
| | DEEP GREEN | | | |
| | WHITE | | | |
| 12V PRODUCTS | ALL COLORS | 20 mA | 12V | 14V |
| 24V PRODUCTS | ALL COLORS | 20 mA | 24 V | 28.6 V |

LP7-D and LP9 SERIES LIGHTING VOLTAGE/CURRENT COMPONENTS RATINGS

| LIGHT SOURCE VOLTAGE CATEGORY | LED COLOR, WAVELENGTH (nm) | FORWARD CURRENT | TYP. FORWARD VOLTAGE | MAX. FORWARD VOLTAGE |
|---|----------------------------|-----------------|----------------------|----------------------|
| 2V LIGHTPIPE STYLE | RED (631) | 20 mA | 2V | 2.4V |
| | GREEN (525) | 20 mA | 3.2V | 3.6V |
| | AMBER (591) | 20 mA | 2.1V | 2.4V |
| | BLUE (470) | 20 mA | 3.3V | 3.8V |
| | WHITE | 5 mA | 2.9V | 3.15V |
| 2V, TRANSLUCENT FULLY ILLUMINATED STYLE | RED (630) | 20 mA | 1.95V | 2.5V |
| | GREEN (525) | 20 mA | 3.3V | 4.1V |
| | AMBER (601) | 20 mA | 2.1V | 2.5V |
| | BLUE (465) | 20 mA | 3.3V | 4V |
| | WHITE | 5 mA | 2.85V | 3.1V |
| 12V ALL PRODUCTS | ALL COLORS, SAME AS 2V | (20 mA) | 12.0V | 14.0V |

| LP9L SERIES LIGHTING VOLTAGE/CURRENT COMPONENTS RATINGS | | | | |
|--|----------------------------|-----------------|----------------------|----------------------|
| LIGHT SOURCE VOLTAGE CATEGORY | LED COLOR, WAVELENGTH (nm) | FORWARD CURRENT | TYP. FORWARD VOLTAGE | MAX. FORWARD VOLTAGE |
| 2V PRODUCTS | RED (631) | 20 mA | 2V | 2.4V |
| | GREEN (525) | 20 mA | 3.2V | 3.6V |
| | AMBER (591) | 20 mA | 2.1V | 2.4V |
| | BLUE (470) | 20 mA | 3.3V | 3.8V |
| | WHITE | 5 mA | 2.9V | 3.15V |
| 12V PRODUCTS | ALL COLORS, SAME AS 2V | (20 mA) | 12.0V | 14.0V |

*Intended for use with external resistor. The "2 volt" switches are intended to have a resistor added in series into the lighting circuit by the customer. To determine the approximate value of the resistor, use the equation below:

$$\text{RESISTOR SIZE} = \frac{\text{POWER SUPPLY VOLTAGE} - \text{LED FORWARD VOLTAGE}}{\text{LED FORWARD CURRENT}}$$

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А