

# MC74HC390A

## Dual 4-Stage Binary Ripple Counter with $\div 2$ and $\div 5$ Sections

### High-Performance Silicon-Gate CMOS

The MC74HC390A is identical in pinout to the LS390. The device inputs are compatible with standard CMOS outputs; with pullup resistors, they are compatible with LSTTL outputs.

This device consists of two independent 4-bit counters, each composed of a divide-by-two and a divide-by-five section. The divide-by-two and divide-by-five counters have separate clock inputs, and can be cascaded to implement various combinations of  $\div 2$  and/or  $\div 5$  up to a  $\div 100$  counter.

Flip-flops internal to the counters are triggered by high-to-low transitions of the clock input. A separate, asynchronous reset is provided for each 4-bit counter. State changes of the Q outputs do not occur simultaneously because of internal ripple delays. Therefore, decoded output signals are subject to decoding spikes and should not be used as clocks or strobes except when gated with the Clock of the HC390A.

#### Features


- Output Drive Capability: 10 LSTTL Loads
- Outputs Directly Interface to CMOS, NMOS, and TTL
- Operating Voltage Range: 2.0 to 6.0 V
- Low Input Current: 1  $\mu$ A
- High Noise Immunity Characteristic of CMOS Devices
- In Compliance with the Requirements Defined by JEDEC Standard No 7 A
- Chip Complexity: 244 FETs or 61 Equivalent Gates
- NLV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q100 Qualified and PPAP Capable
- These Devices are Pb-Free, Halogen Free/BFR Free and are RoHS Compliant



ON Semiconductor®

<http://onsemi.com>

#### MARKING DIAGRAMS

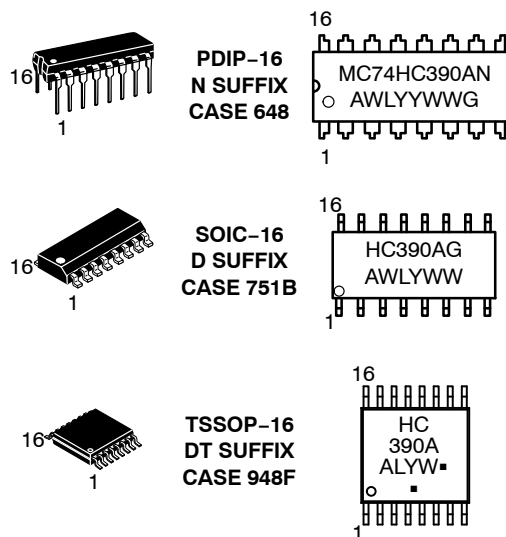

A = Assembly Location  
L, WL = Wafer Lot  
Y, YY = Year  
W, WW = Work Week  
G or ■ = Pb-Free Package

(Note: Microdot may be in either location)

#### ORDERING INFORMATION

See detailed ordering and shipping information in the package dimensions section on page 2 of this data sheet.

# MC74HC390A

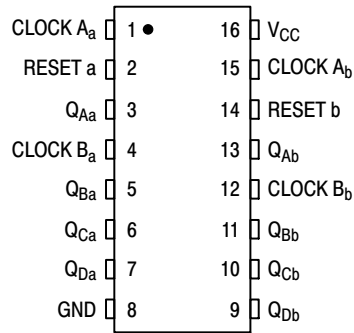


Figure 1. Pin Assignment

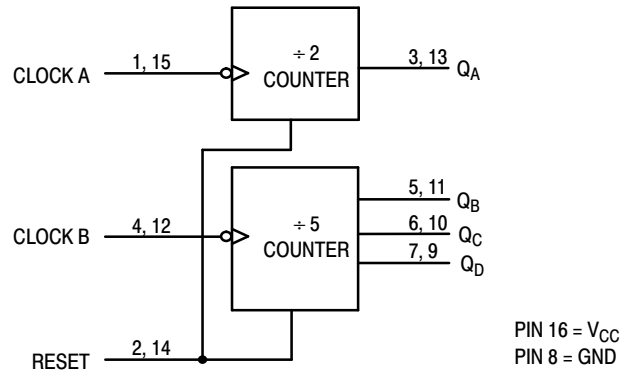


Figure 2. Logic Diagram

## FUNCTION TABLE

| Clock |   | Reset | Action               |
|-------|---|-------|----------------------|
| A     | B |       |                      |
| X     | X | H     | Reset<br>÷ 2 and ÷ 5 |
| ↘     | X | L     | Increment<br>÷ 2     |
| X     | ↘ | L     | Increment<br>÷ 5     |

## ORDERING INFORMATION

| Device           | Package               | Shipping <sup>†</sup> |
|------------------|-----------------------|-----------------------|
| MC74HC390ANG     | PDIP-16<br>(Pb-Free)  | 500 Units / Rail      |
| MC74HC390ADG     | SOIC-16<br>(Pb-Free)  | 48 Units / Rail       |
| MC74HC390ADR2G   | SOIC-16<br>(Pb-Free)  | 2500 / Tape & Reel    |
| MC74HC390ADTR2G  | TSSOP-16<br>(Pb-Free) | 2500 / Tape & Reel    |
| NLV74HC390ADR2G* | SOIC-16<br>(Pb-Free)  | 2500 / Tape & Reel    |

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

\*NLV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q100 Qualified and PPAP Capable

# MC74HC390A

## MAXIMUM RATINGS

| Symbol    | Parameter                                                                             | Value                   | Unit |
|-----------|---------------------------------------------------------------------------------------|-------------------------|------|
| $V_{CC}$  | DC Supply Voltage (Referenced to GND)                                                 | – 0.5 to + 7.0          | V    |
| $V_{in}$  | DC Input Voltage (Referenced to GND)                                                  | – 0.5 to $V_{CC} + 0.5$ | V    |
| $V_{out}$ | DC Output Voltage (Referenced to GND)                                                 | – 0.5 to $V_{CC} + 0.5$ | V    |
| $I_{in}$  | DC Input Current, per Pin                                                             | $\pm 20$                | mA   |
| $I_{out}$ | DC Output Current, per Pin                                                            | $\pm 25$                | mA   |
| $I_{CC}$  | DC Supply Current, $V_{CC}$ and GND Pins                                              | $\pm 50$                | mA   |
| $P_D$     | Power Dissipation in Still Air,<br>Plastic DIP†<br>SOIC Package†<br>TSSOP Package†    | 750<br>500<br>450       | mW   |
| $T_{stg}$ | Storage Temperature                                                                   | – 65 to + 150           | °C   |
| $T_L$     | Lead Temperature, 1 mm from Case for 10 Seconds<br>Plastic DIP, SOIC or TSSOP Package | 260                     | °C   |

This device contains protection circuitry to guard against damage due to high static voltages or electric fields. However, precautions must be taken to avoid applications of any voltage higher than maximum rated voltages to this high-impedance circuit. For proper operation,  $V_{in}$  and  $V_{out}$  should be constrained to the range  $GND \leq (V_{in} \text{ or } V_{out}) \leq V_{CC}$ . Unused inputs must always be tied to an appropriate logic voltage level (e.g., either GND or  $V_{CC}$ ). Unused outputs must be left open.

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

†Derating — Plastic DIP: – 10 mW/°C from 65° to 125°C  
SOIC Package: – 7 mW/°C from 65° to 125°C  
TSSOP Package: – 6.1 mW/°C from 65° to 125°C

## RECOMMENDED OPERATING CONDITIONS

| Symbol                             | Parameter                                            | Min                                                                                                                          | Max                       | Unit |
|------------------------------------|------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------|---------------------------|------|
| V <sub>CC</sub>                    | DC Supply Voltage (Referenced to GND)                | 2.0                                                                                                                          | 6.0                       | V    |
| V <sub>in</sub> , V <sub>out</sub> | DC Input Voltage, Output Voltage (Referenced to GND) | 0                                                                                                                            | V <sub>CC</sub>           | V    |
| T <sub>A</sub>                     | Operating Temperature, All Package Types             | − 55                                                                                                                         | + 125                     | °C   |
| t <sub>r</sub> , t <sub>f</sub>    | Input Rise and Fall Time<br>(Figure 1)               | V <sub>CC</sub> = 2.0 V<br>0<br>V <sub>CC</sub> = 3.0 V<br>0<br>V <sub>CC</sub> = 4.5 V<br>0<br>V <sub>CC</sub> = 6.0 V<br>0 | 1000<br>600<br>500<br>400 | ns   |

## DC ELECTRICAL CHARACTERISTICS (Voltages Referenced to GND)

| Symbol   | Parameter                         | Test Conditions                                                                                                                               | $V_{CC}$<br>V            | Guaranteed Limit          |                           |                           | Unit |
|----------|-----------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|---------------------------|---------------------------|---------------------------|------|
|          |                                   |                                                                                                                                               |                          | – 55 to<br>25°C           | ≤ 85°C                    | ≤ 125°C                   |      |
| $V_{IH}$ | Minimum High-Level Input Voltage  | $V_{out} = 0.1 \text{ V or } V_{CC} - 0.1 \text{ V}$<br>$ I_{out}  \leq 20 \mu\text{A}$                                                       | 2.0<br>3.0<br>4.5<br>6.0 | 1.5<br>2.1<br>3.15<br>4.2 | 1.5<br>2.1<br>3.15<br>4.2 | 1.5<br>2.1<br>3.15<br>4.2 | V    |
| $V_{IL}$ | Maximum Low-Level Input Voltage   | $V_{out} = 0.1 \text{ V or } V_{CC} - 0.1 \text{ V}$<br>$ I_{out}  \leq 20 \mu\text{A}$                                                       | 2.0<br>3.0<br>4.5<br>6.0 | 0.5<br>0.9<br>1.35<br>1.8 | 0.5<br>0.9<br>1.35<br>1.8 | 0.5<br>0.9<br>1.35<br>1.8 | V    |
| $V_{OH}$ | Minimum High-Level Output Voltage | $V_{in} = V_{IH} \text{ or } V_{IL}$<br>$ I_{out}  \leq 20 \mu\text{A}$                                                                       | 2.0<br>4.5<br>6.0        | 1.9<br>4.4<br>5.9         | 1.9<br>4.4<br>5.9         | 1.9<br>4.4<br>5.9         | V    |
|          |                                   | $V_{in} = V_{IH} \text{ or } V_{IL}$<br>$ I_{out}  \leq 2.4 \text{ mA}$<br>$ I_{out}  \leq 4.0 \text{ mA}$<br>$ I_{out}  \leq 5.2 \text{ mA}$ | 3.0<br>4.5<br>6.0        | 2.48<br>3.98<br>5.48      | 2.34<br>3.84<br>5.34      | 2.20<br>3.70<br>5.20      |      |
| $V_{OL}$ | Maximum Low-Level Output Voltage  | $V_{in} = V_{IH} \text{ or } V_{IL}$<br>$ I_{out}  \leq 20 \mu\text{A}$                                                                       | 2.0<br>4.5<br>6.0        | 0.1<br>0.1<br>0.1         | 0.1<br>0.1<br>0.1         | 0.1<br>0.1<br>0.1         | V    |
|          |                                   | $V_{in} = V_{IH} \text{ or } V_{IL}$<br>$ I_{out}  \leq 2.4 \text{ mA}$<br>$ I_{out}  \leq 4.0 \text{ mA}$<br>$ I_{out}  \leq 5.2 \text{ mA}$ | 3.0<br>4.5<br>6.0        | 0.26<br>0.26<br>0.26      | 0.33<br>0.33<br>0.33      | 0.40<br>0.40<br>0.40      |      |

# MC74HC390A

## DC ELECTRICAL CHARACTERISTICS (Voltages Referenced to GND)

| Symbol          | Parameter                                      | Test Conditions                                                     | V <sub>CC</sub><br>V | Guaranteed Limit |        |         | Unit |
|-----------------|------------------------------------------------|---------------------------------------------------------------------|----------------------|------------------|--------|---------|------|
|                 |                                                |                                                                     |                      | – 55 to 25°C     | ≤ 85°C | ≤ 125°C |      |
| I <sub>in</sub> | Maximum Input Leakage Current                  | V <sub>in</sub> = V <sub>CC</sub> or GND                            | 6.0                  | ± 0.1            | ± 1.0  | ± 1.0   | μA   |
| I <sub>CC</sub> | Maximum Quiescent Supply Current (per Package) | V <sub>in</sub> = V <sub>CC</sub> or GND<br>I <sub>out</sub> = 0 μA | 6.0                  | 4                | 40     | 160     | μA   |

## AC ELECTRICAL CHARACTERISTICS (C<sub>L</sub> = 50 pF, Input t<sub>f</sub> = t<sub>r</sub> = 6 ns)

| Symbol                                 | Parameter                                                                                  | V <sub>CC</sub><br>V                    | Guaranteed Limit |        |         | Unit |
|----------------------------------------|--------------------------------------------------------------------------------------------|-----------------------------------------|------------------|--------|---------|------|
|                                        |                                                                                            |                                         | – 55 to<br>25°C  | ≤ 85°C | ≤ 125°C |      |
| f <sub>max</sub>                       | Maximum Clock Frequency (50% Duty Cycle)<br>(Figures 1 and 3)                              | 2.0                                     | 10               | 9      | 8       | MHz  |
|                                        |                                                                                            | 3.0                                     | 15               | 14     | 12      |      |
|                                        |                                                                                            | 4.5                                     | 30               | 28     | 25      |      |
|                                        |                                                                                            | 6.0                                     | 50               | 45     | 40      |      |
| t <sub>PLH</sub> ,<br>t <sub>PHL</sub> | Maximum Propagation Delay, Clock A to QA<br>(Figures 1 and 3)                              | 2.0                                     | 70               | 80     | 90      | ns   |
|                                        |                                                                                            | 3.0                                     | 40               | 45     | 50      |      |
|                                        |                                                                                            | 4.5                                     | 24               | 30     | 36      |      |
|                                        |                                                                                            | 6.0                                     | 20               | 26     | 31      |      |
| t <sub>PLH</sub> ,<br>t <sub>PHL</sub> | Maximum Propagation Delay, Clock A to QC<br>(QA connected to Clock B)<br>(Figures 1 and 3) | 2.0                                     | 200              | 250    | 300     | ns   |
|                                        |                                                                                            | 3.0                                     | 160              | 185    | 210     |      |
|                                        |                                                                                            | 4.5                                     | 58               | 65     | 70      |      |
|                                        |                                                                                            | 6.0                                     | 49               | 62     | 68      |      |
| t <sub>PLH</sub> ,<br>t <sub>PHL</sub> | Maximum Propagation Delay, Clock B to QB<br>(Figures 1 and 3)                              | 2.0                                     | 70               | 80     | 90      | ns   |
|                                        |                                                                                            | 3.0                                     | 40               | 45     | 50      |      |
|                                        |                                                                                            | 4.5                                     | 26               | 33     | 39      |      |
|                                        |                                                                                            | 6.0                                     | 22               | 28     | 33      |      |
| t <sub>PLH</sub> ,<br>t <sub>PHL</sub> | Maximum Propagation Delay, Clock B to QC<br>(Figures 1 and 3)                              | 2.0                                     | 90               | 105    | 180     | ns   |
|                                        |                                                                                            | 3.0                                     | 56               | 70     | 100     |      |
|                                        |                                                                                            | 4.5                                     | 37               | 46     | 56      |      |
|                                        |                                                                                            | 6.0                                     | 31               | 39     | 48      |      |
| t <sub>PLH</sub> ,<br>t <sub>PHL</sub> | Maximum Propagation Delay, Clock B to QD<br>(Figures 1 and 3)                              | 2.0                                     | 70               | 80     | 90      | ns   |
|                                        |                                                                                            | 3.0                                     | 40               | 45     | 50      |      |
|                                        |                                                                                            | 4.5                                     | 26               | 33     | 39      |      |
|                                        |                                                                                            | 6.0                                     | 22               | 28     | 33      |      |
| t <sub>PHL</sub>                       | Maximum Propagation Delay, Reset to any Q<br>(Figures 2 and 3)                             | 2.0                                     | 80               | 95     | 110     | ns   |
|                                        |                                                                                            | 3.0                                     | 48               | 65     | 75      |      |
|                                        |                                                                                            | 4.5                                     | 30               | 38     | 44      |      |
|                                        |                                                                                            | 6.0                                     | 26               | 33     | 39      |      |
| t <sub>TLH</sub> ,<br>t <sub>THL</sub> | Maximum Output Transition Time, Any Output<br>(Figures 1 and 3)                            | 2.0                                     | 75               | 95     | 110     | ns   |
|                                        |                                                                                            | 3.0                                     | 27               | 32     | 36      |      |
|                                        |                                                                                            | 4.5                                     | 15               | 19     | 22      |      |
|                                        |                                                                                            | 6.0                                     | 13               | 15     | 19      |      |
| C <sub>in</sub>                        | Maximum Input Capacitance                                                                  | –                                       | 10               | 10     | 10      | pF   |
| C <sub>PD</sub>                        | Power Dissipation Capacitance (Per Counter)*                                               | Typical @ 25°C, V <sub>CC</sub> = 5.0 V |                  |        | 35      | pF   |
|                                        |                                                                                            |                                         |                  |        |         |      |

\* Used to determine the no-load dynamic power consumption: P<sub>D</sub> = C<sub>PD</sub> V<sub>CC</sub><sup>2</sup>f + I<sub>CC</sub> V<sub>CC</sub>.

# MC74HC390A

## TIMING REQUIREMENTS (Input $t_r = t_f = 6$ ns)

| Symbol     | Parameter                                                              | V <sub>CC</sub><br>V | Guaranteed Limit |        |         | Unit |
|------------|------------------------------------------------------------------------|----------------------|------------------|--------|---------|------|
|            |                                                                        |                      | – 55 to 25°C     | ≤ 85°C | ≤ 125°C |      |
| $t_{rec}$  | Minimum Recovery Time, Reset Inactive to Clock A or Clock B (Figure 4) | 2.0                  | 25               | 30     | 40      | ns   |
|            |                                                                        | 3.0                  | 15               | 20     | 30      |      |
|            |                                                                        | 4.5                  | 10               | 13     | 15      |      |
|            |                                                                        | 6.0                  | 9                | 11     | 13      |      |
| $t_w$      | Minimum Pulse Width, Clock A, Clock B (Figure 3)                       | 2.0                  | 75               | 95     | 110     | ns   |
|            |                                                                        | 3.0                  | 27               | 32     | 36      |      |
|            |                                                                        | 4.5                  | 15               | 19     | 22      |      |
|            |                                                                        | 6.0                  | 13               | 15     | 19      |      |
| $t_w$      | Minimum Pulse Width, Reset (Figure 4)                                  | 2.0                  | 75               | 95     | 110     | ns   |
|            |                                                                        | 3.0                  | 27               | 32     | 36      |      |
|            |                                                                        | 4.5                  | 20               | 24     | 30      |      |
|            |                                                                        | 6.0                  | 18               | 22     | 28      |      |
| $t_r, t_f$ | Maximum Input Rise and Fall Times (Figure 3)                           | 2.0                  | 1000             | 1000   | 1000    | ns   |
|            |                                                                        | 3.0                  | 800              | 800    | 800     |      |
|            |                                                                        | 4.5                  | 500              | 500    | 500     |      |
|            |                                                                        | 6.0                  | 400              | 400    | 400     |      |

## PIN DESCRIPTIONS

### INPUTS

#### Clock A (Pins 1, 15) and Clock B (Pins 4, 15)

Clock A is the clock input to the ÷ 2 counter; Clock B is the clock input to the ÷ 5 counter. The internal flip-flops are toggled by high-to-low transitions of the clock input.

### CONTROL INPUTS

#### Reset (Pins 2, 14)

Asynchronous reset. A high at the Reset input prevents counting, resets the internal flip-flops, and forces  $Q_A$  through  $Q_D$  low.

### OUTPUTS

#### $Q_A$ (Pins 3, 13)

Output of the ÷ 2 counter.

#### $Q_B, Q_C, Q_D$ (Pins 5, 6, 7, 9, 10, 11)

Outputs of the ÷ 5 counter.  $Q_D$  is the most significant bit.  $Q_A$  is the least significant bit when the counter is connected for BCD output as in Figure 6.  $Q_B$  is the least significant bit when the counter is operating in the bi-quinary mode as in Figure 7.

## SWITCHING WAVEFORMS

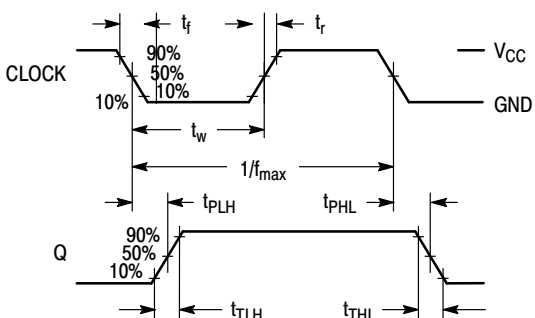


Figure 3.


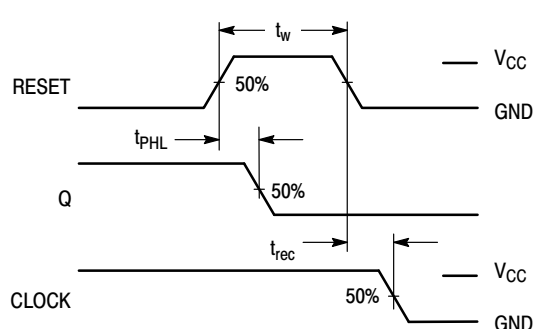


Figure 4.

# MC74HC390A


## TEST CIRCUIT




\*Includes all probe and jig capacitance

Figure 5.

## EXPANDED LOGIC DIAGRAM

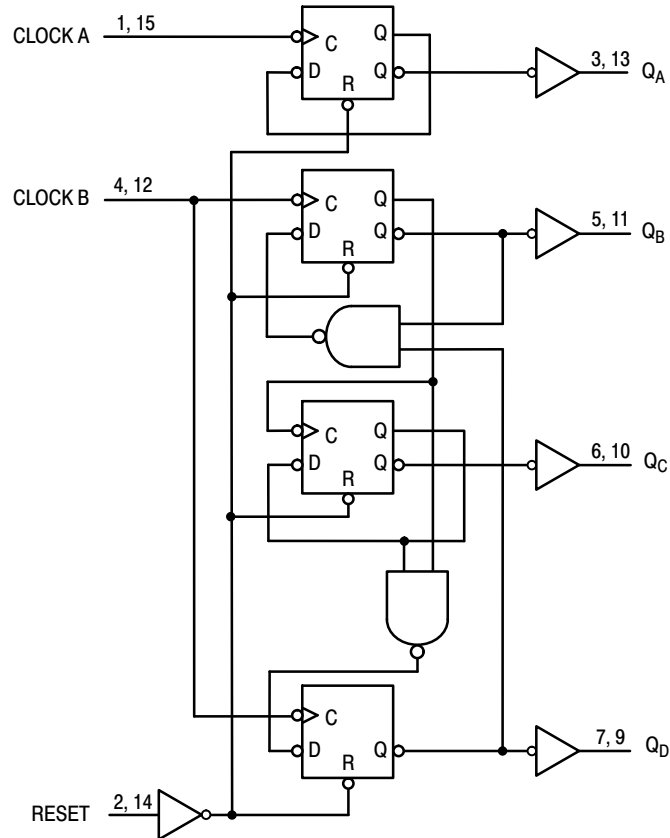

## TIMING DIAGRAM (Q<sub>A</sub> Connected to Clock B)

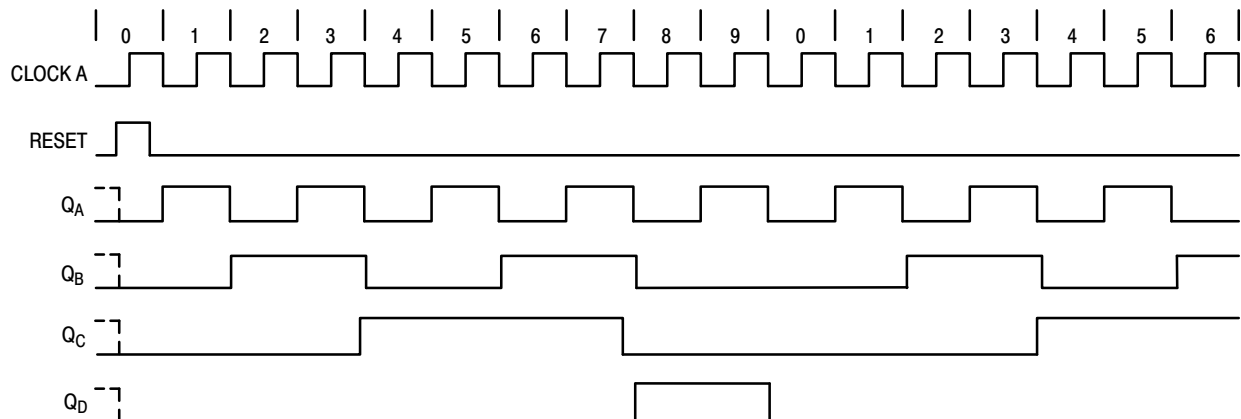

# MC74HC390A

## APPLICATIONS INFORMATION

Each half of the MC54/74HC390A has independent  $\div 2$  and  $\div 5$  sections (except for the Reset function). The  $\div 2$  and  $\div 5$  counters can be connected to give BCD or bi-quinary (2–5) count sequences. If Output  $Q_A$  is connected to the Clock B input (Figure 4), a decade divider with BCD output is obtained. The function table for the BCD count sequence is given in Table 1.

To obtain a bi-quinary count sequence, the input signals connected to the Clock B input, and output  $Q_D$  is connected to the Clock A input (Figure 7).  $Q_A$  provides a 50% duty cycle output. The bi-quinary count sequence function table is given in Table 2.

**Table 1. BCD Count Sequence\***

| Count | Output |       |       |       |
|-------|--------|-------|-------|-------|
|       | $Q_D$  | $Q_C$ | $Q_B$ | $Q_A$ |
| 0     | L      | L     | L     | L     |
| 1     | L      | L     | L     | H     |
| 2     | L      | L     | H     | L     |
| 3     | L      | L     | H     | H     |
| 4     | L      | H     | L     | L     |
| 5     | L      | H     | L     | H     |
| 6     | L      | H     | H     | L     |
| 7     | L      | H     | H     | H     |
| 8     | H      | L     | L     | L     |
| 9     | H      | L     | L     | H     |


\* $Q_A$  connected to Clock B input.

**Table 2. Bi-Quinary Count Sequence\*\***


| Count | Output |       |       |       |
|-------|--------|-------|-------|-------|
|       | $Q_A$  | $Q_D$ | $Q_C$ | $Q_B$ |
| 0     | L      | L     | L     | L     |
| 1     | L      | L     | L     | H     |
| 2     | L      | L     | H     | L     |
| 3     | L      | L     | H     | H     |
| 4     | L      | H     | L     | L     |
| 8     | H      | L     | L     | L     |
| 9     | H      | L     | L     | H     |
| 10    | H      | L     | H     | L     |
| 11    | H      | L     | H     | H     |
| 12    | H      | H     | L     | L     |

\*\* $Q_D$  connected to Clock A input.

## CONNECTION DIAGRAMS

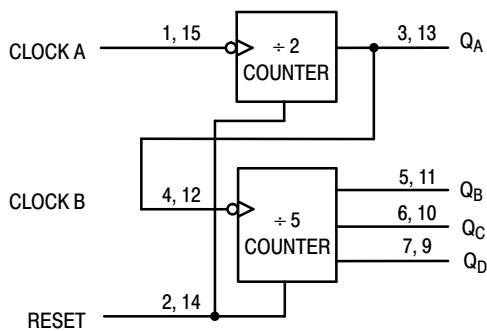

**Figure 6. BCD Count**

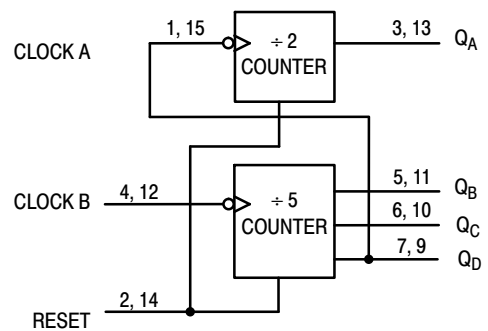


**Figure 7. Bi-Quinary Count**

# MC74HC390A

## PACKAGE DIMENSIONS

PDIP-16  
CASE 648-08  
ISSUE T

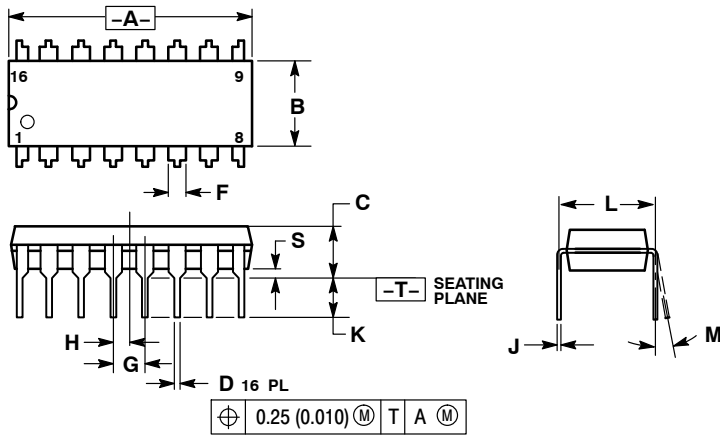

### NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIMENSION L TO CENTER OF LEADS WHEN FORMED PARALLEL.
4. DIMENSION B DOES NOT INCLUDE MOLD FLASH.
5. ROUNDED CORNERS OPTIONAL.


| DIM | INCHES    |       | MILLIMETERS |       |
|-----|-----------|-------|-------------|-------|
|     | MIN       | MAX   | MIN         | MAX   |
| A   | 0.740     | 0.770 | 18.80       | 19.55 |
| B   | 0.250     | 0.270 | 6.35        | 6.85  |
| C   | 0.145     | 0.175 | 3.69        | 4.44  |
| D   | 0.015     | 0.021 | 0.39        | 0.53  |
| F   | 0.040     | 0.70  | 1.02        | 1.77  |
| G   | 0.100 BSC |       | 2.54 BSC    |       |
| H   | 0.050 BSC |       | 1.27 BSC    |       |
| J   | 0.008     | 0.015 | 0.21        | 0.38  |
| K   | 0.110     | 0.130 | 2.80        | 3.30  |
| L   | 0.295     | 0.305 | 7.50        | 7.74  |
| M   | 0°        | 10°   | 0°          | 10°   |
| S   | 0.020     | 0.040 | 0.51        | 1.01  |



# MC74HC390A

## PACKAGE DIMENSIONS


SOIC-16  
CASE 751B-05  
ISSUE K

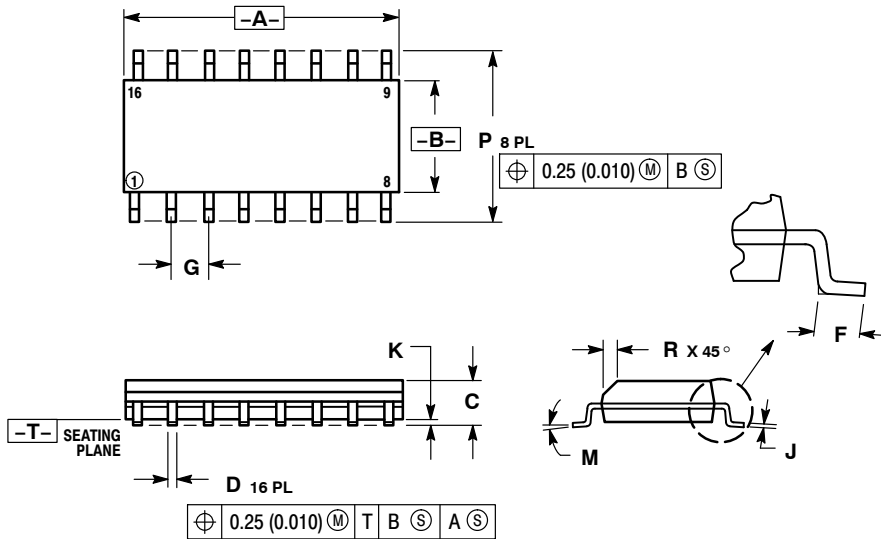

- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
  2. CONTROLLING DIMENSION: MILLIMETER.
  3. DIMENSIONS A AND B DO NOT INCLUDE MOLD PROTRUSION.
  4. MAXIMUM MOLD PROTRUSION 0.15 (0.006) PER SIDE.
  5. DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.127 (0.005) TOTAL IN EXCESS OF THE D DIMENSION AT MAXIMUM MATERIAL CONDITION.

| DIM | MILLIMETERS |       | INCHES    |       |
|-----|-------------|-------|-----------|-------|
|     | MIN         | MAX   | MIN       | MAX   |
| A   | 9.80        | 10.00 | 0.386     | 0.393 |
| B   | 3.80        | 4.00  | 0.150     | 0.157 |
| C   | 1.35        | 1.75  | 0.054     | 0.068 |
| D   | 0.35        | 0.49  | 0.014     | 0.019 |
| F   | 0.40        | 1.25  | 0.016     | 0.049 |
| G   | 1.27 BSC    |       | 0.050 BSC |       |
| J   | 0.19        | 0.25  | 0.008     | 0.009 |
| K   | 0.10        | 0.25  | 0.004     | 0.009 |
| M   | 0°          | 7°    | 0°        | 7°    |
| P   | 5.80        | 6.20  | 0.229     | 0.244 |
| R   | 0.25        | 0.50  | 0.010     | 0.019 |

## SOLDERING FOOTPRINT\*

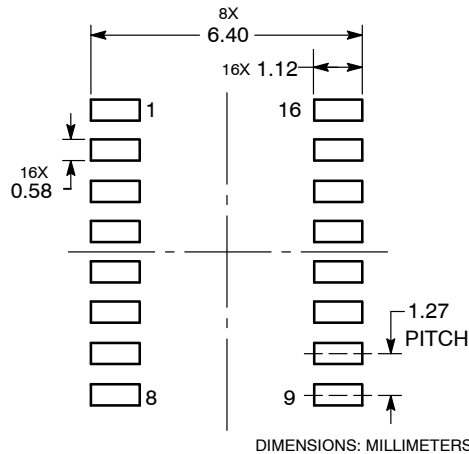

DIMENSIONS: MILLIMETERS

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.



# MC74HC390A

**ON Semiconductor** and  are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of SCILLC's product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## PUBLICATION ORDERING INFORMATION

### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor  
P.O. Box 5163, Denver, Colorado 80217 USA  
**Phone:** 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
**Fax:** 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
**Email:** [orderlit@onsemi.com](mailto:orderlit@onsemi.com)

**N. American Technical Support:** 800-282-9855 Toll Free  
USA/Canada

**Europe, Middle East and Africa Technical Support:**  
Phone: 421 33 790 2910

**Japan Customer Focus Center**  
Phone: 81-3-5817-1050

**ON Semiconductor Website:** [www.onsemi.com](http://www.onsemi.com)

**Order Literature:** <http://www.onsemi.com/orderlit>

For additional information, please contact your local  
Sales Representative

**MC74HC390A/D**

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А