


Ni1000SOT Temperature Sensor



- Contact temperature sensing
- Comply with former DIN 43760 standard
- Small SMD package SOT 23
- Automotive qualified

DESCRIPTION

Ni1000SOT is a nickel thin film resistance temperature detector (RTD) that is suitable for use in contact temperature sensing.

The devices are manufactured by PVD-deposition on a silicon substrate. The thin film structure is covered by a passivation layer for environmental protection and enhanced stability. The nickel elements are mounted on lead frames and encapsulated in SOT23 packages. This technology allows the production of miniature, low cost, high precision temperature sensors.

The characteristics of the temperature sensor comply with the former DIN 43760 standard. It is qualified for the most demanding automotive applications (incl. exposure to hot oil) and is suitable for many more applications in harsh environments.

FEATURES

- Resistance: 1000 ohms at 0°C
- Min/ Max temp -55°C to +160°C
- Good linearity between resistance and temperature (R V's T)
- Large temperature coefficient of resistance: 6178 ppm/K (0°C, 100°C)
- Low power consumption
- Good thermal contact via Pin 3
- Tape and reel (8mm format)

APPLICATIONS

- Temperature sensing, control and compensation
- General instrumentation
- Automotive (VW standard 801-01 vibration)
- Remote sensing

Ni1000SOT Temperature Sensor

PERFORMANCE SPECS

| Parameter | Symbol | Condition | Min. | Typ. | Max. | Unit |
|---|-----------------|-------------------|--------|---------|---------|-------|
| Basic resistance | R ₀ | 0°C | 997,81 | 1000 | 1002,20 | Ω |
| Temperature coefficient of resistance (according to DIN 43760, see below) | TCR | 0°C to +100°C | 6100 | 6178 | 6240 | ppm/K |
| Measurement current | I | | | 0.2 | 5 | mA |
| Self heating coefficient | EK | +23 °C, still air | 1.4 | 1.7 | 2 | mW/K |
| Operation temperature | T _{Op} | | -55 | | +160 | °C |
| Maximum resistance drift | ΔR | 1000h@150°C | | 0.1 | | % |
| Storage temperature | T _{St} | | -55 | | +160 | °C |
| ESD resistant | | MIL 883E3015.7 | | Class 1 | | |

SELF HEATING EFFECT

For accurate temperature measurement it is recommended to choose a small current to avoid self heating of the nickel sensing element. The temperature error caused by excessive measurement current can be calculated using: $\Delta T = P/EK$



where $P = I^2 \cdot R$ is the power generated by the measurement current and EK is the self heating coefficient.

PACKAGE INFORMATION

| Parameter | Condition | Typ. | Unit |
|-----------------|-------------------|---|--------------------------|
| Package | | SOT23 | |
| Soldering | Reflow to + 260°C | 96Sn4Ag | |
| Packing units | | 13" (330 mm) / 10000 | Reel Size / # of sensors |
| Package marking | | Three Digit code: "1" + "XX", where "XX" is the revision. | |

Ni1000SOT Temperature Sensor

TYPICAL PERFORMANCE CURVES

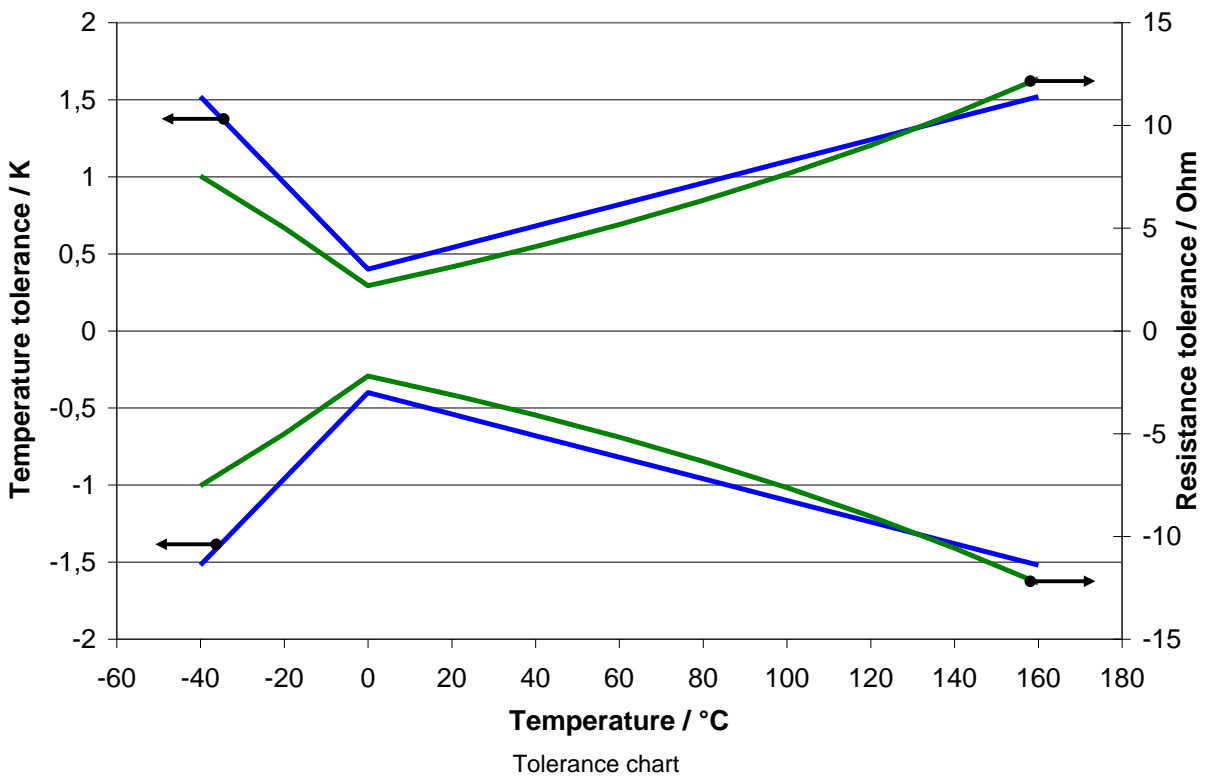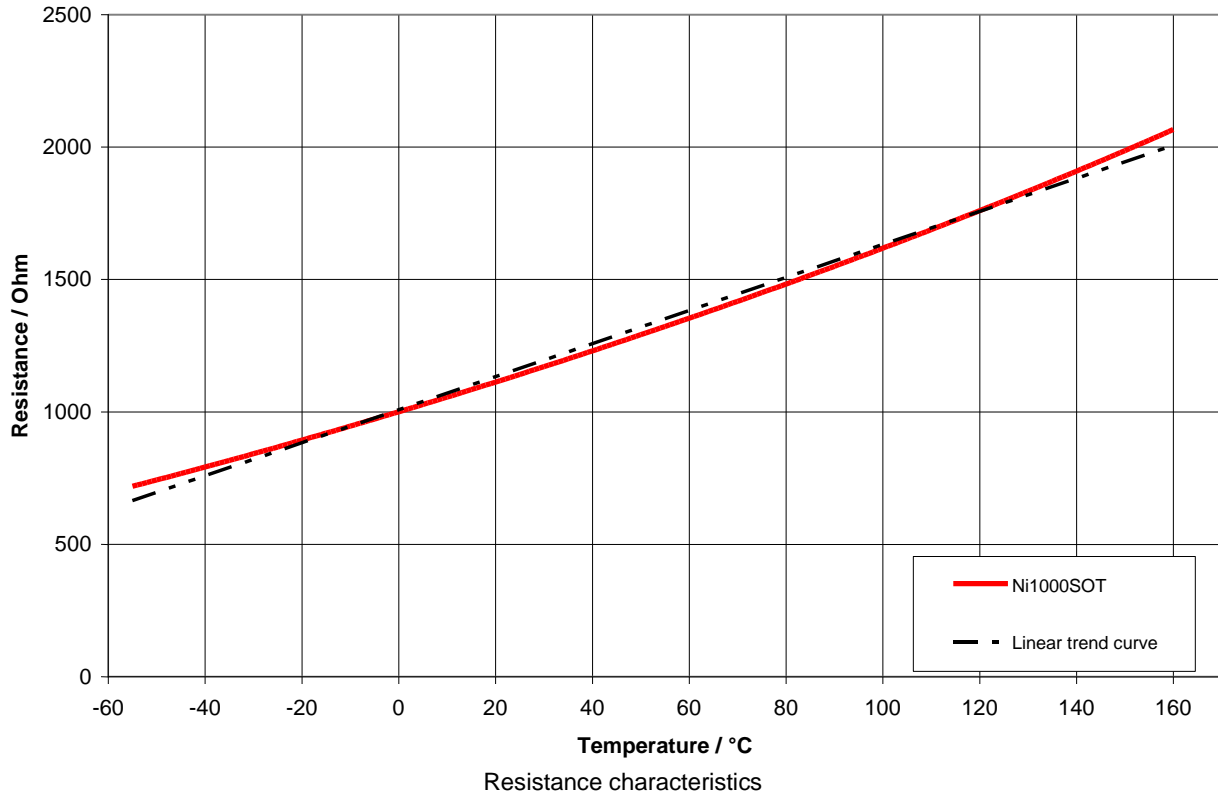

Ni1000SOT Temperature Sensor

ELECTRICAL CHARACTERISTIC

The characteristic of the nickel temperature sensor is specified as per DIN 43760. The large Temperature Coefficient of Resistance (TCR) of the Ni-RTD, 6178 ppm/K, offers greater sensitivity than other types of RTD's. The electrical characteristic can be described by the following equation:

$$R(T) = R_0(1+aT+bT^2+cT^4+dT^6)$$

| | | |
|---------------|-----|----------------------------|
| Coefficients: | a = | 5.485 x 10 ⁻³ |
| | b = | 6.650 x 10 ⁻⁶ |
| | c = | 2.805 x 10 ⁻¹¹ |
| | d = | -2.000 x 10 ⁻¹⁷ |

$$T(R) = a' + b'(1+c'R)^{1/2} + d'R^5 + e'R^7 \quad dT < 0.12 \text{ K (higher order equations on request)}$$

| | | |
|---------------|------|---------------------------|
| Coefficients: | a' = | -412.6 |
| | b' = | 140.41 |
| | c' = | 0.00764 |
| | d' = | -6.25 x 10 ⁻¹⁷ |
| | e' = | -1.25 x 10 ⁻²⁴ |


| | | | |
|--------------------|---------|---------------------|------------------------------|
| Tolerances: | Class B | ± (0.4+0.007 x T) | in range from 0°C to +160 °C |
| | | ± (0.4+0.028 x T) | in range from -55°C to 0 °C |

| T/°C | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 |
|------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| -60 | 695.2 | 699.9 | 704.6 | 709.3 | 714.0 | 718.7 | 723.4 | 728.2 | 733.0 | 737.8 |
| -50 | 742.6 | 747.4 | 752.2 | 757.0 | 761.9 | 766.8 | 771.6 | 776.5 | 781.4 | 786.4 |
| -40 | 791.3 | 796.3 | 801.2 | 806.2 | 811.2 | 816.2 | 821.2 | 826.3 | 831.3 | 836.4 |
| -30 | 841.5 | 846.5 | 851.7 | 856.8 | 861.9 | 867.0 | 872.2 | 877.4 | 882.6 | 887.8 |
| -20 | 893.0 | 898.2 | 903.4 | 908.7 | 913.9 | 919.2 | 924.5 | 929.8 | 935.1 | 940.5 |
| -10 | 945.8 | 951.2 | 956.5 | 961.9 | 967.3 | 972.7 | 978.2 | 983.6 | 989.1 | 994.5 |
| 0 | 1000.0 | 1005.5 | 1011.0 | 1016.5 | 1022.0 | 1027.6 | 1033.1 | 1038.7 | 1044.3 | 1049.9 |
| 10 | 1055.5 | 1061.1 | 1066.8 | 1072.4 | 1078.1 | 1083.8 | 1089.5 | 1095.2 | 1100.9 | 1106.6 |
| 20 | 1112.4 | 1118.1 | 1123.9 | 1129.7 | 1135.5 | 1141.3 | 1147.1 | 1153.0 | 1158.8 | 1164.7 |
| 30 | 1170.6 | 1176.5 | 1182.4 | 1188.3 | 1194.2 | 1200.2 | 1206.1 | 1212.1 | 1218.1 | 1224.1 |
| 40 | 1230.1 | 1236.1 | 1242.2 | 1248.2 | 1254.3 | 1260.4 | 1266.5 | 1272.6 | 1278.8 | 1284.9 |
| 50 | 1291.1 | 1297.2 | 1303.4 | 1309.6 | 1315.8 | 1322.0 | 1328.3 | 1334.5 | 1340.8 | 1347.1 |
| 60 | 1353.4 | 1359.7 | 1366.0 | 1372.4 | 1378.7 | 1385.1 | 1391.5 | 1397.9 | 1404.3 | 1410.8 |
| 70 | 1417.2 | 1423.7 | 1430.1 | 1436.6 | 1443.1 | 1449.7 | 1456.2 | 1462.8 | 1469.3 | 1475.9 |
| 80 | 1482.5 | 1489.1 | 1495.7 | 1502.4 | 1509.1 | 1515.7 | 1522.4 | 1529.1 | 1535.9 | 1542.6 |
| 90 | 1549.3 | 1556.1 | 1562.9 | 1569.7 | 1576.5 | 1583.4 | 1590.2 | 1597.1 | 1604.0 | 1610.9 |
| 100 | 1617.8 | 1624.7 | 1631.7 | 1638.6 | 1645.6 | 1652.6 | 1659.6 | 1666.7 | 1673.7 | 1680.8 |
| 110 | 1687.9 | 1695.0 | 1702.1 | 1709.3 | 1716.4 | 1723.6 | 1730.8 | 1738.0 | 1745.2 | 1752.5 |
| 120 | 1759.7 | 1767.0 | 1774.3 | 1781.6 | 1788.9 | 1796.3 | 1803.7 | 1811.1 | 1818.5 | 1825.9 |
| 130 | 1833.3 | 1840.8 | 1848.3 | 1855.8 | 1863.3 | 1870.9 | 1878.4 | 1886.0 | 1893.6 | 1901.2 |
| 140 | 1908.9 | 1916.5 | 1924.2 | 1931.9 | 1939.6 | 1947.4 | 1955.1 | 1962.9 | 1970.7 | 1978.5 |
| 150 | 1986.3 | 1994.2 | 2002.1 | 2010.0 | 2017.9 | 2025.9 | 2033.8 | 2041.8 | 2049.8 | 2057.8 |
| 160 | 2065.9 | 2074.0 | 2082.1 | 2090.2 | 2098.3 | 2106.5 | 2114.6 | 2122.8 | 2131.1 | 2139.3 |

Ni1000SOT Temperature Sensor

MECHANICAL DIMENSIONS

PACKAGE DIMENSIONS SOT23

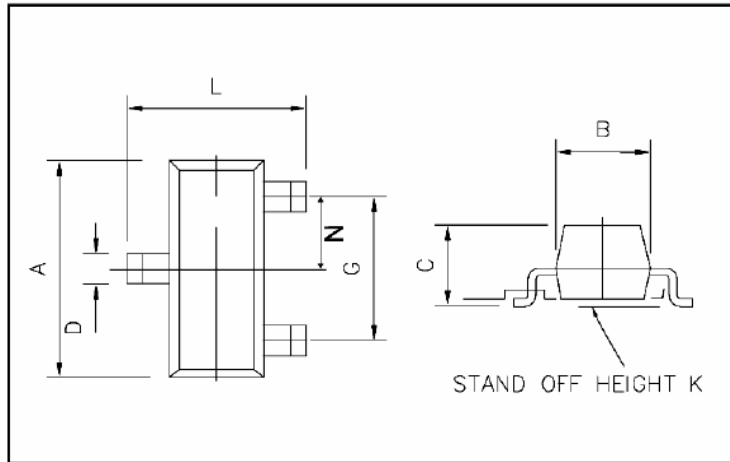

| DIM | Millimeters | | Inches | |
|-----|-------------|------|--------|--------|
| | Min | Max | Min | Max |
| A | 2.67 | 3.05 | 0.1051 | 0.1201 |
| B | 1.20 | 1.40 | 0.0472 | 0.0551 |
| C | 0.89 | 1.12 | 0.0350 | 0.0441 |
| D | 0.37 | 0.53 | 0.0146 | 0.0209 |
| G | 1.78 | 2.05 | 0.0701 | 0.0807 |
| K | 0.01 | 0.10 | 0.0004 | 0.0039 |
| L | 2.10 | 2.64 | 0.0827 | 0.1039 |
| N | 0.89 | 1.03 | 0.0350 | 0.0406 |

PIN DIMENSIONS

| Dimension | Millimeters | | Inches | |
|---------------|-------------|------|--------|--------|
| | Min | Max | Min | Max |
| Pin Thickness | 0.085 | 0.18 | 0.0033 | 0.0071 |

CONNECTIONS


| | | |
|------------------|---------|---------------------------------------|
| <p>Top view:</p> | Pin # 1 | Nickel RTD electrical contact |
| | Pin # 2 | Nickel RTD electrical contact |
| | Pin # 3 | Electrically isolated thermal contact |

Ni1000SOT Temperature Sensor

APPLICATION NOTE 1

Analogue Interface Circuit for general purpose measurement


The following voltage dividing circuit can be used for low accuracy measurements. There is no linearization given.



Example of voltage dividing circuit using Ni1000SOT sensor

The output voltage will be calculated by the following equation:

$$UNI = RN1 / (R1 + RN1) \cdot VCC$$

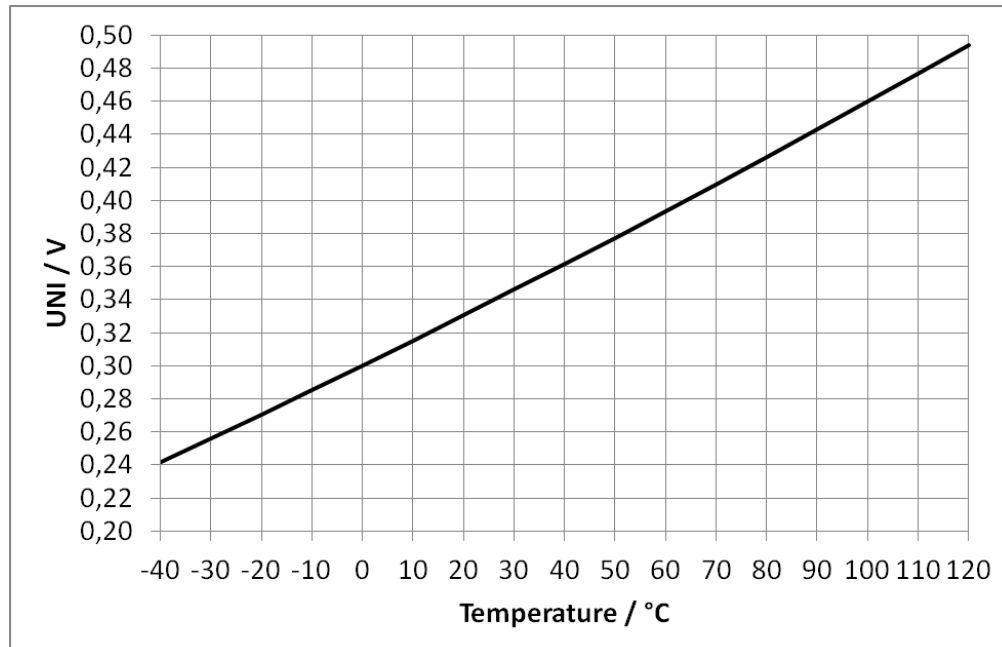


Output voltage characteristics with VCC = 3.3V

Ni1000SOT Temperature Sensor

APPLICATION NOTE 2

Analogue Interface Circuit for high accuracy measurement


The following circuitry utilizes the output of a bridge circuitry which is amplified in order to improve the measurement resolution. By bridging RNI with an optional 3.65kOhm resistor this circuitry can be linearized.

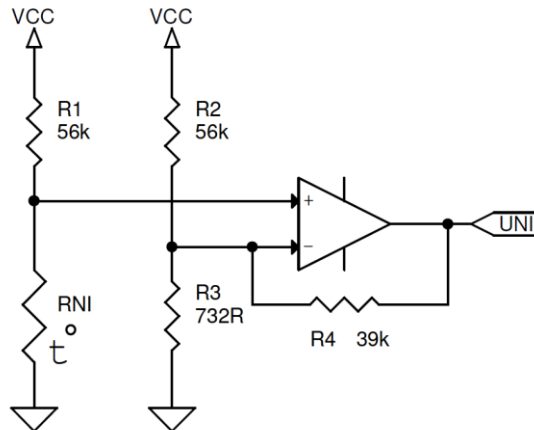

Example of analog interface circuit for high accuracy measurement using Ni1000SOT sensor

The output voltage will be calculated by the following equation:

$$UNI = RNI/(R1+RNI) \cdot VCC \cdot [1 + R4 \cdot (1/R2 + 1/R3)] - R4/R2 \cdot VCC$$

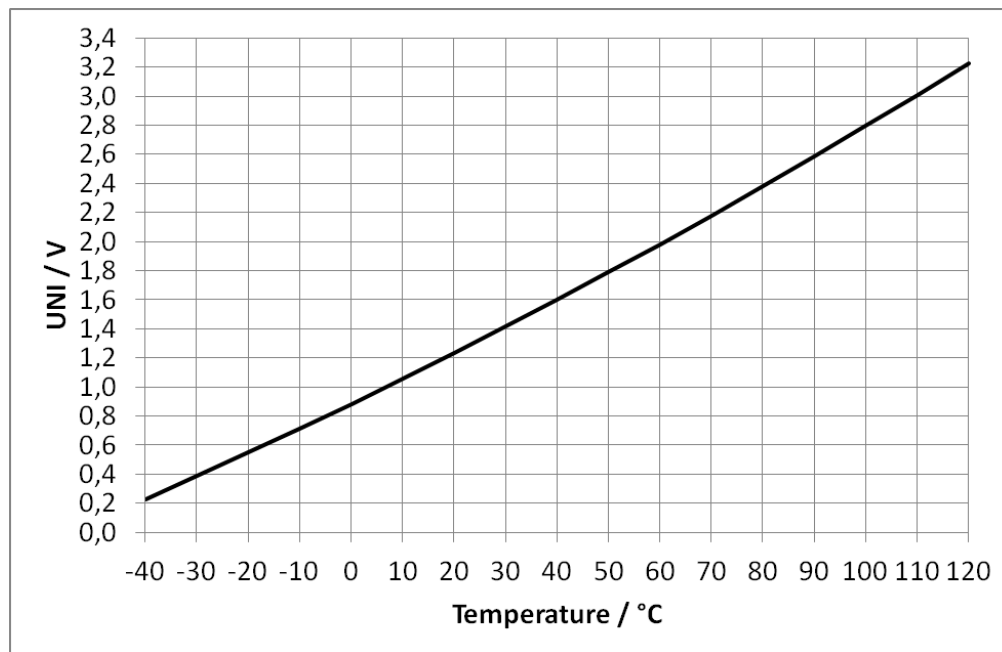

Output voltage characteristics with VCC = 3.3V

Ni1000SOT Temperature Sensor

ORDER INFORMATION

Please order this product using following:

| | |
|-------------|------------------|
| Part Number | Part Description |
| G-NICO-001 | Ni1000SOT |

DEFINITIONS AND DISCLAIMERS

- Application information – Applications that are described herein for any of these products are for illustrative purpose only. MEAS Deutschland GmbH makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- Life support applications – These products are not designed for use in life support appliances, devices, or systems where malfunctions of these products can reasonably be expected to result in personal injury.
MEAS Deutschland GmbH customers using or selling this product for use in such applications do so at their own risk and agree to fully indemnify MEAS Deutschland GmbH for any damages resulting from such improper use or sale.

TECHNICAL CONTACT INFORMATION

| NORTH AMERICA | EUROPE | ASIA |
|--|--|--|
| Measurement Specialties, Inc. 910 Turnpike Road Shrewsbury, MA 01545 United States Phone: +1-508-842-0516 Fax: +1-508-842-0342 Email: temperature.sales.amer@meas-spec.com Web: www.meas-spec.com | MEAS Deutschland GmbH Hauert 13 D-44227 Dortmund Germany Phone: +49-(0)231-9740-0 Fax: +49-(0)231-9740-20 Email: info.de@meas-spec.com Web: www.meas-spec.com | Measurement Specialties China Ltd. No. 26, Langshan Road High-tech Park (North) Nanshan District, Shenzhen 518057 China Phone: +86-755-33305088 Fax: +86-755-33305099 Email: temperature.sales.asia@meas-spec.com Web: www.meas-spec.com |

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Measurement Specialties, Inc. reserves the right to make changes without further notice to any product herein. Measurement Specialties, Inc. makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Measurement Specialties, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. Measurement Specialties, Inc. does not convey any license under its patent rights nor the rights of others.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А