



GaAs MMIC DOUBLE-BALANCED HIGH IP3 MIXER, 9 - 15 GHz

Typical Applications


The HMC410AMS8G(E) is ideal for:

- Long Haul Radio Platforms
- Microwave Radio
- VSAT

Features

- Conversion Loss: 8 dB
- LO/RF Isolation: 40 dB
- LO/IF Isolation: 37 dB
- Input IP3: +24 dBm
- No External Components
- MSOP8G SMT Package

Functional Diagram

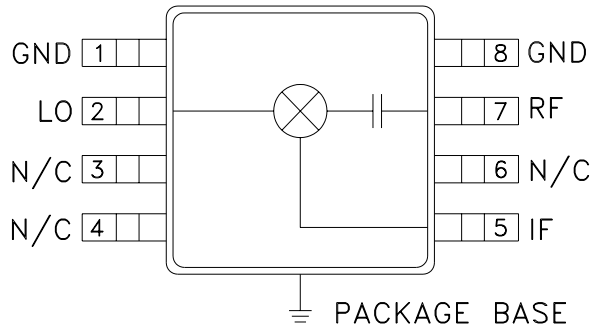

General Description

The HMC410AMS8G(E) is a passive double-balanced high IP3 mixer that operates between 9 and 15 GHz. The HMC410AMS8G(E) operates with LO drive levels between +13 dBm and +19 dBm, and provides 8 dB conversion loss across the entire specified frequency band. These mixers require no external components or bias.

Electrical Specifications, $T_A = +25^\circ C$

| Parameter | IF = 1.45 GHz LO = +17 dBm | | | Units |
|--------------------------|-------------------------------|---------|------|-------|
| | Min. | Typ. | Max. | |
| Frequency Range, RF & LO | 9 - 15 | | | GHz |
| Frequency Range, IF | DC - 2.5 | | | GHz |
| Conversion Loss | | 8 | 11 | dB |
| Noise Figure (SSB) | | 8 | 11 | dB |
| LO to RF Isolation | 30 | 40 - 45 | | dB |
| LO to IF Isolation | 30 | 37 | | dB |
| RF to IF Isolation | 8 | 17 | | dB |
| IP3 (Input) | 20 | 24 | | dBm |
| 1 dB Compression (Input) | 11 | 14 | | dBm |

* Unless otherwise noted, all measurements performed as downconverter, IF= 1.45 GHz.




MICROWAVE CORPORATION v00.0410




HMC410AMS8G / 410AMS8GE

GaAs MMIC DOUBLE-BALANCED HIGH IP3 MIXER, 9 - 15 GHz


Conversion Gain vs. Temperature @ LO = +17 dBm

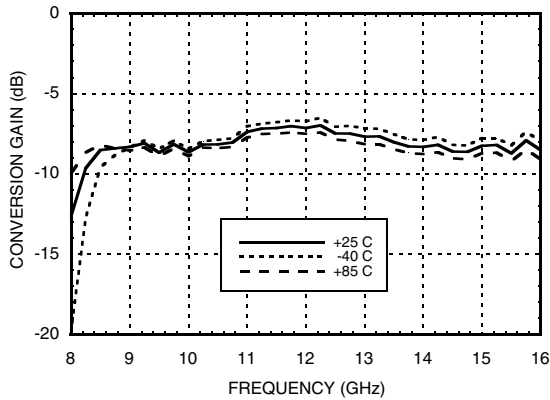


Isolation @ LO = +17 dBm

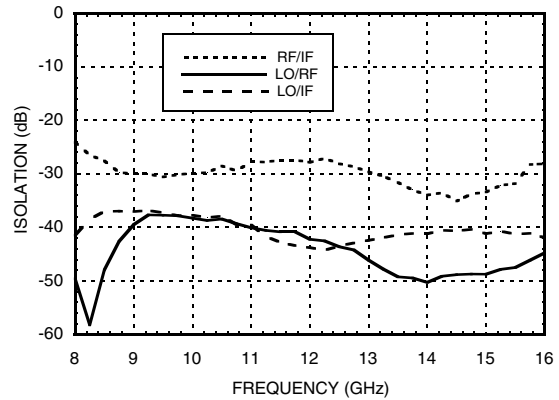


Conversion Gain vs. LO Drive

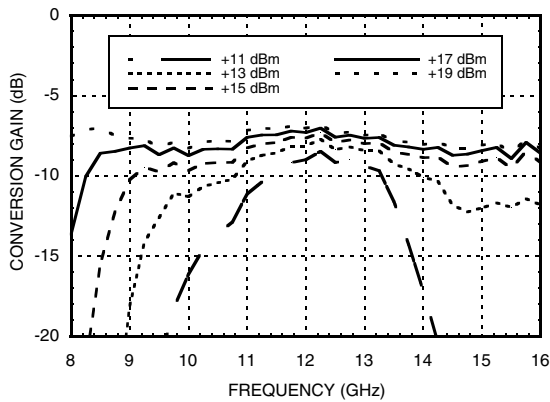


Return Loss @ LO = +17 dBm

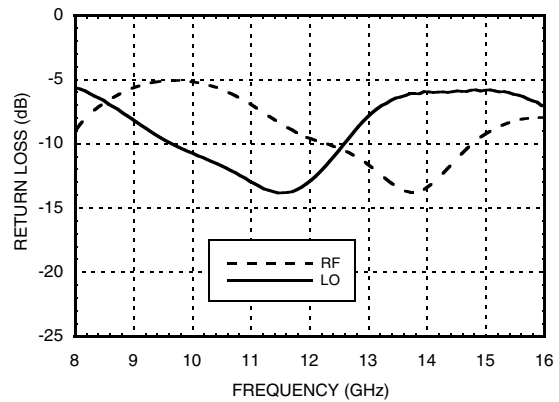

IF Bandwidth @ LO = +17 dBm

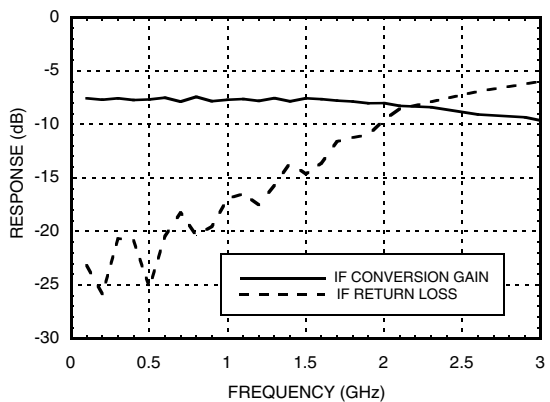

Upconverter Performance Conversion Gain @ LO = +17 dBm

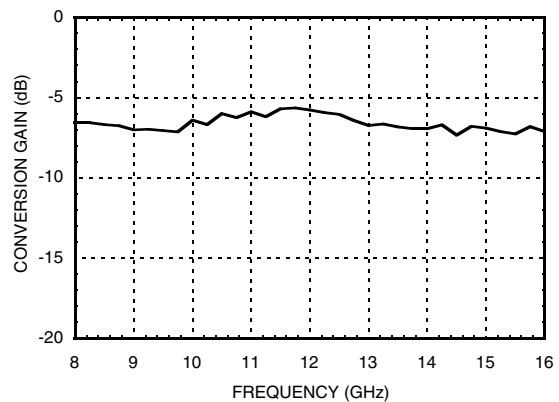


10


MIXERS - SINGLE & DOUBLE BALANCED - SMT

GaAs MMIC DOUBLE-BALANCED HIGH IP3 MIXER, 9 - 15 GHz


Input IP3 vs. LO Drive*

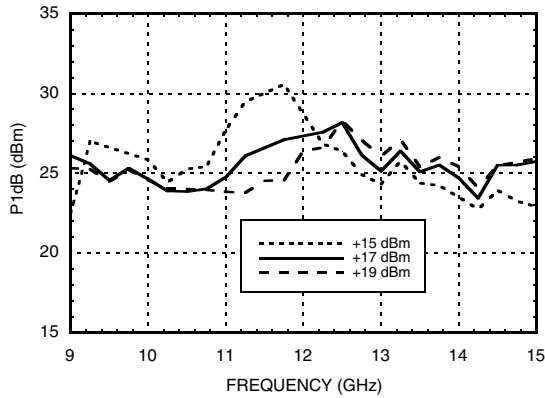


Input IP3 vs. Temperature @ LO = +17 dBm*

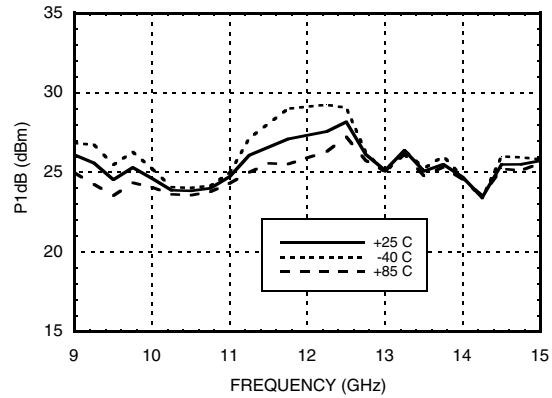

Input IP2 vs. LO Drive *

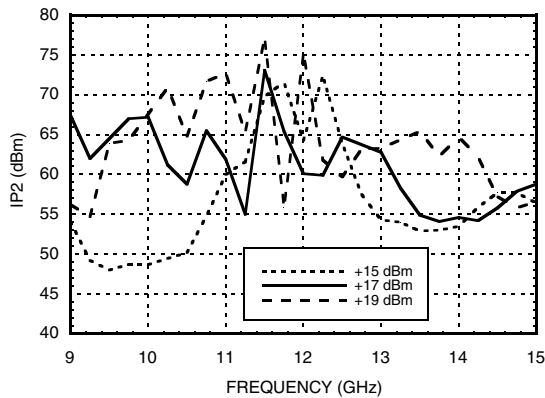

Input P1dB vs. Temperature @ LO = +17 dBm

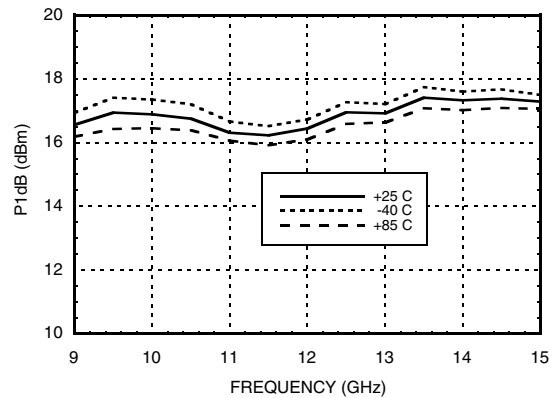

MxN Spurious @ IF Port

| mRF | nLO | | | | |
|-----|-----|-----|-----|-----|-----|
| | 0 | 1 | 2 | 3 | 4 |
| 0 | XX | 4 | 28 | 23 | N/A |
| 1 | 15 | 0 | 40 | 62 | 46 |
| 2 | 85 | 70 | 67 | 78 | 83 |
| 3 | >90 | >90 | >90 | 79 | >90 |
| 4 | N/A | >90 | >90 | >90 | >90 |

RF = 14.45 GHz @ -10 dBm
 LO = 13 GHz @ +17 dBm
 All values in dBc relative to the IF power level.
 Measured as downconverter.

Harmonics of LO

| LO Freq. (GHz) | nLO Spur @ RF Port | | | |
|----------------|--------------------|----|----|-----|
| | 1 | 2 | 3 | 4 |
| 9 | 34 | 28 | 46 | 60 |
| 10.5 | 37 | 37 | 50 | 69 |
| 12 | 44 | 45 | 46 | 60 |
| 13.5 | 47 | 46 | 62 | N/A |
| 15 | 40 | 56 | 58 | N/A |
| 16.5 | 34 | 47 | 51 | N/A |

LO = +17 dBm
 All values in dBc below input LO level @ RF port.

* Two-tone input power = 0 dBm each tone, 1 MHz spacing.


Absolute Maximum Ratings

| | |
|-----------------------|----------------|
| RF / IF Input | +20 dBm |
| LO Drive | +27 dBm |
| IF DC Current | ±4 mA |
| Storage Temperature | -65 to +150 °C |
| Operating Temperature | -40 to +85 °C |
| ESD Sensitivity (HBM) | Class 1A |



ELECTROSTATIC SENSITIVE DEVICE
OBSERVE HANDLING PRECAUTIONS

Outline Drawing

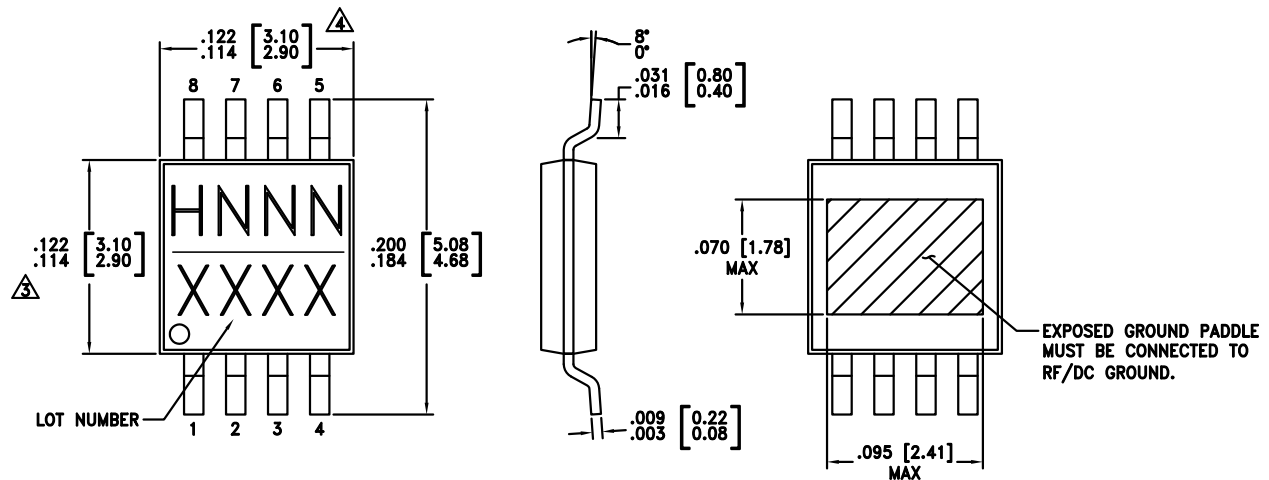

NOTES:

1. LEADFRAME MATERIAL: COPPER ALLOY
2. DIMENSIONS ARE IN INCHES [MILLIMETERS]
3. DIMENSION DOES NOT INCLUDE MOLDFLASH OF 0.15mm PER SIDE.
4. DIMENSION DOES NOT INCLUDE MOLDFLASH OF 0.25mm PER SIDE.
5. ALL GROUND LEADS AND GROUND PADDLE MUST BE SOLDERED TO PCB RF GROUND.

Package Information





| Part Number | Package Body Material | Lead Finish | MSL Rating | Package Marking ^[3] |
|--------------|--|---------------|---------------------|--------------------------------|
| HMC410AMS8G | Low Stress Injection Molded Plastic | Sn/Pb Solder | MSL1 ^[1] | H410A XXXX |
| HMC410AMS8GE | RoHS-compliant Low Stress Injection Molded Plastic | 100% matte Sn | MSL1 ^[2] | H410A XXXX |

[1] Max peak reflow temperature of 235 °C


[2] Max peak reflow temperature of 260 °C

[3] 4-Digit lot number XXXX

Pin Descriptions

| Pin Number | Function | Description | Interface Schematic |
|------------|----------|---|--|
| 1, 8 | GND | Pins and exposed ground slug must be connected to RF ground. |  |
| 2 | LO | This pin is AC coupled and matched to 50 Ohms. |  |
| 3, 4, 6 | N/C | The pins are not connected internally; however, all data shown herein was measured with these pins connected to RF/DC ground externally. | |
| 5 | IF | This pin is DC coupled. For applications not requiring operation to DC this port should be DC blocked externally using a series capacitor whose value has been chosen to pass the necessary IF frequency range. For operation to DC, this pin must not source/sink more than 4mA of current or die non-function and possible die failure will result. |  |
| 7 | RF | This pin is DC coupled and matched to 50 Ohms. |  |

Evaluation PCB

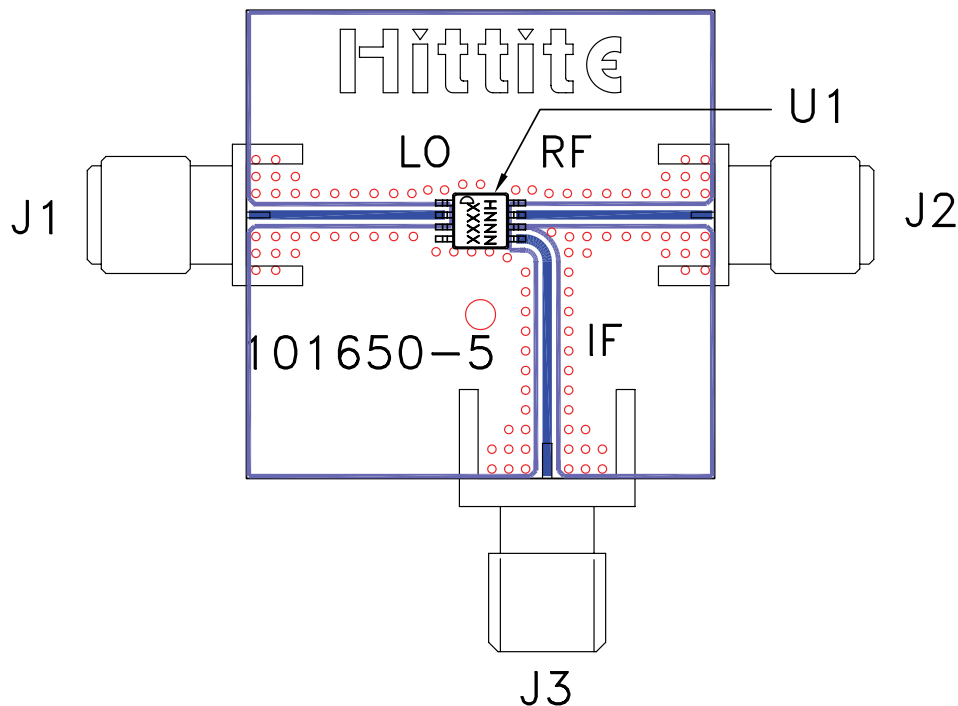

List of Materials for Evaluation PCB 103350 [1]

| Item | Description |
|---------|----------------------------------|
| J1 - J2 | PCB Mount SMA RF Connector, SRI |
| J3 | PCB Mount SMA Connector, Johnson |
| U1 | HMC410AMS8G(E) Mixer |
| PCB [2] | 101650 Evaluation Board |

[1] Reference this number when ordering complete evaluation PCB

[2] Circuit Board Material: Rogers 4350

The circuit board used in the application should use RF circuit design techniques. Signal lines should have 50 Ohm impedance while the package ground leads and exposed paddle should be connected directly to the ground plane similar to that shown. A sufficient number of via holes should be used to connect the top and bottom ground planes. The evaluation circuit board shown is available from Hittite upon request.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А