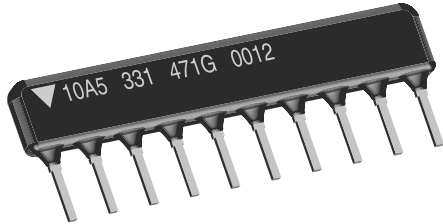


## Thick Film Resistor Networks, Single-In-Line, Conformal Coated SIP



### FEATURES

- Isolated, bussed and dual terminator schematics available
- Body height: "A" profile = 0.195" (4.95 mm) and "B" profile = 0.295" (7.50 mm) standard; custom "C" profile = 0.350" (8.89 mm) also available
- "A" profile standard in 4 thru 12 pins
- Thick film resistive elements
- Reduces total assembly costs
- Resistor elements protected by tough epoxy conformal coating
- Wide resistance range (10 Ω to 2.2 MΩ)
- Available in bulk pack as standard; optional tube pack is also available
- Meets EIA/ECA-CB23 rev. G whisker test requirements for Class 1A products
- Compliant to RoHS directive 2002/95/EC



**RoHS\***  
COMPLIANT

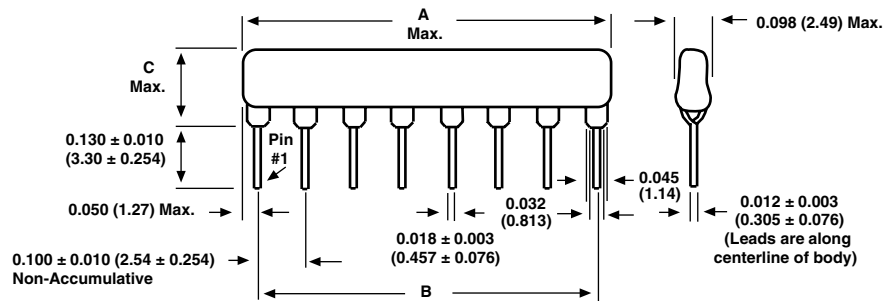
| STANDARD ELECTRICAL SPECIFICATIONS |                |  |                       |  |                            |  |  |
|------------------------------------|----------------|--|-----------------------|--|----------------------------|--|--|
| GLOBAL MODEL/ SCHEMATIC            | PACKAGE HEIGHT | POWER RATING ELEMENT <sup>(1)</sup><br><i>P</i> <sub>70 °C W</sub> | RESISTANCE RANGE<br>Ω | TEMP. COEFFICIENT<br>(- 55 °C to + 125 °C)<br>± ppm/°C | TOL. <sup>(2)</sup><br>± % | TCR TRACKING <sup>(1)</sup><br>(- 55 °C to + 125 °C)<br>± ppm/°C | MAX. WORKING VOLTAGE <sup>(3)</sup><br>V <sub>DC</sub> |
| CSCxxx01                           | A              | 0.20   | 10 to 50              | 250  | 1, 2, 5                    | 50   | 100  |
|                                    | B              | 0.25   | 50.1 to 2.2M          | 100  |                            |  |  |
| CSCxxx03                           | A              | 0.30   | 10 to 50              | 250  | 1, 2, 5                    | 50   | 100  |
|                                    | B              | 0.40   | 50.1 to 2.2M          | 100  |                            |  |  |
| CSCxxx05                           | A              | 0.20   | 10 to 50              | 250  | 1, 2, 5                    | 150  | 100  |
|                                    | B              | 0.25   | 50.1 to 2.2M          | 100  |                            |  |  |

### Notes

- See derating curves for package power rating
- <sup>(1)</sup> For resistor power ratings at + 25 °C see derating curves
- <sup>(2)</sup> ± 2 % standard, ± 1 % and ± 5 % available
- <sup>(3)</sup> Continuous working voltage shall be  $\sqrt{P \times R}$  or maximum working voltage, whichever is less

| GLOBAL PART NUMBER INFORMATION  |   |  |  |  |  |   |  |   |   |   |   |   |   |   |  |  |  |
|---|---|--|--|--|--|---|--|---|---|---|---|---|---|---|--|--|--|
| <b>New Global Part Numbering: CSC08A03100RGEK (preferred part number format)</b>      |   |  |  |  |  |   |  |   |   |   |   |   |   |   |  |  |  |
| C   | S   | C  | 0  | 8  | A  | 0   | 3  | 1 | 0 | 0 | R | G | E | K |  |  |  |
| GLOBAL MODEL<br><b>CSC</b>  | PIN COUNT<br>04 to 12 pin available<br><b>04</b> = 4 pin<br><b>08</b> = 8 pin<br><b>12</b> = 12 pin | PACKAGE HEIGHT<br><b>A</b> = "A" profile<br><b>B</b> = "B" profile | SCHEMATIC<br><b>01</b> = Bussed<br><b>03</b> = Isolated<br><b>00</b> = Special | RESISTANCE VALUE<br><b>R</b> = Ω<br><b>K</b> = kΩ<br><b>M</b> = MΩ<br><b>10R0</b> = 10 Ω<br><b>680K</b> = 680 kΩ<br><b>1M00</b> = 1.0 MΩ | TOLERANCE CODE<br><b>F</b> = ± 1 %<br><b>G</b> = ± 2 %<br><b>J</b> = ± 5 %<br><b>S</b> = Special | PACKAGING<br><b>EK</b> = Lead (Pb)-free, bulk<br><b>PA</b> = Tin/lead, bulk | SPECIAL<br>Blank = Standard (Dash Number) (Up to 3 digits) From <b>1</b> to <b>999</b> as applicable |   |   |   |   |   |   |   |  |  |  |
| <b>Historical Part Number example: CSC08A03101GEK (will continue to be accepted)</b>  |   |  |  |  |  |   |  |   |   |   |   |   |   |   |  |  |  |
| CSC   | 08  | A  | 03   | 101  | G  | EK  |  |   |   |   |   |   |   |   |  |  |  |
| HISTORICAL MODEL  | PIN COUNT   | PACKAGE HEIGHT   | SCHEMATIC  | RESISTANCE VALUE   | TOLERANCE CODE   | PACKAGING   |  |   |   |   |   |   |   |   |  |  |  |
| <b>New Global Part Numbering: CSC08A05131AGEK (preferred part number format)</b>      |   |  |  |  |  |   |  |   |   |   |   |   |   |   |  |  |  |
| C   | S   | C  | 0  | 8  | A  | 0   | 5  | 1 | 3 | 1 | A | G | E | K |  |  |  |
| GLOBAL MODEL<br><b>CSC</b>  | PIN COUNT<br>04 to 12 pin available<br><b>04</b> = 4 pin<br><b>08</b> = 8 pin<br><b>12</b> = 12 pin | PACKAGE HEIGHT<br><b>A</b> = "A" profile<br><b>B</b> = "B" profile | SCHEMATIC<br><b>05</b> = Dual terminator                                       | RESISTANCE VALUE<br>3 digit impedance code, followed by alpha modifier (see impedance codes table)                                       | TOLERANCE CODE<br><b>F</b> = ± 1 %<br><b>G</b> = ± 2 %<br><b>J</b> = ± 5 %                       | PACKAGING<br><b>EK</b> = Lead (Pb)-free, bulk<br><b>PA</b> = Tin/lead, bulk | SPECIAL<br>Blank = Standard (Dash Number) (Up to 3 digits) From <b>1</b> to <b>999</b> as applicable |   |   |   |   |   |   |   |  |  |  |
| <b>Historical Part Number example: CSC08A05131AGEK (will continue to be accepted)</b> |   |  |  |  |  |   |  |   |   |   |   |   |   |   |  |  |  |
| CSC   | 08  | A  | 05   | 221  | 331  | G   | EK   |   |   |   |   |   |   |   |  |  |  |
| HISTORICAL MODEL  | PIN COUNT   | PACKAGE HEIGHT   | SCHEMATIC  | RESISTANCE VALUE 1   | RESISTANCE VALUE 2   | TOLERANCE CODE  | PACKAGING  |   |   |   |   |   |   |   |  |  |  |

| TECHNICAL SPECIFICATIONS            |             |                  |
|-------------------------------------|-------------|------------------|
| PARAMETER                           | UNIT        | CSC SERIES       |
| Voltage Coefficient of Resistance   | $V_{eff}$   | < 50 ppm typical |
| Dielectric Strength                 | $V_{AC}$    | 200              |
| Isolation Resistance (03 Schematic) | $\Omega$    | > 100M           |
| Operating Temperature Range         | $^{\circ}C$ | - 55 to + 125    |

**DIMENSIONS** in inches (millimeters)


| 01 SCHEMATIC | GLOBAL MODEL | NUMBER OF RESISTORS | A (Maximum)   | B             | C (Maximum)  |
|--------------|--------------|---------------------|---------------|---------------|--|
|              | CSC04        | 3                   | 0.390 (9.91)  | 0.300 (7.62)  | "A" profile = 0.195 (4.95)<br>"B" profile = 0.295 (7.50) |
|              | CSC05        | 4                   | 0.490 (12.45) | 0.400 (10.16) |  |
|              | CSC06        | 5                   | 0.590 (14.99) | 0.500 (12.70) |  |
|              | CSC07        | 6                   | 0.690 (17.53) | 0.600 (15.24) |  |
|              | CSC08        | 7                   | 0.790 (20.07) | 0.700 (17.78) |  |
|              | CSC09        | 8                   | 0.890 (22.61) | 0.800 (20.32) |  |
|              | CSC10        | 9                   | 0.990 (25.15) | 0.900 (22.86) |  |
|              | CSC11        | 10                  | 1.09 (27.69)  | 1.00 (25.40)  |  |
|              | CSC12        | 11                  | 1.19 (30.23)  | 1.100 (27.94) |  |
| 03 SCHEMATIC | GLOBAL MODEL | NUMBER OF RESISTORS | A (Maximum)   | B             | C (Maximum)  |
|              | CSC04        | 2                   | 0.390 (9.91)  | 0.300 (7.62)  | "A" profile = 0.195 (4.95)<br>"B" profile = 0.295 (7.50) |
|              | CSC06        | 3                   | 0.590 (14.99) | 0.500 (12.70) |  |
|              | CSC08        | 4                   | 0.790 (20.07) | 0.700 (17.78) |  |
|              | CSC10        | 5                   | 0.990 (25.15) | 0.900 (22.86) |  |
|              | CSC12        | 6                   | 1.19 (30.23)  | 1.100 (27.94) |  |
| 05 SCHEMATIC | GLOBAL MODEL | NUMBER OF RESISTORS | A (Maximum)   | B             | C (Maximum)  |
|              | CSC04        | 4                   | 0.390 (9.91)  | 0.300 (7.62)  | "A" profile = 0.195 (4.95)<br>"B" profile = 0.295 (7.50) |
|              | CSC05        | 6                   | 0.490 (12.45) | 0.400 (10.16) |  |
|              | CSC06        | 8                   | 0.590 (14.99) | 0.500 (12.70) |  |
|              | CSC07        | 10                  | 0.690 (17.53) | 0.600 (15.24) |  |
|              | CSC08        | 12                  | 0.790 (20.07) | 0.700 (17.78) |  |
|              | CSC09        | 14                  | 0.890 (22.61) | 0.800 (20.32) |  |
|              | CSC10        | 16                  | 0.990 (25.15) | 0.900 (22.86) |  |
|              | CSC11        | 18                  | 1.09 (27.69)  | 1.00 (25.40)  |  |
|              | CSC12        | 20                  | 1.19 (30.23)  | 1.100 (27.94) |  |

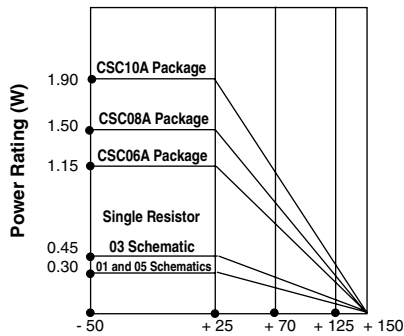
| MECHANICAL SPECIFICATIONS      |  |
|--------------------------------|--|
| Marking Resistance to Solvents | Permanency testing per MIL-STD-202, method 215 |
| Solderability                  | Per MIL-STD-202, method 208E, RMA flux         |
| Body                           | High alumina, epoxy coated                     |
| Terminals                      | Solder plated leads                            |

**STOCKED RESISTANCE VALUES IN OHMS (“G” TOLERANCE)**

Standard E-24 resistance values stocked. Consult factory.  
Many dual terminator resistance values stocked. Consult factory.

| IMPEDANCE CODES |                    |                    |      |                    |                    |
|-----------------|--------------------|--------------------|------|--------------------|--------------------|
| CODE            | R <sub>1</sub> (Ω) | R <sub>2</sub> (Ω) | CODE | R <sub>1</sub> (Ω) | R <sub>2</sub> (Ω) |
| 500B            | 82                 | 130                | 141A | 270                | 270                |
| 750B            | 120                | 200                | 181A | 330                | 390                |
| 800C            | 130                | 210                | 191A | 330                | 470                |
| 990A            | 160                | 260                | 221B | 330                | 680                |
| 101C            | 180                | 240                | 281B | 560                | 560                |
| 111C            | 180                | 270                | 381B | 560                | 1.2K               |
| 121B            | 180                | 390                | 501C | 620                | 2.7K               |
| 121C            | 220                | 270                | 102A | 1.5K               | 3.3K               |
| 131A            | 220                | 330                | 202B | 3K                 | 6.2K               |

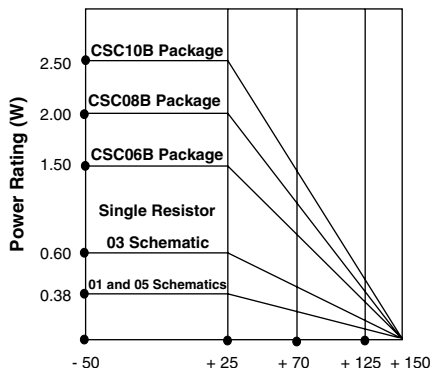
**”A” Profile**



Derating Ambient Temperature °C


| ”A” PROFILE + 70 °C PACKAGE RATINGS |        |
|-------------------------------------|--------|
| CSC12A                              | 1.5 W  |
| CSC11A                              | 1.37 W |
| CSC10A                              | 1.25 W |
| CSC09A                              | 1.12 W |
| CSC08A                              | 1.00 W |
| CSC07A                              | 0.87 W |
| CSC06A                              | 0.75 W |
| CSC05A                              | 0.62 W |
| CSC04A                              | 0.40 W |

**”B” Profile**



Derating Ambient Temperature °C


| ”B” PROFILE + 70 °C PACKAGE RATINGS |        |
|-------------------------------------|--------|
| CSC12B                              | 1.90 W |
| CSC11B                              | 1.75 W |
| CSC10B                              | 1.60 W |
| CSC09B                              | 1.45 W |
| CSC08B                              | 1.30 W |
| CSC07B                              | 1.15 W |
| CSC06B                              | 1.00 W |
| CSC05B                              | 0.80 W |
| CSC04B                              | 0.60 W |

**CIRCUIT APPLICATIONS**
**01 Schematic**
**Bussed**


The CSCxxx01 single-in-line resistor networks provide the user with nominally equal resistors, each connected to a common pin (pin no. 1). Commonly used in the following applications:

- “Wired OR” Pull-up
- Power Gate Pull-up
- MOS/ROM Pull-up/Pull-down
- Open Collector Pull-up
- TTL Input Pull-down
- TTL Unused Gate Pull-up

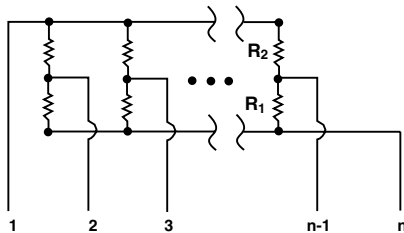
\* “A” profile standard, “B” Profile available.

**03 Schematic**
**Isolated**


The CSCxxx03 single-in-line resistor networks provide the user with nominally equal resistors. Each resistor is isolated from all others. Commonly used in the following applications:

- “Wired OR” Pull-up
- Power Driven Pull-up
- Power Gate Pull-up
- Line Termination
- Long-Line Impedance Balancing
- LED Current Limiting
- ECL Output Pull-down
- TTL Input Pull-down

\* “A” Profile standard, “B” Profile available.

**05 Schematic**
**Dual Terminator**


The CSCxxx05 circuits contain series pairs of resistors. Each series pair is connected between two common lines. The junction of these resistor pairs is connected to the input terminals. The 05 circuits are designed for TTL dual-line termination and pulse squaring.

\* “A” profile standard, “B” Profile available.

**PERFORMANCE**

| TEST                            | CONDITIONS   | MAX. $\Delta R$ (TYPICAL TEST LOTS) |
|---------------------------------|--|-------------------------------------|
| Thermal Shock                   | 5 cycles between - 65 °C and + 125 °C  | $\pm 0.50 \% \Delta R$              |
| Short Time Overload             | 2.5 x rated working voltage, 5 s   | $\pm 0.25 \% \Delta R$              |
| Low Temperature Operation       | 45 min at full rated working voltage at - 65 °C  | $\pm 0.25 \% \Delta R$              |
| Moisture Resistance             | 240 h with humidity ranging from 80 % RH to 98 % RH  | $\pm 1.00 \% \Delta R$              |
| Resistance to Soldering Heat    | Leads immersed in + 350 °C solder to within 1/16" of body for 3 s  | $\pm 0.25 \% \Delta R$              |
| Shock                           | Total of 18 shocks at 100 g's  | $\pm 0.25 \% \Delta R$              |
| Vibration                       | 12 h at maximum of 20 g's between 10 Hz and 2000 Hz  | $\pm 0.25 \% \Delta R$              |
| Load Life                       | 1000 h at + 70 °C, rated power applied 1.5 h “ON”, 0.5 h “OFF” for full 1000 h period. Derated according to the curve. | $\pm 1.00 \% \Delta R$              |
| Terminal Strength               | 4.5 pound pull for 30 s  | $\pm 0.25 \% \Delta R$              |
| Insulation Resistance           | 10 000 M $\Omega$ (minimum)  | -                                   |
| Dielectric Withstanding Voltage | No evidence of arcing or damage (200 V <sub>RMS</sub> for 1 min)   | -                                   |



## Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

## Material Category Policy

**Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as RoHS-Compliant fulfill the definitions and restrictions defined under Directive 2011/65/EU of The European Parliament and of the Council of June 8, 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (EEE) - recast, unless otherwise specified as non-compliant.**

**Please note that some Vishay documentation may still make reference to RoHS Directive 2002/95/EC. We confirm that all the products identified as being compliant to Directive 2002/95/EC conform to Directive 2011/65/EU.**

**Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as Halogen-Free follow Halogen-Free requirements as per JEDEC JS709A standards. Please note that some Vishay documentation may still make reference to the IEC 61249-2-21 definition. We confirm that all the products identified as being compliant to IEC 61249-2-21 conform to JEDEC JS709A standards.**

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А