

# MOSFET

Metal Oxide Semiconductor Field Effect Transistor

## OptiMOS™ Small-Signal-Transistor, 75V

BSL716SN

### Data Sheet

Rev. 2.0  
Final

Industrial & Multimarket

## OptiMOS™ Small-Signal-Transistor


### Features

- N-channel
- Enhancement mode
- Logic Level (4.5V rated)
- Avalanche rated
- Qualified according to AEC Q101
- RoHS compliant
- Halogen-free according to IEC61249-2-21




### Product Summary

|                  |                       |      |          |
|------------------|-----------------------|------|----------|
| $V_{DS}$         |                       | 75   | V        |
| $R_{DS(on),max}$ | $V_{GS}=10\text{ V}$  | 0.15 | $\Omega$ |
|                  | $V_{GS}=4.5\text{ V}$ | 0.18 |          |
| $I_D$            |                       | 2.5  | A        |



TSOP6



| Type     | Package | Tape and Reel Info    | Marking | Halogen Free | Packing |
|----------|---------|-----------------------|---------|--------------|---------|
| BSL716SN | TSOP6   | H6327: 3000 pcs/ reel | sPZ     | Yes          | Non dry |

Maximum ratings, at  $T_j=25\text{ °C}$ , unless otherwise specified

| Parameter                           | Symbol            | Conditions                                                                                                     | Value                  | Unit               |
|-------------------------------------|-------------------|----------------------------------------------------------------------------------------------------------------|------------------------|--------------------|
| Continuous drain current            | $I_D$             | $T_A=25\text{ °C}$                                                                                             | 2.5                    | A                  |
|                                     |                   | $T_A=70\text{ °C}$                                                                                             | 2.0                    |                    |
| Pulsed drain current                | $I_{D,pulse}$     | $T_A=25\text{ °C}$                                                                                             | 10.0                   |                    |
| Avalanche energy, single pulse      | $E_{AS}$          | $I_D=2.5\text{ A}$ , $R_{GS}=25\text{ }\Omega$                                                                 | 33                     | mJ                 |
| Reverse diode $dv/dt$               | $dv/dt$           | $I_D=2.5\text{ A}$ , $V_{DS}=50\text{ V}$ ,<br>$di/dt=200\text{ A}/\mu\text{s}$ ,<br>$T_{j,max}=150\text{ °C}$ | 6                      | kV/ $\mu\text{s}$  |
| Gate source voltage                 | $V_{GS}$          |                                                                                                                | $\pm 20$               | V                  |
| Power dissipation <sup>1)</sup>     | $P_{tot}$         | $T_A=25\text{ °C}$                                                                                             | 2.0                    | W                  |
| Operating and storage temperature   | $T_j$ , $T_{stg}$ |                                                                                                                | -55 ... 150            | $^{\circ}\text{C}$ |
| ESD Class                           |                   | JESD22-A114 -HBM                                                                                               | 0 (<250V)              |                    |
| Soldering Temperature               |                   |                                                                                                                | 260 $^{\circ}\text{C}$ |                    |
| IEC climatic category; DIN IEC 68-1 |                   |                                                                                                                | 55/150/56              |                    |

| Parameter | Symbol | Conditions | Values |      |      | Unit |
|-----------|--------|------------|--------|------|------|------|
|           |        |            | min.   | typ. | max. |      |

#### Thermal characteristics

|                                                  |            |                                              |   |   |      |     |
|--------------------------------------------------|------------|----------------------------------------------|---|---|------|-----|
| Thermal resistance<br>junction - soldering point | $R_{thJS}$ |                                              | - | - | 50   | K/W |
| Thermal resistance<br>junction - ambient         | $R_{thJA}$ | minimal footprint                            | - | - | 230  |     |
|                                                  |            | 6 cm <sup>2</sup> cooling area <sup>1)</sup> | - | - | 62.5 |     |

#### Electrical characteristics, at $T_j=25\text{ °C}$ , unless otherwise specified

#### Static characteristics

|                                  |               |                                                            |     |      |      |               |
|----------------------------------|---------------|------------------------------------------------------------|-----|------|------|---------------|
| Drain-source breakdown voltage   | $V_{(BR)DSS}$ | $V_{GS}=0\text{ V}, I_D=250\text{ }\mu\text{A}$            | 75  | -    | -    | V             |
| Gate threshold voltage           | $V_{GS(th)}$  | $V_{DS}=V_{GS}\text{ V}, I_D=218\text{ }\mu\text{A}$       | 0.8 | 1.4  | 1.80 |               |
| Drain-source leakage current     | $I_{DSS}$     | $V_{DS}=75\text{ V}, V_{GS}=0\text{ V}, T_j=25\text{ °C}$  | -   | -    | 0.02 | $\mu\text{A}$ |
|                                  |               | $V_{DS}=75\text{ V}, V_{GS}=0\text{ V}, T_j=150\text{ °C}$ | -   | -    | 10   |               |
| Gate-source leakage current      | $I_{GSS}$     | $V_{GS}=20\text{ V}, V_{DS}=0\text{ V}$                    | -   | -    | 10   | nA            |
| Drain-source on-state resistance | $R_{DS(on)}$  | $V_{GS}=10\text{ V}, I_D=2.5\text{ A}$                     | -   | 120  | 150  | m $\Omega$    |
|                                  |               | $V_{GS}=4.5\text{ V}, I_D=2.3\text{ A}$                    | -   | 136  | 180  |               |
| Transconductance                 | $g_{fs}$      | $ V_{DS} >2 I_D R_{DS(on)max}, I_D=2\text{ A}$             |     | 6.06 | -    | S             |

<sup>1)</sup> Device on 40mm x 40mm x 1.5mm epoxy PCB FR4 with 6cm<sup>2</sup> (one layer, 70 $\mu\text{m}$  thick) copper area for drain connection. PCB is vertical in still air. (  $t < 5\text{ sec}$  )

| Parameter | Symbol | Conditions | Values |      |      | Unit |
|-----------|--------|------------|--------|------|------|------|
|           |        |            | min.   | typ. | max. |      |

#### Dynamic characteristics

|                              |              |                                                                                             |   |      |      |    |
|------------------------------|--------------|---------------------------------------------------------------------------------------------|---|------|------|----|
| Input capacitance            | $C_{iss}$    | $V_{GS}=0\text{ V}, V_{DS}=25\text{ V},$<br>$f=1\text{ MHz}$                                | - | 237  | 315  | pF |
| Output capacitance           | $C_{oss}$    |                                                                                             | - | 41   | 55   |    |
| Reverse transfer capacitance | $C_{rss}$    |                                                                                             | - | 19   | 29   |    |
| Turn-on delay time           | $t_{d(on)}$  | $V_{DD}=37.5\text{ V},$<br>$V_{GS}=10\text{ V}, I_D=2.5\text{ A},$<br>$R_{G,ext}=6\ \Omega$ | - | 4.2  | 6.3  | ns |
| Rise time                    | $t_r$        |                                                                                             | - | 3.4  | 5.1  |    |
| Turn-off delay time          | $t_{d(off)}$ |                                                                                             | - | 50.3 | 75.5 |    |
| Fall time                    | $t_f$        |                                                                                             | - | 14.3 | 21.5 |    |

#### Gate Charge Characteristics


|                       |               |                                                                               |   |     |      |    |
|-----------------------|---------------|-------------------------------------------------------------------------------|---|-----|------|----|
| Gate to source charge | $Q_{gs}$      | $V_{DD}=37.5\text{ V}, I_D=2.5\text{ A},$<br>$V_{GS}=0\text{ to }10\text{ V}$ | - | 0.6 | 0.8  | nC |
| Gate to drain charge  | $Q_{gd}$      |                                                                               | - | 2.5 | 3.7  |    |
| Gate charge total     | $Q_g$         |                                                                               | - | 8.7 | 13.1 |    |
| Gate plateau voltage  | $V_{plateau}$ |                                                                               | - | 2.4 | -    | V  |

#### Reverse Diode

|                                  |               |                                                                              |   |     |      |    |
|----------------------------------|---------------|------------------------------------------------------------------------------|---|-----|------|----|
| Diode continuous forward current | $I_S$         | $T_A=25\text{ °C}$                                                           | - | -   | 2.1  | A  |
| Diode pulse current              | $I_{S,pulse}$ |                                                                              | - | -   | 10.0 |    |
| Diode forward voltage            | $V_{SD}$      | $V_{GS}=0\text{ V}, I_F=2.5\text{ A},$<br>$T_J=25\text{ °C}$                 | - | 0.8 | 1.1  | V  |
| Reverse recovery time            | $t_{rr}$      | $V_R=37.5\text{ V}, I_F=2.5\text{ A},$<br>$di_F/dt=200\text{ A}/\mu\text{s}$ | - | 29  | 36   | ns |
| Reverse recovery charge          | $Q_{rr}$      |                                                                              | - | 58  | 73   | nC |


### 1 Power dissipation

$$P_{\text{tot}} = f(T_A)$$

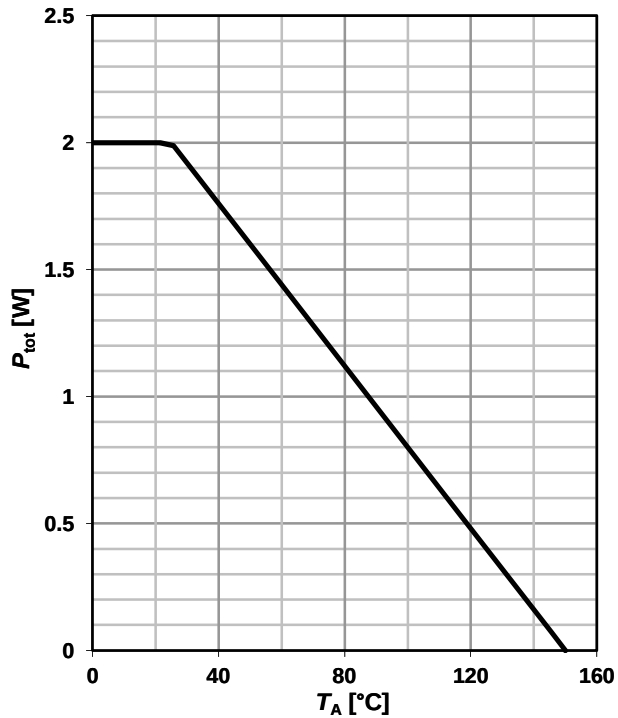

### 2 Drain current


$$I_D = f(T_A); V_{GS} \geq 10 \text{ V}$$

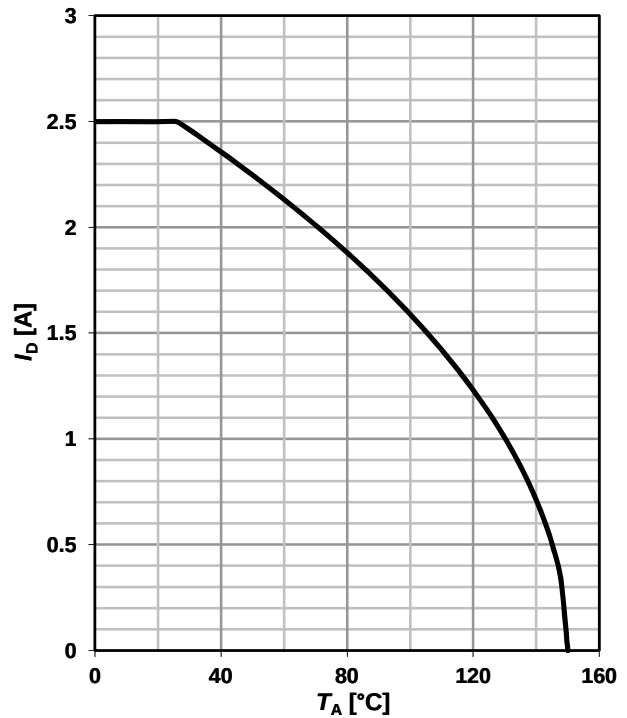

### 3 Safe operating area

$$I_D = f(V_{DS}); T_A = 25^\circ\text{C}; D = 0$$


parameter:  $t_p$

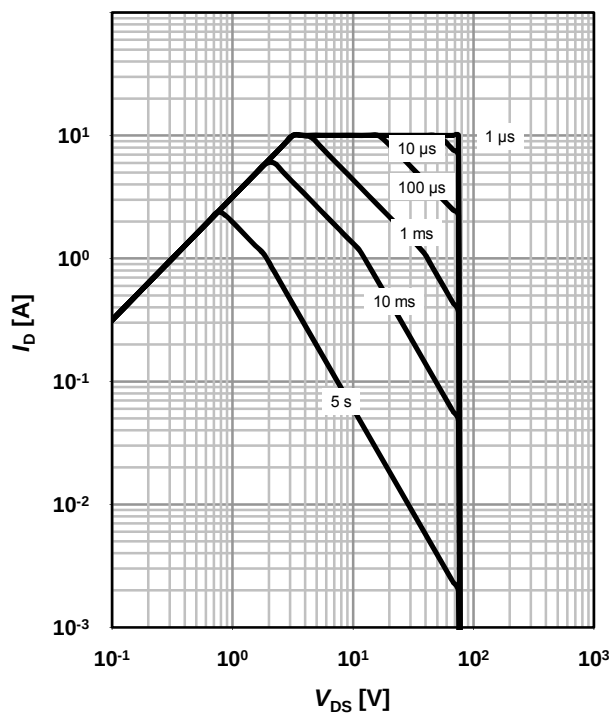

### 4 Max. transient thermal impedance

$$Z_{thJA} = f(t_p)$$


parameter:  $D = t_p/T$

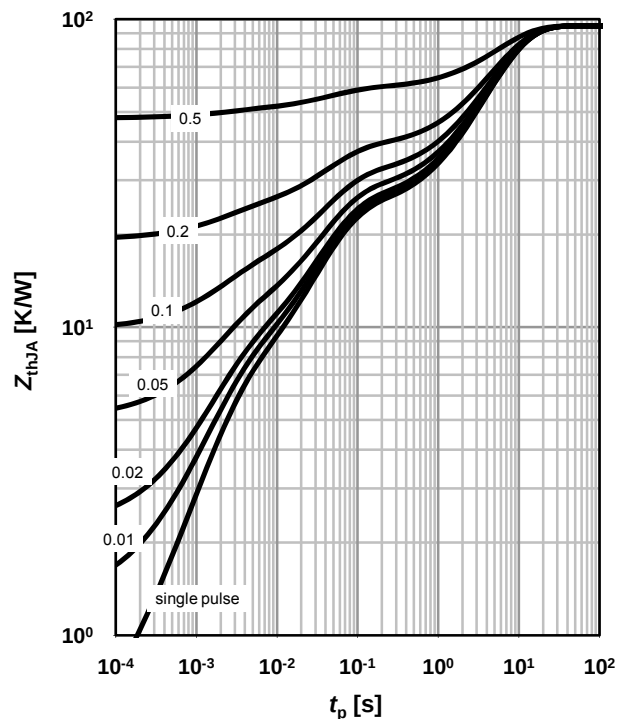

## 5 Typ. output characteristics

$$I_D = f(V_{DS}); T_j = 25^\circ\text{C}$$


parameter:  $V_{GS}$

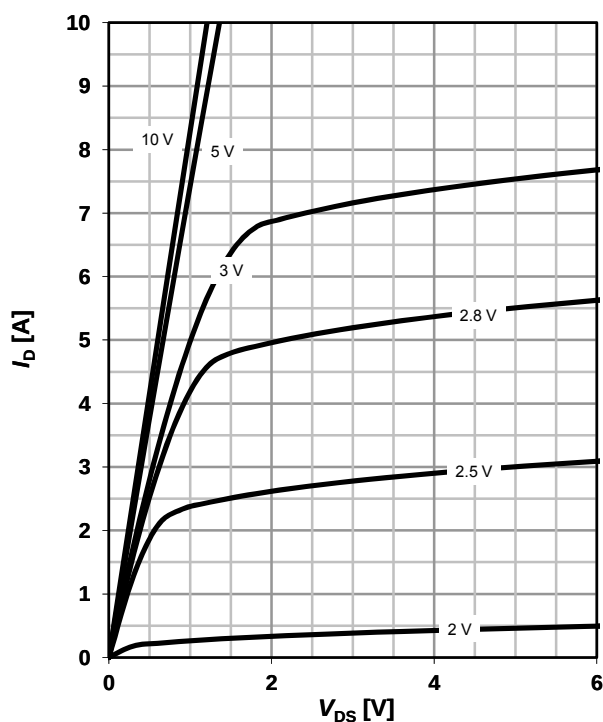

## 6 Typ. drain-source on resistance


$$R_{DS(on)} = f(I_D); T_j = 25^\circ\text{C}$$

parameter:  $V_{GS}$

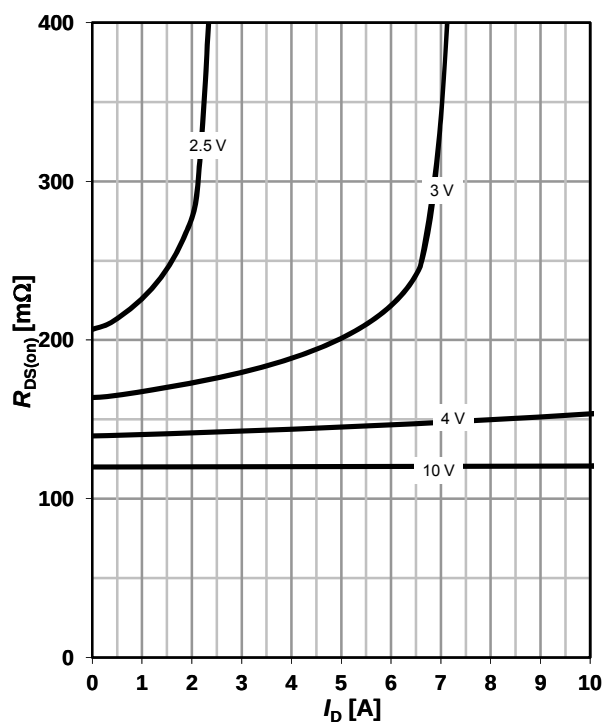


## 7 Typ. transfer characteristics

$$I_D = f(V_{GS}); |V_{DS}| > 2|I_D|R_{DS(on)max}$$

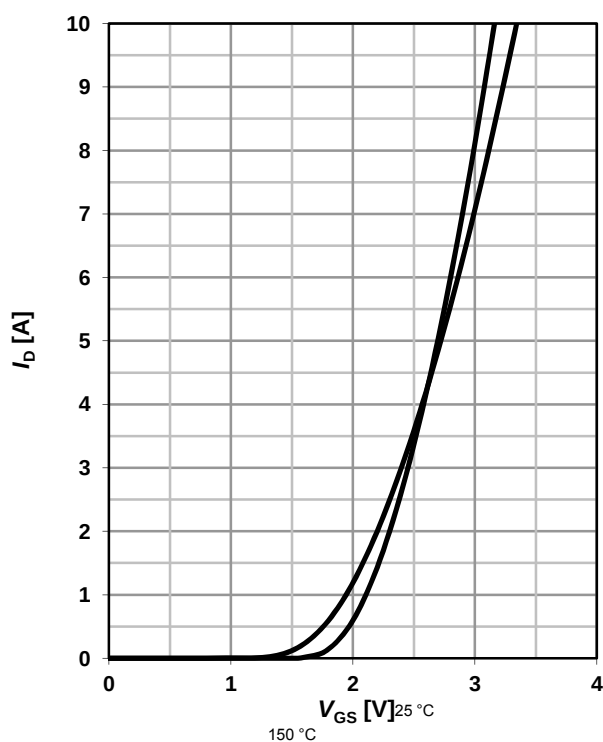


## 8 Typ. forward transconductance

$$g_{fs} = f(I_D); T_j = 25^\circ\text{C}$$

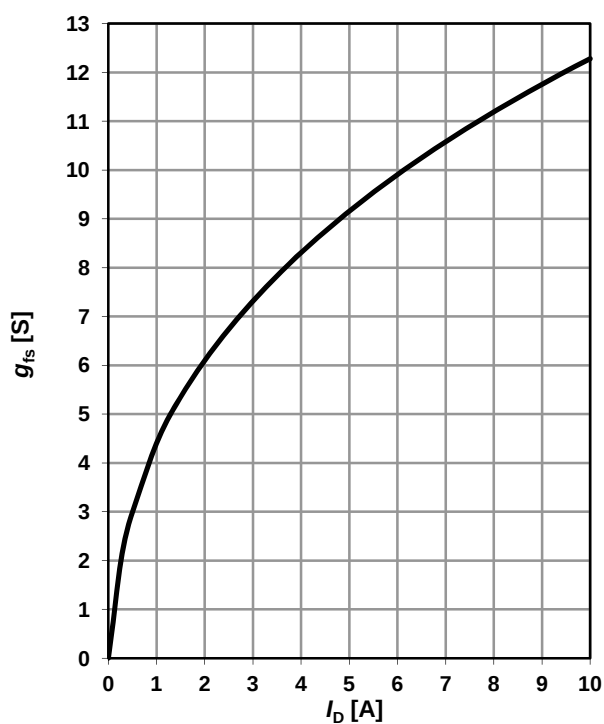


## 9 Drain-source on-state resistance

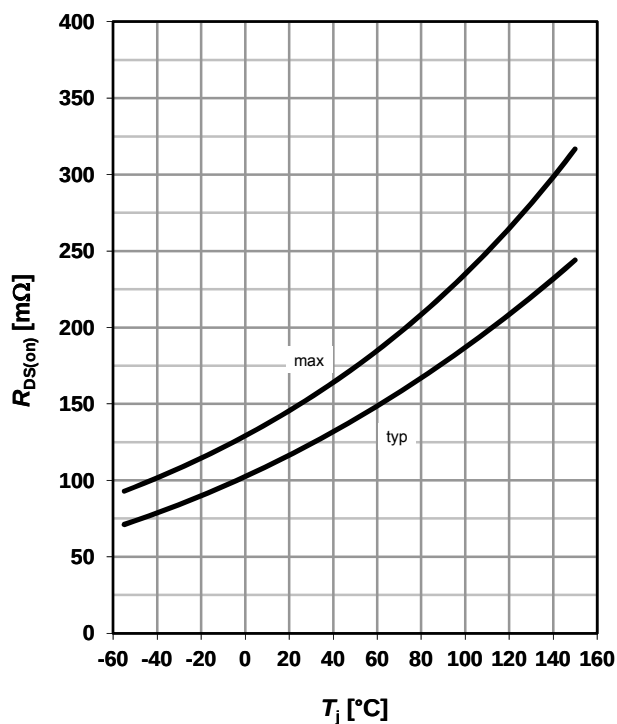
 $R_{DS(on)} = f(T_j); I_D = 2.5 \text{ A}; V_{GS} = 10 \text{ V}$ 


## 10 Typ. gate threshold voltage

 $V_{GS(th)} = f(T_j); V_{DS} = V_{GS}; I_D = 218 \mu\text{A}$ 

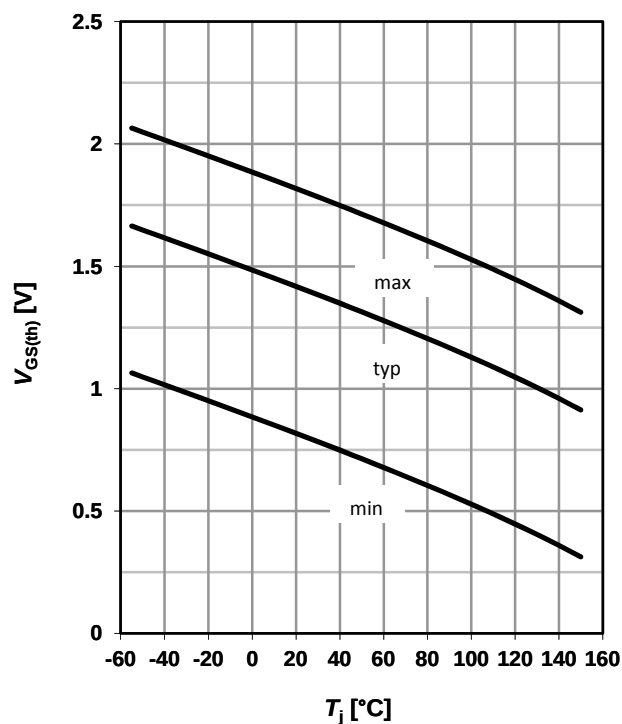
parameter:  $I_D$ 


## 11 Typ. capacitances

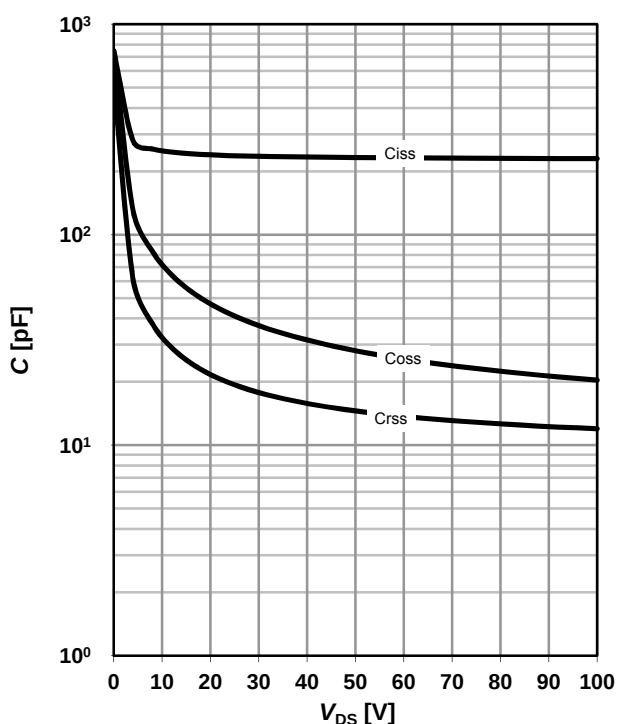 $C = f(V_{DS}); V_{GS} = 0 \text{ V}; f = 1 \text{ MHz}; T_j = 25^\circ\text{C}$ 


## 12 Forward characteristics of reverse diode


 $I_F = f(V_{SD})$ 

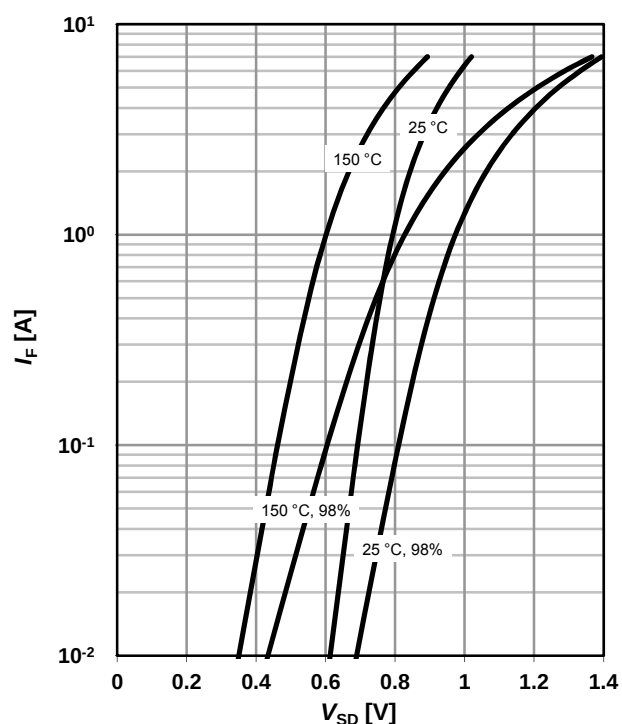parameter:  $T_j$ 


### 13 Avalanche characteristics

$$I_{AS}=f(t_{AV}); R_{GS}=25\ \Omega$$


parameter:  $T_{j(\text{start})}$

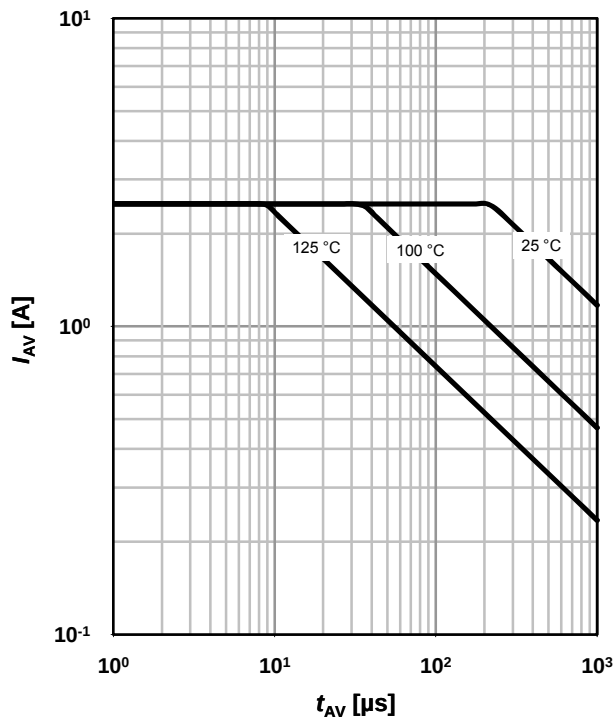

### 14 Typ. gate charge


$$V_{GS}=f(Q_{\text{gate}}); I_D=2.5\ \text{A pulsed}$$

parameter:  $V_{DD}$

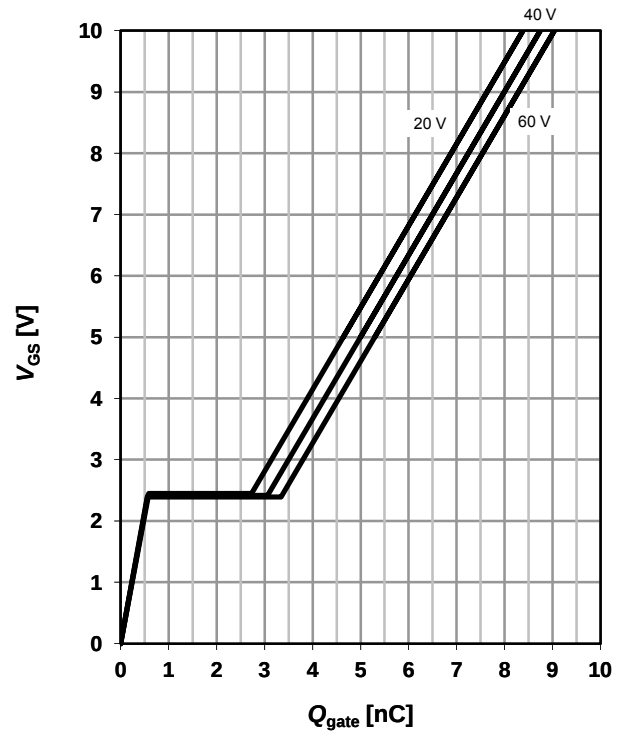


### 15 Drain-source breakdown voltage

$$V_{BR(DSS)}=f(T_j); I_D=250\ \mu\text{A}$$

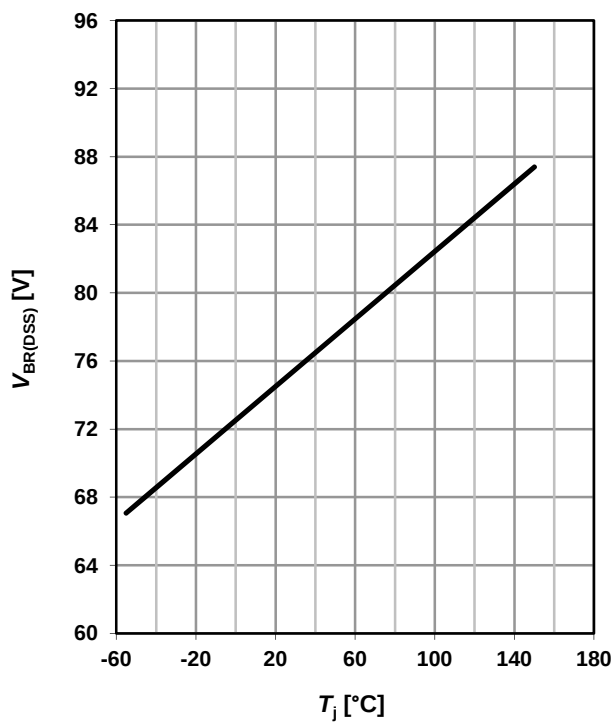


### 16 Gate charge waveforms

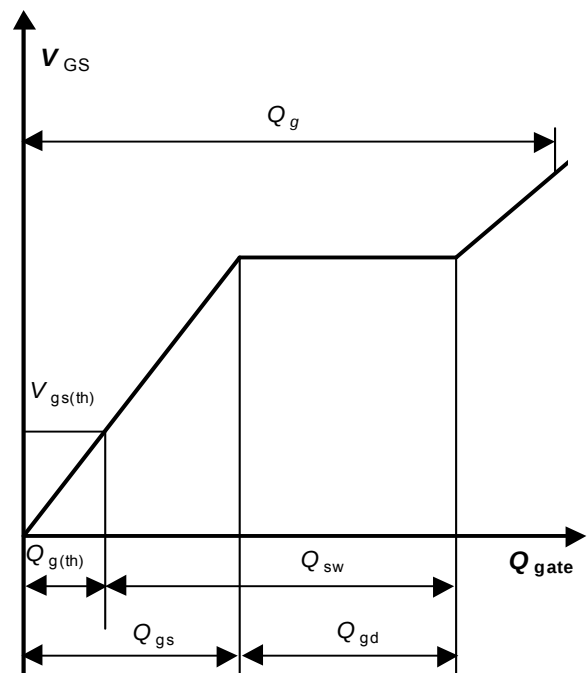


## TSOP6

## Package Outline:

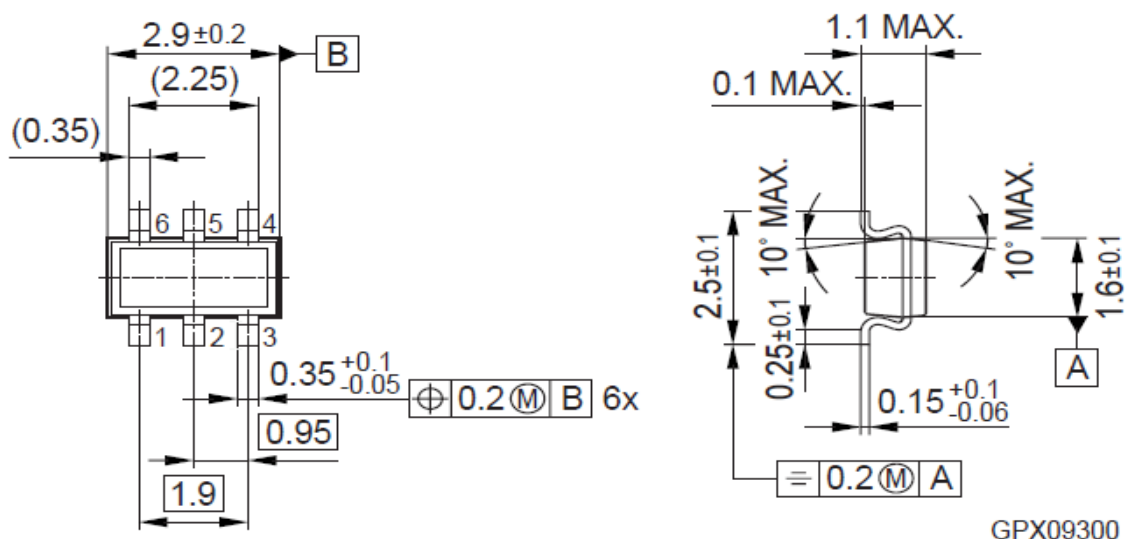


## Footprint:



Remark: Wave soldering possible dep.  
on customers process conditions  
HLG09283

## Packaging:

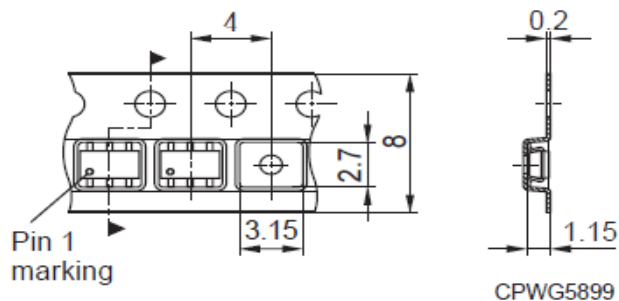

Dimensions in mm

Note: For symmetric types there is no defined Pin 1 orientation in the reel.

## Revision History

BSL716SN

**Revision: 2014-10-03, Rev. 2.0**

Previous Revision

| Revision | Date       | Subjects (major changes since last revision) |
|----------|------------|----------------------------------------------|
| 2.0      | 2014-10-03 | Release of final version                     |

### We Listen to Your Comments

Any information within this document that you feel is wrong, unclear or missing at all? Your feedback will help us to continuously improve the quality of this document. Please send your proposal (including a reference to this document) to:

**erratum@infineon.com**

### Published by

**Infineon Technologies AG**

**81726 München, Germany**

**© 2014 Infineon Technologies AG**

**All Rights Reserved.**

### Legal Disclaimer

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

### Information

For further information on technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies Office (**[www.infineon.com](http://www.infineon.com)**).

### Warnings

Due to technical requirements, components may contain dangerous substances. For information on the types in question, please contact the nearest Infineon Technologies Office.

The Infineon Technologies component described in this Data Sheet may be used in life-support devices or systems and/or automotive, aviation and aerospace applications or systems only with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support, automotive, aviation and aerospace device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А