

# D2RV

## Miniature Basic Switch

### High Reliability for Micro Load Applications, Even in Adverse Atmospheres (Dust, High Humidity, Silicon Gas, etc.)

- The reed switch offers exceptional contact reliability in micro load applications.
- Same mounting pitch as for the V Miniature Basic Switch.
- High durability with a bounce time of 1 ms max.

RoHS Compliant

### Model Number Legend

D2RV-12

#### 1. Actuator

- None : Pin plunger model
- L11 : Short hinge lever
- L : Hinge lever
- L13 : Simulated roller lever
- L22 : Short hinge roller lever
- L2 : Hinge roller lever

#### 2. Maximum Operating Force (OF)

- None : 0.49 N {50 gf}
- E : 0.25 N {25 gf}
- G : 0.98 N {100 gf}

Note. These values are for the pin plunger models.


### List of Models

Actuator	Maximum Operating Force (OF)	Model
Pin plunger 	0.25 N {25 gf}	<b>D2RV-E</b>
	0.49 N {50 gf}	<b>D2RV</b>
	0.98 N {100 gf}	<b>D2RV-G</b>
Short hinge lever 	0.49 N {50 gf}	<b>D2RV-L11</b>
	0.98 N {100 gf}	<b>D2RV-L11G</b>
Hinge lever 	0.25 N {25 gf}	<b>D2RV-L</b>
	0.49 N {50 gf}	<b>D2RV-LG</b>
Simulated roller lever 	0.25 N {25 gf}	<b>D2RV-L13</b>
	0.49 N {50 gf}	<b>D2RV-L13G</b>
Short hinge roller lever 	0.49 N {50 gf}	<b>D2RV-L22</b>
	0.98 N {100 gf}	<b>D2RV-L22G</b>
Hinge roller lever 	0.25 N {25 gf}	<b>D2RV-L2</b>
	0.49 N {50 gf}	<b>D2RV-L2G</b>



### Contact Form

#### ● SPST-NO



### Ratings

Switching voltage	100 VDC (max.)
Switching current	0.25 ADC (max.)
Contact capacity	10 WDC (max.)

Note. The above rating values apply under the following test conditions.

- (1) Ambient temperature: 20±2°C
- (2) Ambient humidity: 65±5%
- (3) Operating frequency: 30 operations/min

### Characteristics


Permissible operating speed	0.1mm to 1 m/s (for pin plunger models)	
Permissible operating frequency	Mechanical	200 operations/min
	Electrical	200 operations/min
Insulation resistance	100 MΩ min. (at 500 VDC with insulation tester)	
Contact resistance (initial value)	150 mΩ max.	
Dielectric strength * 1	Between terminals of the same polarity	200 VDC 1 min
	Between current-carrying metal parts and ground	500 VAC 50/60 Hz for 1 min
	Between each terminal and non-current-carrying metal parts	500 VAC 50/60 Hz for 1 min
Vibration resistance * 2	Malfunction	10 to 55 Hz, 1.5 mm double amplitude
	Shock resistance	Destruction
		Malfunction * 2
Durability * 3	Mechanical	10,000,000 operations min. (60 operations/min)
	Electrical	3,000,000 operations min. (30 operations/min)
Degree of protection	IEC IP40	
Ambient operating temperature	-10°C to +60°C (at ambient humidity of 60% max.) (with no icing or condensation)	
Ambient operating humidity	80% max. (for +5°C to +35°C)	
Weight	Approx. 7g (for pin plunger models)	

Note. The data given above are initial values.


- \*1. The values for dielectric strength shown are for models with a Separator (refer to "Basic Switch Common Accessories").
- \*2. For the pin plunger models, the above values apply for use at the free position and total travel position. For the lever models, they apply at the total travel position. Close or open circuit of the contact is 1ms max.
- \*3. For testing conditions, consult your OMRON sales representative.

Separator (Sold Separately), Actuator (Sold Separately), Terminal Connector (Sold Separately) ➔ Refer to "Basic Switch Common Accessories"

## Terminals/Apearances (Unit:mm)



## Mounting Holes (Unit: mm)




## Dimensions (Unit: mm) /Operating Characteristics

### ●Pin Plunger

D2RV-E

D2RV

D2RV-G

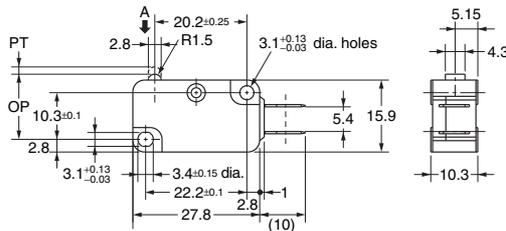


Model		D2RV-E	D2RV	D2RV-G
Operating characteristics				
Operating Force	OF Max.	0.25 N {25 gf}	0.49 N {50 gf}	0.98 N {100 gf}
Pretravel	PT Max.	1.6 mm		
Overtravel	OT Min.	0.6 mm		
Movement Differential	MD Max.	0.8 mm		
Operating Position	OP	14.4±0.6 mm		

### ●Short Hinge Lever

D2RV-L11

D2RV-L11G

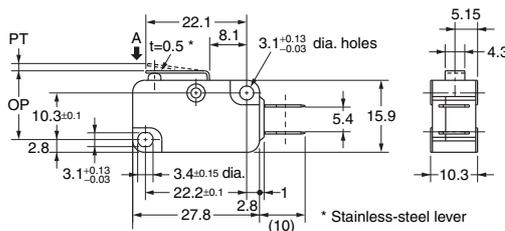


Model		D2RV-L11	D2RV-L11G
Operating characteristics			
Operating Force	OF Max.	0.49 N {50 gf}	0.98 N {100 gf}
Pretravel	PT Max.	1.8 mm	
Overtravel	OT Min.	0.4 mm	
Movement Differential	MD Max.	1.0 mm	
Operating Position	OP	15.0±0.6 mm	

### ●Hinge Lever Models

D2RV-L

D2RV-LG

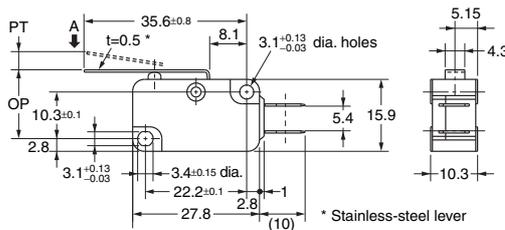


Model		D2RV-L	D2RV-LG
Operating characteristics			
Operating Force	OF Max.	0.25 N {25 gf}	0.49 N {50 gf}
Pretravel	PT Max.	4.0 mm	
Overtravel	OT Min.	1.0 mm	
Movement Differential	MD Max.	1.6 mm	
Operating Position	OP	14.4±1.2 mm	

### ●Simulated Roller Lever Models

D2RV-L13

D2RV-L13G

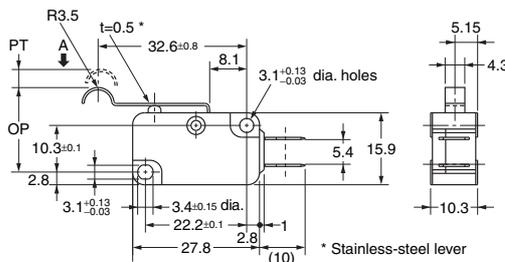


Model		D2RV-L13	D2RV-L13G
Operating characteristics			
Operating Force	OF Max.	0.25 N {25 gf}	0.49 N {50 gf}
Pretravel	PT Max.	4.0 mm	
Overtravel	OT Min.	1.0 mm	
Movement Differential	MD Max.	1.6 mm	
Operating Position	OP	18.1±1.2 mm	

Note 1. Unless otherwise specified, a tolerance of ±0.4 mm applies to all dimensions.

Note 2. The operating characteristics are for operation in the A direction (↓).

## ●Short Hinge Roller Lever Models


D2RV-L22  
D2RV-L22G

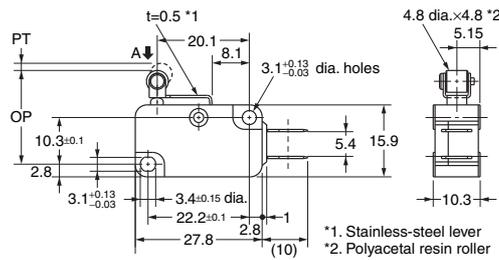

		Model	
Operating characteristics		D2RV-L22	D2RV-L22G
Operating Force	OF Max.	0.49 N {50 gf}	0.98 N {100 gf}
Pretravel	PT Max.	1.8 mm	
Overtravel	OT Min.	0.4 mm	
Movement Differential	MD Max.	1.0 mm	
Operating Position	OP	20.4±0.6 mm	

## ●Hinge Roller Lever Models

D2RV-L2  
D2RV-L2G

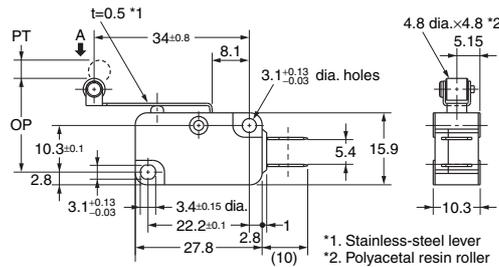

		Model	
Operating characteristics		D2RV-L2	D2RV-L2G
Operating Force	OF Max.	0.25 N {25 gf}	0.49 N {50 gf}
Pretravel	PT Max.	4.0 mm	
Overtravel	OT Min.	1.0 mm	
Movement Differential	MD Max.	1.6 mm	
Operating Position	OP	19.9±1.2 mm	

Note 1. Unless otherwise specified, a tolerance of ±0.4 mm applies to all dimensions.

Note 2. The operating characteristics are for operation in the A direction (↓).

## Precautions

★Please refer to "Basic Switches Common Precautions" for correct use.

### Cautions

#### ●Handling

Do not drop the Switch or apply strong shock. It may result in internal mechanism damages and may deteriorate the characteristics of the inner Reed Switch.

#### ●Effect of the External Vibration

When a vibration of 1 kHz or higher is applied, note that false switching operations may occur due to resonant frequency, even with a low acceleration.

#### ●Soldering

- Terminal connections

Complete the soldering at the iron tip temperature between 250 to 350°C (60W) within 5 seconds, and do not apply any external force for 1 minute after soldering.

Apply minimum amount of flux required. It may result in contact failure once the flux penetrates into the internal part of the Switch.

### Correct Use

#### ●Effect of the External Magnetic Fields

- If two or more switch units are closely installed, mutual interference due to the fringing field will occur, resulting in malfunction. Be sure to keep the gap between the switch units 8 mm or more.
- If you install the switch unit on the iron plate, each operating characteristic will change. Therefore, confirm that the interval between the switch units should be 2 mm or more.
- Do not use the switch in some area where a strong external magnetic field would be applied, otherwise malfunction will be caused.
- Use nonmagnetic brass or stainless steel (SUS304 alloy) screws for installation. Do not use any iron screw.

• Application examples provided in this document are for reference only. In actual applications, confirm equipment functions and safety before using the product.  
• Consult your OMRON representative before using the product under conditions which are not described in the manual or applying the product to nuclear control systems, railroad systems, aviation systems, vehicles, combustion systems, medical equipment, amusement machines, safety equipment, and other systems or equipment that may have a serious influence on lives and property if used improperly. Make sure that the ratings and performance characteristics of the product provide a margin of safety for the system or equipment, and be sure to provide the system or equipment with double safety mechanisms.

**Note: Do not use this document to operate the Unit.**

---

**OMRON Corporation**

ELECTRONIC AND MECHANICAL COMPONENTS COMPANY

Contact: [www.omron.com/ecb](http://www.omron.com/ecb)

Cat. No. B056-E1-04  
0812(0207)(O)

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А