RC

●Features

1. Improved pulse endurance characteristics compared to carbon-film devices.
2. Wide resistance range is available, 1 ohm ~ 22M ohm.
3. Stability Class : 10%

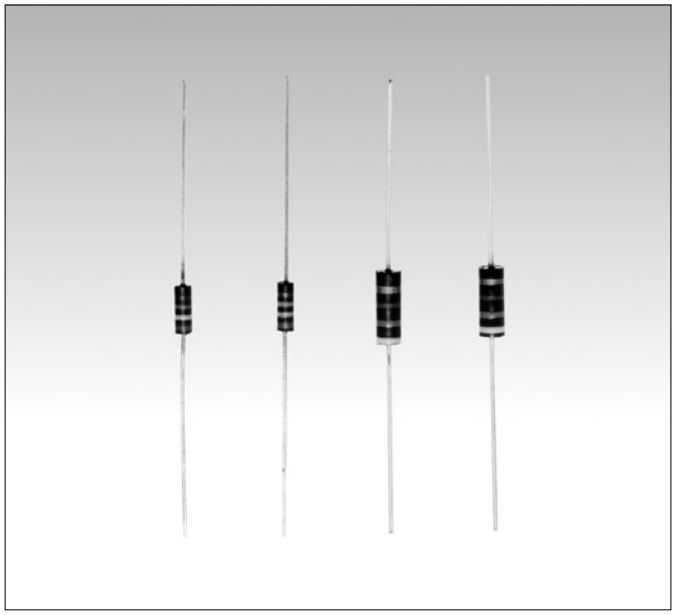

●Dimensions

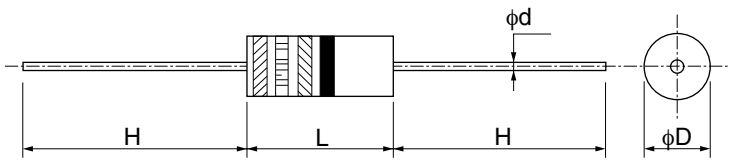

Unit : mm

Style	L	D	H	d	*Unit weight/pc.
RC1/4	6.3 ±0.7	2.4±0.1	30±3	0.6 ±0.05	222mg
RC1/2	9.5 $^{+0.8}_{-0.7}$	3.6±0.2	28±3	0.7 $^{+0.07}_{-0.05}$	422mg

*Values for reference

●Part Number Description

Example

Style		102	J	B
RC	1/4			
Product Type	Rated Dissipation	Rated Resistance	Tolerance on Rated Resistance	*Packaging

Rated Dissipation	
1/4	0.25W
1/2	0.5W

Rated Resistance: E24, 12, 6 Series
e.g. : 2R2=2.2 ohm
102=1k ohm

Tolerance on Rated Resistance	
J	±5%
K	±10%
M	±20%

*Packaging	
B	Bulk (Straight)
H	Horizontal Forming
TB	52 mm Width Tape (Ammo Box)
TD	52 mm Width Tape (Reel)

*Refer to Tape and Packaging information on pages 66.

FIXED CARBON COMPOSITION RESISTORS RC

●Ratings

Style	Rated Dissipation at 70°C W	Limiting Element Voltage V	Rated Resistance Range	Combination of Rated Resistance Range and Temperature Coefficient of Resistance			Tolerance on Rated Resistance and Perferred Number Series for Resistors	Isolation Voltage V	Category Temperature Range °C
				Temperature Coefficient of Resistance %		Rated Resistance Range			
				at −55 °C	at +125 °C				
RC1/4	0.25	250	1 ohm~5.6M ohm	+6.5 ~0	+1~−5	1 ohm~ 1k ohm	J (± 5%) : E24 K (± 10%) : E12 M(± 20%) : E6	100	−55~+125
				+10 ~0	0~−6	1.1k ohm~ 10k ohm			
RC1/2	0.5	350	1 ohm~22M ohm	+13 ~0	0~−7.5	11k ohm~100k ohm		500	
				+15 ~0	0~−10	110k ohm~ 1M ohm			
				+20 ~0	0~−15	1.1M ohm~ 22M ohm			

Note1. Rated Voltage = $\sqrt{(\text{Rated Dissipation}) \times (\text{Rated Resistance})}$. (d.c. or a.c. r.m.s. Voltage)
Note2. Limiting Element Voltage can only be applied to resistors when the resistance value is equal to or higher than the critical resistance value.
Note3. Critical Resistance Value is the resistance value at which the rated voltage is equal to the limiting element voltage.

●Storage

Temperature 20±15°C, Humidity 60%R.H. Max, Recommendation Storing Term 6 months after shipped from factory.

●Derating Curve

The derated values of dissipation for temperatures in excess of 70°C shall be indicated by the following Curve.

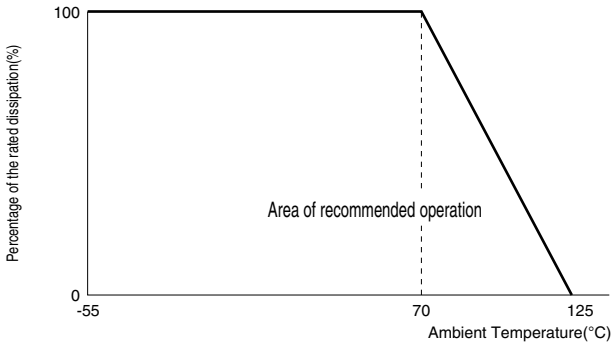

●Climatic Category

55/125/56

Lower Category Temperature	−55°C
Upper Category Temperature	+125°C
Duration of the Damp heat, Steady-State Test	56 days

●Performance Characteristics JIS C 5201-1 : 1998

Description		Requirements	Test Methods
Voltage proof		No breakdown or flashover	Clause 4.7 V-block method RC1/4 100Va.c.,60s RC1/2 500Va.c.,60s
Variation of resistance with temperature		See Ratings Table	Clause 4.8 Measuring temperature : +20°C/−55°C/ +20°C/+125°C/+20°C
Overload		ΔR≤±(2%+0.1 ohm) No visible damage, legible marking	Clause 4.13 The applied voltage shall be 2.5 times of the rated voltage or twice of the limiting element voltage, whichever is the less Severe, 5s.
Robustness of terminations	Tensile	ΔR≤±(2%+0.1 ohm) No visible damage	Clause 4.16.2 10N for 5~10s
	Bending	ΔR≤±(2%+0.1 ohm) No visible damage	Clause 4.16.3 5N twice
	Torsion	ΔR≤±(2%+0.1 ohm) No visible damage	Clause 4.16.4 180°C, 2 rotation
Solderability		In accordance with Clause 4.17.4.5	Clause 4.17 235°C, 5s
Resistance to soldering heat		ΔR≤±(3%+0.1 ohm) No visible damage, legible marking	Clause 4.18 After immersion into the flux, the immersion into solder shall be carried out 4mm from the body at 350°C for 3.5s.
Rapid change of temperature		ΔR≤±(2%+0.1 ohm) No visible damage	Clause 4.19 5 cycles between −55°C and +125°C.
Climatic sequence		ΔR≤±(10%+0.5 ohm) Insulation resistance : R≥100M ohm No visible damage	Clause 4.23 Dry/Damp heat(12+12h cycle), first cycle./ Cold/Damp heat(12+12h cycle), remaining cycle./ D.C.Load.
Damp test, steady state		ΔR≤±(10%+0.5 ohm) Insulation resistance : R≥100M ohm No visible damage, legible marking	Clause 4.24 40°C, 95%R.H., 56 days, test a) , b) and c) of Clause 4.24.2.1
Endurance at 70°C		ΔR≤±(10%+0.5 ohm) No visible damage Insulation resistance : R≥1G ohm	Clause 4.25.1 Rated voltage, 1.5h "ON", 0.5h "OFF", 70°C, 1,000h.
Endurance at the upper category temperature		ΔR≤±(10%+0.5 ohm) No visible damage Insulation resistance : R≥1G ohm	Clause 4.25.3 125°C, no-load, 1,000h.

●Typical Characteristics

•Surge Resistance Characteristics

Charging and discharging a 2,000 pF capacitor for 100 cycles.

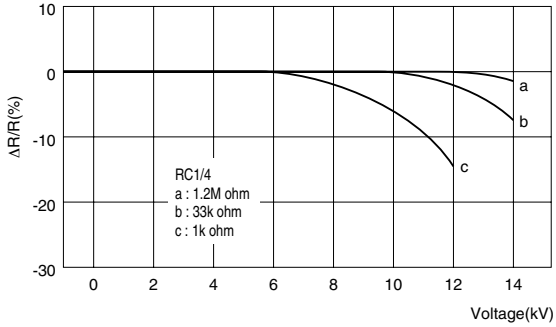

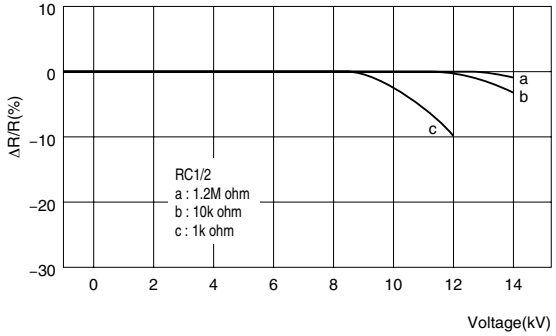

•Relationship between Load Ratio and Category Temperature

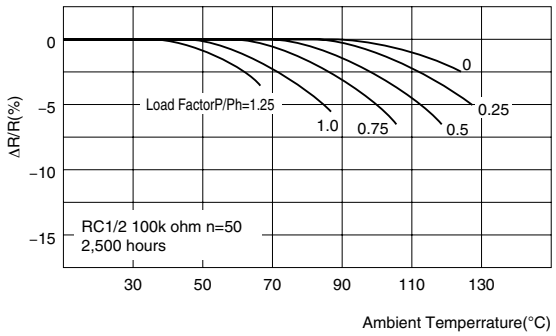

•Endurance at 70°C

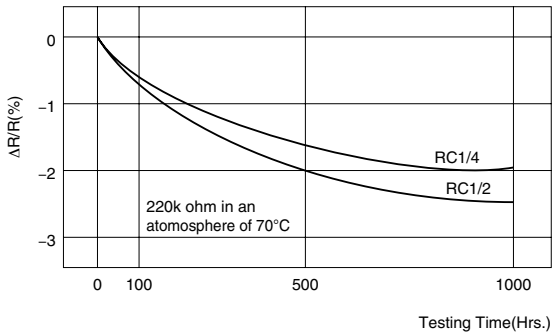

•Variation with Time

Condition : 5~35°C , 45~85% R.H.

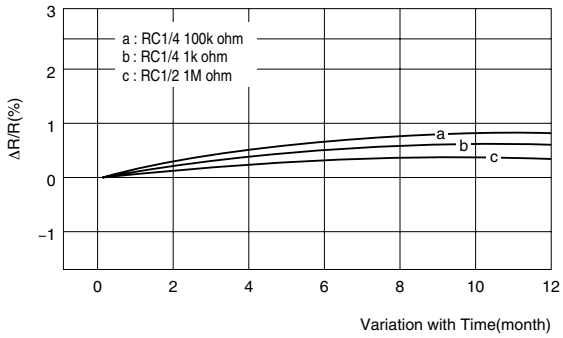

•Frequency Characteristics

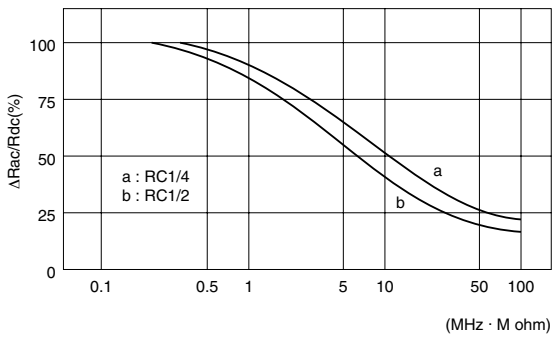

"Typical characteristics indicate the mean values of ΔR/R etc."

●Reliability Test

Endurance in humidity

Samples : RC1/4J,100 ohm,1k ohm,10k ohm,100k ohm×150 each. Total 2,400.

Conditions : Direct current voltage equivalent to the following load ratings in cycles on "ON" for 1.5h and "OFF" for 0.5h for a total of 5,000h in an atmosphere of 40°C, 90 to 95%R.H.

Criterion (%)		Load Ratio P/Pn (%)	Total Testing Time T(Hrs.)	Number of Failures r(pcs.)	Failure Ratio		Average Lifetime (60% reliability level) (Hrs.)
					$\hat{\lambda}$	λCL(60%)	
ΔR/R	±5	0	$2.984X10^{6}$	6	0.201	0.244	4.098×10^{5}
		20	$2.990X10^{6}$	4	0.134	0.176	5.682×10^{5}
		60	$2.997X10^{6}$	2	0.067	0.104	9.615×10^{5}
		100	$2.992X10^{6}$	3	0.100	0.139	7.194×10^{5}
		Total	$1.196X10^{7}$	15	0.125	0.138	7.209×10^{5}
	±10	Total	$1.20X10^{7}$	0	0.0055	0.007	1.299×10^{7}

 Product specifications contained in this catalogue are subject to change at any time without notice. Please confirm specifications with your order. 【RoHS】

OCEAN CHIPS
Океан Электроники
Поставка электронных компонентов

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «**JONHON**», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «**FORSTAR**».

AVIC JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).

FORSTAR®

Телефон: 8 (812) 309-75-97 (многоканальный)
Факс: 8 (812) 320-03-32
Электронная почта: ocean@oceanchips.ru
Web: http://oceanchips.ru/
Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А