

# Safety Standard Recognized, 900 Series, Radial Disc, Encapsulated, AH Type, X1 400 VAC/Y1 250 VAC (Industrial Grade)

## Overview

KEMET's 900 series encapsulated radial through-hole ceramic disc capacitors are specifically designed for interference-suppression AC line filtering applications. Having internationally recognized safety certifications, these capacitors are well-suited for applications that require keeping potentially disruptive or damaging line transients and EMI out of susceptible equipment. They are also an ideal solution when needing to suppress line disturbances at the source.

Safety Certified Capacitors are classified as either X and/or Y capacitors. Class X capacitors are primarily used in line-to-line (across-the-line) applications. In this application there is no danger of electric shock to humans should the capacitor fail, but could result in a risk of fire. The class Y capacitor is primarily used in line-to-ground (line by-pass) applications. In this application, failure of the capacitor could lead to danger of electric shock.

With a working voltage of 400 VAC in line-to-line (Class X) and 250 VAC in line-to-ground (Class Y) applications, these safety capacitors meet the impulse test criteria outlined in IEC Standard 60384. Meeting subclass X1 and Y1 requirements, these devices are certified to withstand impulses up to 4 KV (X1) and 8 KV (Y1) respectively. These encapsulated devices also meet the flame test requirements outlined in UL Standard 94V-0.



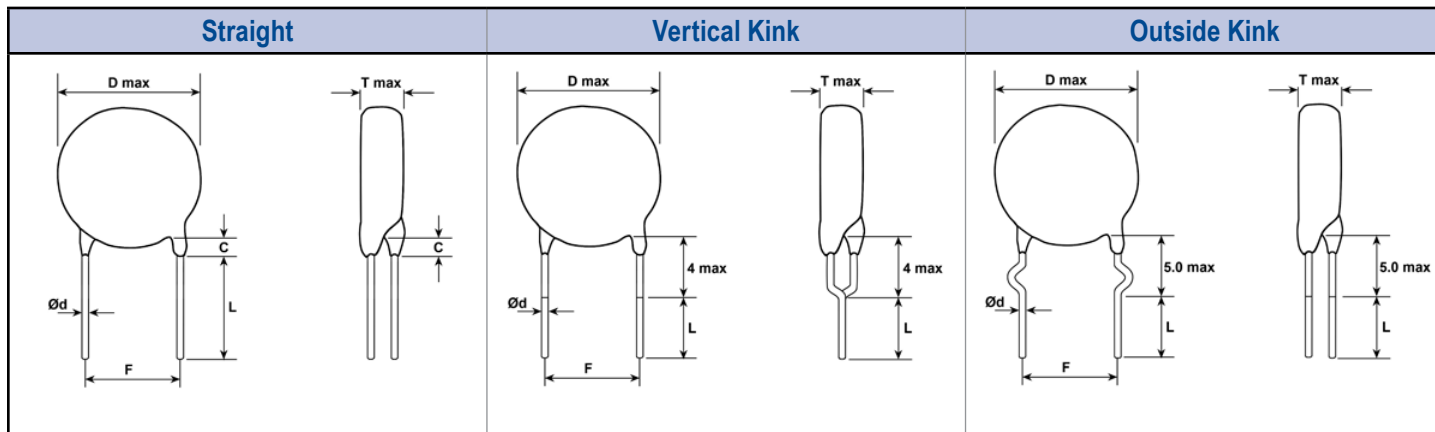
## Ordering Information

| C9                      | 1                                                                                                  | 1                         | U          | 620                                                                                   | J                                                            | U                           | S                                                       | D        | A                                                   | A            | 7317                                                                                                                                                                                                                        |
|-------------------------|----------------------------------------------------------------------------------------------------|---------------------------|------------|---------------------------------------------------------------------------------------|--------------------------------------------------------------|-----------------------------|---------------------------------------------------------|----------|-----------------------------------------------------|--------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Ceramic Series          | Body Diameter                                                                                      | Lead Spacing <sup>1</sup> | Spec.      | Capacitance Code (pF)                                                                 | Capacitance Tolerance                                        | Rated Voltage               | Dielectric/Temp. Char.                                  | Design   | Lead Config. <sup>2</sup>                           | Failure Rate | Packaging (C-Spec) <sup>1,2</sup>                                                                                                                                                                                           |
| C9 = Ceramic 900 Series | 0 = 7.0 mm<br>1 = 8.0 mm<br>2 = 9.0 mm<br>3 = 10.0 mm<br>4 = 11.0 mm<br>5 = 12.0 mm<br>7 = 14.0 mm | 1 = 10.0 mm               | U = Safety | 2 significant digits + Number of zeroes<br>Use 9 for 1.0 - 9.9pF<br>e.g., 2.2pF = 229 | C = ±0.25pF<br>D = ±0.5pF<br>J = ±5%<br>K = ±10%<br>M = ±10% | U = X1 400 VAC / Y1 250 VAC | N = CH (NP0)<br>S = SL<br>Y = Y5P<br>W = Y5U<br>V = Y5V | D = Disc | A = Straight<br>B = Vertical<br>C = Outside<br>Kink | A = N/A      | 7317 = Ammo Pack<br>WL30 = Bulk/3.0 mm Lead length<br>WL35 = Bulk/3.5 mm Lead length<br>WL40 = Bulk/4.0 mm Lead length<br>WL45 = Bulk/4.5 mm Lead length<br>WL50 = Bulk/5.0 mm Lead length<br>WL20 = Bulk/20 mm Lead length |

<sup>1</sup> "Vertical Kink" and "Outside Kink" lead configurations cannot be combined with the bulk/20 mm lead length option (WL20). 20 mm lead length is only available on capacitors ordered with straight leads (lead configuration ordering code "A"). For nonstandard lead length inquiries, please contact KEMET.

<sup>2</sup> Bulk packaging lead length availability is dependent upon "Lead Configuration." See "Dimensions" section of this document to verify availability of a specific lead length option. For nonstandard lead length inquiries, please contact KEMET.

## Lead Configurations



## Dimensions – Millimeters

| Lead Config.              | Lead Config. Ordering Code <sup>1</sup> | F            | Lead Spacing Tolerance | Packaging Type | L              | Packaging C-Spec Ordering Code <sup>2</sup> | D                                                  | T              | e             | Ød        |
|---------------------------|-----------------------------------------|--------------|------------------------|----------------|----------------|---------------------------------------------|----------------------------------------------------|----------------|---------------|-----------|
|                           |                                         | Lead Spacing |                        |                | Lead Length    |                                             | Body Diameter                                      | Body Thickness | Lead Meniscus | Lead Dia. |
| Straight                  | A                                       | 10.0         | ±1.0                   | Ammo Pack      | 20.0 +1.5/-1.0 | 7317                                        | See Table 1 - "Product Ordering Codes and Ratings" |                | 3.0 maximum   | 0.5 ±0.1  |
|                           |                                         |              |                        | Bulk           | 3.0 ±1.0       | WL30                                        |                                                    |                |               |           |
|                           |                                         |              |                        |                | 4.5 ±1.0       | WL45                                        |                                                    |                |               |           |
|                           |                                         |              |                        |                | 5.0 ±1.0       | WL50                                        |                                                    |                |               |           |
| 20.0 minimum              | WL20                                    |              |                        |                |                |                                             |                                                    |                |               |           |
| Vertical Kink (Preformed) | B                                       | 10.0         | ±1.0                   | Ammo Pack      | 18.0 +2.0/-0   | 7317                                        |                                                    |                |               |           |
|                           |                                         |              |                        | Bulk           | 3.5 ±1.0       | WL35                                        |                                                    |                |               |           |
|                           |                                         |              |                        |                | 4.0 ±1.0       | WL40                                        |                                                    |                |               |           |
|                           |                                         |              |                        |                |                |                                             |                                                    |                |               |           |
| Outside Kink (Preformed)  | C                                       | 10.0         | ±1.0                   | Ammo Pack      | 18.0 +2.0/-0   | 7317                                        |                                                    |                |               |           |
|                           |                                         |              |                        | Bulk           | 3.5 ±1.0       | WL35                                        |                                                    |                |               |           |
|                           |                                         |              |                        |                | 4.0 ±1.0       | WL40                                        |                                                    |                |               |           |
|                           |                                         |              |                        |                | 5.0 ±1.0       | WL50                                        |                                                    |                |               |           |

<sup>1</sup> Lead Configuration is identified in the 13<sup>th</sup> character of the ordering code. See "Lead Configuration" and "Ordering Information" sections of this document for further details.

<sup>2</sup> The "Packaging C-Spec" is a 4-digit numeric or alphanumeric code which identifies both the packaging type and lead length requirement. When ordering, this code must be included in the 15<sup>th</sup> through 18<sup>th</sup> character positions of the ordering code. See "Ordering Information" section of this document for further details.

## Benefits

- Safety Standard Recognized (IEC 60384-14)
- Reliable operation up to 125°C
- Class X1/Y1
- 10 mm lead spacing
- Lead (Pb)-free and RoHS Compliant
- Halogen Free
- Capacitance offerings ranging from 2.0 pF up to 4,700 pF
- Available capacitance tolerances of  $\pm 0.25$  pF,  $\pm 0.5$  pF,  $\pm 5\%$ ,  $\pm 10\%$ , and  $\pm 20\%$
- High reliability
- Preformed (crimped) or straight lead configurations
- Non-polar device, minimizing installation concerns
- 100% pure matte tin-plated lead finish allowing for excellent solderability
- Encapsulation meets flammability standard UL 94V-0

## Applications

Typical applications include:

- Line-to-line (Class X) filtering
- Line-to-ground (Class Y) filtering
- Antenna coupling
- Primary and secondary coupling (switching power supplies)
- Line disturbances suppression (motors and motor controls, relays, switching power supplies, and inverters)

## Approval Standard and Certification No.

| Safety Standard | Standard No. | Subclass | Working Voltage | Certificate No. |
|-----------------|--------------|----------|-----------------|-----------------|
| VDE<br>(ENEC)   | IEC 60384-14 | X1       | 400 VAC         | 40036417        |
|                 |              | Y1       | 250 VAC         |                 |

These devices are VDE/ENEC recognized for antenna coupling and AC line-to-line (Class X) and line-to-ground (Class Y) applications per IEC60384-14.

## Environmental Compliance

These devices are Halogen Free and RoHS Compliant. They meet all requirements set forth by both EU and China RoHS directives.



RoHS Compliant



## General Specifications/Performance Characteristics

| Dielectric/Temperature Characteristic:                              | CH(NP0)                                                         | SL                   | Y5P                      | Y5U       | Y5V         |
|---------------------------------------------------------------------|-----------------------------------------------------------------|----------------------|--------------------------|-----------|-------------|
| Operating Temperature Range:                                        | -25°C to +125°C                                                 |                      |                          |           |             |
| Capacitance Change with Reference to +25°C and 0 VDC Applied (TCC): | ±60 ppm/°C                                                      | -1,000 ~ +350 ppm/°C | ±10%                     | +20%/-55% | ~ +30%/-80% |
| Dielectric Withstanding Voltage                                     | 4,000 VAC<br>(60 ±5 seconds at 25°C)                            |                      |                          |           |             |
| Quality Factor (Q)                                                  | 30 pF and above: ≥ 1,000<br>Below 30 pF: ≥ 400 +(20xC)*         |                      | See "Dissipation Factor" |           |             |
| Dissipation Factor (tanδ) at +25°C <sup>1</sup>                     | See "Quality Factor"                                            |                      | 2.50%                    | 2.50%     | 5.0%        |
| Insulation Resistance (IR) Limit at +25°C                           | 10,000 MΩ Minimum<br>(500 VDC applied for 60 ±5 seconds @ 25°C) |                      |                          |           |             |

\* C = Nominal capacitance

<sup>1</sup> Capacitance and Dissipation Factor (DF) measured under the following conditions:

CH(NP0) and SL: 1 MHz ±100 kHz and 1.0 ±0.2 Vrms

X5P, Y5U and Y5V: 1 kHz ±50 Hz and 1.0 ±0.2 Vrms

Note: When measuring capacitance, it is important to ensure the set voltage level is held constant. The HP4284 & Agilent E4980 have a feature known as Automatic Level Control (ALC). The ALC feature should be switched to "ON."

### Table 1 – Product Ordering Codes and Ratings

| Dielectric/<br>Temp.<br>Char. | KEMET<br>Part Number | Capacitance | Capacitance<br>Tolerance | Dimensions (mm)               |                                |                  | Lead Spacing      |                   |
|-------------------------------|----------------------|-------------|--------------------------|-------------------------------|--------------------------------|------------------|-------------------|-------------------|
|                               |                      |             |                          | Body<br>Diameter<br>(Maximum) | Body<br>Thickness<br>(Maximum) | Lead<br>Diameter | Bulk<br>Packaging | Ammo<br>Packaging |
| CH<br>(NP0)                   | C901U209CUND(1)A(2)  | 2.0 pF      | ±0.25 pF                 | 7.0                           | 5.0                            | 0.5 ±0.1         | 10 mm             |                   |
|                               | C901U309CUND(1)A(2)  | 3.0 pF      |                          |                               |                                |                  |                   |                   |
|                               | C901U409CUND(1)A(2)  | 4.0 pF      |                          |                               |                                |                  |                   |                   |
|                               | C901U509CUND(1)A(2)  | 5.0 pF      |                          |                               |                                |                  |                   |                   |
|                               | C901U609DUND(1)A(2)  | 6.0 pF      |                          |                               |                                |                  |                   |                   |
|                               | C901U709DUND(1)A(2)  | 7.0 pF      | ±0.5 pF                  | 8.0                           | 5.0                            | 0.5 ±0.1         | 10 mm             |                   |
|                               | C901U809DUND(1)A(2)  | 8.0 pF      |                          |                               |                                |                  |                   |                   |
|                               | C901U909DUND(1)A(2)  | 9.0 pF      |                          |                               |                                |                  |                   |                   |
|                               | C901U100DUND(1)A(2)  | 10 pF       |                          |                               |                                |                  |                   |                   |
|                               | C901U120JUND(1)A(2)  | 12 pF       |                          |                               |                                |                  |                   |                   |
|                               | C911U150JUND(1)A(2)  | 15 pF       | ±5%                      | 8.0                           | 5.0                            | 0.5 ±0.1         | 10 mm             |                   |
|                               | C911U180JUND(1)A(2)  | 18 pF       |                          |                               |                                |                  |                   |                   |
|                               | C911U200JUND(1)A(2)  | 20 pF       |                          |                               |                                |                  |                   |                   |
|                               | C911U220JUND(1)A(2)  | 22 pF       |                          |                               |                                |                  |                   |                   |
|                               | C911U240JUND(1)A(2)  | 24 pF       |                          |                               |                                |                  |                   |                   |
| C911U270JUND(1)A(2)           | 27 pF                |             |                          |                               |                                |                  |                   |                   |
|                               | KEMET Part Number    | Capacitance | Capacitance<br>Tolerance | Body Diameter<br>(Maximum)    | Body Thickness<br>(Maximum)    | Lead Diameter    | Lead Spacing      |                   |

(1) To properly complete ordering code, insert the one-digit character code to reflect the required lead configuration: (See "Lead Configuration" section of this document, page 2, for further details.)

A = Straight

B = Vertical Kink

C = Outside Kink

(2) To properly complete ordering code, enter the four-digit numeric or alphanumeric "Packaging C-Spec Ordering Code." See "Dimensions" section of this document, page 2, for available options.

Table 1 – Product Ordering Codes and Ratings cont'd

| Dielectric/<br>Temp.<br>Char. | KEMET<br>Part Number     | Capacitance        | Capacitance<br>Tolerance         | Dimensions (mm)                    |                                     |                      | Lead Spacing        |                   |
|-------------------------------|--------------------------|--------------------|----------------------------------|------------------------------------|-------------------------------------|----------------------|---------------------|-------------------|
|                               |                          |                    |                                  | Body<br>Diameter<br>(Maximum)      | Body<br>Thickness<br>(Maximum)      | Lead<br>Diameter     | Bulk<br>Packaging   | Ammo<br>Packaging |
| SL                            | C901U150JUSD(1)A(2)      | 15 pF              | ±5%                              | 7.0                                | 5.0                                 | 0.5 ±0.1             | 10 mm               |                   |
|                               | C901U180JUSD(1)A(2)      | 18 pF              |                                  |                                    |                                     |                      |                     |                   |
|                               | C901U200JUSD(1)A(2)      | 20 pF              |                                  |                                    |                                     |                      |                     |                   |
|                               | C901U220JUSD(1)A(2)      | 22 pF              |                                  |                                    |                                     |                      |                     |                   |
|                               | C901U240JUSD(1)A(2)      | 24 pF              |                                  |                                    |                                     |                      |                     |                   |
|                               | C901U270JUSD(1)A(2)      | 27 pF              |                                  |                                    |                                     |                      |                     |                   |
|                               | C901U300JUSD(1)A(2)      | 30 pF              |                                  | 8.0                                |                                     |                      |                     |                   |
|                               | C901U330JUSD(1)A(2)      | 33 pF              |                                  |                                    |                                     |                      |                     |                   |
|                               | C901U360JUSD(1)A(2)      | 36 pF              |                                  |                                    |                                     |                      |                     |                   |
|                               | C901U390JUSD(1)A(2)      | 39 pF              |                                  |                                    |                                     |                      |                     |                   |
|                               | C911U470JUSD(1)A(2)      | 47 pF              |                                  |                                    |                                     |                      |                     |                   |
|                               | C911U500JUSD(1)A(2)      | 50 pF              |                                  |                                    |                                     |                      |                     |                   |
|                               | C911U510JUSD(1)A(2)      | 51 pF              |                                  | 9.0                                |                                     |                      |                     |                   |
|                               | C911U560JUSD(1)A(2)      | 56 pF              |                                  |                                    |                                     |                      |                     |                   |
|                               | C911U620JUSD(1)A(2)      | 62 pF              |                                  |                                    |                                     |                      |                     |                   |
|                               | C921U680JUSD(1)A(2)      | 68 pF              |                                  |                                    |                                     |                      |                     |                   |
| C921U750JUSD(1)A(2)           | 75 pF                    |                    |                                  |                                    |                                     |                      |                     |                   |
| C921U820JUSD(1)A(2)           | 82 pF                    |                    |                                  |                                    |                                     |                      |                     |                   |
| C931U101JUSD(1)A(2)           | 100 pF                   | 10.0               |                                  |                                    |                                     |                      |                     |                   |
| Y5P                           | C901U101KUYD(1)A(2)      | 100 pF             | ±10%                             | 7.0                                | 5.0                                 | 0.5 ±0.1             | 10 mm               |                   |
|                               | C901U151KUYD(1)A(2)      | 150 pF             |                                  |                                    |                                     |                      |                     |                   |
|                               | C901U221KUYD(1)A(2)      | 220 pF             |                                  |                                    |                                     |                      |                     |                   |
|                               | C901U331KUYD(1)A(2)      | 330 pF             |                                  |                                    |                                     |                      |                     |                   |
|                               | C911U471KUYD(1)A(2)      | 470 pF             |                                  |                                    |                                     |                      |                     |                   |
|                               | C921U561KUYD(1)A(2)      | 560 pF             |                                  |                                    |                                     |                      |                     |                   |
|                               | C921U681KUYD(1)A(2)      | 680 pF             |                                  |                                    |                                     |                      |                     |                   |
| C941U102KUYD(1)A(2)           | 1,000 pF                 | 11.0               |                                  |                                    |                                     |                      |                     |                   |
| Y5U                           | C911U102MUWD(1)A(2)      | 1,000 pF           | ±20%                             | 8.0                                | 5.0                                 | 0.5 ±0.1             | 10 mm               |                   |
|                               | C921U152MUWD(1)A(2)      | 1,500 pF           |                                  |                                    |                                     |                      |                     |                   |
|                               | C931U222MUWD(1)A(2)      | 2,200 pF           |                                  |                                    |                                     |                      |                     |                   |
|                               | C951U332MUWD(1)A(2)      | 3,300 pF           |                                  |                                    |                                     |                      |                     |                   |
|                               | C961U392MUWD(1)A(2)      | 3,900 pF           |                                  |                                    |                                     |                      |                     |                   |
|                               | C971U472MUWD(1)A(2)      | 4,700 pF           |                                  |                                    |                                     |                      |                     |                   |
| Y5V                           | C901U102MUVD(1)A(2)      | 1,000 pF           | ±20%                             | 7.0                                | 5.5                                 | 0.5 ±0.1             | 10 mm               |                   |
|                               | C911U152MUVD(1)A(2)      | 1,500 pF           |                                  |                                    |                                     |                      |                     |                   |
|                               | C921U222MUVD(1)A(2)      | 2,200 pF           |                                  |                                    |                                     |                      |                     |                   |
|                               | C941U332MUVD(1)A(2)      | 3,300 pF           |                                  |                                    |                                     |                      |                     |                   |
|                               | C951U472MUVD(1)A(2)      | 4,700 pF           |                                  |                                    |                                     |                      |                     |                   |
|                               | <b>KEMET Part Number</b> | <b>Capacitance</b> | <b>Capacitance<br/>Tolerance</b> | <b>Body Diameter<br/>(Maximum)</b> | <b>Body Thickness<br/>(Maximum)</b> | <b>Lead Diameter</b> | <b>Lead Spacing</b> |                   |

(1) To properly complete ordering code, insert the one-digit character code to reflect the required lead configuration: (See "Lead Configuration" section of this document, page 2, for further details.)


A = Straight

B = Vertical Kink

C = Outside Kink



(2) To properly complete ordering code, enter the four-digit numeric or alphanumeric "Packaging C-Spec Ordering Code." See "Dimensions" section of this document, page 2, for available options.

**Table 2 – Performance & Reliability: Test Methods and Conditions**

| Item                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                                                                                                                                                                                                                                                                                       | Specification                                                                                               | Test Method                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |               |             |           |                  |           |                   |                                                                              |                                                                                                                                                                     |    |                                      |                                                                                                                                                                                                                                                                                                                                                                               |      |             |   |          |   |          |   |          |   |          |   |          |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-------------|-----------|------------------|-----------|-------------------|------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|----|--------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|-------------|---|----------|---|----------|---|----------|---|----------|---|----------|
| Operating Temperature Range                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                                                                                                                                                                                                                                                                                       | -25°C to +125°C                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |               |             |           |                  |           |                   |                                                                              |                                                                                                                                                                     |    |                                      |                                                                                                                                                                                                                                                                                                                                                                               |      |             |   |          |   |          |   |          |   |          |   |          |
| Dielectric Strength                                                                                                                                                                                                                                                                                                                                                                                            | Between lead wires                                                                                                                                                                                                                                                                                                                                    | No failures                                                                                                 | The capacitor shall not be damaged when 4,000 VAC(rms) is applied between the lead wires for 60 seconds.                                                                                                                                                                                                                                                                                                                                                                                                                                           |               |             |           |                  |           |                   |                                                                              |                                                                                                                                                                     |    |                                      |                                                                                                                                                                                                                                                                                                                                                                               |      |             |   |          |   |          |   |          |   |          |   |          |
|                                                                                                                                                                                                                                                                                                                                                                                                                | Body Insulation                                                                                                                                                                                                                                                                                                                                       | No failures                                                                                                 | The terminals (leads) of the capacitor shall be connected together. A metal foil is tightly wrapped around the body of the capacitor at a distance of about 3 to 4 mm from each terminal. The capacitor is then inserted into a container filled with metal balls approximately 1 mm in diameter. 4,000 VAC(rms) is applied for 60 seconds between the capacitor lead wires and metal balls.                                                                    |               |             |           |                  |           |                   |                                                                              |                                                                                                                                                                     |    |                                      |                                                                                                                                                                                                                                                                                                                                                                               |      |             |   |          |   |          |   |          |   |          |   |          |
| Insulation Resistance (IR)                                                                                                                                                                                                                                                                                                                                                                                     |                                                                                                                                                                                                                                                                                                                                                       | 10,000 MΩ minimum                                                                                           | The insulation resistance shall be measured with 500 ±50 VDC applied after 60 ±5 seconds of charging.                                                                                                                                                                                                                                                                                                                                                                                                                                              |               |             |           |                  |           |                   |                                                                              |                                                                                                                                                                     |    |                                      |                                                                                                                                                                                                                                                                                                                                                                               |      |             |   |          |   |          |   |          |   |          |   |          |
| Capacitance                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                                                                                                                                                                                                                                                                                       | Within specified tolerance                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |               |             |           |                  |           |                   |                                                                              |                                                                                                                                                                     |    |                                      |                                                                                                                                                                                                                                                                                                                                                                               |      |             |   |          |   |          |   |          |   |          |   |          |
| Dissipation Factor (DF) or Q                                                                                                                                                                                                                                                                                                                                                                                   | <table border="1"> <thead> <tr> <th>Temperature Characteristics</th> <th>Specification</th> </tr> </thead> <tbody> <tr> <td>Y5P, Y5U</td> <td>DF ≤ 2.5%</td> </tr> <tr> <td>Y5V</td> <td>DF ≤ 5.0%</td> </tr> <tr> <td>NP0,SL</td> <td>≥ 30 pF: Q ≥ 1,000<br/>&lt; 30 pF: Q ≥ 400 + (20 x C)<br/>C = Nominal capacitance</td> </tr> </tbody> </table> |                                                                                                             | Temperature Characteristics                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Specification | Y5P, Y5U    | DF ≤ 2.5% | Y5V              | DF ≤ 5.0% | NP0,SL            | ≥ 30 pF: Q ≥ 1,000<br>< 30 pF: Q ≥ 400 + (20 x C)<br>C = Nominal capacitance | Y5P, Y5U and Y5V: Capacitance is measured at 1 kHz ±20% and 5 Vrms or less. (20 ±2°C)<br>NP0 and SL: Capacitance is measured at 1 MHz ±20% and 1.0 ±0.2 Vrms (25°C) |    |                                      |                                                                                                                                                                                                                                                                                                                                                                               |      |             |   |          |   |          |   |          |   |          |   |          |
|                                                                                                                                                                                                                                                                                                                                                                                                                | Temperature Characteristics                                                                                                                                                                                                                                                                                                                           | Specification                                                                                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |               |             |           |                  |           |                   |                                                                              |                                                                                                                                                                     |    |                                      |                                                                                                                                                                                                                                                                                                                                                                               |      |             |   |          |   |          |   |          |   |          |   |          |
|                                                                                                                                                                                                                                                                                                                                                                                                                | Y5P, Y5U                                                                                                                                                                                                                                                                                                                                              | DF ≤ 2.5%                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |               |             |           |                  |           |                   |                                                                              |                                                                                                                                                                     |    |                                      |                                                                                                                                                                                                                                                                                                                                                                               |      |             |   |          |   |          |   |          |   |          |   |          |
|                                                                                                                                                                                                                                                                                                                                                                                                                | Y5V                                                                                                                                                                                                                                                                                                                                                   | DF ≤ 5.0%                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |               |             |           |                  |           |                   |                                                                              |                                                                                                                                                                     |    |                                      |                                                                                                                                                                                                                                                                                                                                                                               |      |             |   |          |   |          |   |          |   |          |   |          |
| NP0,SL                                                                                                                                                                                                                                                                                                                                                                                                         | ≥ 30 pF: Q ≥ 1,000<br>< 30 pF: Q ≥ 400 + (20 x C)<br>C = Nominal capacitance                                                                                                                                                                                                                                                                          |                                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |               |             |           |                  |           |                   |                                                                              |                                                                                                                                                                     |    |                                      |                                                                                                                                                                                                                                                                                                                                                                               |      |             |   |          |   |          |   |          |   |          |   |          |
| <table border="1"> <thead> <tr> <th>Temperature Characteristics</th> <th>Capacitance Change</th> </tr> </thead> <tbody> <tr> <td>Y5P</td> <td>Within ±10%</td> </tr> <tr> <td>Y5U</td> <td>Within +22%/-56%</td> </tr> <tr> <td>Y5V</td> <td>Within ~+30%/-80%</td> </tr> <tr> <td>CH</td> <td>0 ±60 ppm/°C</td> </tr> <tr> <td>SL</td> <td>-1,000 ~+350 ppm°C<br/>(+20°C ~+85°C)</td> </tr> </tbody> </table> |                                                                                                                                                                                                                                                                                                                                                       | Temperature Characteristics                                                                                 | Capacitance Change                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Y5P           | Within ±10% | Y5U       | Within +22%/-56% | Y5V       | Within ~+30%/-80% | CH                                                                           | 0 ±60 ppm/°C                                                                                                                                                        | SL | -1,000 ~+350 ppm°C<br>(+20°C ~+85°C) | A capacitance measurement is made at each step specified: <table border="1"> <thead> <tr> <th>Step</th> <th>Temperature</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>+20 ±2°C</td> </tr> <tr> <td>2</td> <td>-25 ±2°C</td> </tr> <tr> <td>3</td> <td>+20 ±2°C</td> </tr> <tr> <td>4</td> <td>+85 ±2°C</td> </tr> <tr> <td>5</td> <td>+20 ±2°C</td> </tr> </tbody> </table> | Step | Temperature | 1 | +20 ±2°C | 2 | -25 ±2°C | 3 | +20 ±2°C | 4 | +85 ±2°C | 5 | +20 ±2°C |
| Temperature Characteristics                                                                                                                                                                                                                                                                                                                                                                                    | Capacitance Change                                                                                                                                                                                                                                                                                                                                    |                                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |               |             |           |                  |           |                   |                                                                              |                                                                                                                                                                     |    |                                      |                                                                                                                                                                                                                                                                                                                                                                               |      |             |   |          |   |          |   |          |   |          |   |          |
| Y5P                                                                                                                                                                                                                                                                                                                                                                                                            | Within ±10%                                                                                                                                                                                                                                                                                                                                           |                                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |               |             |           |                  |           |                   |                                                                              |                                                                                                                                                                     |    |                                      |                                                                                                                                                                                                                                                                                                                                                                               |      |             |   |          |   |          |   |          |   |          |   |          |
| Y5U                                                                                                                                                                                                                                                                                                                                                                                                            | Within +22%/-56%                                                                                                                                                                                                                                                                                                                                      |                                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |               |             |           |                  |           |                   |                                                                              |                                                                                                                                                                     |    |                                      |                                                                                                                                                                                                                                                                                                                                                                               |      |             |   |          |   |          |   |          |   |          |   |          |
| Y5V                                                                                                                                                                                                                                                                                                                                                                                                            | Within ~+30%/-80%                                                                                                                                                                                                                                                                                                                                     |                                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |               |             |           |                  |           |                   |                                                                              |                                                                                                                                                                     |    |                                      |                                                                                                                                                                                                                                                                                                                                                                               |      |             |   |          |   |          |   |          |   |          |   |          |
| CH                                                                                                                                                                                                                                                                                                                                                                                                             | 0 ±60 ppm/°C                                                                                                                                                                                                                                                                                                                                          |                                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |               |             |           |                  |           |                   |                                                                              |                                                                                                                                                                     |    |                                      |                                                                                                                                                                                                                                                                                                                                                                               |      |             |   |          |   |          |   |          |   |          |   |          |
| SL                                                                                                                                                                                                                                                                                                                                                                                                             | -1,000 ~+350 ppm°C<br>(+20°C ~+85°C)                                                                                                                                                                                                                                                                                                                  |                                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |               |             |           |                  |           |                   |                                                                              |                                                                                                                                                                     |    |                                      |                                                                                                                                                                                                                                                                                                                                                                               |      |             |   |          |   |          |   |          |   |          |   |          |
| Step                                                                                                                                                                                                                                                                                                                                                                                                           | Temperature                                                                                                                                                                                                                                                                                                                                           |                                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |               |             |           |                  |           |                   |                                                                              |                                                                                                                                                                     |    |                                      |                                                                                                                                                                                                                                                                                                                                                                               |      |             |   |          |   |          |   |          |   |          |   |          |
| 1                                                                                                                                                                                                                                                                                                                                                                                                              | +20 ±2°C                                                                                                                                                                                                                                                                                                                                              |                                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |               |             |           |                  |           |                   |                                                                              |                                                                                                                                                                     |    |                                      |                                                                                                                                                                                                                                                                                                                                                                               |      |             |   |          |   |          |   |          |   |          |   |          |
| 2                                                                                                                                                                                                                                                                                                                                                                                                              | -25 ±2°C                                                                                                                                                                                                                                                                                                                                              |                                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |               |             |           |                  |           |                   |                                                                              |                                                                                                                                                                     |    |                                      |                                                                                                                                                                                                                                                                                                                                                                               |      |             |   |          |   |          |   |          |   |          |   |          |
| 3                                                                                                                                                                                                                                                                                                                                                                                                              | +20 ±2°C                                                                                                                                                                                                                                                                                                                                              |                                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |               |             |           |                  |           |                   |                                                                              |                                                                                                                                                                     |    |                                      |                                                                                                                                                                                                                                                                                                                                                                               |      |             |   |          |   |          |   |          |   |          |   |          |
| 4                                                                                                                                                                                                                                                                                                                                                                                                              | +85 ±2°C                                                                                                                                                                                                                                                                                                                                              |                                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |               |             |           |                  |           |                   |                                                                              |                                                                                                                                                                     |    |                                      |                                                                                                                                                                                                                                                                                                                                                                               |      |             |   |          |   |          |   |          |   |          |   |          |
| 5                                                                                                                                                                                                                                                                                                                                                                                                              | +20 ±2°C                                                                                                                                                                                                                                                                                                                                              |                                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |               |             |           |                  |           |                   |                                                                              |                                                                                                                                                                     |    |                                      |                                                                                                                                                                                                                                                                                                                                                                               |      |             |   |          |   |          |   |          |   |          |   |          |
| Temperature Characteristics                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                                                                                                                                                                                                                                                                                       |                                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |               |             |           |                  |           |                   |                                                                              |                                                                                                                                                                     |    |                                      |                                                                                                                                                                                                                                                                                                                                                                               |      |             |   |          |   |          |   |          |   |          |   |          |
| Terminal Strength                                                                                                                                                                                                                                                                                                                                                                                              | Tensile                                                                                                                                                                                                                                                                                                                                               | Lead wire or capacitor body shall not break.                                                                | With the termination in its normal position, the specimen is held by its body in such a manner that the axis of the termination is vertical; a tensile force of 10 N is applied to the termination in the direction of its axis and acting in a direction away from the body of the specimen.                                                                                                                                                                                                                                                      |               |             |           |                  |           |                   |                                                                              |                                                                                                                                                                     |    |                                      |                                                                                                                                                                                                                                                                                                                                                                               |      |             |   |          |   |          |   |          |   |          |   |          |
|                                                                                                                                                                                                                                                                                                                                                                                                                | Bending                                                                                                                                                                                                                                                                                                                                               | Lead wire or capacitor body shall not break.                                                                | With the termination in its normal position, the specimen is held by its body in such a manner that the axis of the termination is vertical; a mass force of 5 N is then suspended from the end of the termination. The body of the specimen is then inclined within a period of 2 to 3 seconds, through an angle of approximately 90° in the vertical plane and then resumed to its initial position over the same period of time; this operation constitutes one bend. One bend immediately followed by a second bend in the opposite direction. |               |             |           |                  |           |                   |                                                                              |                                                                                                                                                                     |    |                                      |                                                                                                                                                                                                                                                                                                                                                                               |      |             |   |          |   |          |   |          |   |          |   |          |
| Solderability                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                                                                                                                                       | Lead wire should have a uniform coating of solder in the axial direction and over 3/4 of its circumference. | The lead wire of the capacitor is dipped into molten solder for 2 ±0.5 seconds. The depth of immersion is up to 1.5 mm (+5/-0 mm) from the root of lead wires.<br>Solder Temperature: Lead free solder (Sn-3Ag - 0.5Cu) 245°C ±5°C.                                                                                                                                                                                                                                                                                                                |               |             |           |                  |           |                   |                                                                              |                                                                                                                                                                     |    |                                      |                                                                                                                                                                                                                                                                                                                                                                               |      |             |   |          |   |          |   |          |   |          |   |          |

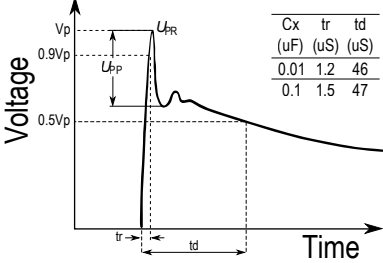
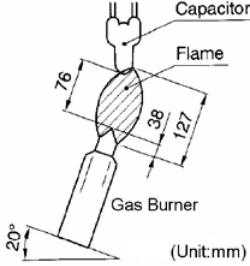
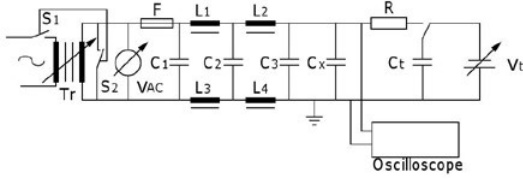
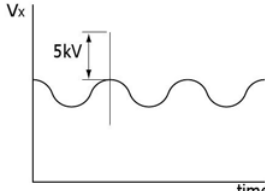
<sup>1</sup> "Room Condition" is defined as follows: Temperature: 15 ~ 35°C/Humidity: 45 ~ 75%/Atmospheric Pressure: 86 ~ 106 kPa.

**Table 2 – Performance & Reliability: Test Methods and Conditions cont'd**

| Item                           |                                                                                                    | Specification                                                                                                                                                                                                                                                                                                                                                            |                    | Test Method                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                    |     |             |     |             |     |             |             |                                                |                                                                                                                                                                 |                                                                                                                                                                                                 |
|--------------------------------|----------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|-----|-------------|-----|-------------|-----|-------------|-------------|------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Soldering Effect (Non-Preheat) | Appearance                                                                                         | No visual defect                                                                                                                                                                                                                                                                                                                                                         |                    | <p>As shown in the figure below, the lead wires are immersed in molten solder up to 1.5 mm (+5/-0 mm) from the end of the epoxy meniscus (root of lead wire).<br/>Duration/Solder Temperature: 3.5 ±0.5 seconds/350°C ±10°C or 10 ±1 seconds/260°C ±5°C</p>  <p><b>Pre-treatment:</b> Capacitor is stored at 85°C ±2°C for 1 hour and then placed at room condition<sup>1</sup> for 24 ±2 hours before initial measurements.<br/><b>Post-treatment:</b> Capacitor is stored for 1 to 2 hours at room condition<sup>1</sup>.</p>                                      |                    |     |             |     |             |     |             |             |                                                |                                                                                                                                                                 |                                                                                                                                                                                                 |
|                                | IR                                                                                                 | 1,000 MΩ                                                                                                                                                                                                                                                                                                                                                                 |                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                    |     |             |     |             |     |             |             |                                                |                                                                                                                                                                 |                                                                                                                                                                                                 |
|                                | Dielectric Strength                                                                                | Per item 1                                                                                                                                                                                                                                                                                                                                                               |                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                    |     |             |     |             |     |             |             |                                                |                                                                                                                                                                 |                                                                                                                                                                                                 |
|                                | Capacitance                                                                                        | Y5P, Y5U and Y5V: Within ±10%<br>SL, CH (NP0): Within ±2.5% or ±0.25 pF, whichever is larger.                                                                                                                                                                                                                                                                            |                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                    |     |             |     |             |     |             |             |                                                |                                                                                                                                                                 |                                                                                                                                                                                                 |
| Soldering Effect (Preheat)     | Appearance                                                                                         | No visual defect                                                                                                                                                                                                                                                                                                                                                         |                    | <p>Capacitor is stored at 120°C +0/-5°C for 60 +0/-5 seconds. Then, as shown in the figure below, the lead wires are immersed in molten solder up to 1.5 mm (+5/-0mm) from the end of the epoxy meniscus (root of lead wire).<br/>Duration/Solder Temperature: 7.5 +0/-1 seconds/260°C ±5°C</p>  <p><b>Pre-treatment:</b> Capacitor is stored at 85°C ±2°C for 1 hour and then placed at room condition<sup>1</sup> for 24 ±2 hours before initial measurements.<br/><b>Post-treatment:</b> Capacitor is stored for 1 to 2 hours at room condition<sup>1</sup>.</p> |                    |     |             |     |             |     |             |             |                                                |                                                                                                                                                                 |                                                                                                                                                                                                 |
|                                | IR                                                                                                 | 1,000 MΩ                                                                                                                                                                                                                                                                                                                                                                 |                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                    |     |             |     |             |     |             |             |                                                |                                                                                                                                                                 |                                                                                                                                                                                                 |
|                                | Dielectric Strength                                                                                | Per item 1                                                                                                                                                                                                                                                                                                                                                               |                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                    |     |             |     |             |     |             |             |                                                |                                                                                                                                                                 |                                                                                                                                                                                                 |
|                                | Capacitance                                                                                        | Y5P, Y5U and Y5V: Within ±10%<br>SL, CH (NP0): Within ±2.5% or ±0.25 pF, whichever is larger.                                                                                                                                                                                                                                                                            |                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                    |     |             |     |             |     |             |             |                                                |                                                                                                                                                                 |                                                                                                                                                                                                 |
| Biased Humidity                | Appearance                                                                                         | No visual defect                                                                                                                                                                                                                                                                                                                                                         |                    | Steady State Humidity:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Load Humidity:     |     |             |     |             |     |             |             |                                                |                                                                                                                                                                 |                                                                                                                                                                                                 |
|                                | Capacitance                                                                                        | <table border="1"> <thead> <tr> <th>Temperature Characteristics</th> <th>Capacitance Change</th> </tr> </thead> <tbody> <tr> <td>Y5P</td> <td>Within ±10%</td> </tr> <tr> <td>Y5U</td> <td>Within ±20%</td> </tr> <tr> <td>Y5V</td> <td>Within ±30%</td> </tr> <tr> <td>SL CH (NP0)</td> <td>Within ±2.5% or ±0.25 pF, whichever is larger.</td> </tr> </tbody> </table> |                    | Temperature Characteristics                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Capacitance Change | Y5P | Within ±10% | Y5U | Within ±20% | Y5V | Within ±30% | SL CH (NP0) | Within ±2.5% or ±0.25 pF, whichever is larger. | <p>90 to 95% humidity at 40°C ±2°C for 500 ±12 hours.</p> <p><b>Post Treatment:</b><br/>Capacitor is stored for 1 to 2 hours at room condition<sup>1</sup>.</p> | <p>90 to 95% humidity at 40°C ±2°C for 500 ±12 hours with full rated voltage applied.</p> <p><b>Post Treatment:</b><br/>Capacitor is stored for 1 to 2 hours at room condition<sup>1</sup>.</p> |
|                                |                                                                                                    | Temperature Characteristics                                                                                                                                                                                                                                                                                                                                              | Capacitance Change |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                    |     |             |     |             |     |             |             |                                                |                                                                                                                                                                 |                                                                                                                                                                                                 |
|                                |                                                                                                    | Y5P                                                                                                                                                                                                                                                                                                                                                                      | Within ±10%        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                    |     |             |     |             |     |             |             |                                                |                                                                                                                                                                 |                                                                                                                                                                                                 |
|                                |                                                                                                    | Y5U                                                                                                                                                                                                                                                                                                                                                                      | Within ±20%        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                    |     |             |     |             |     |             |             |                                                |                                                                                                                                                                 |                                                                                                                                                                                                 |
|                                | Y5V                                                                                                | Within ±30%                                                                                                                                                                                                                                                                                                                                                              |                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                    |     |             |     |             |     |             |             |                                                |                                                                                                                                                                 |                                                                                                                                                                                                 |
|                                | SL CH (NP0)                                                                                        | Within ±2.5% or ±0.25 pF, whichever is larger.                                                                                                                                                                                                                                                                                                                           |                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                    |     |             |     |             |     |             |             |                                                |                                                                                                                                                                 |                                                                                                                                                                                                 |
|                                | DF                                                                                                 | Y5P and Y5U: 5.0% maximum<br>Y5V: 7.5% maximum                                                                                                                                                                                                                                                                                                                           |                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                    |     |             |     |             |     |             |             |                                                |                                                                                                                                                                 |                                                                                                                                                                                                 |
| Q                              | SL&CH(NP0): Less than 30 pF: Q ≥ 100+10×C/3<br>More than 30 pF: Q ≥ 200<br>C = Nominal capacitance |                                                                                                                                                                                                                                                                                                                                                                          |                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                    |     |             |     |             |     |             |             |                                                |                                                                                                                                                                 |                                                                                                                                                                                                 |
| IR                             | Y5P, Y5V and Y5U: 3,000 MΩ minimum<br>SL and CH (NP0): 1,000 MΩ minimum                            |                                                                                                                                                                                                                                                                                                                                                                          |                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                    |     |             |     |             |     |             |             |                                                |                                                                                                                                                                 |                                                                                                                                                                                                 |
| Dielectric Strength            | No failures                                                                                        |                                                                                                                                                                                                                                                                                                                                                                          |                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                    |     |             |     |             |     |             |             |                                                |                                                                                                                                                                 |                                                                                                                                                                                                 |

<sup>1</sup> "Room Condition" is defined as follows: Temperature: 15 ~ 35°C/Humidity: 45 ~ 75%/Atmospheric Pressure: 86 ~ 106 kPa.

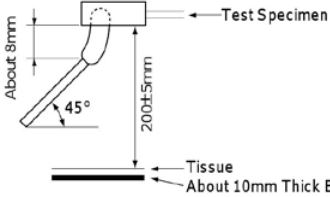
**Table 2 – Performance & Reliability: Test Methods and Conditions cont'd**

| Item                  |                                                                                                                                                                                                                                                                                                | Specification                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Test Method                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                      |                    |                               |                    |                                                                                                                                                                                                                                     |      |                |     |               |                 |              |    |                           |                |               |   |                 |    |                       |
|-----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|--------------------|-------------------------------|--------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|----------------|-----|---------------|-----------------|--------------|----|---------------------------|----------------|---------------|---|-----------------|----|-----------------------|
| High Temperature Life | Appearance                                                                                                                                                                                                                                                                                     | No visual defect                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | <p>Impulse Voltage: Each individual capacitor is subjected to three 8 kv impulses prior to life testing.</p>  <table border="1" data-bbox="1136 409 1247 499"> <tr> <td>Cx</td> <td>tr</td> <td>td</td> </tr> <tr> <td>(uF)</td> <td>(uS)</td> <td>(uS)</td> </tr> <tr> <td>0.01</td> <td>1.2</td> <td>46</td> </tr> <tr> <td>0.1</td> <td>1.5</td> <td>47</td> </tr> </table> | Cx                   | tr                 | td                            | (uF)               | (uS)                                                                                                                                                                                                                                | (uS) | 0.01           | 1.2 | 46            | 0.1             | 1.5          | 47 |                           |                |               |   |                 |    |                       |
|                       | Cx                                                                                                                                                                                                                                                                                             | tr                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | td                   |                    |                               |                    |                                                                                                                                                                                                                                     |      |                |     |               |                 |              |    |                           |                |               |   |                 |    |                       |
|                       | (uF)                                                                                                                                                                                                                                                                                           | (uS)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | (uS)                 |                    |                               |                    |                                                                                                                                                                                                                                     |      |                |     |               |                 |              |    |                           |                |               |   |                 |    |                       |
|                       | 0.01                                                                                                                                                                                                                                                                                           | 1.2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 46                   |                    |                               |                    |                                                                                                                                                                                                                                     |      |                |     |               |                 |              |    |                           |                |               |   |                 |    |                       |
| 0.1                   | 1.5                                                                                                                                                                                                                                                                                            | 47                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                      |                    |                               |                    |                                                                                                                                                                                                                                     |      |                |     |               |                 |              |    |                           |                |               |   |                 |    |                       |
| Capacitance Change    | Y5P, Y5V and Y5U: Within $\pm 20\%$<br>SL and CH (NPO): Within $\pm 3$ or $\pm 0.3$ pF, whichever is larger.                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                      |                    |                               |                    |                                                                                                                                                                                                                                     |      |                |     |               |                 |              |    |                           |                |               |   |                 |    |                       |
| IR                    | 3,000 M $\Omega$ minimum<br>SL and CH (NPO): 1,000 M $\Omega$ minimum                                                                                                                                                                                                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                      |                    |                               |                    |                                                                                                                                                                                                                                     |      |                |     |               |                 |              |    |                           |                |               |   |                 |    |                       |
| Dielectric Strength   | No failures                                                                                                                                                                                                                                                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                      |                    |                               |                    |                                                                                                                                                                                                                                     |      |                |     |               |                 |              |    |                           |                |               |   |                 |    |                       |
| Flame Test            | <p>The capacitor flame extinguishes as follows:</p> <table border="1" data-bbox="457 934 805 1062"> <thead> <tr> <th>Cycle</th> <th>Time</th> </tr> </thead> <tbody> <tr> <td>1 ~ 4</td> <td>30 seconds maximum</td> </tr> <tr> <td>5</td> <td>60 seconds maximum</td> </tr> </tbody> </table> | Cycle                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Time                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 1 ~ 4                | 30 seconds maximum | 5                             | 60 seconds maximum | <p>The capacitor is exposed to a flame for 15 seconds and then removed for 15 seconds. This test is repeated for 5 cycles.</p>  <p>(Unit:mm)</p> |      |                |     |               |                 |              |    |                           |                |               |   |                 |    |                       |
| Cycle                 | Time                                                                                                                                                                                                                                                                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                      |                    |                               |                    |                                                                                                                                                                                                                                     |      |                |     |               |                 |              |    |                           |                |               |   |                 |    |                       |
| 1 ~ 4                 | 30 seconds maximum                                                                                                                                                                                                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                      |                    |                               |                    |                                                                                                                                                                                                                                     |      |                |     |               |                 |              |    |                           |                |               |   |                 |    |                       |
| 5                     | 60 seconds maximum                                                                                                                                                                                                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                      |                    |                               |                    |                                                                                                                                                                                                                                     |      |                |     |               |                 |              |    |                           |                |               |   |                 |    |                       |
| Active Flammability   | The cheesecloth should not ignite.                                                                                                                                                                                                                                                             | <p>The capacitors are individually wrapped in at least one, but not more than two, complete layers of cheesecloth. They are then subjected to 20 discharges. The interval between successive discharges is 5 seconds. The VAC is maintained for 2 minutes after the last discharge.</p>  <table border="1" data-bbox="850 1459 1523 1663"> <tbody> <tr> <td>C<sub>1,2</sub></td> <td>1 <math>\mu</math>F <math>\pm 10\%</math></td> <td>C<sub>3</sub></td> <td>0.033 <math>\mu</math>F <math>\pm 5\%</math> 10 kV</td> </tr> <tr> <td>L<sub>1-4</sub></td> <td>1.5 Mh <math>\pm 20\%</math> 16A Rod core choke</td> <td>Cx</td> <td>Test capacitor</td> </tr> <tr> <td>R</td> <td>100 <math>\pm 2\%</math></td> <td>V<sub>AC</sub></td> <td>VR <math>\pm 5\%</math></td> </tr> <tr> <td>Ct</td> <td>3 <math>\mu</math>F <math>\pm 5\%</math> 10 kV</td> <td>V<sub>R</sub></td> <td>Rated Voltage</td> </tr> <tr> <td>F</td> <td>Fuse, Rated 10A</td> <td>Vt</td> <td>Voltage applied to Ct</td> </tr> </tbody> </table>  | C <sub>1,2</sub>                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 1 $\mu$ F $\pm 10\%$ | C <sub>3</sub>     | 0.033 $\mu$ F $\pm 5\%$ 10 kV | L <sub>1-4</sub>   | 1.5 Mh $\pm 20\%$ 16A Rod core choke                                                                                                                                                                                                | Cx   | Test capacitor | R   | 100 $\pm 2\%$ | V <sub>AC</sub> | VR $\pm 5\%$ | Ct | 3 $\mu$ F $\pm 5\%$ 10 kV | V <sub>R</sub> | Rated Voltage | F | Fuse, Rated 10A | Vt | Voltage applied to Ct |
| C <sub>1,2</sub>      | 1 $\mu$ F $\pm 10\%$                                                                                                                                                                                                                                                                           | C <sub>3</sub>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 0.033 $\mu$ F $\pm 5\%$ 10 kV                                                                                                                                                                                                                                                                                                                                                                                                                                    |                      |                    |                               |                    |                                                                                                                                                                                                                                     |      |                |     |               |                 |              |    |                           |                |               |   |                 |    |                       |
| L <sub>1-4</sub>      | 1.5 Mh $\pm 20\%$ 16A Rod core choke                                                                                                                                                                                                                                                           | Cx                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Test capacitor                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                      |                    |                               |                    |                                                                                                                                                                                                                                     |      |                |     |               |                 |              |    |                           |                |               |   |                 |    |                       |
| R                     | 100 $\pm 2\%$                                                                                                                                                                                                                                                                                  | V <sub>AC</sub>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | VR $\pm 5\%$                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                      |                    |                               |                    |                                                                                                                                                                                                                                     |      |                |     |               |                 |              |    |                           |                |               |   |                 |    |                       |
| Ct                    | 3 $\mu$ F $\pm 5\%$ 10 kV                                                                                                                                                                                                                                                                      | V <sub>R</sub>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Rated Voltage                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                      |                    |                               |                    |                                                                                                                                                                                                                                     |      |                |     |               |                 |              |    |                           |                |               |   |                 |    |                       |
| F                     | Fuse, Rated 10A                                                                                                                                                                                                                                                                                | Vt                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Voltage applied to Ct                                                                                                                                                                                                                                                                                                                                                                                                                                            |                      |                    |                               |                    |                                                                                                                                                                                                                                     |      |                |     |               |                 |              |    |                           |                |               |   |                 |    |                       |

<sup>1</sup> "Room Condition" is defined as follows: Temperature: 15 ~ 35°C/Humidity: 45 ~ 75%/Atmospheric Pressure: 86 ~ 106 kPa.



**Table 2 – Performance & Reliability: Test Methods and Conditions cont'd**

| Item                 |                                                       | Specification                                                                                    | Test Method                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                |                  |                |   |           |    |   |                  |   |   |           |    |   |                  |   |
|----------------------|-------------------------------------------------------|--------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|------------------|----------------|---|-----------|----|---|------------------|---|---|-----------|----|---|------------------|---|
| Passive Flammability |                                                       | <p>The burning time should not exceed 30 seconds.</p> <p>The tissue paper should not ignite.</p> | <p>The capacitor under test is held into a flame and in a position which best promotes burning. Each specimen is exposed to the flame one time.</p>  <p>Time of exposure to flame: 30 seconds<br/>                     Length of flame: 12 ±1 mm<br/>                     Gas burner length: 35 mm minimum<br/>                     Inside diameter: 0.5 ±0.1 mm<br/>                     Outside diameter: 0.9 mm maximum<br/>                     Gas butane gas purity: 95% minimum</p>                                                                                                                                                                                                           |                |                  |                |   |           |    |   |                  |   |   |           |    |   |                  |   |
| Temperature Cycle    | Appearance                                            | No visual defect                                                                                 | <p>The capacitor is subjected to 5 temperature cycles.</p> <p style="text-align: center;"><b>(Temperature Cycle)</b></p> <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th>Step</th> <th>Temperature (°C)</th> <th>Time (minutes)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>-25 +0/-3</td> <td>30</td> </tr> <tr> <td>2</td> <td>Room temperature</td> <td>3</td> </tr> <tr> <td>3</td> <td>125 +3/-0</td> <td>30</td> </tr> <tr> <td>4</td> <td>Room temperature</td> <td>3</td> </tr> </tbody> </table> <p><b>Pre-treatment:</b> Capacitor shall be stored at 85 ±2 for 1 hour then placed at room condition<sup>1</sup> for 24 ±2 hours.<br/> <b>Post-treatment:</b> Capacitor is stored for 1 to 2 hours at room condition<sup>1</sup>.</p> | Step           | Temperature (°C) | Time (minutes) | 1 | -25 +0/-3 | 30 | 2 | Room temperature | 3 | 3 | 125 +3/-0 | 30 | 4 | Room temperature | 3 |
|                      | Step                                                  | Temperature (°C)                                                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Time (minutes) |                  |                |   |           |    |   |                  |   |   |           |    |   |                  |   |
|                      | 1                                                     | -25 +0/-3                                                                                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 30             |                  |                |   |           |    |   |                  |   |   |           |    |   |                  |   |
|                      | 2                                                     | Room temperature                                                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 3              |                  |                |   |           |    |   |                  |   |   |           |    |   |                  |   |
|                      | 3                                                     | 125 +3/-0                                                                                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 30             |                  |                |   |           |    |   |                  |   |   |           |    |   |                  |   |
|                      | 4                                                     | Room temperature                                                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 3              |                  |                |   |           |    |   |                  |   |   |           |    |   |                  |   |
| Capacitance          | <b>Temperature Characteristics</b>                    |                                                                                                  | <b>Capacitance Change</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                |                  |                |   |           |    |   |                  |   |   |           |    |   |                  |   |
|                      | SL, CH (NP0)                                          | Within ±5%                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                |                  |                |   |           |    |   |                  |   |   |           |    |   |                  |   |
|                      | Y5P                                                   | Within ±10%                                                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                |                  |                |   |           |    |   |                  |   |   |           |    |   |                  |   |
|                      | Y5U, Y5V                                              | Within ±20%                                                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                |                  |                |   |           |    |   |                  |   |   |           |    |   |                  |   |
| DF/Q                 | SL, CH (NP0)                                          | ≥30 pF: Q ≥ 350<br><30 pF: Q ≥ 275<br>+5/2C<br>C = Nominal capacitance                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                |                  |                |   |           |    |   |                  |   |   |           |    |   |                  |   |
|                      | Y5P                                                   | DF ≤ 5%                                                                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                |                  |                |   |           |    |   |                  |   |   |           |    |   |                  |   |
|                      | Y5U, Y5V                                              | DF ≤ 7.5%                                                                                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                |                  |                |   |           |    |   |                  |   |   |           |    |   |                  |   |
| IR                   | 3,000 MΩ minimum<br>SL and CH (NPO): 1,000 MΩ minimum |                                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                |                  |                |   |           |    |   |                  |   |   |           |    |   |                  |   |
| Dielectric Strength  | No failures                                           |                                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                |                  |                |   |           |    |   |                  |   |   |           |    |   |                  |   |

<sup>1</sup> "Room Condition" is defined as follows: Temperature: 15 ~ 35°C/Humidity: 45 ~ 75%/Atmospheric Pressure: 86 ~ 106 kPa.

## Soldering and Mounting Information

### Soldering:

When soldering this product to a PCB/PWB, do not exceed the solder heat resistance specification of the capacitor. Subjecting this product to excessive heating could reflow the solder joint between the lead and ceramic element and/or may result in thermal shocks that can crack the ceramic element.

When soldering these capacitors with a soldering iron, it should be performed under the following conditions:

- Temperature of iron-tip: 400°C maximum
- Soldering iron wattage: 50 W maximum
- Soldering time: 3.5 seconds maximum

### Cleaning (ultrasonic cleaning):

To perform ultrasonic cleaning, observe the following conditions:

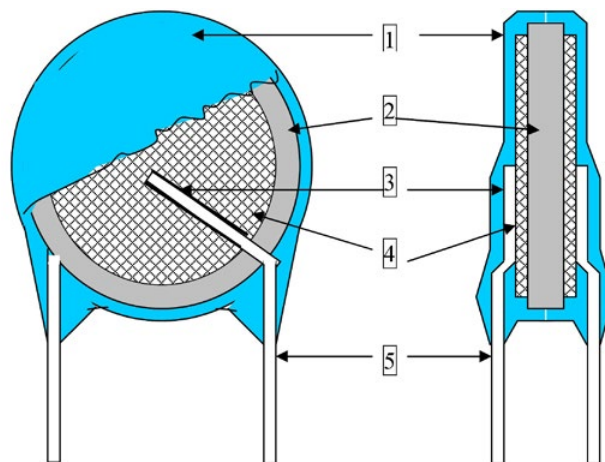
- Rinse bath capacity: Output of 20 watts per liter or less
- Rinsing time: 5 minute maximum
- Do not vibrate the PCB/PWB directly
- Excessive ultrasonic cleaning may lead to fatigue destruction of the lead wires

## Construction

| Reference | Item                       | Material                                                  |
|-----------|----------------------------|-----------------------------------------------------------|
| 1         | Encapsulation <sup>1</sup> | Epoxy resin, Pigment (Blue/UL 94 V-0)                     |
| 2         | Dielectric Material        | BaTiO <sub>3</sub>                                        |
| 3         | Solder                     | Sn 96.5, Ag 3, Cu 0.5                                     |
| 4         | Electrodes                 | Ag (Glass frit)                                           |
| 5         | Lead Wires                 | Tinned copper clad steel wire<br>(Sn Plating 100% 3-7 μm) |

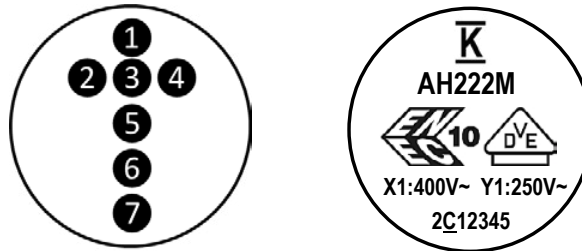
<sup>1</sup> The minimum thickness of the insulation coating (encapsulation) is 0.4 mm



Note: Image is exaggerated in order to clearly identify all components of construction.



## Capacitor Marking

These capacitors shall be stamped or laser marked with KEMET's trademark, type designation, capacitor class, rated voltage, rated capacitance, and capacitance tolerance codes. In addition, all devices are marked with the recognized approval mark and a date/lot code for traceability. Marking will be supplied either on one side or both sides of the encapsulated capacitor body. All marking shall be legible to allow for clear identification of the component. Marking appears in legible contrast. Illustrated below is an example of the marking format and content. (Two sided marking is limited to capacitors with body diameters  $\leq 8.0$  mm.)



| Location #                               | Description                                         | Detail                                                                                                                                                                                                                                                                                                                                                                                                                                              |                             |   |   |      |                                          |                                |                                                                                         |                             |
|------------------------------------------|-----------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------|---|---|------|------------------------------------------|--------------------------------|-----------------------------------------------------------------------------------------|-----------------------------|
| 1                                        | KEMET Trademark                                     |                                                                                                                                                                                                                                                                                                                                                                  |                             |   |   |      |                                          |                                |                                                                                         |                             |
| 2 <sup>1</sup>                           | Type Designation<br>(2 characters)                  | AH                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                             |   |   |      |                                          |                                |                                                                                         |                             |
| 3 <sup>1</sup>                           | Rated Capacitance<br>(3 numeric characters)         | First two digits are the significant figures of capacitance. Third digit indicates the additional number of zeros. For example, 2,200 pF is identified as 222. (For values below 10 pF an "R" is used in place of the decimal point, e.g., 2R0 = 2.0 pF.)                                                                                                                                                                                           |                             |   |   |      |                                          |                                |                                                                                         |                             |
| 4                                        | Capacitance Tolerance<br>Code (1 character)         | C = 0.25 pF, D = 0.5 pF, J = $\pm 5\%$ , K = $\pm 10\%$ , M = $\pm 20\%$                                                                                                                                                                                                                                                                                                                                                                            |                             |   |   |      |                                          |                                |                                                                                         |                             |
| 5                                        | VDE & ENEC approval mark<br>IEC 60384-14 3rd (2005) |                                                                                                                                                                                                                                                                                                                                                                 |                             |   |   |      |                                          |                                |                                                                                         |                             |
| 6                                        | Capacitor Class and Rated<br>Voltage                | X1: 400 V~ Y1: 250 V~                                                                                                                                                                                                                                                                                                                                                                                                                               |                             |   |   |      |                                          |                                |                                                                                         |                             |
| 7                                        | Date/Lot Code                                       | Date/Lot Code, e.g., 3C12345<br><table border="1" style="width: 100%; text-align: center;"> <thead> <tr> <th>3</th> <th>C</th> <th>1</th> <th>2345</th> </tr> </thead> <tbody> <tr> <td>Last digit of year,<br/>e.g.,<br/>3 = 2013</td> <td>Manufacturing<br/>Location Code</td> <td>Manufacturing Month:<br/>1-9 = Jan - Sept<br/>A = October<br/>N = November<br/>D = December</td> <td>Last 4 digits of<br/>lot no.</td> </tr> </tbody> </table> | 3                           | C | 1 | 2345 | Last digit of year,<br>e.g.,<br>3 = 2013 | Manufacturing<br>Location Code | Manufacturing Month:<br>1-9 = Jan - Sept<br>A = October<br>N = November<br>D = December | Last 4 digits of<br>lot no. |
| 3                                        | C                                                   | 1                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 2345                        |   |   |      |                                          |                                |                                                                                         |                             |
| Last digit of year,<br>e.g.,<br>3 = 2013 | Manufacturing<br>Location Code                      | Manufacturing Month:<br>1-9 = Jan - Sept<br>A = October<br>N = November<br>D = December                                                                                                                                                                                                                                                                                                                                                             | Last 4 digits of<br>lot no. |   |   |      |                                          |                                |                                                                                         |                             |

## Packaging Quantities

| Packaging Type | Loose (Bulk Bag) | Carrier Tape Quantity         |
|----------------|------------------|-------------------------------|
|                |                  | (25.4 mm Pitch <sup>1</sup> ) |
| Ammo Pack      | N/A              | 500 pieces/box                |
| Bulk           | 500 pieces/bag   | N/A                           |

<sup>1</sup> For details regarding component pitch on carrier tape, see "Ammo Pack Taping Format" and "Ammo Pack Taping Specifications" sections of this document.

Figure 1 - Ammo Pack Taping Format (10 mm Lead Spacing)

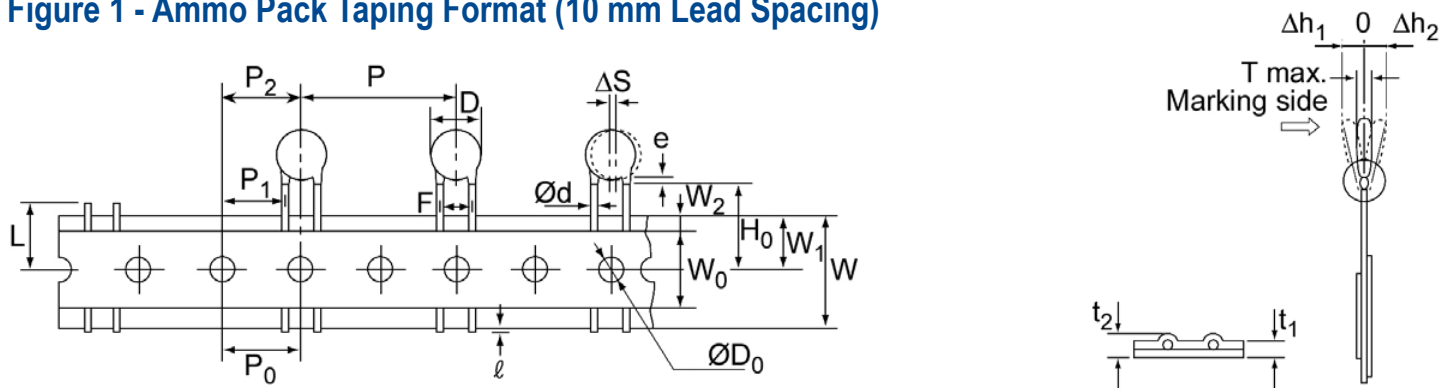


Table 3 – Ammo Pack Taping Specifications

| Lead Spacing                                                         |                 | 10 mm                                                                                                 |                        |
|----------------------------------------------------------------------|-----------------|-------------------------------------------------------------------------------------------------------|------------------------|
| Lead Style                                                           |                 | Straight                                                                                              | Preformed <sup>1</sup> |
| Item                                                                 | Symbol          | Dimensions (mm)                                                                                       |                        |
| Lead Spacing                                                         | F               | 10.0 ±1.0                                                                                             |                        |
| Component Pitch                                                      | P               | 25.4 ±2                                                                                               |                        |
| Sprocket Hole Pitch                                                  | P <sub>0</sub>  | 12.7 ±0.3                                                                                             |                        |
| Sprocket Hole Center to Component Center                             | P <sub>2</sub>  | 12.7 ±1.5                                                                                             |                        |
| Sprocket Hole Center to Lead Center                                  | P <sub>1</sub>  | 7.7 ±1.5                                                                                              |                        |
| Body Diameter                                                        | D               | See "Product Ordering Codes and Ratings" section of this document.                                    |                        |
| Component Alignment (side/side)                                      | ΔS              | 0 ±2.0                                                                                                |                        |
| Carrier Tape Width                                                   | W               | 18.0 +1.0/-0.5                                                                                        |                        |
| Sprocket Hole Position                                               | W <sub>1</sub>  | 9.0 ±0.5                                                                                              |                        |
| Height to Seating Plane <sup>2</sup> (preformed leads <sup>1</sup> ) | H <sub>0</sub>  | N/A                                                                                                   | 18.0 +2.0/-0           |
| Height to Seating Plane <sup>2</sup> (straight leads)                | H               | 20.0 +1.5/-1.0                                                                                        | N/A                    |
| Lead Protrusion                                                      | ℓ               | 2.0 maximum                                                                                           |                        |
| Diameter of Sprocket Hole                                            | D <sub>0</sub>  | 4.0 ±0.2                                                                                              |                        |
| Lead Diameter                                                        | φd              | 0.5 ±0.1                                                                                              |                        |
| Carrier Tape Thickness                                               | t <sub>1</sub>  | 0.6 ±0.3                                                                                              |                        |
| Total Thickness (Carrier Tape, Hold-Down Tape and Lead)              | t <sub>2</sub>  | 1.5 maximum                                                                                           |                        |
| Component Alignment (front/back)                                     | Δh <sub>1</sub> | 2.0 maximum                                                                                           |                        |
|                                                                      | Δh <sub>2</sub> | 2.0 maximum                                                                                           |                        |
| Cut Out Length                                                       | L               | 11.0 maximum                                                                                          |                        |
| Hold-Down Tape Width                                                 | W <sub>0</sub>  | 11.0 minimum                                                                                          |                        |
| Hold-Down Tape Position                                              | W <sub>2</sub>  | 1.5 ±1.5                                                                                              |                        |
| Coating Extension on Leads (meniscus)                                | e               | 3.0 maximum for straight lead; not to exceed the bend for preformed <sup>1</sup> lead configurations. |                        |
| Body Thickness                                                       | T               | See "Product Ordering Codes and Ratings" section of this document.                                    |                        |

<sup>1</sup>Preformed (crimped) lead configurations include vertical kink and outside kink. See "Lead Configurations" and "Ordering Information" sections of this document for further details.

<sup>2</sup>Also referred to as "lead length" in this document.






## Application Notes:

### Storage and Operating Conditions:

The insulating coating of these devices does not form an air and moisture-tight seal. Avoid exposure to moisture and do not use or store these devices in a corrosive atmosphere, especially where chloride gas, sulfide gas, acid, alkali, salt, or the like are present. Before cleaning, bonding or molding these devices, it is important to verify that your process does not affect product quality and performance. KEMET recommends testing and evaluating the performance of a cleaned, bonded or molded product prior to implementing and/or qualifying any of these processes. Store the capacitors where the temperature and relative humidity do not exceed 40 degrees Centigrade and 70% respectively. For optimum solderability, capacitor stock should be used promptly, preferably within 6 months of receipt.

### Working Voltage:

Application voltage ( $V_{p-p}$  or  $V_{o-p}$ ) must not exceed the voltage rating of the capacitor. Irregular voltages can be generated for a transient period of time when voltage is initially applied and/or removed from a circuit. It is important to choose a capacitor with a voltage rating greater than or equal to these irregular voltages.

| Voltage                | DC Voltage                                                                        | DC +AC Voltage                                                                    | AC Voltage                                                                        | Pulse Voltage (1)                                                                   | Pulse Voltage (2)                                                                   |
|------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Positional Measurement |  |  |  |  |  |

### Operating Temperature and Self-Generating Heat:

The surface temperature of a capacitor should be kept below the upper limit of its rated operating temperature range. Be sure to take into account the heat generated by the capacitor itself. When the capacitor is used in a high-frequency current, pulse current or similar current, it may self-generate heat due to dielectric loss. Temperature rise due to self-generated heating should not exceed 20°C (while operated at an atmosphere temperature of 25°C).

### Handling - Vibration and Impact:

Do not expose these devices or their leads to excessive shock or vibration during use.

**FAILURE TO FOLLOW THE ABOVE CAUTIONS MAY RESULT, WORST CASE, IN A SHORT CIRCUIT AND CAUSE FUMING OR PARTIAL DISPERSION WHEN THE PRODUCT IS USED.**

## KEMET Corporation World Headquarters

2835 KEMET Way  
Simpsonville, SC 29681

Mailing Address:  
P.O. Box 5928  
Greenville, SC 29606

www.kemet.com  
Tel: 864-963-6300  
Fax: 864-963-6521

**Corporate Offices**  
Fort Lauderdale, FL  
Tel: 954-766-2800

## North America

**Southeast**  
Lake Mary, FL  
Tel: 407-855-8886

**Northeast**  
Wilmington, MA  
Tel: 978-658-1663

**Central**  
Novi, MI  
Tel: 248-994-1030

**West**  
Milpitas, CA  
Tel: 408-433-9950

**Mexico**  
Guadalajara, Jalisco  
Tel: 52-33-3123-2141

## Europe

**Southern Europe**  
Paris, France  
Tel: 33-1-4646-1006

Sasso Marconi, Italy  
Tel: 39-051-939111

**Central Europe**  
Landsberg, Germany  
Tel: 49-8191-3350800

Kamen, Germany  
Tel: 49-2307-438110

**Northern Europe**  
Bishop's Stortford, United Kingdom  
Tel: 44-1279-460122

Espoo, Finland  
Tel: 358-9-5406-5000

## Asia

**Northeast Asia**  
Hong Kong  
Tel: 852-2305-1168

Shenzhen, China  
Tel: 86-755-2518-1306

Beijing, China  
Tel: 86-10-5829-1711

Shanghai, China  
Tel: 86-21-6447-0707

Taipei, Taiwan  
Tel: 886-2-27528585

**Southeast Asia**  
Singapore  
Tel: 65-6586-1900

Penang, Malaysia  
Tel: 60-4-6430200

Bangalore, India  
Tel: 91-806-53-76817

*Note: KEMET reserves the right to modify minor details of internal and external construction at any time in the interest of product improvement. KEMET does not assume any responsibility for infringement that might result from the use of KEMET Capacitors in potential circuit designs. KEMET is a registered trademark of KEMET Electronics Corporation.*

## Other KEMET Resources

| Tools                          |                                                                               |
|--------------------------------|-------------------------------------------------------------------------------|
| Resource                       | Location                                                                      |
| Configure A Part: CapEdge      | <a href="http://capacitoreedge.kemet.com">http://capacitoreedge.kemet.com</a> |
| SPICE & FIT Software           | <a href="http://www.kemet.com/spice">http://www.kemet.com/spice</a>           |
| Search Our FAQs: KnowledgeEdge | <a href="http://www.kemet.com/keask">http://www.kemet.com/keask</a>           |
| Electrolytic LifeCalculator    | <a href="http://www.kemet.com:8080/elc">http://www.kemet.com:8080/elc</a>     |

| Product Information                                  |                                                                                           |
|------------------------------------------------------|-------------------------------------------------------------------------------------------|
| Resource                                             | Location                                                                                  |
| Products                                             | <a href="http://www.kemet.com/products">http://www.kemet.com/products</a>                 |
| Technical Resources (Including Soldering Techniques) | <a href="http://www.kemet.com/technicalpapers">http://www.kemet.com/technicalpapers</a>   |
| RoHS Statement                                       | <a href="http://www.kemet.com/rohs">http://www.kemet.com/rohs</a>                         |
| Quality Documents                                    | <a href="http://www.kemet.com/qualitydocuments">http://www.kemet.com/qualitydocuments</a> |

| Product Request         |                                                                       |
|-------------------------|-----------------------------------------------------------------------|
| Resource                | Location                                                              |
| Sample Request          | <a href="http://www.kemet.com/sample">http://www.kemet.com/sample</a> |
| Engineering Kit Request | <a href="http://www.kemet.com/kits">http://www.kemet.com/kits</a>     |

| Contact            |                                                                                     |
|--------------------|-------------------------------------------------------------------------------------|
| Resource           | Location                                                                            |
| Website            | <a href="http://www.kemet.com">www.kemet.com</a>                                    |
| Contact Us         | <a href="http://www.kemet.com/contact">http://www.kemet.com/contact</a>             |
| Investor Relations | <a href="http://www.kemet.com/ir">http://www.kemet.com/ir</a>                       |
| Call Us            | 1-877-MyKEMET                                                                       |
| Twitter            | <a href="http://twitter.com/kemetcapacitors">http://twitter.com/kemetcapacitors</a> |

## Disclaimer

All product specifications, statements, information and data (collectively, the "Information") in this datasheet are subject to change. The customer is responsible for checking and verifying the extent to which the Information contained in this publication is applicable to an order at the time the order is placed.

All Information given herein is believed to be accurate and reliable, but it is presented without guarantee, warranty, or responsibility of any kind, expressed or implied.

Statements of suitability for certain applications are based on KEMET Electronics Corporation's ("KEMET") knowledge of typical operating conditions for such applications, but are not intended to constitute – and KEMET specifically disclaims – any warranty concerning suitability for a specific customer application or use. The Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by KEMET with reference to the use of KEMET's products is given gratis, and KEMET assumes no obligation or liability for the advice given or results obtained.

Although KEMET designs and manufactures its products to the most stringent quality and safety standards, given the current state of the art, isolated component failures may still occur. Accordingly, customer applications which require a high degree of reliability or safety should employ suitable designs or other safeguards (such as installation of protective circuitry or redundancies) in order to ensure that the failure of an electrical component does not result in a risk of personal injury or property damage.

Although all product-related warnings, cautions and notes must be observed, the customer should not assume that all safety measures are indicated or that other measures may not be required.





Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А