




### High capacity up to 6A in a slim SIL package


PhotoMOS®  
**Power 1 Form A**  
High Capacity (AQZ200G)

**New**



(Height includes  
standoff)

mm inch



**RoHS compliant**

Please check our website for the latest information regarding compliance to safety standards.

## FEATURES

### 1. High capacity type power PhotoMOS.

Can switch a wide range of currents and voltages. Can control various types of loads, from very small loads to a max. 6A AC/DC current for sequencers, motors, and lamps.

### 2. Low on-resistance and high sensitivity.

Low on-resistance of less than Typ. 0.015Ω (AQZ202G). High sensitivity LED operate current of Typ. 1 mA.

### 3. AC/DC dual use

Bi-directional control is possible. There is no need to differentiate depending on the load as was necessary with the conventional SSR.

### 4. Slim SIL 4-pin package

(L) 21.0 mm × (W) 3.5 mm × (H) 12.5 mm  
(L) .827 inch × (W) .138 inch × (H) .492 inch

The compact size of the 4-pin SIL package allows high density mounting

### 5. Low-level off state leakage current of max. 10 μA

### 6. Controls low-level analog signals

The triac, photocoupler, or SSR cannot be used to control signals of less than several hundred mV. The high capacity type power PhotoMOS feature extremely low closed-circuit offset voltage to enable control of low-level analog signals without distortion.

## TYPICAL APPLICATIONS

- Traffic signals
- Measuring instruments
- Industrial machines
- Mercury relay replacement

## TYPES

|                | Output rating* |              | Package  | Part No. | Packing quantity |              |
|----------------|----------------|--------------|----------|----------|------------------|--------------|
|                | Load voltage   | Load current |          |          | Inner carton     | Outer carton |
| AC/DC dual use | 60 V           | 6.0 A        | SIL4-pin | AQZ202G  | 25 pcs.          | 500 pcs.     |
|                | 100 V          | 4.0 A        |          | AQZ205G  |                  |              |
|                | 200 V          | 2.0 A        |          | AQZ207G  |                  |              |
|                | 600 V          | 1.0 A        |          | AQZ206G2 |                  |              |

Note: Please refer to the "Cautions for use" regarding the recommended operation load voltage.

\* Load voltage and current: Indicate the peak AC and DC values.

## RATING

### 1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)


| Item                    |                         | Symbol            | AQZ202G                    | AQZ205G | AQZ207G | AQZ206G2 | Remarks                             |
|-------------------------|-------------------------|-------------------|----------------------------|---------|---------|----------|-------------------------------------|
| Input                   | LED forward current     | I <sub>F</sub>    | 50 mA                      |         |         |          |                                     |
|                         | LED reverse voltage     | V <sub>R</sub>    | 5 V                        |         |         |          |                                     |
|                         | Peak forward current    | I <sub>FP</sub>   | 1 A                        |         |         |          | f = 100Hz, Duty factor = 0.1%       |
|                         | Power dissipation       | P <sub>in</sub>   | 75 mW                      |         |         |          |                                     |
| Output                  | Load voltage            | V <sub>L</sub>    | 60 V                       | 100 V   | 200 V   | 600 V    |                                     |
|                         | Continuous load current | I <sub>L</sub>    | 6.0 A                      | 4.0 A   | 2.0 A   | 1.0 A    | Peak AC, DC                         |
|                         | Peak load current       | I <sub>peak</sub> | 12.0 A                     | 8.0 A   | 6.0 A   | 3.0 A    | 100 ms (1shot), V <sub>L</sub> = DC |
|                         | Power dissipation       | P <sub>out</sub>  | 1.6 W                      |         |         |          |                                     |
| Total power dissipation |                         | P <sub>T</sub>    | 1.6 W                      |         |         |          |                                     |
| I/O isolation voltage   |                         | V <sub>iso</sub>  | 2,500 Vrms                 |         |         |          |                                     |
| Ambient temperature     | Operating               | T <sub>opr</sub>  | -40 to +85°C -40 to 185°F  |         |         |          | (Non-icing at low temperatures)     |
|                         | Storage                 | T <sub>stg</sub>  | -40 to +100°C -40 to 212°F |         |         |          |                                     |

# Power 1 Form A (AQZ200G)

## 2. Electrical characteristics (Ambient temperature: 25°C 77°F)

| Item                             |                           |                  | Symbol                                    | AQZ202G | AQZ205G | AQZ207G | AQZ206G2  | Condition  |
|----------------------------------|---------------------------|------------------|---|---------|---------|---------|---|--|
| Input                            | LED operate current       | Typical          | I <sub>Fon</sub>                          | 1.0 mA  |         |         |   | I <sub>L</sub> = 100 mA<br>V <sub>L</sub> = 10 V                           |
|                                  |                           | Maximum          |   | 3.0 mA  |         |         |   |  |
|                                  | LED turn off current      | Minimum          | I <sub>Foff</sub>                         | 0.2 mA  |         |         |   | I <sub>L</sub> = 100 mA<br>V <sub>L</sub> = 10 V                           |
|                                  |                           | Typical          |   | 0.9 mA  |         |         |   |  |
| LED dropout voltage              | Typical                   | V <sub>F</sub>   | 1.25 V (1.16 V at I <sub>F</sub> = 10 mA) |         |         |         | I <sub>F</sub> = 50 mA  |  |
|                                  | Maximum                   |                  | 1.5 V                                     |         |         |         |   |  |
| Output                           | On resistance             | Typical          | R <sub>on</sub>                           | 0.015 Ω | 0.035 Ω | 0.18 Ω  | 0.52 Ω  | I <sub>F</sub> = 10 mA<br>I <sub>L</sub> = Max.<br>Within 1 s              |
|                                  |                           | Maximum          |   | 0.03 Ω  | 0.06 Ω  | 0.35 Ω  | 0.8 Ω   |  |
|                                  | Off state leakage current | Maximum          | I <sub>Leak</sub>                         | 10 μA   |         |         |   | I <sub>F</sub> = 0 mA<br>V <sub>L</sub> = Max.                             |
| Transfer characteristics         | Turn on time*             | Typical          | T <sub>on</sub>                           | 3.8 ms  | 5.0 ms  | 2.5 ms  | 3.0 ms  | I <sub>F</sub> = 10 mA<br>I <sub>L</sub> = 100 mA<br>V <sub>L</sub> = 10 V |
|                                  |                           | Maximum          |   | 10 ms   |         |         |   |  |
|                                  | Turn off time*            | Typical          | T <sub>off</sub>                          | 0.2 ms  | 0.3 ms  | 0.2 ms  |   | I <sub>F</sub> = 10 mA<br>I <sub>L</sub> = 100 mA<br>V <sub>L</sub> = 10 V |
|                                  |                           | Maximum          |   | 3.0 ms  |         |         |   |  |
|                                  | I/O capacitance           | Typical          | C <sub>iso</sub>                          | 0.8 pF  |         |         |   | f = 1 MHz<br>V <sub>B</sub> = 0 V  |
|                                  |                           | Maximum          |   | 1.5 pF  |         |         |   |  |
| Initial I/O isolation resistance | Minimum                   | R <sub>iso</sub> | 1,000 MΩ                                  |         |         |         | 500 V DC  |  |
| Max. operating frequency         | Maximum                   | —                | 0.5 cps                                   |         |         |         | I <sub>F</sub> = 10 mA<br>Duty factor = 50%<br>I <sub>L</sub> = Max., V <sub>L</sub> = Max. |  |

\*Turn on/Turn off time

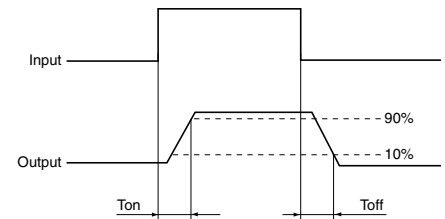

## 3. Recommended operating conditions (Ambient temperature: 25°C 77°F)

Please use under recommended operating conditions to obtain expected characteristics.

| Item              |                         | Symbol         | Min. | Max. | Unit |
|-------------------|-------------------------|----------------|------|------|------|
| Input LED current |                         | I <sub>F</sub> | 10   | 30   | mA   |
| AQZ202G           | Load voltage (Peak AC)  | V <sub>L</sub> | —    | 48   | V    |
|                   | Continuous load current | I <sub>L</sub> | —    | 6.0  | A    |
| AQZ205G           | Load voltage (Peak AC)  | V <sub>L</sub> | —    | 80   | V    |
|                   | Continuous load current | I <sub>L</sub> | —    | 4.0  | A    |
| AQZ207G           | Load voltage (Peak AC)  | V <sub>L</sub> | —    | 160  | V    |
|                   | Continuous load current | I <sub>L</sub> | —    | 2.0  | A    |
| AQZ206G2          | Load voltage (Peak AC)  | V <sub>L</sub> | —    | 480  | V    |
|                   | Continuous load current | I <sub>L</sub> | —    | 1.0  | A    |


■ These products are not designed for automotive use.

If you are considering to use these products for automotive applications, please contact your local Panasonic Corporation technical representative.

## REFERENCE DATA


1. Load current vs. ambient temperature characteristics

Allowable ambient temperature: -40 to +85°C  
-40 to +185°F

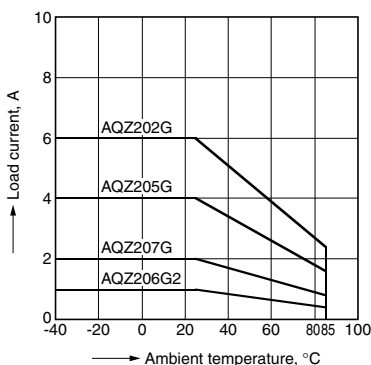


2. Load current vs. ambient temperature characteristics in adjacent mounting

I<sub>L</sub>: Load current;  
I<sub>L</sub> (max.): Maximum continuous load current

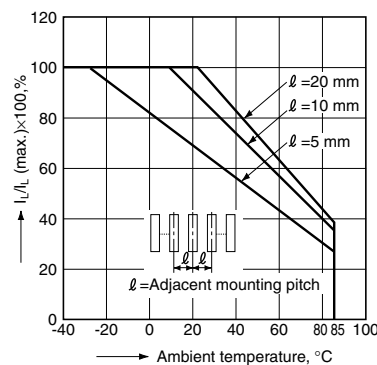


3. On resistance vs. ambient temperature characteristics

LED current: 10 mA;  
Continuous load current:  
6 A (DC) (AQZ202G), 4 A (DC) (AQZ205G),  
2 A (DC) (AQZ207G), 1 A (DC) (AQZ206G2)

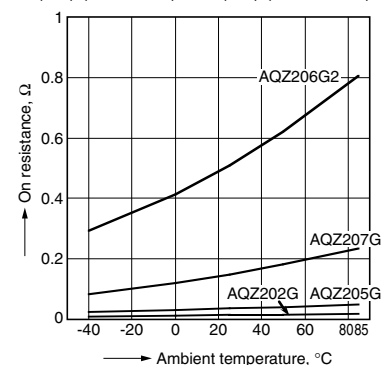


4. Turn on time vs. ambient temperature characteristics

LED current: 10 mA; Load voltage: 10 V (DC); Continuous load current: 100 mA (DC)

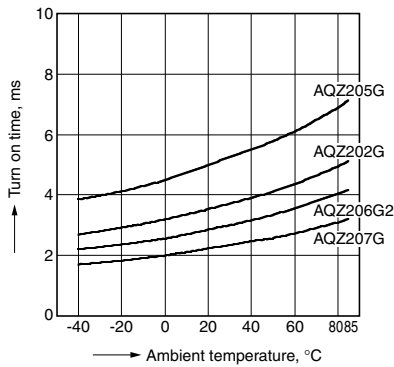


5. Turn off time vs. ambient temperature characteristics

LED current: 10 mA; Load voltage: 10 V (DC); Continuous load current: 100 mA (DC)

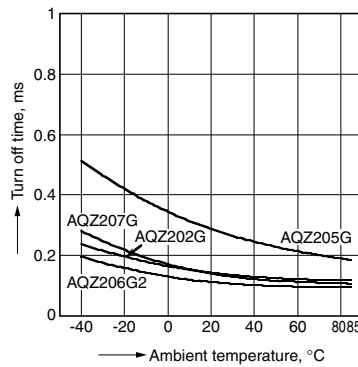


6. LED operate current vs. ambient temperature characteristics

Load voltage: 10 V (DC); Continuous load current: 100 mA (DC)

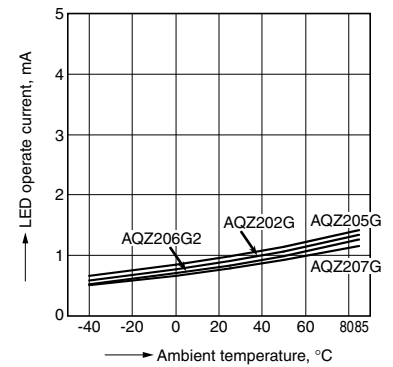


7. LED turn off current vs. ambient temperature characteristics

Load voltage: 10 V (DC); Continuous load current: 100 mA (DC)

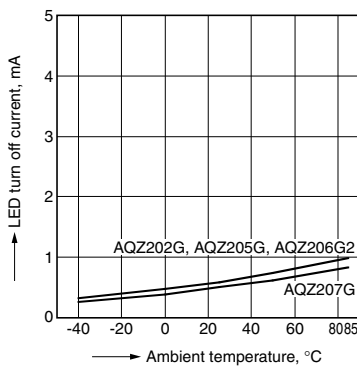


8. LED dropout voltage vs. ambient temperature characteristics

Sample: all types; LED current: 5 to 50 mA

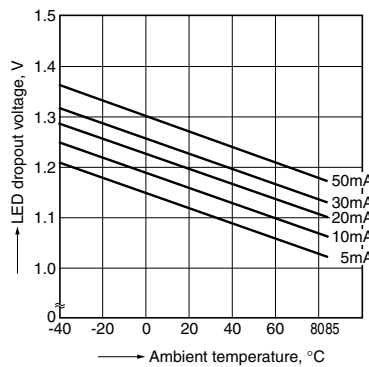


9. Current vs. voltage characteristics of output at MOS portion

Ambient temperature: 25°C 77°F

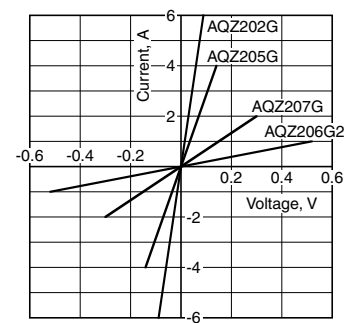


10. Off state leakage current vs. load voltage characteristics

Ambient temperature: 25°C 77°F

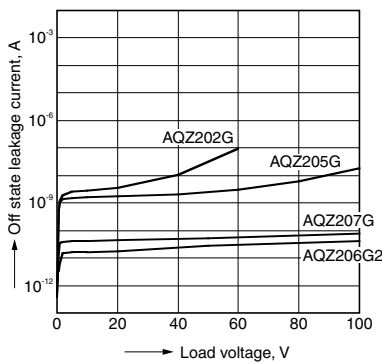


11. Turn on time vs. LED forward current characteristics

Load voltage: 10 V (DC); Continuous load current: 100 mA (DC); Ambient temperature: 25°C 77°F

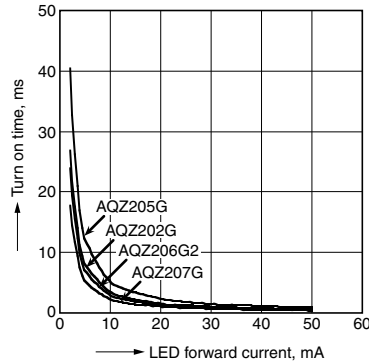


12. Turn off time vs. LED forward current characteristics

Load voltage: 10 V (DC); Continuous load current: 100 mA (DC); Ambient temperature: 25°C 77°F

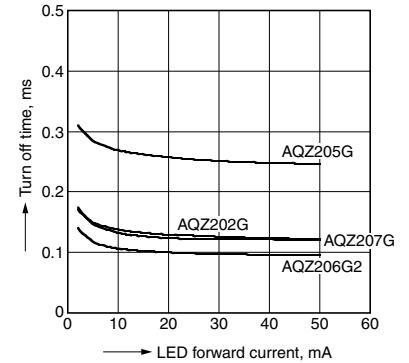


13. Turn on time vs. load voltage characteristics

LED current: 10 mA; Continuous load current: 100 mA; Ambient temperature: 25°C 77°F

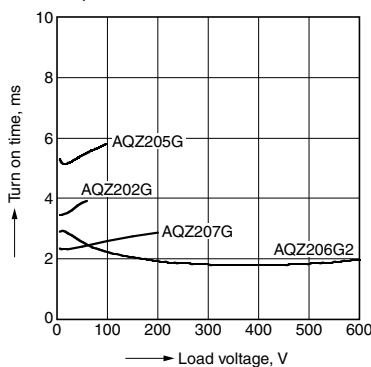


14. Turn on time vs. load current characteristics

LED current: 10 mA; Load voltage: 10 V (DC); Ambient temperature: 25°C 77°F

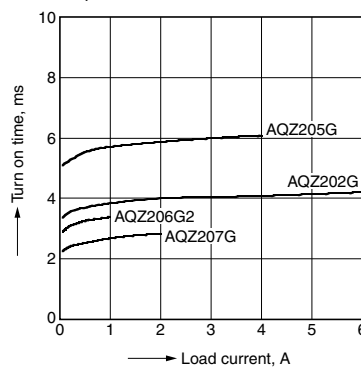

15. Turn off time vs. load voltage characteristics


LED current: 10 mA; Continuous load current: 100 mA; Ambient temperature: 25°C 77°F

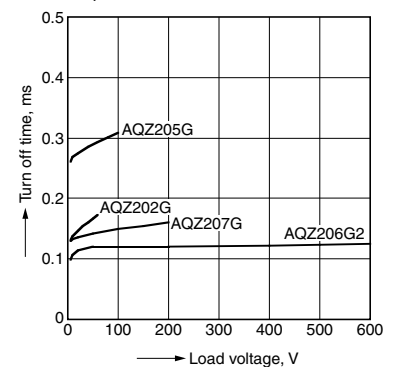

# Power 1 Form A (AQZ200G)


## 16. Turn off time vs. load current characteristics

LED current: 10 mA;  
Load voltage: 10 V (DC);  
Ambient temperature: 25°C 77°F

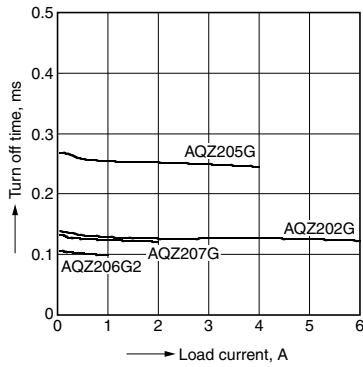


## 17. Max. operating frequency vs. load voltage/ current characteristics

Sample: All types; LED current: 10 mA;  
Ambient temperature: 25°C 77°F  
 $V_L$ : Load voltage,  $V_L$  (Max.): Max. rated load voltage  
 $I_L$ : Load current,  $I_L$  (Max.): Max. rated continuous load current

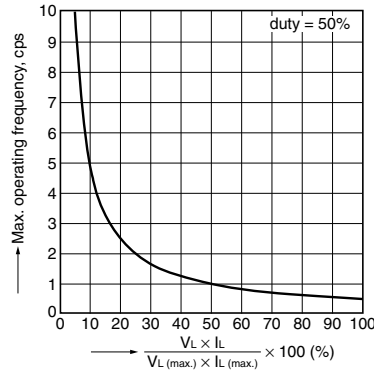


## 18. Output capacitance vs. applied voltage characteristics

Frequency: 1 MHz;  
Ambient temperature: 25°C 77°F

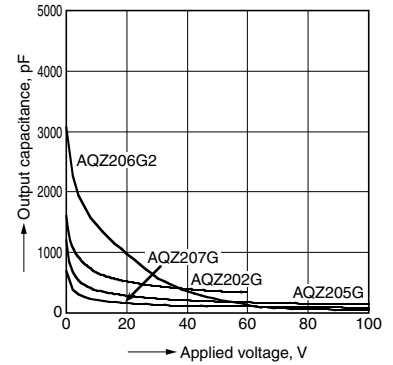

## CAUTIONS FOR USE

For cautions for general use, please read "PhotoMOS® Cautions for Use" at Automation Control WEB site (as described in footer of catalog).

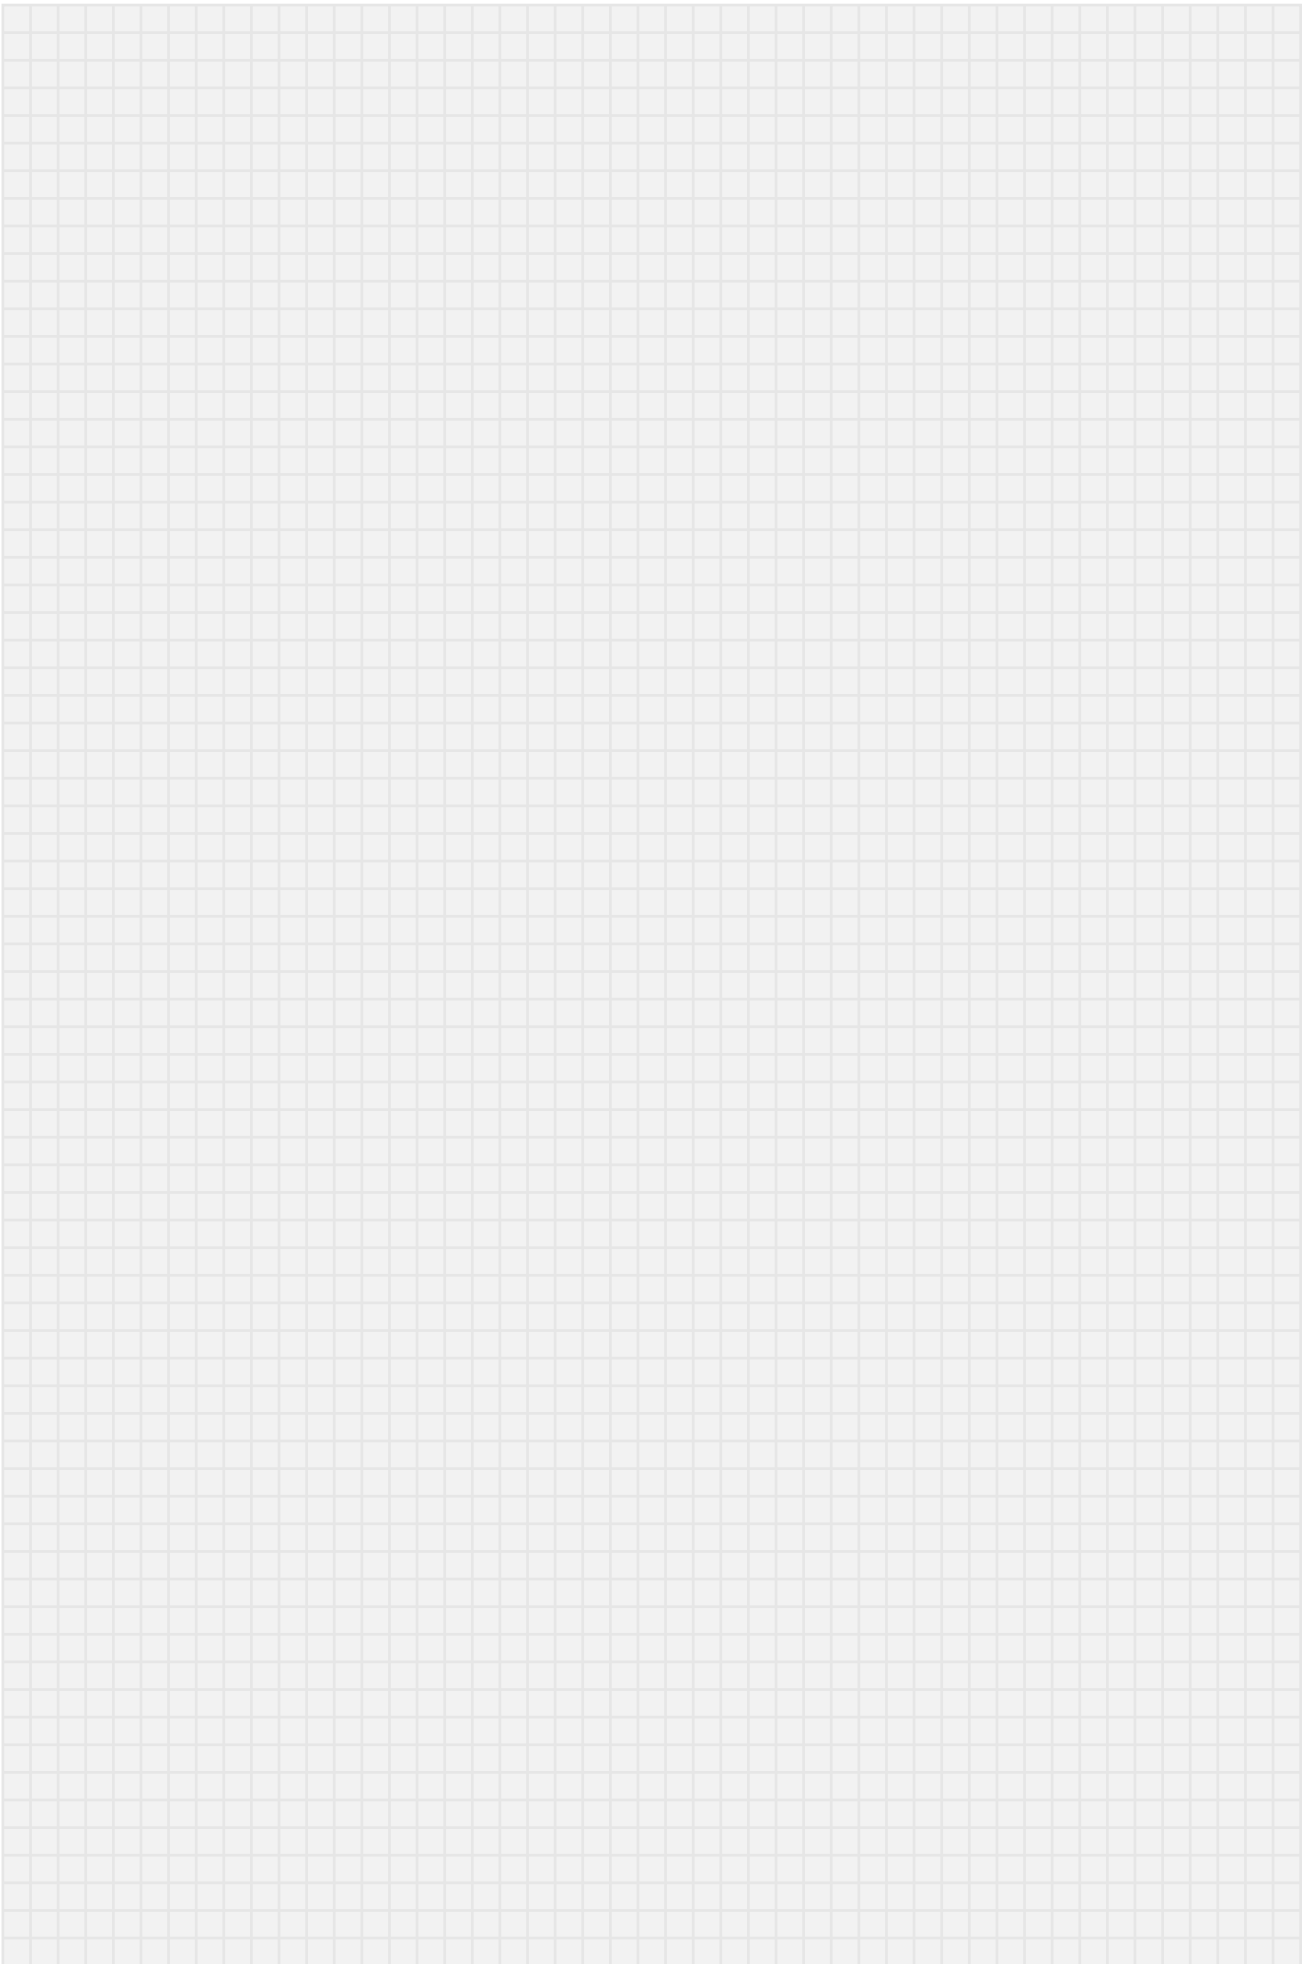

"PhotoMOS®", "PhotoMOS" and "PHOTOMOS" are registered trademarks of Panasonic Corporation.

\*Recognized in Japan, the United States, all member states of European Union and other countries.

Please contact .....

**Panasonic Corporation**

Electromechanical Control Business Division

■ 1006, Oaza Kadoma, Kadoma-shi, Osaka 571-8506, Japan  
[industrial.panasonic.com/ac/e/](http://industrial.panasonic.com/ac/e/)

**Panasonic®**

©Panasonic Corporation 2018

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Panasonic:

[AQZ104](#) [AQZ104D](#) [AQZ105D](#) [AQZ107](#) [AQZ107D](#) [AQZ202D](#) [AQZ204D](#) [AQZ205D](#) [AQZ207D](#) [AQZ264](#)  
[AQZ202G](#) [AQZ207G](#) [AQZ206G2](#) [AQZ205G](#)

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А