

Features

- ◆ 2" x 1" metal package
- ◆ Ultra wide 4:1 input voltage range
9–36, 18–75, 43–160 VDC
- ◆ EN 50155 approval for railway applications
- ◆ Thermal shock and vibration resistant according EN 61373
- ◆ High efficiency up to 92%
- ◆ No minimum load required
- ◆ Operating temperature range
–40°C to +85°C
- ◆ Under voltage lock-out circuit
- ◆ Remote On/Off
- ◆ Output voltage adjustable
- ◆ Lead free design, RoHS compliant
- ◆ 3-year product warranty



The TEN 40WIR series is a family of high performance 40 Watt dc/dc converter modules featuring ultra wide 4:1 input voltage ranges in a 2" x 1" package with industry-standard footprint. Input voltages up to 160 VDC, excellent EMC characteristics and EN 50155 approval make this product the best choice for many demanding applications in railroad and transportation systems. Further standard features include remote On/Off, over voltage protection, under voltage lockout and short circuit protection. Low input current characteristics at minimal load make these converters also the ideal solution for battery-operated systems. Typical applications are in wireless networks, telecom/datacom, industry control systems and measurement equipments.

Models

Order code	Input voltage range	Output voltage	Output current max.	Efficiency typ.
TEN 40-2410WIR TEN 40-2411WIR TEN 40-2412WIR TEN 40-2413WIR TEN 40-2415WIR TEN 40-2422WIR TEN 40-2423WIR TEN 40-2425WIR	9 – 36 VDC (24 VDC nominal)	3.3 VDC 5.0 VDC 12 VDC 15 VDC 24 VDC ±12 VDC ±15 VDC ±24 VDC (48 VDC)*	10'000 mA 8000 mA 3333 mA 2666 mA 1666 mA ±1666 mA ±1333 mA ±833 mA	90 % 91 % 91 % 91 % 91 % 90 % 90 % 91 %
TEN 40-4810WIR TEN 40-4811WIR TEN 40-4812WIR TEN 40-4813WIR TEN 40-4815WIR TEN 40-4822WIR TEN 40-4823WIR TEN 40-4825WIR	18 – 75 VDC (48 VDC nominal)	3.3 VDC 5.0 VDC 12 VDC 15 VDC 24 VDC ±12 VDC ±15 VDC ±24 VDC (48 VDC)*	10'000 mA 8000 mA 3333 mA 2666 mA 1666 mA ±1666 mA ±1333 mA ±833 mA	90 % 91 % 92 % 92 % 91 % 90 % 90 % 91 %
TEN 40-7210WIR TEN 40-7211WIR TEN 40-7212WIR TEN 40-7213WIR TEN 40-7215WIR TEN 40-7222WIR TEN 40-7223WIR TEN 40-7225WIR	43 – 160 VDC (110 VDC nominal)	3.3 VDC 5.0 VDC 12 VDC 15 VDC 24 VDC ±12 VDC ±15 VDC ±24 VDC (48 VDC)*	10'000 mA 8000 mA 3333 mA 2666 mA 1666 mA ±1666 mA ±1333 mA ±833 mA	88 % 89 % 90 % 90 % 90 % 89 % 89 % 81 %

* The outputs can also be used in serial circuit for single 48 VDC operation. Free-wheeling diodes are not necessary but recommended for increased performance for start-up with inductive/capacitive load and at dynamic load operation.

Input Specifications

Input current (no load)	24 Vin models: 15 mA typ. 48 Vin models: 10 mA typ. 110 Vin models: 6 mA typ.
Start-up voltage	24 Vin models: < 9.0 VDC 48 Vin models: < 18 VDC 110 Vin models: < 43 VDC
Under voltage shut down (lock-out circuit)	24 Vin models: 8.0 VDC typ. 48 Vin models: 16 VDC typ. 110 Vin models: 40 VDC typ.
Surge voltage (1 sec.)	24 Vin models: 50 V max. 48 Vin models: 100 V max. 110 Vin models: 170 V max.
Reflected ripple current	20 mAp-p typ.
Conducted noise	EN 55022 class A with external components – see application note document www.tracopower.com/overview/ten40wir
EMC immunity	EN 50155, EN 50121-3-2 – ESD (electrostatic discharge) EN 61000-4-2, air ±8 kV, contact ±6 kV, perf. criteria A – Radiated immunity EN 61000-4-3, 20 V/m, perf. criteria A – Fast transient / surge (with external input capacitor) EN 61000-4-4, ±2 kV, perf. criteria A EN 61000-4-5, ±2 kV perf. criteria A 24 & 48 Vin models: Nippon chemi-con KY 220 µF, 100 V, ESR 48 mOhm 110 Vin models: Ruby-con BXF 68 µF, 200 V, 3pcs in parallel. – Conducted immunity EN 61000-4-6, 10 V, perf. criteria A

Output Specifications

Voltage set accuracy	±1 %
Voltage adjustment range (single output models only)	15 & 24 VDC models: +20 %, -10 % other models: ±10 %
Regulation	– Input variation Vin min. to Vin max. 0.2 % max. – Load variation 0 – 100 % single output models: 0.5 % max. dual output models: 1 % max. (balanced load) 5 % max. (load cross variation 25 % / 100 %)
Minimum load	not required
Temperature coefficient	±0.02 %/K
Ripple and noise (20 MHz bandwidth, measured with 1 µF/ 50 V MLCC)	3.3 & 5.0 VDC models: 75 mVp-p max. 24 VDC models: 150 mVp-p max. other models: 100 mVp-p max.
Start up time	– Power On 60 ms typ. (constant resistive load) – Remote On 60 ms typ.
Transient response (25% load step change)	250 µs typ.
Short circuit protection	indefinite (automatic recovery)
Over load protection	150 % of lout max. typ.
Over voltage protection (only single output models)	3.3 VDC models: 3.9 V 5 VDC models: 6.2 V 12 VDC models: 15 V 15 VDC models: 20 V 24 VDC models: 31 V

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

Output Specifications

Capacitive load (max. values)	3.3 VDC models:	26'600 µF
	5.0 VDC models:	20'000 µF
	12 VDC models:	3900 µF
	15 VDC models:	2600 µF
	24 VDC models:	1300 µF
	±12 VDC models:	2600 µF (each output)
	±15 VDC models:	1600 µF (each output)
	±24 VDC models:	650 µF (each output)

General Specifications



Temperature ranges	– Operating – Casing temperature – Storage	–40°C to +85°C (with derating) +105°C max. –55°C to +125°C
Power derating	– Natural convection – Natural convection with heat sink (optional)	2.5 %/K above +60°C 2.8 %/K above +65°C
Thermal impedance	– Natural convection – Natural convection with heat sink (optional)	10.8 K/W 10.3 K/W
Humidity (non condensing)		5 – 95 % rel. H
Isolation voltage (60 sec.)	– Input / Output	1600 VDC
Isolation resistance	– Input / Output	>10'000 M Ohm
Isolation capacitance	– Input / Output	1'500 pF max.
Switching frequency		250 kHz typ. (pulse width modulation PWM)
Thermal shock, mechanical shock & vibration		EN 50155, EN 61373
Safety approvals	– UL – CB test certificate – certification documents	UL/cUL 60950-1 IEC/EN 60950-1 www.tracopower.com/overview/ten40wir
Remote On/Off	– On: – Off: – Off idle current:	3.0 ... 12 VDC or open circuit 0 ... 1.2 VDC or short circuit pin 3 and pin 2 3.0 mA
Reliability, calculated MTBF (MIL-HDBK-217F, at +25°C, ground benign)		900'000 h
Environmental compliance	– Reach document – RoHS	www.tracopower.com/overview/ten40wir RoHS directive 2011/65/EU

Physical Specifications

Casing material	copper
Baseplate material	non conductive FR4
Potting material	silicone (UL94V-0 rated)
Weight	21.5 g (0.76oz)
Soldering temperature	max. +265°C / 10 sec.

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

Outline Dimensions

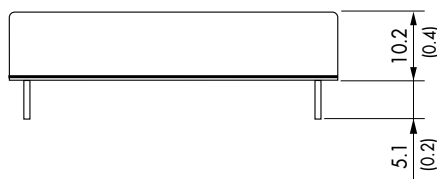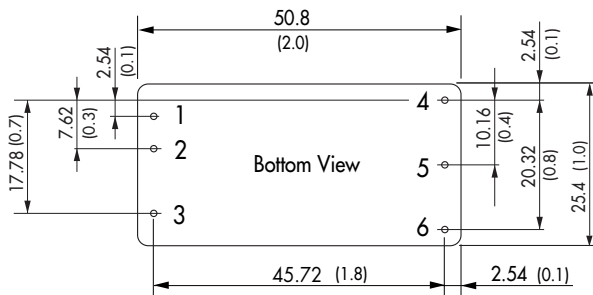

Pin-Out		
Pin	Single	Dual
1	+Vin (Vcc)	+Vin (Vcc)
2	-Vin (GND)	-Vin (GND)
3	Remote On/Off	
4	+Vout	+Vout
5	-Vout	Common
6	trim	-Vout

Dimensions in [mm], (I) = Inch
 Pin diameter: 1.0 ± 0.1 (0.04 ± 0.004)
 Pin pitch tolerances: ± 0.25 (± 0.01)
 Case tolerances: ± 0.5 (± 0.02)

3D drawings and application note at: www.tracopower.com/overview/ten40wir

Heat-Sink (Option)

Order code: TEN-HS1

(cont.: heat-sink, thermal pad, 2 clamps)

Material: Aluminum

Finish: Anodic treatment (black)




Weight: 17 g (0.60oz) without converter

Thermal impedance after assembling: 10.3 K/W

Note:

Before attaching the heatsink, the product label on converter has to be removed for optimal performance.

For volume orders we can supply the converters with heatsink already mounted. Please contact us for a relative quotation.

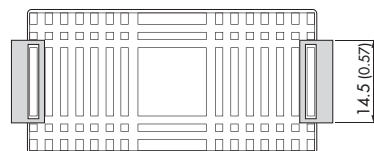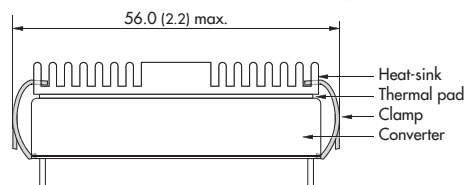

Dimensions in mm, (I) = Inch

Specifications can be changed without notice! Make sure you are using the latest documentation, downloadable at www.tracopower.com

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А