

8bit 20ch D/A converter

BH2222FV

BH2222FV is an 8bit D/A converter for electronic adjustment. The 20-channel output voltage can be independently controlled by three-wire serial interface from micro-controller. The built-in power on reset circuit keeps the output state Low after the power is on. 4-channel have data register function. Two kinds of set voltage can be retained, and output voltage can be switched by SEL pin.

●Applications

The voltage adjustment for DVC, DSC etc.

●Features

- 1) 8bit 20-channel D/A converters adopting R-2R system.
- 2) 3-wire + 1-wire 16-bit serial interface.
- 3) POWER ON RESET circuit.
- 4) The full scale output voltage range : 2.7 ~ 5.5V.
- 5) It is possible to set the two output full scale level independently.
- 6) 4-channel data Register extension function.
- 7) SSOP-B28 package.

●Absolute maximum ratings (Ta=25°C)

Parameter	Symbol	Limits	Unit
Power supply voltage	V _{CC}	-0.3~+7.0	V
Maximum output voltage	V _{IN}	-0.3~V _{CC}	V
Storage temperature	T _{stg}	-55~+125	°C
Power dissipation	P _d	640 *	mW

*Reduced by 6.4mW for each increase in Ta of 1°C over 25°C.

©This product is not designed for protection against radioactive rays.


●Recommended operating conditions (Ta=25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit
V _{CC} supply voltage	V _{CC}	4.5	—	5.5	V
V _{DD1} supply voltage	V _{DD1}	2.7	—	V _{CC}	V
V _{DD2} supply voltage	V _{DD2}	2.7	—	V _{CC}	V
Analog output source current	I _{OL}	—	—	1.0	mA
Analog output sink current	I _{OH}	—	—	1.0	mA
Operating temperature range	T _{opr}	-20	—	85	°C
Clock frequency	FSCLK	—	1.0	—	MHz
Limit load capacitance	CL	—	—	0.47	μF

Please set to V_{CC} ≥ V_{DD1}, V_{DD2}.

Standard ICs

●Block diagram

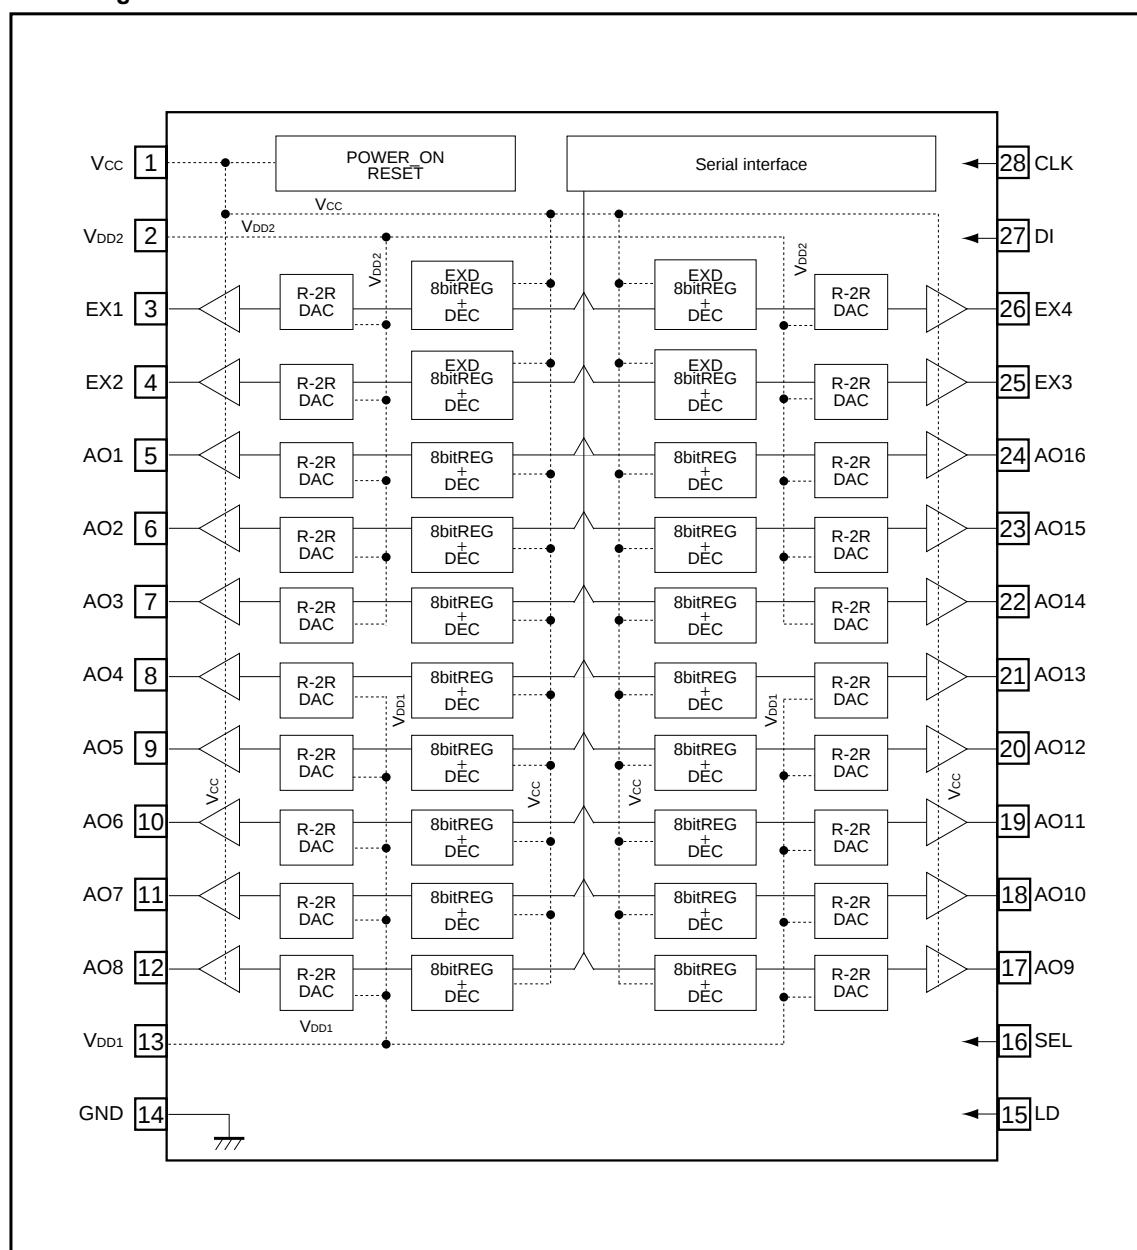

Standard ICs

●Pin descriptions

Pin No.	Pin name	In / Out	Power supply	Functions
1	V _{CC}	–	–	Power supply pin
2	V _{DD2}	–	–	Power supply pin
3	EX1	OUT	V _{DD2}	Analog output pins (Register extension)
4	EX2	OUT	V _{DD2}	
5	AO1	OUT	V _{DD2}	Analog output pins
6	AO2	OUT	V _{DD2}	
7	AO3	OUT	V _{DD2}	
8	AO4	OUT	V _{DD1}	
9	AO5	OUT	V _{DD1}	
10	AO6	OUT	V _{DD1}	
11	AO7	OUT	V _{DD1}	
12	AO8	OUT	V _{DD1}	
13	V _{DD1}	–	–	Power supply pin
14	GND	–	–	Common GND pin
15	LD	IN	–	Serial Load input pin
16	SEL	IN	–	Select extended data register pin
17	AO9	OUT	V _{DD1}	Analog output pins
18	AO10	OUT	V _{DD1}	
19	AO11	OUT	V _{DD1}	
20	AO12	OUT	V _{DD1}	
21	AO13	OUT	V _{DD1}	
22	AO14	OUT	V _{DD2}	
23	AO15	OUT	V _{DD2}	
24	AO16	OUT	V _{DD2}	
25	EX3	OUT	V _{DD2}	Analog output pins (Register extension)
26	EX4	OUT	V _{DD2}	
27	DI	IN	–	Serial Data input pin
28	CLK	IN	–	Serial Clock input pin

Standard ICs

●Electrical characteristics (unless otherwise noted, Ta=25°C, V_{CC}=V_{DD2}=5.0V, V_{DD1}=3.0V, R_L=OPEN, C_L=0pF)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
<Operating current> (80H set)						
V _{CC} system	I _{CC}	–	1.1	2.5	mA	CLK=1MHz
V _{DD1} system	I _{DD1}	–	1.0	2.0	mA	
V _{DD2} system	I _{DD2}	–	1.5	3.0	mA	
<Logic interface>						
Input low voltage	V _{IL}	GND	–	0.6	V	
Input high voltage	V _{IH}	2.4	–	V _{CC}	V	
Input low current	I _{IL}	–	–	10	μA	
Input high current	I _{IH}	–	–	10	μA	
<Buffer amplifier>						
Minimum output voltage	ZS1	GND	–	0.1	V	00H set I _{OH} =0.0mA
	ZS2	GND	–	0.2	V	00H set I _{OH} =0.5mA
	ZS3	GND	–	0.3	V	00H set I _{OH} =1.0mA
Maximum output voltage	FS1	V _{CC} –0.1	–	V _{CC}	V	FFH set I _{OL} =0.0mA
	FS2	V _{CC} –0.2	–	V _{CC}	V	FFH set I _{OL} =0.5mA
	FS3	V _{CC} –0.3	–	V _{CC}	V	FFH set I _{OL} =1.0mA
<DAC accuracy>						
Resolution	RES	–	8	–	bit	
Differential nonlinearity error	DNL	–1.0	–	1.0	LSB	Input code 02H~FDH
Nonlinearity error	INL	–1.5	–	1.5	LSB	Input code 02H~FDH

●Circuit operation

(1) Power on reset

This LSI has a power on reset circuit that sets an analog output to low level in V_{CC} power stand-up.


Please be sure that the time constant meets below condition, because the output is undefined when V_{CC} power stand up too rapidly.

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
V _{CC} supply voltage rise time	trV _{CC}	10	–	–	ms	V _{CC} =0→4.5V
Power on reset voltage	VPOR	–	2.1	–	V	

Standard ICs

(2) Conditions of operating timing (unless otherwise noted, $T_a=25^{\circ}\text{C}$, $V_{CC}=5.0\text{V}$, $V_{DD1}=3.0\text{V}$, $V_{DD2}=5.0\text{V}$)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
CLK L level pulse width	t_{CLKL}	200	—	—	ns	
CLK H level pulse width	t_{CLKH}	200	—	—	ns	
DI setup time	t_{SDI}	30	—	—	ns	
DI hold time	t_{hDI}	60	—	—	ns	
LD setup time	t_{SLD}	200	—	—	ns	
LD hold time	t_{hLD}	100	—	—	ns	
LD "H" level pulse width	t_{LDH}	100	—	—	ns	
Analog output delay time	t_{OUT}	—	—	200	μs	$C_L=50\text{pF}$, $R_L=10\text{k}\Omega$

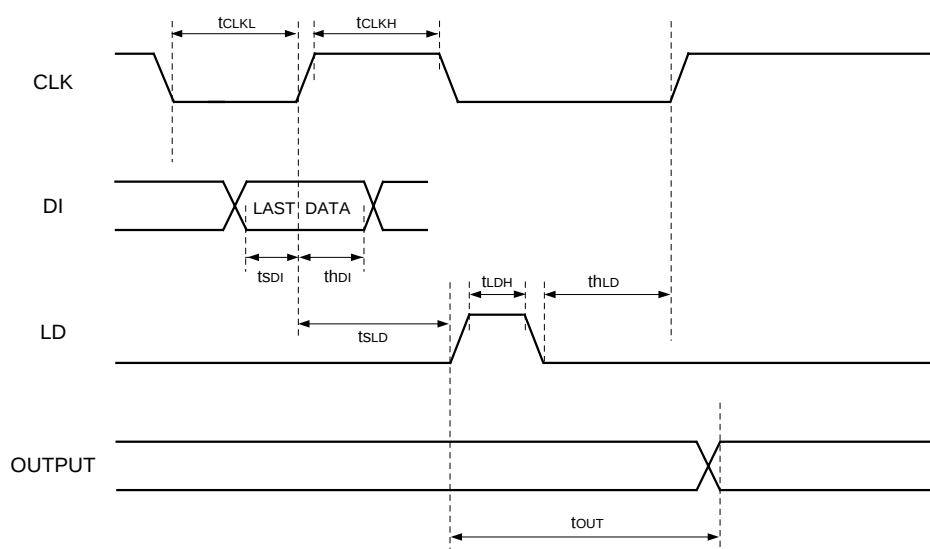

Standard ICs

(3) Command sending

Control command is 3+1wire 16bit serial interface. (LSB first)

Data is taken in with the rise edge of the CLK and output data is fixed in the LD high section.

Data is maintained in the LD low section.

Please change SEL mode in the LD low section.

MSB (LAST)

LSB (FIRST)

Data set								Channel select							
D15	D14	D13	D12	D11	D10	D9	D8	D7	D6	D5	D4	D3	D2	D1	D0

•Data set

D15	D14	D13	D12	D11	D10	D9	D8	Analog output voltage level
0	0	0	0	0	0	0	0	GND
0	0	0	0	0	0	0	1	$(V_{DD1} - 2 \cdot GND) / 256 \times 1$
0	0	0	0	0	0	1	0	$(V_{DD1} - 2 \cdot GND) / 256 \times 2$
⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮
1	1	1	1	1	1	1	0	$((V_{DD1} - 2 \cdot GND) / 256 \times 254)$
1	1	1	1	1	1	1	1	$((V_{DD1} - 2 \cdot GND) / 256 \times 255)$

•Channel select

D7	D6	D5	D4	D3	D2	D1	D0	Function	SEL	Output pin
×	×	×	0	0	0	0	0	Don't Care	×	×
×	×	×	0	0	0	0	1	AO1	×	AO1
⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮
×	×	×	1	0	0	0	0	AO16	×	AO16
×	×	×	1	0	0	0	1	EX1_0	0	EX1
⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮
×	×	×	1	0	1	0	0	EX4_0	0	EX4
×	×	×	1	0	1	0	1	EX1_1	1	EX1
⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮
×	×	×	1	1	0	0	0	EX4_1	1	EX4
×	×	×	1	1	0	0	1	Don't Care	×	×
⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮
×	×	×	1	1	1	1	1	Don't Care	×	×

× : Don't Care

Standard ICs

●Operation notes

(1) Regarding to the DNL & INL

This item is guaranteed under below condition.

Input code 02H~FDH

(2) Regarding to the early stage condition

With the power on reset, the output is fixed to low level in power stand-up.

But the output is undefined when only LD signal is inputted. Input the LD signal after setting data.

(3) Regarding to the setting of the each voltage

Set the VCC, VDD1, VDD2 to become the following condition. When not satisfied, unnecessary current flows.


$V_{CC} \geq V_{DD1}, V_{DD2}$

(4) Regarding to the power on reset function

This function operates detecting the voltage level of the VCC.

So, if the voltage level of the VCC become less than power on reset voltage when working, it is a possibility that the outputs become reset condition.

●External dimensions (Units : mm)

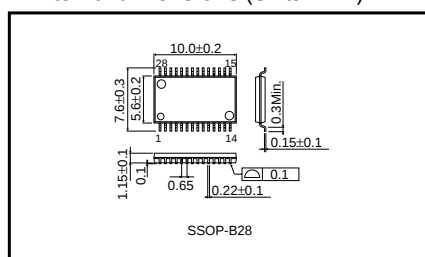

This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А