



# Surface Mount PAR<sup>®</sup> Transient Voltage Suppressors

High Temperature Stability and High Reliability Conditions



DO-214AB (SMCJ)

PRIMARY CHARACTERISTICS	
V <sub>BR</sub>	6.8 V to 47 V
V <sub>WM</sub>	5.50 V to 40.2 V
P <sub>PPM</sub>	1500 W
I <sub>FSM</sub>	200 A
T <sub>J</sub> max.	185 °C
Polarity	Uni-directional
Package	DO-214AB (SMCJ)

## TYPICAL APPLICATIONS

Use in sensitive electronics protection against voltage transients induced by inductive load switching and lighting on ICs, MOSFET, signal lines of sensor units for consumer, computer, industrial, automotive and telecommunication.

## FEATURES

- Junction passivation optimized design passivated anisotropic rectifier technology
- T<sub>J</sub> = 185 °C capability suitable for high reliability and automotive requirement
- Available in uni-directional polarity only
- 1500 W peak pulse power capability with a 10/1000 μs waveform
- Excellent clamping capability
- Very fast response time
- Low incremental surge resistance
- Meets MSL level 1, per J-STD-020, LF maximum peak of 260 °C
- AEC-Q101 qualified
- Material categorization: For definitions of compliance please see [www.vishay.com/doc?99912](http://www.vishay.com/doc?99912)



RoHS COMPLIANT

## MECHANICAL DATA

**Case:** DO-214AB (SMCJ)

Molding compound meets UL 94 V-0 flammability rating Base P/NHE3\_X - RoHS-compliant and AEC-Q101 qualified (“\_X” denotes revision code e.g. A, B, ....)

**Terminals:** Matte tin plated leads, solderable per J-STD-002 and JESD 22-B102

HE3 suffix meets JESD 201 class 2 whisker test

**Polarity:** Color band denotes cathode end

MAXIMUM RATINGS (T <sub>A</sub> = 25 °C, unless otherwise noted)			
PARAMETER	SYMBOL	VALUE	UNIT
Peak pulse power dissipation with a 10/1000 μs waveform (fig. 3) <sup>(1)(2)</sup>	P <sub>PPM</sub>	1500	W
Peak power pulse current with a 10/1000 μs waveform (fig. 1) <sup>(1)</sup>	I <sub>PPM</sub>	See table next page	A
Peak forward surge current 8.3 ms single half sine-wave <sup>(2)(3)</sup>	I <sub>FSM</sub>	200	A
Maximum instantaneous forward voltage at 100 A <sup>(2)(3)</sup>	V <sub>F</sub>	3.5	V
Operating junction and storage temperature range	T <sub>J</sub> , T <sub>STG</sub>	- 65 to + 185	°C

### Notes

<sup>(1)</sup> Non-repetitive current pulse, per fig. 3 and derated above T<sub>A</sub> = 25 °C per fig. 2

<sup>(2)</sup> Mounted on 0.31" x 0.31" (8.0 mm x 8.0 mm) copper pads at each terminal

<sup>(3)</sup> Measured on 8.3 ms single half sine-wave, or equivalent square wave, duty cycle = 4 pulses per minute maximum



ELECTRICAL CHARACTERISTICS (T <sub>A</sub> = 25 °C, unless otherwise noted)									
DEVICE TYPE	DEVICE MARKING CODE	BREAKDOWN VOLTAGE V <sub>BR</sub> <sup>(1)</sup> AT I <sub>T</sub> (V)		TEST CURRENT I <sub>T</sub> (mA)	STAND-OFF VOLTAGE V <sub>WM</sub> (V)	MAXIMUM REVERSE LEAKAGE AT V <sub>WM</sub> I <sub>R</sub> (μA)	MAXIMUM REVERSE LEAKAGE AT V <sub>WM</sub> T <sub>J</sub> = 150 °C I <sub>D</sub> (μA)	MAXIMUM PEAK PULSE SURGE CURRENT I <sub>PPM</sub> <sup>(2)</sup> (A)	MAXIMUM CLAMPING VOLTAGE AT I <sub>PPM</sub> V <sub>C</sub> (V)
		MIN.	MAX.						
TPSMC6.8	DDP	6.12	7.48	10	5.5	1000	10000	139	10.8
TPSMC6.8A	DEP	6.45	7.14	10	5.8	1000	10000	143	10.5
TPSMC7.5	DFP	6.75	8.25	10	6.05	500	5000	128	11.7
TPSMC7.5A	DGP	7.13	7.88	10	6.4	500	5000	133	11.3
TPSMC8.2	DHP	7.38	9.02	10	6.63	200	2000	120	12.5
TPSMC8.2A	DKP	7.79	8.61	10	7.02	200	2000	124	12.1
TPSMC9.1	DLP	8.19	10	1	7.37	50	500	109	13.8
TPSMC9.1A	DMP	8.65	9.55	1	7.78	50	500	112	13.4
TPSMC10	DNP	9	11	1	8.1	20	200	100	15
TPSMC10A	DPP	9.5	10.5	1	8.55	20	200	103	14.5
TPSMC11	DQP	9.9	12.1	1	8.92	5	50	92.6	16.2
TPSMC11A	DRP	10.5	11.6	1	9.4	5	50	96.2	15.6
TPSMC12	DSP	10.8	13.2	1	9.72	2	10	86.7	17.3
TPSMC12A	DTP	11.4	12.6	1	10.2	2	10	89.8	16.7
TPSMC13	DUP	11.7	14.3	1	10.5	2	10	78.9	19
TPSMC13A	DVP	12.4	13.7	1	11.1	2	10	82.4	18.2
TPSMC15	DWP	13.5	16.5	1	12.1	1	10	68.2	22
TPSMC15A	DXP	14.3	15.8	1	12.8	1	10	70.8	21.2
TPSMC16	DYP	14.4	17.6	1	12.9	1	10	63.8	23.5
TPSMC16A	DZP	15.2	16.8	1	13.6	1	10	66.7	22.5
TPSMC18	EDP	16.2	19.8	1	14.5	1	10	56.6	26.5
TPSMC18A	EEP	17.1	18.9	1	15.3	1	10	59.5	25.2
TPSMC20	EFP	18	22	1	16.2	1	10	51.5	29.1
TPSMC20A	EGP	19	21	1	17.1	1	10	54.2	27.7
TPSMC22	EHP	19.8	24.2	1	17.8	1	10	47	31.9
TPSMC22A	EKP	20.9	23.1	1	18.8	1	10	49	30.6
TPSMC24	ELP	21.6	26.4	1	19.4	1	10	43.2	34.7
TPSMC24A	EMP	22.8	25.2	1	20.5	1	10	45.2	33.2
TPSMC27	ENP	24.3	29.7	1	21.8	1	10	38.4	39.1
TPSMC27A	EPP	25.7	28.4	1	23.1	1	10	40	37.5
TPSMC30	EQP	27	33	1	24.3	1	10	34.5	43.5
TPSMC30A	ERP	28.5	31.5	1	25.6	1	10	36.2	41.4
TPSMC33	ESP	29.7	36.3	1	26.8	1	10	31.4	47.7
TPSMC33A	ETP	31.4	34.7	1	28.2	1	10	32.8	45.7
TPSMC36	EUP	32.4	39.6	1	29.1	1	15	28.8	52
TPSMC36A	EVP	34.2	37.8	1	30.8	1	15	30.1	49.9
TPSMC39	EWP	35.1	42.9	1	31.6	1	15	26.6	56.4
TPSMC39A	EXP	37.1	41	1	33.3	1	15	27.8	53.9
TPSMC43	EYP	38.7	47.3	1	34.8	1	20	24.2	61.9
TPSMC43A	EZP	40.9	45.2	1	36.8	1	20	25.3	59.3
TPSMC47	FDP	42.3	51.7	1	38.1	1	20	22.1	67.8
TPSMC47A	FEP	44.7	49.4	1	40.2	1	20	23.1	64.8

Notes

- (1) V<sub>BR</sub> measured after I<sub>T</sub> applied for 300 μs, I<sub>T</sub> = square wave pulse or equivalent
- (2) Surge current waveform per fig. 3 and derated per fig. 2
- (3) All terms and symbols are consistent with ANSI/IEEE C62.35

ORDERING INFORMATION (Example)				
PREFERRED P/N	UNIT WEIGHT (g)	PREFERRED PACKAGE CODE	BASE QUANTITY	DELIVERY MODE
TPSMC6.8AHE3_A/H <sup>(1)</sup>	0.211	H	850	7" diameter plastic tape and reel
TPSMC6.8AHE3_A/I <sup>(1)</sup>	0.211	I	3500	13" diameter plastic tape and reel

**Note**
<sup>(1)</sup> AEC-Q101 qualified

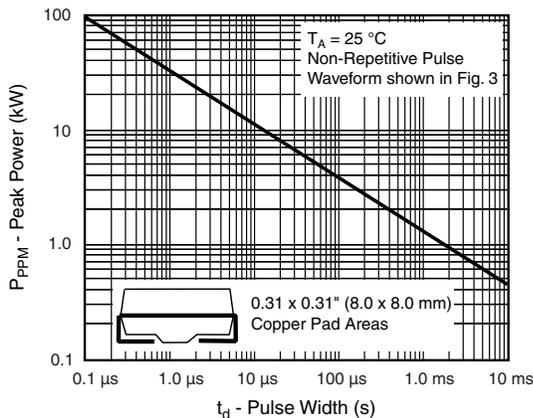
**RATINGS AND CHARACTERISTICS CURVES**
 $(T_A = 25\text{ }^\circ\text{C}$  unless otherwise noted)


Fig. 1 - Peak Pulse Power Rating Curve

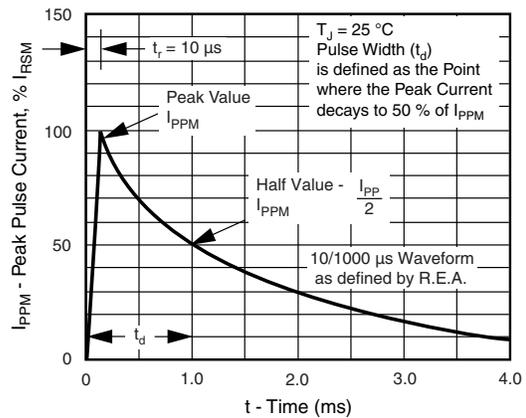


Fig. 3 - Pulse Waveform

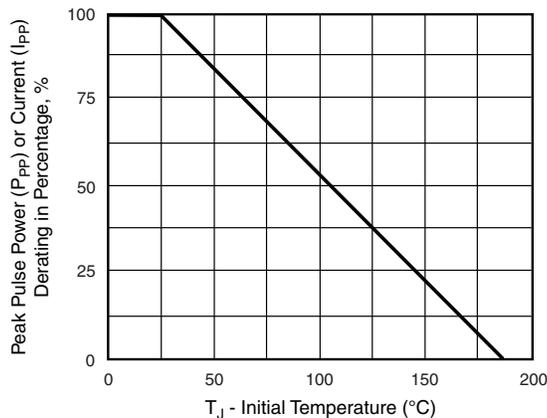


Fig. 2 - Pulse Power or Current vs. Initial Junction Temperature

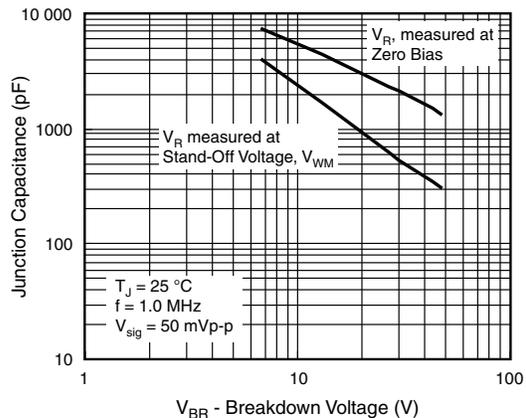


Fig. 4 - Typical Junction Capacitance


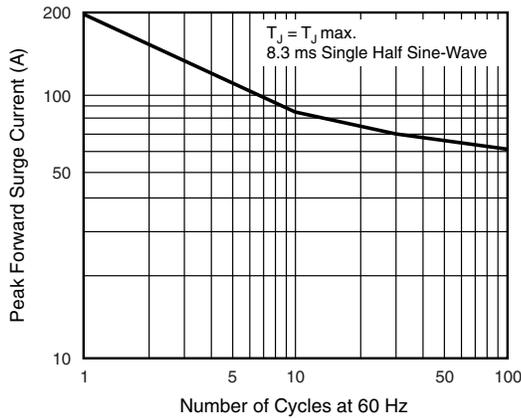


Fig. 5 - Maximum Non-Repetitive/Peak Forward Surge Current

**PACKAGE OUTLINE DIMENSIONS** in inches (millimeters)



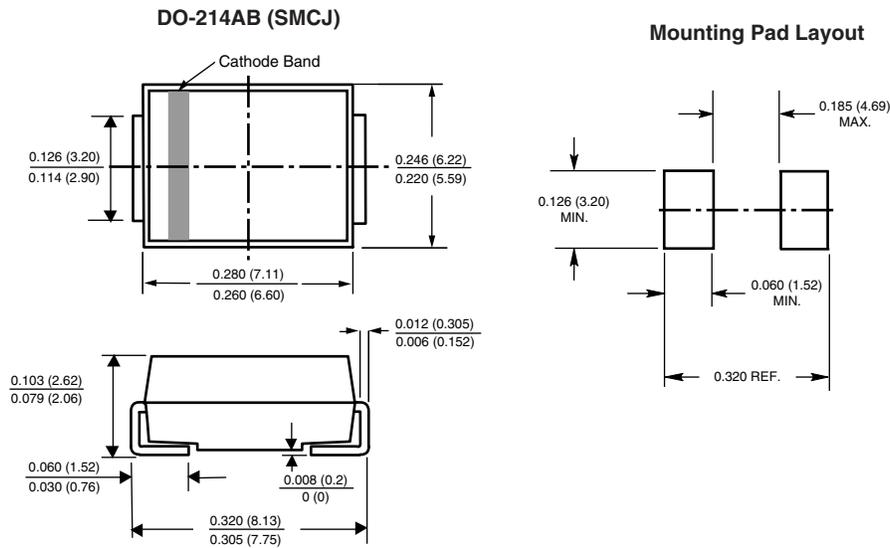

## Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

## Material Category Policy

**Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as RoHS-Compliant fulfill the definitions and restrictions defined under Directive 2011/65/EU of The European Parliament and of the Council of June 8, 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (EEE) - recast, unless otherwise specified as non-compliant.**

**Please note that some Vishay documentation may still make reference to RoHS Directive 2002/95/EC. We confirm that all the products identified as being compliant to Directive 2002/95/EC conform to Directive 2011/65/EU.**

**Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as Halogen-Free follow Halogen-Free requirements as per JEDEC JS709A standards. Please note that some Vishay documentation may still make reference to the IEC 61249-2-21 definition. We confirm that all the products identified as being compliant to IEC 61249-2-21 conform to JEDEC JS709A standards.**

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А