

# Aluminum Capacitors

## + 105 °C, General Purpose Miniature, Radial Lead




Fig.1 Component outline

### FEATURES

- High CV per case size
- Low cost
- Solvent resistant construction  
(through 100 WVDC)
- High temperature operation
- Life test to 2000 hours at + 105 °C


RoHS  
COMPLIANT

| QUICK REFERENCE DATA                    |                                                                                                                                                                                                                                                                                                                                                                                    |
|-----------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| DESCRIPTION                             | VALUE                                                                                                                                                                                                                                                                                                                                                                              |
| Nominal case size<br>Ø D x L in mm      | 0.197" x 0.433" [5.0 x 11.0]<br>to 0.709" x 1.575" [18.0 x 40.0]                                                                                                                                                                                                                                                                                                                   |
| Operating temperature                   | - 55 °C to + 105 °C (6.3 WVDC<br>to 100 WVDC)<br>- 40 °C to + 105 °C (160 WVDC<br>to 250 WVDC)                                                                                                                                                                                                                                                                                     |
| Rated Capacitance range, C <sub>R</sub> | 0.47 µF to 15 000 µF                                                                                                                                                                                                                                                                                                                                                               |
| Tolerance on C <sub>R</sub>             | ± 20 %                                                                                                                                                                                                                                                                                                                                                                             |
| Rated voltage range, U <sub>R</sub>     | 6.3 WVDC to 250 WVDC                                                                                                                                                                                                                                                                                                                                                               |
| Termination                             | 2 radial leads                                                                                                                                                                                                                                                                                                                                                                     |
| Life validation test at 105 °C          | 2000 hours: Δ CAP ± 20 % from<br>initial measurement.<br>Δ DF 2 x initial specified limit.<br>Δ DCL ≤ initial specified limit.                                                                                                                                                                                                                                                     |
| Shelf life at 105 °C                    | 1000 hours: Δ CAP ± 20 % from<br>initial measurement.<br>Δ DF 2 x initial specified limit.<br>Δ DCL ≤ initial specified limit                                                                                                                                                                                                                                                      |
| DC leakage current                      | Rated voltage for 1 minute for<br>6.3 WVDC to 100 WVDC units:<br>I < 0.03 CV or 4 µA<br>(whichever is greater).<br>Rated voltage for 2 minutes for<br>6.3 WVDC to 100 WVDC units:<br>I < 0.04 CV or 3 µA<br>(whichever is greater).<br>rated voltage for 1 minute for<br>160 WVDC to 250 WVDC units:<br>I < 0.1 CV + 40 µA and CV > 1000;<br>I < 0.04 CV + 100 µA<br>and CV > 1000 |

| RIPPLE CURRENT MULTIPLIERS |               |         |           |             |       |          |
|----------------------------|---------------|---------|-----------|-------------|-------|----------|
| TEMPERATURE                |               |         |           |             |       |          |
| Ambient Temperature        |               |         |           | Multipliers |       |          |
| + 70 °C                    |               |         |           | 1.78        |       |          |
| + 85 °C                    |               |         |           | 1.4         |       |          |
| + 105 °C                   |               |         |           | 1.0         |       |          |
| FREQUENCY (Hz)             |               |         |           |             |       |          |
| WVDC                       | Cap. (µF)     | 50 - 60 | 100 - 120 | 300 - 400   | 1 kHz | ≤ 10 kHz |
| 6.3 - 100                  | 0 - 47        | 0.75    | 1         | 1.35        | 1.57  | 2.00     |
|                            | 100 - 470     | 0.80    | 1         | 1.23        | 1.34  | 1.50     |
|                            | 1000 - 22 000 | 0.85    | 1         | 1.10        | 1.13  | 1.15     |
| 160 - 250                  | 0.47 - 100    | 0.80    | 1         | 1.25        | 1.40  | 1.60     |

| LOW TEMPERATURE PERFORMANCE                                                           |                     |                     |
|---------------------------------------------------------------------------------------|---------------------|---------------------|
| MAXIMUM IMPEDANCE RATIO Z <sup>(T)</sup> /Z <sup>(+ 20 °C)</sup><br>MAXIMUM AT 120 Hz |                     |                     |
| Rated Voltage<br>(WVDC)                                                               | Z - 25 °C/Z + 20 °C | Z - 40 °C/Z + 20 °C |
| 6.3                                                                                   | 4.0                 | 8.0                 |
| 10.0                                                                                  | 3.0                 | 6.0                 |
| 16.0                                                                                  | 2.0                 | 4.0                 |
| 25.0 - 100.0                                                                          | 2.0                 | 3.0                 |
| 160.0 - 200.0                                                                         | 2.0                 | 4.0                 |
| 250.0                                                                                 | 4.0                 | 6.0                 |


| DIMENSIONS in inches [millimeters] |                             |                   |                            |                           |
|------------------------------------|-----------------------------|-------------------|----------------------------|---------------------------|
| CASE CODE                          | NOMINAL CASE SIZE<br>D x L  | LEAD SPACING<br>S | NOMINAL LEAD DIAMETER<br>D | TYPICAL WEIGHT<br>(GRAMS) |
| JA                                 | 0.197 x .433 [5.0 x 11.0]   | 0.079 [2.0]       | 0.020 [0.50]               | 0.44                      |
| AA                                 | 0.248 x .433 [6.3 x 11.0]   | 0.098 [2.5]       | 0.020 [0.50]               | 0.63                      |
| BB                                 | 0.315 x .453 [8.0 x 11.5]   | 0.138 [3.5]       | 0.024 [0.60]               | 1.03                      |
| CC                                 | 0.394 x .492 [10.0 x 12.5]  | 0.197 [5.0]       | 0.024 [0.60]               | 1.53                      |
| CD                                 | 0.394 x .630 [10.0 x 16.0]  | 0.197 [5.0]       | 0.024 [0.60]               | 1.86                      |
| CG                                 | 0.394 x .787 [10.0 x 20.0]  | 0.197 [5.0]       | 0.024 [0.60]               | 2.48                      |
| DG                                 | 0.492 x 0.787 [12.5 x 20.0] | 0.197 [5.0]       | 0.024 [0.60]               | 3.98                      |

**DIMENSIONS** in inches [millimeters]


| CASE CODE | NOMINAL CASE SIZE<br>D X L  | LEAD SPACING<br>S | NOMINAL LEAD DIAMETER<br>D | TYPICAL WEIGHT<br>(GRAMS) |
|-----------|-----------------------------|-------------------|----------------------------|---------------------------|
| DK        | 0.492 x 0.984 [12.5 x 25.0] | 0.197 [5.0]       | 0.024 [0.60]               | 5.27                      |
| EK        | 0.630 x 0.984 [16.0 x 25.0] | 0.295 [7.5]       | 0.031 [0.80]               | 7.72                      |
| EN        | 0.630 x 1.24 [16.0 x 31.5]  | 0.295 [7.5]       | 0.031 [0.80]               | 9.90                      |
| ER        | 0.630 x 1.40 [16.0 x 35.5]  | 0.295 [7.5]       | 0.031 [0.80]               | 11.10                     |
| FR        | 0.709 x 1.40 [18.0 x 35.5]  | 0.295 [7.5]       | 0.031 [0.80]               | 13.04                     |
| FV        | 0.709 x 1.575 [18.0 x 40.0] | 0.295 [7.5]       | 0.031 [0.80]               | 15.74                     |

**ELECTROLYTIC CAPACITOR WITH CUT OR FORMED LEADS** in inches [millimeters]


Code F

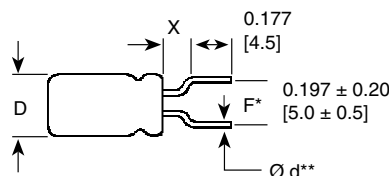


Code S

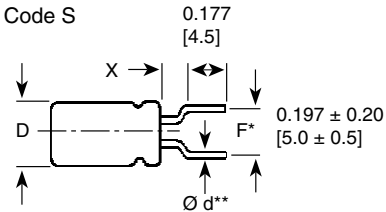


Code S

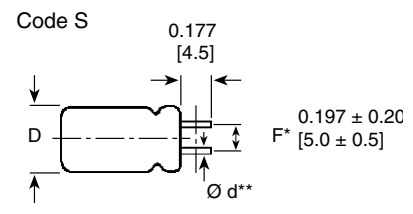

Code C




Code S



(4, 5, 6.3, 8)

Code S



(10, 12.5, 16, 18)

**DIMENSIONS** in inches [millimeters]

| FORMING METHOD | FORMED LEAD CODE | DIMENSIONS   |             |             |             |             |
|----------------|------------------|--------------|-------------|-------------|-------------|-------------|
|                |                  | D            | L.S.        | P           | e***        | X (Max.)    |
| Formed and Cut | F                | 0.197 [5.0]  | 0.197 [5.0] | 0.079 [2.0] | -           | 0.059 [1.5] |
|                |                  | 0.248 [6.3]  | 0.197 [5.0] | 0.098 [2.5] | -           | 0.098 [2.5] |
|                |                  | 0.315 [8.0]  | 0.197 [5.0] | 0.138 [3.5] | -           | 0.098 [2.5] |
| Cut            | C                | 0.394 [10.0] | 0.197 [5.0] | -           | -           | -           |
|                |                  | 0.492 [12.5] | 0.197 [5.0] | -           | -           | -           |
|                |                  | 0.630 [16.0] | 0.295 [7.5] | -           | -           | -           |
|                |                  | 0.709 [18.0] | 0.295 [7.5] | -           | -           | -           |
| Snap-in        | S                | 0.197 [5.0]  | 0.197 [5.0] | 0.079 [2.0] | 0.043 [1.1] | 0.059 [1.5] |
|                |                  | 0.248 [6.3]  | 0.197 [5.0] | 0.098 [2.5] | 0.043 [1.1] | 0.059 [1.5] |
|                |                  | 0.315 [8.0]  | 0.197 [5.0] | 0.138 [3.5] | 0.051 [1.3] | 0.059 [1.5] |
|                |                  | 0.394 [10.0] | 0.197 [5.0] | -           | 0.051 [1.3] | -           |
|                |                  | 0.492 [12.5] | 0.197 [5.0] | -           | 0.051 [1.3] | -           |
|                |                  | 0.630 [16.0] | 0.295 [7.5] | -           | 0.051 [1.3] | -           |
|                |                  | 0.709 [18.0] | 0.295 [7.5] | -           | 0.051 [1.3] | -           |

**Note:** The cut or formed code is to be added to the end of type number in 15<sup>th</sup> position (with position 14 coded "6").


\* Formed lead. \*\* Lead thickness Ø d depends on capacitor specification. \*\*\* Lead protrusion at bottom of tape.

**TAPED CAPACITORS FOR AUTOMATIC INSERTION SYSTEMS** in inches [millimeters]

| PACKAGING | LEAD CODE | SPECIFICATION |          | LEAD SPACE  | CAPACITOR SIZES AVAILABLE                                            |
|-----------|-----------|---------------|----------|-------------|----------------------------------------------------------------------|
|           |           | LEAD STYLE    | + LEADER |             |                                                                      |
| Ammo Pack | P         | Formed Lead** | -        | 0.197 [5.0] | 0.197 x 0.433 [5.0 x 11.0] - 0.492 x 0.787 [4.0 x 7.0 - 12.5 x 20.0] |

**Note:** The ammo pack code is to be added to the end of type number in the 15<sup>th</sup> position (with position 14 coded as "8" as appropriate.)

\*\* Except 0.394 [10.0 mm] and 0.492 [12.5 mm] diameter have straight unformed leads.

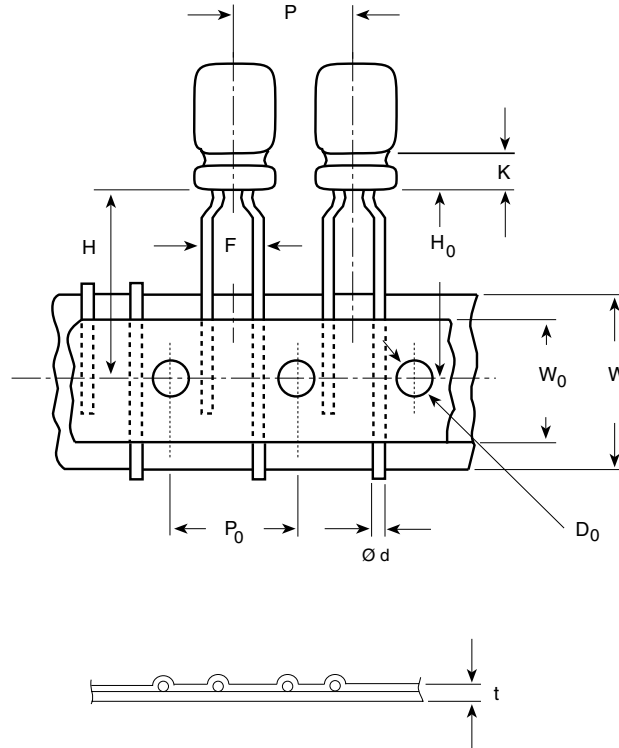**TAPING SPECIFICATIONS** in inches [millimeters]**Formed Lead Type****DIMENSIONS** in inches [millimeters]

| ITEM                                     | CASE SIZE<br>(Diameter x Length) |                               |                               |                        |                        |
|------------------------------------------|----------------------------------|-------------------------------|-------------------------------|------------------------|------------------------|
|                                          | FORMED LEAD TYPE                 |                               |                               | STRAIGHT LEAD TYPE     |                        |
|                                          | 0.197 x 0.433<br>[5.0 x 11.0]    | 0.248 x 0.433<br>[6.3 x 11.0] | 0.315 x 0.452<br>[8.0 x 11.5] | 0.394 [10.0]<br>(Dia.) | 0.492 [12.5]<br>(Dia.) |
| Ø d - Lead-wire Diameter                 | 0.020 [0.5]                      | 0.020 [0.5]                   | 0.024 [0.6]                   | 0.024 [0.6]            | 0.024 [0.6]            |
| P - Pitch of Component                   | 0.500 [12.7]                     | 0.500 [12.7]                  | 0.500 [12.7]                  | 0.500 [12.7]           | 0.591 [15.0]           |
| P <sub>0</sub> - Feed Hole Pitch         | 0.500 [12.7]                     | 0.500 [12.7]                  | 0.500 [12.7]                  | 0.500 [12.7]           | 0.591 [15.0]           |
| F - Lead-to-lead Distance                | 0.197 [5.0]                      | 0.197 [5.0]                   | 0.197 [5.0]                   | 0.197 [5.0]            | 0.197 [5.0]            |
| K - Clinch Height                        | 0.098 [2.5]                      | 0.098 [2.5]                   | 0.157 [4.0]                   | —                      | —                      |
| H - Height of Component from Tape Center | 0.728 [18.5]                     | 0.728 [18.5]                  | 0.787 [20.0]                  | 0.728 [18.5]           | 0.630 [16.0]           |
| H <sub>0</sub> - Lead-wire Clinch Height | 0.630 [16.0]                     | 0.630 [16.0]                  | 0.630 [16.0]                  | —                      | —                      |
| W - Tape Width                           | 0.709 [18.0]                     | 0.709 [18.0]                  | 0.709 [18.0]                  | 0.709 [18.0]           | 0.709 [18.0]           |
| W <sub>0</sub> - Hold Down Tape Width    | 0.512 [13.0]                     | 0.512 [13.0]                  | 0.512 [13.0]                  | 0.512 [13.0]           | 0.512 [13.0]           |
| D <sub>0</sub> - Feed Hole Diameter      | 0.157 [4.0]                      | 0.157 [4.0]                   | 0.157 [4.0]                   | 0.157 [4.0]            | 0.157 [4.0]            |
| t - Total Tape Thickness                 | 0.028 [0.7]                      | 0.028 [0.7]                   | 0.028 [0.7]                   | 0.028 [0.7]            | 0.028 [0.7]            |

**ELECTRICAL DATA**

| SYMBOL | DESCRIPTION                         |
|--------|-------------------------------------|
| μF     | rated capacitance                   |
| ± %    | M = ± 20 %                          |
| DC     | voltage rating at 105 °C            |
| JA     | see dimensions in millimeters table |
| 6      | packaging code                      |
| A      | termination                         |

**ORDERING EXAMPLE\***

Electrolytic capacitor 517D series

517D 107M 6R3 JA 6A E3

6A = Bulk, Uncut leads.

6C = Cut leads (not stocked).

6F = Formed and cut leads (not stocked).

6S = Snap-in leads (not stocked).

For Cases Codes JA, AA, BB, CC, CD, CG, and DG only:  
8P = Ammo-Pack.

All items stating "not stocked" are items that are not generally stocked unless a Purchase Order is placed. Lead time is 16 weeks for these items unless there is excess inventory.

\* Suffix E3 denotes lead (Pb)-free/RoHS compliant products.

**ELECTRICAL DATA AND ORDERING INFORMATION**

| CAPACITANCE<br>(μF)                      | PART NUMBER       | NOMINAL CASE SIZE<br>D x L  | Max. RIPPLE<br>at + 105 °C<br>120 Hz (mA) | Max. DF<br>at + 20 °C<br>120 Hz |
|------------------------------------------|-------------------|-----------------------------|-------------------------------------------|---------------------------------|
| <b>6.3 WVDC at + 105 °C, SURGE = 8 V</b> |                   |                             |                                           |                                 |
| 22.0                                     | 517D226M6R3JA6AE3 | 0.197 x 0.433 [5.0 x 11.0]  | 34.0                                      | 0.26                            |
| 33.0                                     | 517D336M6R3JA6AE3 | 0.197 x 0.433 [5.0 x 11.0]  | 50.0                                      | 0.26                            |
| 47.0                                     | 517D476M6R3JA6AE3 | 0.197 x 0.433 [5.0 x 11.0]  | 65.0                                      | 0.26                            |
| 100.0                                    | 517D107M6R3JA6AE3 | 0.197 x 0.433 [5.0 x 11.0]  | 100.0                                     | 0.26                            |
| 220.0                                    | 517D227M6R3AA6AE3 | 0.248 x 0.433 [6.3 x 11.0]  | 165.0                                     | 0.26                            |
| 330.0                                    | 517D337M6R3AA6AE3 | 0.248 x 0.433 [6.3 x 11.0]  | 200.0                                     | 0.26                            |
| 470.0                                    | 517D477M6R3BB6AE3 | 0.315 x 0.453 [8.0 x 11.5]  | 280.0                                     | 0.26                            |
| 1000.0                                   | 517D108M6R3CC6AE3 | 0.394 x 0.492 [10.0 x 12.5] | 470.0                                     | 0.26                            |
| 2200.0                                   | 517D228M6R3DG6AE3 | 0.492 x 0.787 [12.5 x 20.0] | 930.0                                     | 0.26                            |
| 3300.0                                   | 517D338M6R3DG6AE3 | 0.492 x 0.787 [12.5 x 20.0] | 1100.0                                    | 0.26                            |
| 4700.0                                   | 517D478M6R3EK6AE3 | 0.630 x 0.984 [16.0 x 25.0] | 1320.0                                    | 0.26                            |
| 6800.0                                   | 517D688M6R3EK6AE3 | 0.630 x 0.984 [16.0 x 25.0] | 1490.0                                    | 0.26                            |
| 10 000.0                                 | 517D109M6R3EN6AE3 | 0.630 x 1.240 [16.0 x 31.5] | 1830.0                                    | 0.26                            |
| 15 000.0                                 | 517D159M6R3FR6AE3 | 0.709 x 1.398 [18.0 x 35.5] | 2280.0                                    | 0.26                            |
| <b>10 WVDC at + 105 °C, SURGE = 13 V</b> |                   |                             |                                           |                                 |
| 22.0                                     | 517D226M010JA6AE3 | 0.197 x 0.433 [5.0 x 11.0]  | 45.0                                      | 0.22                            |
| 33.0                                     | 517D336M010JA6AE3 | 0.197 x 0.433 [5.0 x 11.0]  | 60.0                                      | 0.22                            |
| 47.0                                     | 517D476M010JA6AE3 | 0.197 x 0.433 [5.0 x 11.0]  | 75.0                                      | 0.22                            |
| 100.0                                    | 517D107M010JA6AE3 | 0.197 x 0.433 [5.0 x 11.0]  | 110.0                                     | 0.22                            |
| 220.0                                    | 517D227M010AA6AE3 | 0.248 x 0.433 [6.3 x 11.0]  | 180.0                                     | 0.22                            |
| 330.0                                    | 517D337M010BB6AE3 | 0.315 x 0.453 [8.0 x 11.5]  | 255.0                                     | 0.22                            |
| 470.0                                    | 517D477M010BB6AE3 | 0.315 x 0.453 [8.0 x 11.5]  | 305.0                                     | 0.22                            |
| 1000.0                                   | 517D108M010CD6AE3 | 0.394 x 0.630 [10.0 x 16.0] | 570.0                                     | 0.22                            |
| 2200.0                                   | 517D228M010DG6AE3 | 0.492 x 0.787 [12.5 x 20.0] | 1010.0                                    | 0.22                            |
| 3300.0                                   | 517D338M010DK6AE3 | 0.492 x 0.984 [12.5 x 25.0] | 1220.0                                    | 0.22                            |
| 4700.0                                   | 517D478M010EK6AE3 | 0.630 x 0.984 [16.0 x 25.0] | 1410.0                                    | 0.22                            |
| 6800.0                                   | 517D688M010EN6AE3 | 0.630 x 1.240 [16.0 x 31.5] | 1610.0                                    | 0.22                            |
| 10 000.0                                 | 517D109M010FR6AE3 | 0.709 x 1.398 [18.0 x 35.5] | 1980.0                                    | 0.22                            |
| 15 000.0                                 | 517D159M010FV6AE3 | 0.709 x 1.575 [18.0 x 40.0] | 2470.0                                    | 0.22                            |

Aluminum Capacitors  
+ 105 °C, General Purpose Miniature, Radial Lead

Vishay Sprague

**ELECTRICAL DATA AND ORDERING INFORMATION**

| CAPACITANCE<br>( $\mu$ F)                | PART NUMBER       | NOMINAL CASE SIZE<br>D x L  | Max. RIPPLE<br>at + 105 °C<br>120 Hz (mA) | Max. DF<br>at + 20 °C<br>120 Hz |
|------------------------------------------|-------------------|-----------------------------|-------------------------------------------|---------------------------------|
| <b>16 WVDC at + 105 °C, SURGE = 20 V</b> |                   |                             |                                           |                                 |
| 10.0                                     | 517D106M016JA6AE3 | 0.197 x 0.433 [5.0 x 11.0]  | 35.0                                      | 0.18                            |
| 22.0                                     | 517D226M016JA6AE3 | 0.197 x 0.433 [5.0 x 11.0]  | 55.0                                      | 0.18                            |
| 33.0                                     | 517D336M016JA6AE3 | 0.197 x 0.433 [5.0 x 11.0]  | 70.0                                      | 0.18                            |
| 47.0                                     | 517D476M016JA6AE3 | 0.197 x 0.433 [5.0 x 11.0]  | 85.0                                      | 0.18                            |
| 100.0                                    | 517D107M016AA6AE3 | 0.248 x 0.433 [6.3 x 11.0]  | 135.0                                     | 0.18                            |
| 220.0                                    | 517D227M016BB6AE3 | 0.315 x 0.453 [8.0 x 11.5]  | 235.0                                     | 0.18                            |
| 330.0                                    | 517D337M016BB6AE3 | 0.315 x 0.453 [8.0 x 11.5]  | 285.0                                     | 0.18                            |
| 470.0                                    | 517D477M016CC6AE3 | 0.394 x .0492 [10.0 x 12.5] | 395.0                                     | 0.18                            |
| 1000.0                                   | 517D108M016CG6AE3 | 0.394 x 0.787 [10.0 x 20.0] | 700.0                                     | 0.18                            |
| 2200.0                                   | 517D228M016DK6AE3 | 0.492 x 0.984 [12.5 x 25.0] | 1150.0                                    | 0.18                            |
| 3300.0                                   | 517D338M016EK6AE3 | 0.630 x 0.984 [16.0 x 25.0] | 1350.0                                    | 0.18                            |
| 4700.0                                   | 517D478M016EN6AE3 | 0.630 x 1.240 [16.0 x 31.5] | 1560.0                                    | 0.18                            |
| 6800.0                                   | 517D688M016FR6AE3 | 0.709 x 1.398 [18.0 x 35.5] | 1750.0                                    | 0.18                            |
| 10 000.0                                 | 517D109M016FV6AE3 | 0.709 x 1.575 [18.0 x 40.0] | 2170.0                                    | 0.18                            |
| <b>25 WVDC at + 105 °C, SURGE = 32V</b>  |                   |                             |                                           |                                 |
| 4.7                                      | 517D475M025JA6AE3 | 0.197 x .0433 [5.0 x 11.0]  | 24.0                                      | 0.16                            |
| 10.0                                     | 517D106M025JA6AE3 | 0.197 x 0.433 [5.0 x 11.0]  | 39.0                                      | 0.16                            |
| 22.0                                     | 517D226M025JA6AE3 | 0.197 x 0.433 [5.0 x 11.0]  | 60.0                                      | 0.16                            |
| 33.0                                     | 517D336M025JA6AE3 | 0.197 x 0.433 [5.0 x 11.0]  | 75.0                                      | 0.16                            |
| 47.0                                     | 517D476M025JA6AE3 | 0.197 x 0.433 [5.0 x 11.0]  | 90.0                                      | 0.16                            |
| 100.0                                    | 517D107M025AA6AE3 | 0.248 x 0.433 [6.3 x 11.0]  | 145.0                                     | 0.16                            |
| 220.0                                    | 517D227M025BB6AE3 | 0.315 x 0.453 [8.0 x 11.5]  | 250.0                                     | 0.16                            |
| 330.0                                    | 517D337M025CC6AE3 | 0.394 x 0.492 [10.0 x 12.5] | 355.0                                     | 0.16                            |
| 470.0                                    | 517D477M025CD6AE3 | 0.394 x 0.630 [10.0 x 16.0] | 470.0                                     | 0.16                            |
| 1000.0                                   | 517D108M025DG6AE3 | 0.492 x 0.787 [12.5 x 20.0] | 855.0                                     | 0.16                            |
| 2200.0                                   | 517D228M025EK6AE3 | 0.630 x 0.984 [16.0 x 25.0] | 1230.0                                    | 0.16                            |
| 3300.0                                   | 517D338M025EN6AE3 | 0.630 x 1.240 [16.0 x 31.5] | 1450.0                                    | 0.16                            |
| 4700.0                                   | 517D478M025FR6AE3 | 0.709 x 1.398 [18.0 x 35.5] | 1660.0                                    | 0.16                            |
| <b>35 WVDC at + 105 °C, SURGE = 44 V</b> |                   |                             |                                           |                                 |
| 4.7                                      | 517D475M035JA6AE3 | 0.197 x 0.433 [5.0 x 11.0]  | 27.0                                      | 0.13                            |
| 10.0                                     | 517D106M035JA6AE3 | 0.197 x 0.433 [5.0 x 11.0]  | 44.0                                      | 0.13                            |
| 22.0                                     | 517D226M035JA6AE3 | 0.197 x 0.433 [5.0 x 11.0]  | 65.0                                      | 0.13                            |
| 33.0                                     | 517D336M035JA6AE3 | 0.197 x 0.433 [5.0 x 11.0]  | 85.0                                      | 0.13                            |
| 47.0                                     | 517D476M035AA6AE3 | 0.248 x 0.433 [6.3 x 11.0]  | 115.0                                     | 0.13                            |
| 100.0                                    | 517D107M035BB6AE3 | 0.315 x 0.453 [8.0 x 11.5]  | 190.0                                     | 0.13                            |
| 220.0                                    | 517D227M035CC6AE3 | 0.394 x 0.492 [10.0 x 12.5] | 325.0                                     | 0.13                            |
| 330.0                                    | 517D337M035CD6AE3 | 0.394 x 0.630 [10.0 x 16.0] | 440.0                                     | 0.13                            |
| 470.0                                    | 517D477M035CG6AE3 | 0.394 x 0.787 [10.0 x 20.0] | 580.0                                     | 0.13                            |
| 1000.0                                   | 517D108M035DK6AE3 | 0.492 x 0.984 [12.5 x 25.0] | 995.0                                     | 0.13                            |
| 2200.0                                   | 517D228M035EN6AE3 | 0.630 x 1.240 [16.0 x 31.5] | 1450.0                                    | 0.13                            |
| 3300.0                                   | 517D338M035FR6AE3 | 0.709 x 1.398 [18.0 x 35.5] | 1660.0                                    | 0.13                            |
| 4700.0                                   | 517D478M035FV6AE3 | 0.709 x 1.575 [18.0 x 40.0] | 2030.0                                    | 0.13                            |

**ELECTRICAL DATA AND ORDERING INFORMATION**

| CAPACITANCE<br>( $\mu$ F)                  | PART NUMBER       | NOMINAL CASE SIZE<br>D x L  | Max. RIPPLE<br>at + 105 °C<br>120 Hz (mA) | Max. DF<br>at + 20 °C<br>120 Hz |
|--------------------------------------------|-------------------|-----------------------------|-------------------------------------------|---------------------------------|
| <b>50 WVDC at + 105 °C, SURGE = 63 V</b>   |                   |                             |                                           |                                 |
| 0.47                                       | 517D474M050JA6AE3 | 0.197 x 0.433 [5.0 x 11.0]  | 7.0                                       | 0.10                            |
| 1.0                                        | 517D105M050JA6AE3 | 0.197 x 0.433 [5.0 x 11.0]  | 12.0                                      | 0.10                            |
| 2.2                                        | 517D225M050JA6AE3 | 0.197 x 0.433 [5.0 x 11.0]  | 18.0                                      | 0.10                            |
| 3.3                                        | 517D335M050JA6AE3 | 0.197 x 0.433 [5.0 x 11.0]  | 25.0                                      | 0.10                            |
| 4.7                                        | 517D475M050JA6AE3 | 0.197 x 0.433 [5.0 x 11.0]  | 30.0                                      | 0.10                            |
| 10.0                                       | 517D106M050JA6AE3 | 0.197 x 0.433 [5.0 x 11.0]  | 50.0                                      | 0.10                            |
| 22.0                                       | 517D226M050JA6AE3 | 0.197 x 0.433 [5.0 x 11.0]  | 75.0                                      | 0.10                            |
| 33.0                                       | 517D336M050M6AE3  | 0.248 x 0.433 [6.3 x 11.0]  | 105.0                                     | 0.10                            |
| 47.0                                       | 517D476M050AA6AE3 | 0.248 x 0.433 [6.3 x 11.0]  | 125.0                                     | 0.10                            |
| 100.0                                      | 517D107M050BB6AE3 | 0.315 x 0.453 [8.0 x 11.5]  | 210.0                                     | 0.10                            |
| 220.0                                      | 517D227M050CD6AE3 | 0.394 x 0.630 [10.0 x 16.0] | 400.0                                     | 0.10                            |
| 330.0                                      | 517D337M050CG6AE3 | 0.394 x 0.787 [10.0 x 20.0] | 535.0                                     | 0.10                            |
| 470.0                                      | 517D477M050DG6AE3 | 0.492 x 0.787 [12.5 x 20.0] | 730.0                                     | 0.10                            |
| 1000.0                                     | 517D108M050EK6AE3 | 0.630 x 0.984 [16.0 x 25.0] | 1110.0                                    | 0.10                            |
| 2200.0                                     | 517D228M050FR6AE3 | 0.709 x 1.398 [18.0 x 35.5] | 1530.0                                    | 0.10                            |
| <b>63 WVDC at + 105 °C, SURGE = 79 V</b>   |                   |                             |                                           |                                 |
| 4.7                                        | 517D475M063JA6AE3 | 0.197 x 0.433 [5.0 x 11.0]  | 34.0                                      | 0.09                            |
| 10.0                                       | 517D106M063JA6AE3 | 0.197 x 0.433 [5.0 x 11.0]  | 55.0                                      | 0.09                            |
| 22.0                                       | 517D226M063AA6AE3 | 0.248 x 0.433 [6.3 x 11.0]  | 90.0                                      | 0.09                            |
| 33.0                                       | 517D336M063AA6AE3 | 0.248 x 0.433 [6.3 x 11.0]  | 110.0                                     | 0.09                            |
| 47.0                                       | 517D476M063BB6AE3 | 0.315 x 0.453 [8.0 x 11.5]  | 155.0                                     | 0.09                            |
| 100.0                                      | 517D107M063CC6AE3 | 0.394 x .0492 [10.0 x 12.5] | 260.0                                     | 0.09                            |
| 220.0                                      | 517D227M063CG6AE3 | 0.394 x 0.787 [10.0 x 20.0] | 465.0                                     | 0.09                            |
| 330.0                                      | 517D337M063DG6AE3 | 0.492 x 0.787 [12.5 x 20.0] | 650.0                                     | 0.09                            |
| 4700.0                                     | 517D477M063DK6AE3 | 0.492 x 0.984 [12.5 x 25.0] | 800.0                                     | 0.09                            |
| 1000.0                                     | 517D108M063EN6AE3 | 0.630 x 1.240 [16.0 x 31.5] | 1200.0                                    | 0.09                            |
| 2200.0                                     | 517D228M063FV6AE3 | 0.709 x 1.575 [18.0 x 40.0] | 1840.0                                    | 0.09                            |
| <b>100 WVDC at + 105 °C, SURGE = 125 V</b> |                   |                             |                                           |                                 |
| 0.47                                       | 517D474M100JA6AE3 | 0.197 x 0.433 [5.0 x 11.0]  | 10.0                                      | 0.08                            |
| 1.0                                        | 517D105M100JA6AE3 | 0.197 x 0.433 [5.0 x 11.0]  | 15.0                                      | 0.08                            |
| 2.2                                        | 517D225M100JA6AE3 | 0.197 x 0.433 [5.0 x 11.0]  | 22.0                                      | 0.08                            |
| 3.3                                        | 517D335M100JA6AE3 | 0.197 x 0.433 [5.0 x 11.0]  | 29.0                                      | 0.08                            |
| 4.7                                        | 517D475M100JA6AE3 | 0.197 x 0.433 [5.0 x 11.0]  | 37.0                                      | 0.08                            |
| 10.0                                       | 517D106M100AA6AE3 | 0.248 x 0.433 [6.3 x 11.0]  | 65.0                                      | 0.08                            |
| 22.0                                       | 517D226M100BB6AE3 | 0.315 x 0.453 [8.0 x 11.5]  | 115.0                                     | 0.08                            |
| 33.0                                       | 517D336M100CC6AE3 | 0.394 x 0.492 [10.0 x 12.5] | 160.0                                     | 0.08                            |
| 47.0                                       | 517D476M100CD6AE3 | 0.394 x 0.630 [10.0 x 16.0] | 220.0                                     | 0.08                            |
| 100.0                                      | 517D107M100DG6AE3 | 0.492 x 0.787 [12.5 x 20.0] | 385.0                                     | 0.08                            |
| 220.0                                      | 517D227M100EK6AE3 | 0.630 x 0.984 [16.0 x 25.0] | 590.0                                     | 0.08                            |
| 330.0                                      | 517D337M100EK6AE3 | 0.630 x 0.984 [16.0 x 25.0] | 720.0                                     | 0.08                            |
| 470.0                                      | 517D477M100EN6AE3 | 0.630 x 1.240 [16.0 x 31.5] | 875.0                                     | 0.08                            |
| 1000.0                                     | 517D108M100FV6AE3 | 0.709 x 1.575 [18.0 x 40.0] | 1320.0                                    | 0.08                            |

Aluminum Capacitors  
+ 105 °C, General Purpose Miniature, Radial Lead

Vishay Sprague

**ELECTRICAL DATA AND ORDERING INFORMATION**

| CAPACITANCE<br>( $\mu$ F)                  | PART NUMBER       | NOMINAL CASE SIZE<br>D x L  | Max. RIPPLE<br>at + 105 °C<br>120 Hz (mA) | Max. DF<br>at + 20 °C<br>120 Hz |
|--------------------------------------------|-------------------|-----------------------------|-------------------------------------------|---------------------------------|
| <b>160 WVDC at + 105 °C, SURGE = 200 V</b> |                   |                             |                                           |                                 |
| 0.47                                       | 517D474M160AA6AE3 | 0.248 x 0.433 [6.3 x 11.0]  | 12.0                                      | 0.15                            |
| 1.0                                        | 517D105M160AA6AE3 | 0.248 x 0.433 [6.3 x 11.0]  | 17.0                                      | 0.15                            |
| 2.2                                        | 517D225M160AA6AE3 | 0.248 x 0.433 [6.3 x 11.0]  | 25.0                                      | 0.15                            |
| 3.3                                        | 517D335M160BB6AE3 | 0.315 x 0.453 [8.0 x 11.5]  | 36.0                                      | 0.15                            |
| 4.7                                        | 517D475M160BB6AE3 | 0.315 x 0.453 [8.0 x 11.5]  | 43.0                                      | 0.15                            |
| 10.0                                       | 517D106M160CC6AE3 | 0.394 x 0.492 [10.0 x 12.5] | 70.0                                      | 0.15                            |
| 22.0                                       | 517D226M160CG6AE3 | 0.394 x 0.787 [10.0 x 20.0] | 130.0                                     | 0.15                            |
| 33.0                                       | 517D336M160DG6AE3 | 0.492 x 0.787 [12.5 x 20.0] | 180.0                                     | 0.15                            |
| 47.0                                       | 517D476M160DK6AE3 | 0.492 x 0.984 [12.5 x 25.0] | 220.0                                     | 0.15                            |
| 100.0                                      | 517D107M160EK6AE3 | 0.630 x 0.984 [16.0 x 25.0] | 330.0                                     | 0.15                            |
| 220.0                                      | 517D227M160FR6AE3 | 0.709 x 1.398 [18.0 x 35.5] | 500.0                                     | 0.15                            |
| <b>200 WVDC at + 105 °C, SURGE = 250 V</b> |                   |                             |                                           |                                 |
| 0.47                                       | 517D474M200AA6AE3 | 0.248 x 0.433 [6.3 x 11.0]  | 12.0                                      | 0.15                            |
| 1.0                                        | 517D105M200AA6AE3 | 0.248 x 0.433 [6.3 x 11.0]  | 17.0                                      | 0.15                            |
| 2.2                                        | 517D225M200AA6AE3 | 0.248 x 0.433 [6.3 x 11.0]  | 25.0                                      | 0.15                            |
| 3.3                                        | 517D335M200BB6AE3 | 0.315 x 0.453 [8.0 x 11.5]  | 36.0                                      | 0.15                            |
| 4.7                                        | 517D475M200CC6AE3 | 0.394 x 0.492 [10.0 x 12.5] | 50.0                                      | 0.15                            |
| 10.0                                       | 517D106M200CD6AE3 | 0.394 x 0.630 [10.0 x 16.0] | 80.0                                      | 0.15                            |
| 22.0                                       | 517D226M200CG6AE3 | 0.394 x 0.787 [10.0 x 20.0] | 140.0                                     | 0.15                            |
| 33.0                                       | 517D336M200DK6AE3 | 0.492 x 0.984 [12.5 x 25.0] | 198.0                                     | 0.15                            |
| 47.0                                       | 517D476M200DK6AE3 | 0.492 x 0.984 [12.5 x 25.0] | 220.0                                     | 0.15                            |
| 100.0                                      | 517D107M200EN6AE3 | 0.630 x 1.240 [16.0 x 31.5] | 335.0                                     | 0.15                            |
| 220.0                                      | 517D227M200FV6AE3 | 0.709 x 1.575 [18.0 x 40.0] | 515.0                                     | 0.15                            |
| <b>250 WVDC at + 105 °C, SURGE = 300 V</b> |                   |                             |                                           |                                 |
| 0.47                                       | 517D474M250AA6AE3 | 0.248 x 0.433 [6.3 x 11.0]  | 12.0                                      | 0.15                            |
| 1.0                                        | 517D105M250AA6AE3 | 0.248 x 0.433 [6.3 x 11.0]  | 17.0                                      | 0.15                            |
| 2.2                                        | 517D225M250BB6AE3 | 0.315 x 0.453 [8.0 x 11.5]  | 29.0                                      | 0.15                            |
| 3.3                                        | 517D335M250CC6AE3 | 0.394 x 0.492 [10.0 x 12.5] | 42.0                                      | 0.15                            |
| 4.7                                        | 517D475M250CC6AE3 | 0.394 x 0.492 [10.0 x 12.5] | 50.0                                      | 0.15                            |
| 10.0                                       | 517D106M250CG6AE3 | 0.394 x 0.787 [10.0 x 20.0] | 88.0                                      | 0.15                            |
| 22.0                                       | 517D226M250DK6AE3 | 0.492 x 0.984 [12.5 x 25.0] | 155.0                                     | 0.15                            |
| 33.0                                       | 517D336M250DK6AE3 | 0.492 x 0.984 [12.5 x 25.0] | 190.0                                     | 0.15                            |
| 47.0                                       | 517D476M250EK6AE3 | 0.630 x 0.984 [16.0 x 25.0] | 230.0                                     | 0.15                            |
| 100.0                                      | 517D107M250FR6AE3 | 0.709 x 1.398 [18.0 x 35.5] | 340.0                                     | 0.15                            |



### Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А