

# NPI-15 Series

## Current Driven, Media Isolated High Pressure Sensors



### Applications

- Process control systems
- Hydraulic systems and valves
- Automobiles and trucks
- Biomedical instruments
- Refrigeration and HVAC controls
- Appliances and consumer electronics
- Ship and marine systems
- Aircraft and avionic systems

### Features

- Solid state, high reliability
- High sensitivity with 200 mV typical FSO with 1.0 mA
- 316L stainless steel, IsoSensor design
- Linearity 0.1% FSO typical
- Thermal accuracy 0.2% FSO typical
- Four standard ranges: 500 psi to 5,000 psi (34 bar to 345 bar) available
- Standard configurations include:
  - 1/2–20 UNF threaded male port with 1.0 in (25.40 mm) flange
  - 0.59 in (15 mm) diameter x 0.87 in (22 mm) long cylinder with o-ring seals
  - 1/4–18 NPT male port with 7/8 in flange
  - 1/8–27 NPT male port with 7/8 in flange
- Thermal accuracy FSO 0.2% typical
- Custom configurations and other pressure ranges available. Please consult factory

# NPI-15 Series Specifications

## Description


The NovaSensor NPI-15 Series incorporates state-of-the-art IsoSensor technology, which gives the OEM user the best in price and performance. They are designed to operate in hostile environments and yet give the outstanding sensitivity, linearity, and hysteresis of a silicon sensor. The piezoresistive sensor chip is housed in a fluid-filled cylindrical cavity and isolated from the measured media by a stainless steel diaphragm and body. As with all NovaSensor silicon sensors, the NPI-15 Series employs SenStable® processing technology, providing excellent stability.

The modular design allows for a variety of pressure port modules which are hermetically welded to the sensor header module. Standard types A, B, H, and J are shown to the right.

For compensation of temperature effects, a complete resistor network is supplied on a hybrid ceramic substrate. The IsoSensor design minimizes temperature errors to provide a maximum offset errors of 0.75% FSO over the 32°F to 158°F (0°C to 70°C) compensated range.



NPI-15 Series schematic diagram

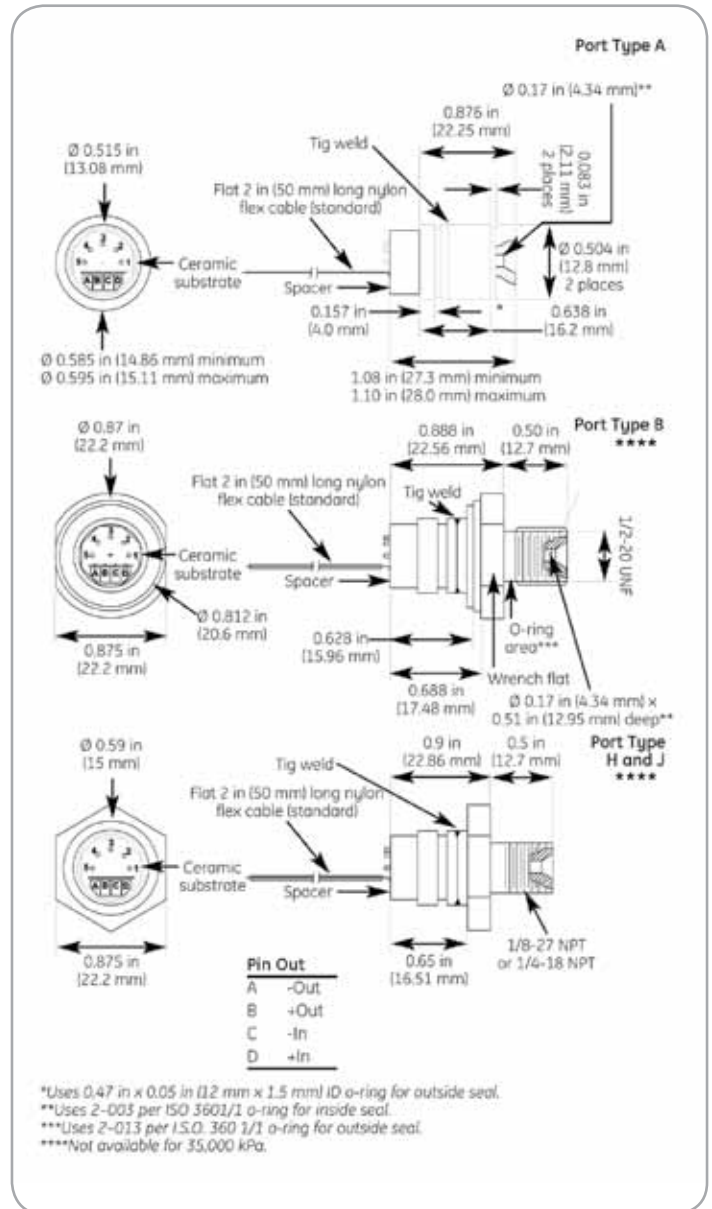

NPI-15 Series dimensions

# NPI-15 Series Specifications

| Parameter  | Value   | Units  | Notes                             |      |   |
|--|---|--------|-----------------------------------|------|---|
| <b>General</b>   |   |        |                                   |      |   |
| Pressure Range   | 3500  | kPa    | 507 psi                           |      |   |
|  | 7000  | kPa    | 1015 psi                          |      |   |
|  | 35,000  | kPa    | 5076 psi                          |      |   |
| Maximum Pressure   | 2 x   |        | rated pressure                    |      |   |
| <b>Electrical @ 77°F (25°C) unless otherwise stated</b>                  |   |        |                                   |      |   |
| Input Excitation   | 1.0   | mA     | 1.5 mA maximum                    |      |   |
| Insulation Resistance  | 100M  | Ω      | @ 50 VDC                          |      |   |
| Input Impedance (min)  | 4,000   | Ω      | ± 20%                             |      |   |
| Output Impedance   | 5,000   | Ω      | ± 20%                             |      |   |
| Bridge Impedance   | 5,000   | Ω      | ± 20%                             |      |   |
| <b>Environmental</b>   |   |        |                                   |      |   |
| Temperature Range  |   |        |                                   |      |   |
| Operating <sup>(9)</sup>   | -40 to 257°F  |        | (-40°C to 125°C)                  |      |   |
| Compensated Range  | 32 to 158°F   |        | (0°C to 70°C)                     |      |   |
| Vibration  | 10  | gRMS   | 20 to 2000Hz                      |      |   |
| Shock  | 100   | g      | 11 milliseconds                   |      |   |
| Life (Dynamic Pressure Cycle)  | 10 x 10 <sup>6</sup>                                    | cycles | 500/1000 psi<br>34.47/68.94 (bar) |      |   |
|  | 1 x 10 <sup>6</sup>                                     | cycles | 5000 psi<br>(344.73 (bar)         |      |   |
| <b>Mechanical <sup>(1)</sup></b>   |   |        |                                   |      |   |
| Weight   | ≈28   | g      | (28 g) NPI-15A-XXX                |      |   |
|  | ≈47   | g      | (47 g) NPI-15B-XXX                |      |   |
| Media Compatibility  | All corrosive media compatible with 316 stainless steel |        |                                   |      |   |
| Case and Diaphragm Material 316L stainless steel                         |   |        |                                   |      |   |
| Recommended O-Ring Type A:   | 0.472 in (12 mm) ID x 0.059 in (1.5 mm) wall            |        |                                   |      |   |
| Type B:  | 2-013 per ISO 3601/1                                    |        |                                   |      |   |
| <b>Performance Parameters 3,500, 7,000, &amp; 35,000 kPa (Note 1, 8)</b> |   |        |                                   |      |   |
| Offset   | mV  | -2     | 1                                 | 2    |   |
| Full Scale Output  | mV  | 170    | 200                               | 230  | 2 |
| Linearity  | %FSO  | -0.25  | 0.1                               | 0.25 | 3 |
| Hysteresis and Repeatability   |   |        |                                   |      |   |
| Repeatability  | %FSO  | -0.05  | 0.1                               | 0.05 | 3 |
| Thermal Accuracy of Offset   |   |        |                                   |      |   |
| Thermal Accuracy of Offset   | %FSO  | -0.75  | 0.2                               | 0.75 | 4 |
| Thermal Accuracy of FSO  |   |        |                                   |      |   |
| Thermal Accuracy of FSO  | %FSO  | -0.75  | -0.2                              | 0.75 | 4 |
| Thermal Hysteresis   |   |        |                                   |      |   |
| Thermal Hysteresis   | %FSO  | -0.2   | 0.1                               | 0.2  | 5 |
| Short-Term Stability of Offset   |   |        |                                   |      |   |
| Short-Term Stability of Offset   | μV/V  |        | 5                                 |      | 6 |
| Short-Term Stability of FSO  |   |        |                                   |      |   |
| Short-Term Stability of FSO  | μV/V  |        | 5                                 |      | 6 |
| Long-Term Stability of Offset  |   |        |                                   |      |   |
| Long-Term Stability of Offset  | %FSO  |        | 0.1                               |      | 7 |
| Long-Term Stability of FSO   |   |        |                                   |      |   |
| Long-Term Stability of FSO   | %FSO  |        | 0.1                               |      | 7 |

## Warranty

NovaSensor warrants its products against defects in material and workmanship for 12 months from the date of shipment . Products not subjected to misuse will be repaired or replaced. NovaSensor reserves the right to make changes without further notice to any products herein. NovaSensor makes no warranty, representation or guarantee regarding the suitability of its products for any particular application, nor does NovaSensor assume any liability arising out of the application or use of any product or circuit and specifically disclaims and all liability without limitation consequential or incidental damages. The foregoing warranties are exclusive and in lieu of all other warranties, whether written, oral, implied or statutory. No Implied statutory warranty of merchantability or fitness for particular purpose shall apply.

## Ordering Information

### NPI-15

#### Code Pressure Port Type

|   |            |
|---|------------|
| A | No port    |
| B | 1/2-20 UNF |
| H | 1/4-18 NPT |
| J | 1/8-27 NPT |

#### Code Pressure Ranges (kilo Pascals (kPa); 3rd digit is number of zeros)

|     |                           |
|-----|---------------------------|
| 352 | 3500 kPa                  |
| 702 | 7000 kPa                  |
| 353 | 35,000 kPa (NPI-15A Only) |

#### Code Compensation

|              |                             |
|--------------|-----------------------------|
| A            | Absolute                    |
| S            | Sealed gauge                |
| Code Voltage |                             |
| H            | Constant Current Excitation |

NPI-15 — — — — — Typical model number

- Performance with offset , thermal accuracy of offset and thermal accuracy of FSO compensation resistors.
- FSO with 1.0 mA input excitation.
- Linearity by best fit straight line.
- 32°F to 158°F (0°C to 70°C) with reference to 77°F (25°C).
- 32°F to 158°F (0°C to 70°C,) by design.
- Normalized offset/ bridge voltage—100 hours, typical value, not tested in production.
- One year, typical value, not tested in production.
- All values measured at 77°F (25°C) and at 1.0 mA constant current , unless otherwise noted.
- Reduced performance outside compensation range.

**Amphenol**  
**Advanced Sensors**

[www.amphenol-sensors.com](http://www.amphenol-sensors.com)

© 2015 Amphenol Corporation. All Rights Reserved. Specifications are subject to change without notice. Other company names and product names used in this document are the registered trademarks or trademarks of their respective owners.

AAS-920-260C-10/2015

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## [Amphenol:](#)

[NPI-15B-352SH](#) [NPI-15A-353AH](#) [NPI-15A-353SH](#) [NPI-15A-702AH](#) [NPI-15B-702AH](#) [NPI-15B-702SH](#) [NPI-15A-702SH](#) [NPI-15A-352SH](#) [NPI-15A-352AH](#) [NPI-15B-352AH](#) [NPI-15H-702SH](#) [NPI-15J-352SH](#) [NPI-15H-352SH](#) [NPI-15H-352AH](#) [NPI-15J-352AH](#) [NPI-15J-702SH](#) [NPI-15J-702AH](#) [NPI-15H-702AH](#) [NPI-15J-353SH](#)

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А