

P	LTR	DESCRIPTION	DATE	DWN	APVD
	H2	REVISED PER ECO-11-004587	11MAR11	RK	HMR

D

C

B


A

-	-	-	-	-	-	-	-	-	-	-	-	-	-	180.7	188.2	18	1-1546306-8
-	-	-	-	-	-	-	-	-	-	-	-	-	-	171.2	178.7	17	1-1546306-7
-	-	-	-	-	-	-	-	-	-	-	-	-	-	161.7	169.2	16	1-1546306-6
   	-	-	-	-	-	-	-	-	-	-	-	-	-	152.2	159.7	15	6-1546306-2
-	-	-	-	-	-	-	-	-	-	-	-	-	-	152.2	159.7	15	1-1546306-5
-	-	-	-	-	-	-	-	-	-	-	-	-	-	142.7	150.2	14	1-1546306-4
-	-	-	-	-	-	-	-	-	-	-	-	-	-	133.2	140.7	13	1-1546306-3
 	-	-	-	-	-	-	-	-	-	-	-	-	-	123.7	131.2	12	4-1546306-0
 	-	-	-	-	-	-	-	-	-	-	-	-	-	123.7	131.2	12	3-1546306-3
-	-	-	-	-	-	-	-	-	-	-	-	-	-	123.7	131.2	12	1-1546306-2
	-	-	-	11	-	-	-	-	-	-	-	-	-	114.2	121.7	11	5-1546306-2
 	-	-	-	-	2	-	-	-	-	-	11	-	-	114.2	121.7	11	3-1546306-4
	-	-	-	-	-	-	-	-	-	-	11	-	-	114.2	121.7	11	3-1546306-1
-	-	-	-	-	-	-	-	-	-	-	-	-	-	114.2	121.7	11	1-1546306-1
	-	-	-	-	-	-	-	-	10	3	-	-	-	104.7	112.2	10	6-1546306-0
 	-	-	-	-	-	-	-	-	-	-	-	-	-	104.7	112.2	10	5-1546306-8
-	-	-	-	-	-	-	-	-	-	-	-	-	-	104.7	112.2	10	1-1546306-0
  	-	4	9	-	-	-	-	-	-	-	-	-	-	95.2	102.7	9	6-1546306-3
 	-	-	-	-	-	-	-	-	-	-	-	-	-	95.2	102.7	9	5-1546306-6
-	-	-	-	-	-	-	-	-	-	-	-	-	-	95.2	102.7	9	1546306-9
-	-	-	-	-	-	-	-	-	8	-	-	-	-	85.7	93.2	8	5-1546306-9
 	-	-	-	-	-	-	-	-	-	-	-	-	-	85.7	93.2	8	3-1546306-9
-	-	-	-	-	-	-	-	-	-	-	-	-	-	85.7	93.2	8	1546306-8
 	-	-	-	-	-	-	-	-	-	-	-	-	-	76.2	83.7	7	5-1546306-5
	-	-	-	-	1	-	-	7	-	-	-	-	-	76.2	83.7	7	5-1546306-0
-	-	-	-	-	-	-	-	-	-	-	-	7	7	76.2	83.7	7	4-1546306-5
	-	-	-	-	-	-	-	-	-	-	7	-	-	76.2	83.7	7	3-1546306-7
-	-	-	-	-	-	-	-	-	-	-	-	-	-	76.2	83.7	7	1546306-7
 	-	-	-	-	-	-	-	-	-	-	-	-	-	66.7	74.2	6	5-1546306-4
 	-	-	-	-	-	-	1	6	-	-	-	-	-	66.7	74.2	6	4-1546306-9
-	-	-	-	-	-	6	-	-	-	-	-	-	-	66.7	74.2	6	4-1546306-8
-	-	-	-	-	-	-	-	-	-	-	-	6	6	66.7	74.2	6	4-1546306-4
	-	-	-	-	-	-	-	-	-	-	6	-	-	66.7	74.2	6	3-1546306-6
-	-	-	-	-	-	-	-	-	-	-	-	-	-	66.7	74.2	6	1546306-6
	-	-	-	-	-	-	-	-	5	-	-	-	-	57.2	64.7	5	5-1546306-7
	-	5	5	-	-	-	-	-	-	-	-	-	-	57.2	64.7	5	5-1546306-3
  SCREW ON ONE SIDE	-	-	-	-	-	-	-	-	-	-	-	-	-	57.2	64.7	5	4-1546306-7
-	-	-	-	-	-	-	-	-	-	-	-	5	5	57.2	64.7	5	4-1546306-3
	-	-	-	-	-	-	-	-	-	-	-	-	-	57.2	64.7	5	3-1546306-5
-	-	-	-	-	-	-	-	-	-	-	-	-	-	57.2	64.7	5	1546306-5
-	-	-	-	-	-	-	-	-	-	-	-	-	4	47.7	55.2	4	4-1546306-2
 	-	-	-	-	-	-	-	-	-	-	-	-	-	47.7	55.2	4	3-1546306-8
-	-	-	-	-	-	-	-	-	-	-	-	-	-	47.7	55.2	4	1546306-4
-	3	3	-	-	-	-	-	-	-	-	-	-	-	38.2	45.7	3	6-1546306-1
-	-	-	-	-	-	-	-	-	-	-	-	-	-	38.2	45.7	3	5-1546306-1
-	-	-	-	-	-	-	-	-	-	-	-	-	-	38.2	45.7	3	1546306-3
	-	-	-	-	-	-	-	-	2	2	2	-	-	28.7	36.2	2	4-1546306-6
-	-	-	-	-	-	2	2	2	-	-	-	-	-	28.7	36.2	2	4-1546306-1
-	-	-	-	-	-	-	-	-	-	-	-	-	-	28.7	36.2	2	1546306-2

NOTES	 QC TAB DBL .187 SS FLAT	 QC TAB DBL .187 SS FLAT	 QC TAB DBL .187 SS 90°	 JUMPER	 QC TAB DBL SIDE 90° .250	 QC TAB DBL SIDE 45° .250	 QC TAB DBL SIDE FLAT .250	 QC TAB DBL SIDE 90° .187	 QC TAB DBL SIDE 45° .187	 QC TAB DBL SIDE FLAT .187	 QC TAB SGL SIDE 90° .250	 QC TAB SGL SIDE 45° .250	 QC TAB SGL SIDE FLAT .250	DIM B	DIM A	NO. OF POS.	PART NO.
-------	---	---	--	--	--	--	---	--	--	---	--	--	---	-------	-------	-------------	----------

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: MM



MATERIAL -

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± 0.3
2 PLC ± 0.25
3 PLC ± -
4 PLC ± -
ANGLES ± 2°
FINISH -

DWN S SCHLEGEL
CHK C RICHARD
APVD C RICHARD
PRODUCT SPEC -
APPLICATION SPEC -
WEIGHT -

20AUG2002
8/20/02
8/20/02

TE Connectivity

9.50MM (.374) DBL ROW BARRIER STRIP W/O WASHER

SIZE A2 CAGE CODE 00779 DRAWING NO C=1546306 RESTRICTED TO -

CUSTOMER DRAWING

SCALE NTS SHEET 1 OF 3 REV H2

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
—	—		—	SEE SHEET 1	—	—	—

- PHYSICAL PROPERTIES:
HOUSING MATERIAL: THERMOPLASTIC, PC
FLAMMABILITY: UL94V-0 COLOR: BLACK
MAX BOW/WARP: .0056 IN/IN.

TERMINAL:
TERMINALS: BRASS, TIN PLATED
SCREWS: 6-32, STEEL, NICKEL PLATED

MECHANICAL:
PITCH (TERMINAL SPACING): 9.50mm(.374")
WIRE RANGE: 12-22 AWG
RECOMMENDED TIGHTENING TORQUE: 12IN-LBS MAX.

ELECTRICAL PROPERTIES:
MAXIMUM CURRENT: 20A
OPERATING VOLTAGE: 300V

ENVIRONMENTAL PROPERTIES:
OPERATING TEMP RANGE: -40°C TO +120°C.
- 1 SEE FIGURE.

2 MARKED WITH WHITE INK.

3 PRELIMINARY PART NUMBER.

4 SCREWS AND TERMINALS ARE NICKEL PLATED BRASS.

5 STAINLESS STEEL SCREWS.

6 SCREWS ARE NICKEL PLATED BRASS.

7 WIRE CLAMP SCREWS TO BE USED ONLY ON SIDE OPPOSITE QC TABS.

8 TE CONNECTIVITY LOGO LOCATED APPROXIMATE AREA SHOWN.

-- SELECT LOAD CHART --

—	—	4-5,5-6	—	—	—	—	ALL	—	—	—	—	11	3-1546306-4
—	—	—	—	—	—	ALL	1-3	—	—	—	—	10	6-1546306-0
—	—	1,2	—	—	ALL	—	—	—	—	—	—	7	5-1546306-0
—	—	—	—	1	ALL	—	—	—	—	—	—	6	4-1546306-9
⑫ QC TAB .187 SS FLAT	⑪ QC TAB .187 SS 90°	⑩ JUMPER	⑨ QC TAB DBL SIDE 90° .250	⑧ QC TAB DBL SIDE 45° .250	⑦ QC TAB DBL SIDE FLAT .250	⑥ QC TAB DBL SIDE 90° .187	⑤ QC TAB DBL SIDE 45° .187	④ QC TAB DBL SIDE FLAT .187	③ QC TAB SGL SIDE 90° .250	② QC TAB SGL SIDE 45° .250	① QC TAB SGL SIDE FLAT .250	NO. OF POS.	PART NUMBER
POSITIONS LOADED													

—	—	—	—	—	—	—	—	—	—	—	—	—	—	294.7	302.2	30	3-1546306-0
—	—	—	—	—	—	—	—	—	—	—	—	—	—	285.2	292.7	29	2-1546306-9
—	—	—	—	—	—	—	—	—	—	—	—	—	—	275.7	283.2	28	2-1546306-8
—	—	—	—	—	—	—	—	—	—	—	—	—	—	266.2	273.7	27	2-1546306-7
—	—	—	—	—	—	—	—	—	—	—	—	—	—	256.7	264.2	26	2-1546306-6
—	—	—	—	—	—	—	—	—	—	—	—	—	—	247.2	254.7	25	2-1546306-5
—	—	—	—	—	—	—	—	—	—	—	—	—	—	237.7	245.2	24	2-1546306-4
—	—	—	—	—	—	—	—	—	—	—	—	—	—	228.2	235.7	23	2-1546306-3
—	—	—	—	—	—	—	—	—	—	—	—	—	—	218.7	226.2	22	2-1546306-2
1 2 SPL MARKING	—	—	—	—	—	—	—	—	—	—	—	—	—	209.2	216.7	21	2-1546306-1
—	—	—	—	—	—	—	—	—	—	—	—	—	—	199.7	207.2	20	3-1546306-2
—	—	—	—	—	—	—	—	—	—	—	—	—	—	199.7	207.2	20	2-1546306-0
—	—	—	—	—	—	—	—	—	—	—	—	—	—	190.2	197.7	19	1-1546306-9
NOTES	13 QC TAB .187 SS FLAT	12 QC TAB .187 SS FLAT	11 QC TAB .187 SS 90°	10 JUMPER	9 QC TAB DBL SIDE 90° .250	8 QC TAB DBL SIDE 45° .250	7 QC TAB DBL SIDE FLAT .250	6 QC TAB DBL SIDE 90° .187	5 QC TAB DBL SIDE 45° .187	4 QC TAB DBL SIDE FLAT .187	3 QC TAB SGL SIDE 90° .250	2 QC TAB SGL SIDE 45° .250	1 QC TAB SGL SIDE FLAT .250	DIM B	DIM A	NO. OF POS.	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
MM

MATERIAL
—

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± —
1 PLC ± 0.3
2 PLC ± 0.25
3 PLC ± —
4 PLC ± —
ANGLES ± 2°
FINISH
—

DWN
S SCHLEGEL
CHK
C RICHARD
APVD
C RICHARD
PRODUCT SPEC
—
APPLICATION SPEC
—
WEIGHT
—
CUSTOMER DRAWING

20AUG2002
8/20/02
8/20/02

TE Connectivity

9.50MM (.374) DBL ROW BARRIER STRIP
W/O WASHER
—




SIZE
A2
CAGE CODE
00779
DRAWING NO
C=1546306
RESTRICTED TO
—

SCALE
NTS
SHEET
2 OF 3
REV
H2



1471-9 (3/11)

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
—	—		—	SEE SHEET 1	—	—	—

D

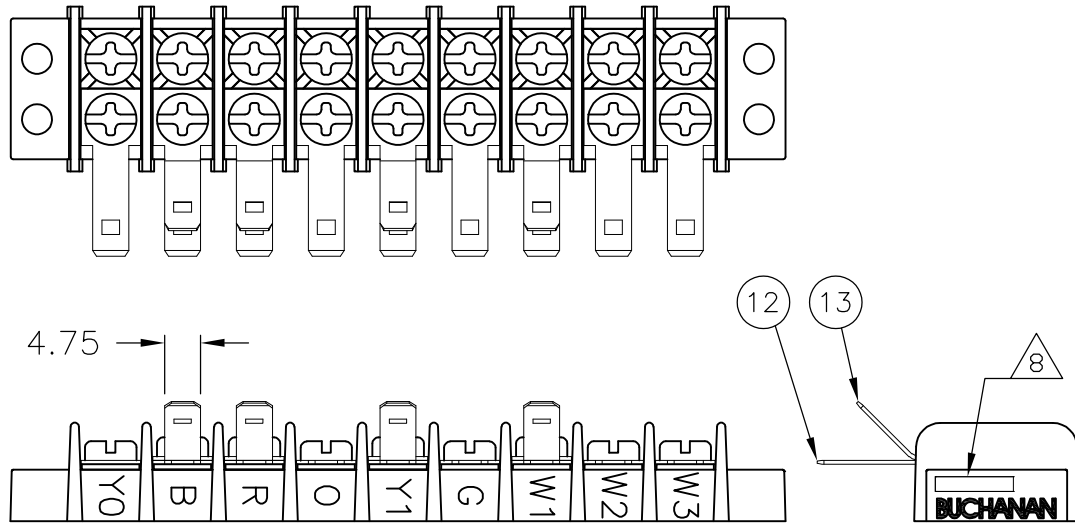
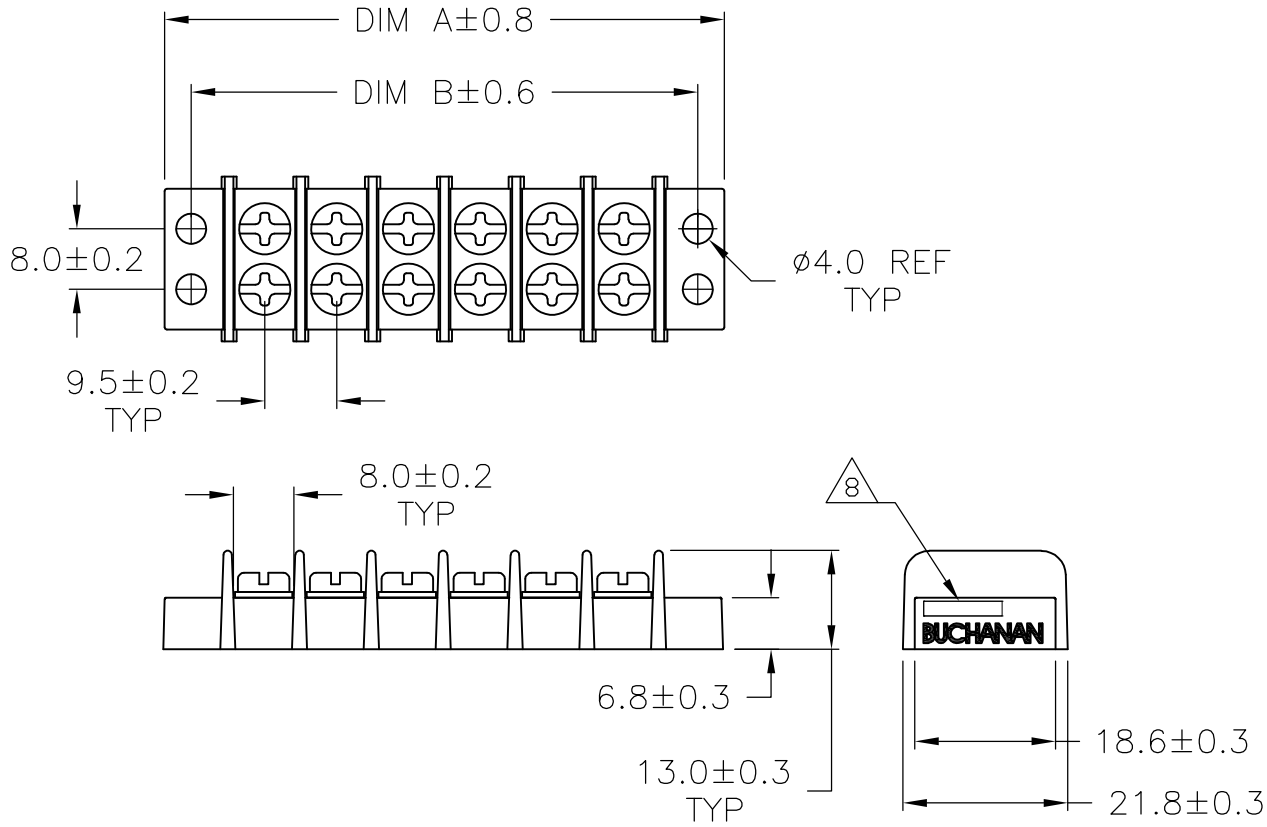
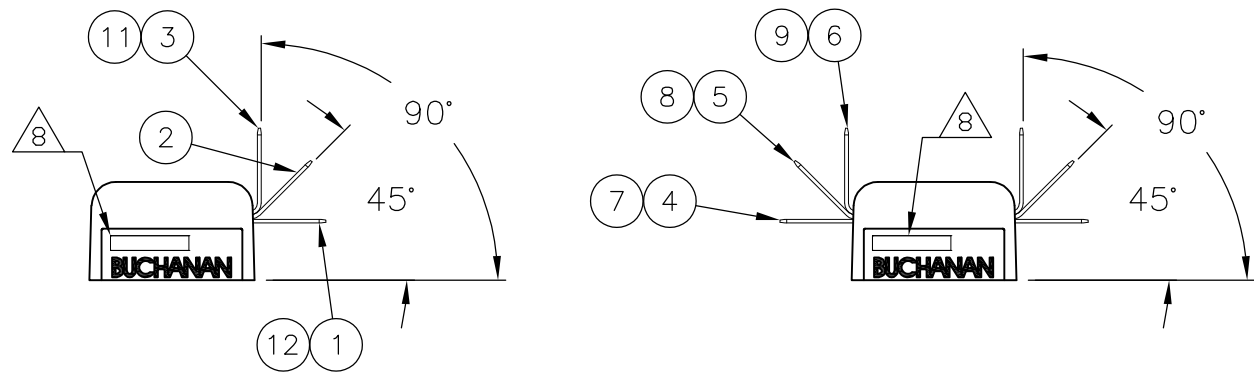


C

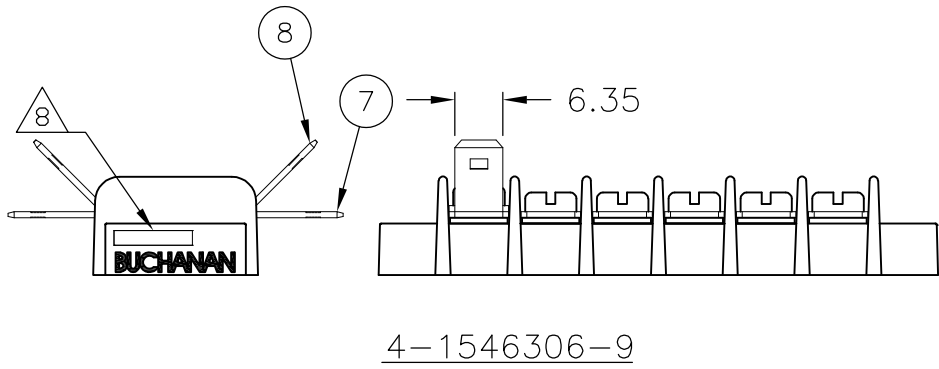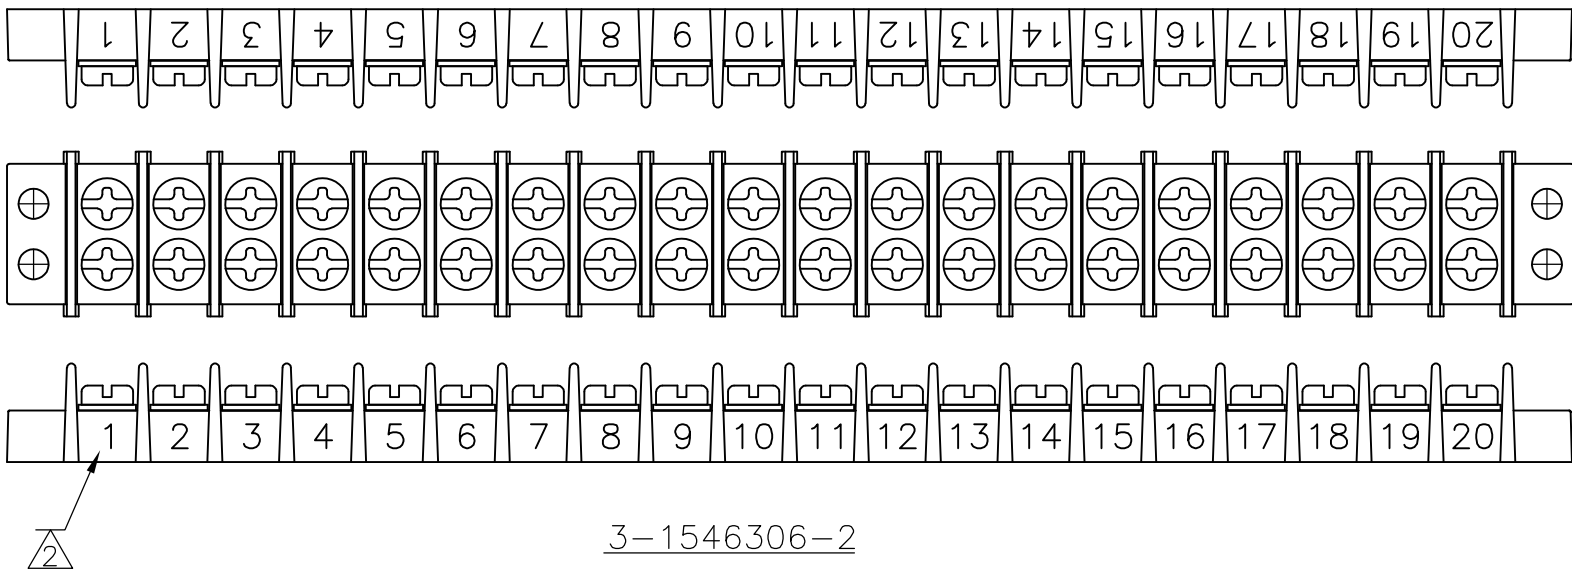


6-1546306-3


B

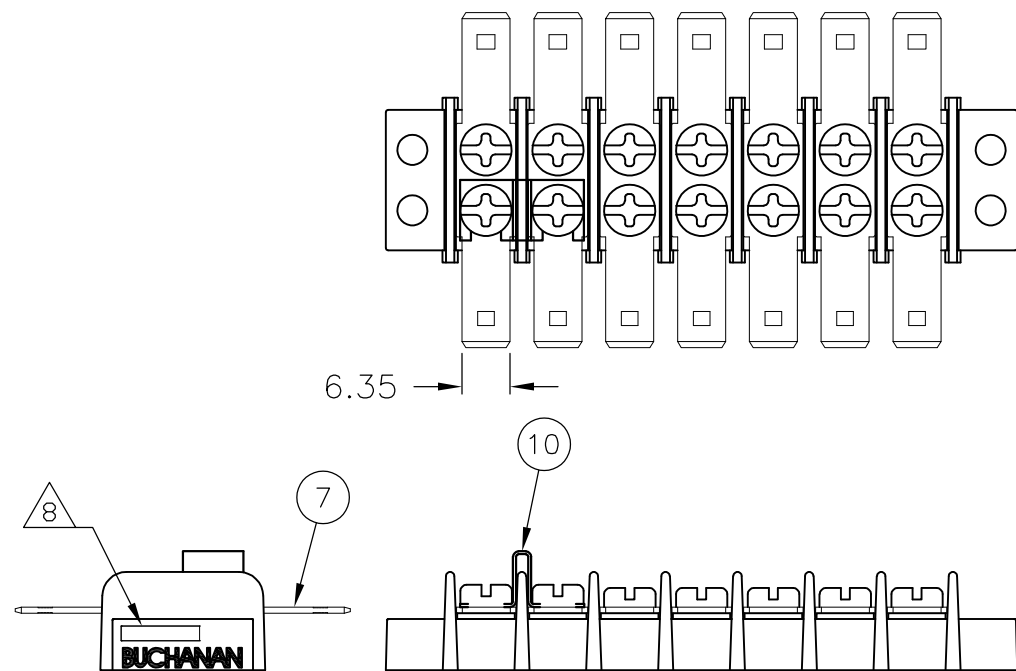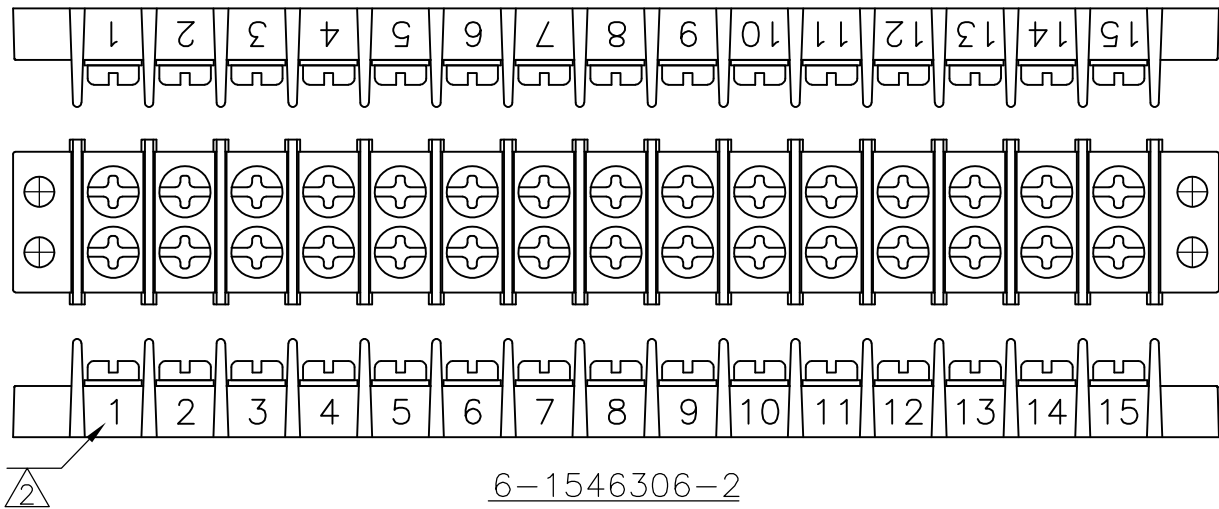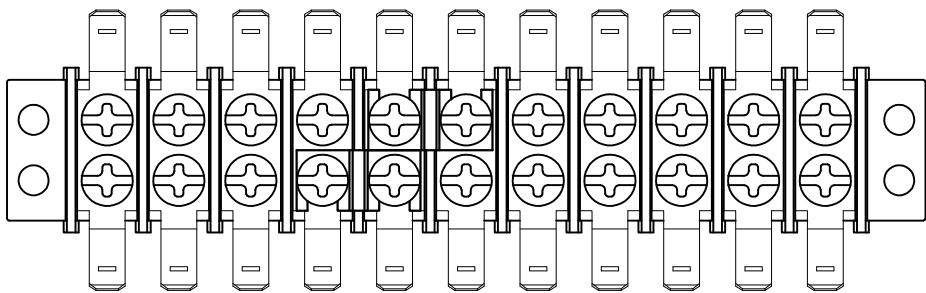

5-1546306-0

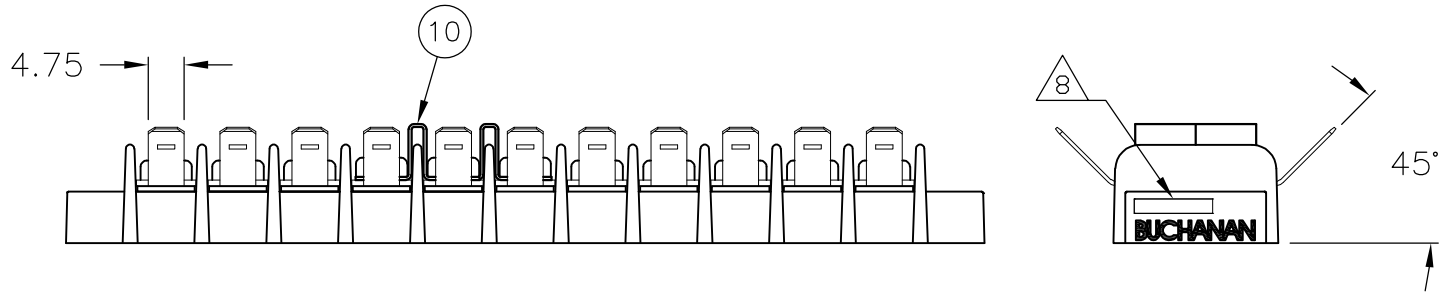


3-1546306-4

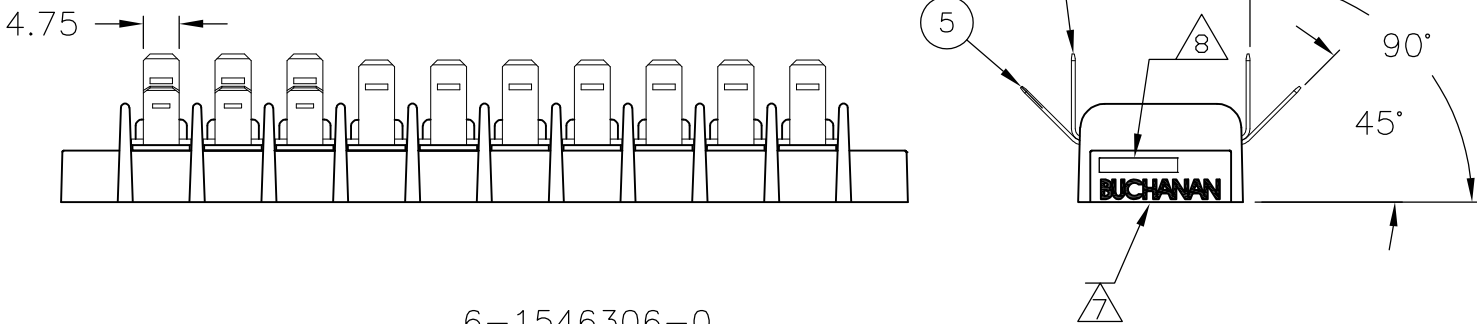

6-1546306-0

A

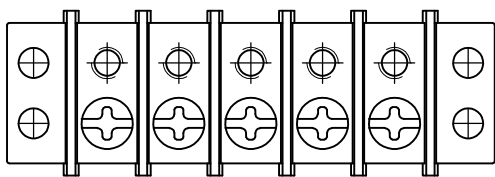

4-1546306-7

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S SCHLEGEL	20AUG2002	 TE Connectivity			
		CHK C RICHARD	8/20/02				
DIMENSIONS: MM		TOLERANCES, UNLESS OTHERWISE SPECIFIED:		NAME 9.50MM (.374) DBL ROW BARRIER STRIP W/O WASHER —			
		0 PLC ± — 1 PLC ± 0.3 2 PLC ± 0.25 3 PLC ± — 4 PLC ± — ANGLES ± .2°					
MATERIAL —		FINISH —		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
		WEIGHT —		A2	00779	C=1546306	—
CUSTOMER DRAWING						SCALE	NTS
						SHEET	3 of 3
						REV	H2

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А