

# MC74LVXC3245

## Configurable Dual Supply Octal Transceiver

### with 3-State Outputs for 3 V Systems

The 74LVXC3245 is a 24-pin dual-supply, octal configurable voltage interface transceiver especially well suited for PCMCIA and other real time configurable I/O applications. The  $V_{CCA}$  pin accepts a 3.0 V supply level; the A port is a dedicated 3.0 V port. The  $V_{CCB}$  pin accepts a 3.0 V-to-5.0 V supply level. The B port is configured to track the  $V_{CCB}$  supply level. A 5.0 V level on the  $V_{CCB}$  pin will configure the I/O pins at a 5.0 V level and a 3.0 V  $V_{CCB}$  will configure the I/O pins at a 3.0 V level. The A port interfaces with a 3.0 V host system and the B port to the card slots. This device will allow the  $V_{CCB}$  voltage source pin and I/O pins on the B port to float when  $\overline{OE}$  is High. This feature is necessary to buffer data to and from a PCMCIA socket that permits PCMCIA cards to be inserted and removed during normal operation. The Transmit/Receive ( $T/\overline{R}$ ) input determines the direction of data flow. Transmit (active-High) enables data from the A port to B port. Receive (active-Low) enables data from the B port to the A port.

#### Features


- Bidirectional Interface Between 3.0 V and 3.0 V/5.0 V Buses
- Control Inputs Compatible with TTL Level
- Outputs Source/Sink Up to 24 mA
- Guaranteed Simultaneous Switching Noise Level and Dynamic Threshold Performance
- Available in SOIC and TSSOP Packages
- Flexible  $V_{CCB}$  Operating Range
- Allows B Port and  $V_{CCB}$  to Float Simultaneously When  $\overline{OE}$  is High
- Functionally Compatible With the 74 Series 245
- These Devices are Pb-Free and are RoHS Compliant



ON Semiconductor®

<http://onsemi.com>

#### MARKING DIAGRAMS

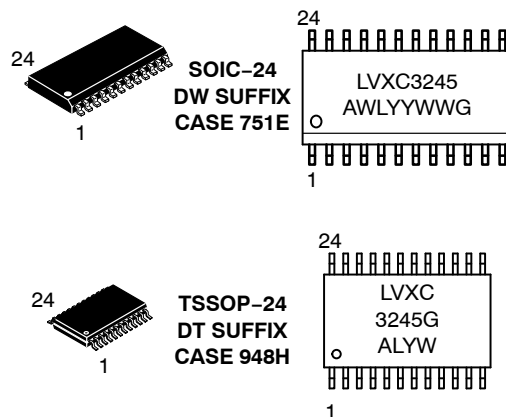

LVXC3245 = Specific Device Code  
A = Assembly Location  
WL, L = Wafer Lot  
Y = Year  
WW, W = Work Week  
G or ■ = Pb-Free Package

(Note: Microdot may be in either location)

#### ORDERING INFORMATION

See detailed ordering and shipping information in the package dimensions section on page 5 of this data sheet.

# MC74LVXC3245

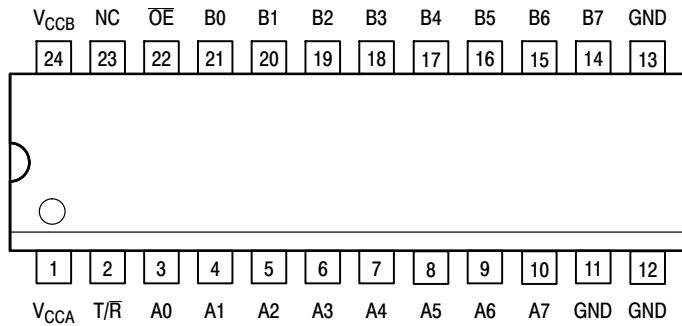


Figure 1. 24-Lead Pinout (Top View)

## PIN NAMES

| Pins            | Function                                 |
|-----------------|------------------------------------------|
| $\overline{OE}$ | Output Enable Input                      |
| T/R             | Transmit/Receive Input                   |
| A0–A7           | Side A 3–State Inputs or 3–State Outputs |
| B0–B7           | Side B 3–State Inputs or 3–State Outputs |

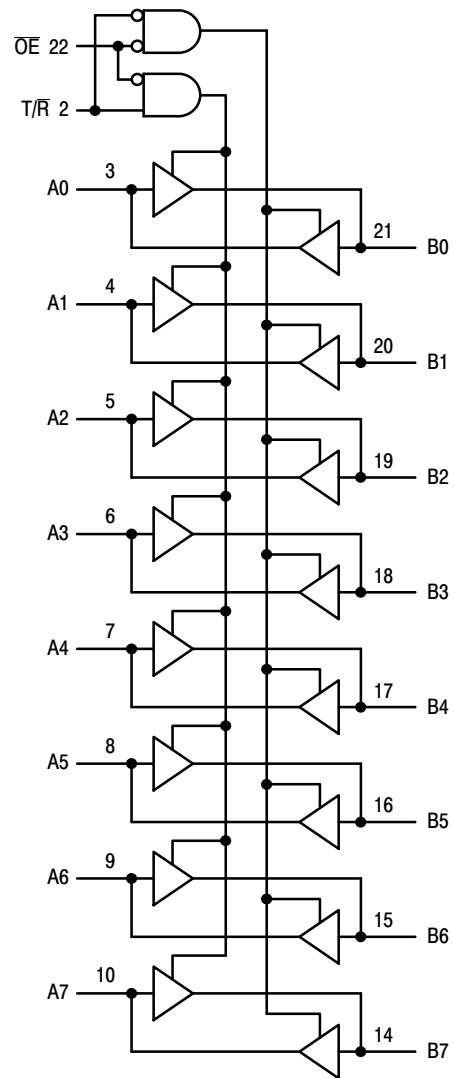


Figure 2. Logic Diagram

| INPUTS          |     | OPERATING MODE<br>Non-Inverting |
|-----------------|-----|---------------------------------|
| $\overline{OE}$ | T/R |                                 |
| L               | L   | B Data to A Bus                 |
| L               | H   | A Data to B Bus                 |
| H               | X   | Z                               |

H = High Voltage Level; L = Low Voltage Level; Z = High Impedance State; X = High or Low Voltage Level and Transitions are Acceptable; for  $I_{CC}$  reasons, Do Not Float Inputs

# MC74LVXC3245

## MAXIMUM RATINGS

| Symbol             | Parameter                                              | Value                   | Condition                 | Unit |
|--------------------|--------------------------------------------------------|-------------------------|---------------------------|------|
| $V_{CCA}, V_{CCB}$ | DC Supply Voltage                                      | -0.5 to +7.0            |                           | V    |
| $V_I$              | DC Input Voltage $\overline{OE}, T/\overline{R}$       | -0.5 to $V_{CCA} + 0.5$ |                           | V    |
| $V_{I/O}$          | DC Input/Output Voltage                                | An                      | -0.5 to $V_{CCA} + 0.5$   | V    |
|                    |                                                        | Bn                      | -0.5 to $V_{CCB} + 0.5$   | V    |
| $I_{IK}$           | DC Input Diode Current $\overline{OE}, T/\overline{R}$ | $\pm 20$                | $V_I < GND$               | mA   |
| $I_{OK}$           | DC Output Diode Current                                | $\pm 50$                | $V_O < GND; V_O > V_{CC}$ | mA   |
| $I_O$              | DC Output Source/Sink Current                          | $\pm 50$                |                           | mA   |
| $I_{CC}, I_{GND}$  | DC Supply Current Per Output Pin Maximum Current       | $\pm 50$<br>$\pm 200$   |                           | mA   |
| $T_{STG}$          | Storage Temperature Range                              | -65 to +150             |                           | °C   |
|                    | DC Latchup Source/Sink Current                         | $\pm 300$               |                           | mA   |

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

## RECOMMENDED OPERATING CONDITIONS

| Symbol              | Parameter                                                                                         | Min        | Max                    | Unit |
|---------------------|---------------------------------------------------------------------------------------------------|------------|------------------------|------|
| $V_{CCA}, V_{CCB}$  | Supply Voltage ( $V_{CCA} \leq V_{CCB}$ )<br>$V_{CCA}$<br>$V_{CCB}$                               | 2.3<br>3.0 | 3.6<br>5.5             | V    |
| $V_I$               | Input Voltage $\overline{OE}, T/\overline{R}$                                                     | 0          | $V_{CCA}$              | V    |
| $V_{I/O}$           | Input/Output Voltage<br>An<br>Bn                                                                  | 0<br>0     | $V_{CCA}$<br>$V_{CCB}$ | V    |
| $T_A$               | Operating Free-Air Temperature                                                                    | -40        | +85                    | °C   |
| $\Delta t/\Delta V$ | Minimum Input Edge Rate<br>$V_{IN}$ from 30% to 70% of $V_{CC}$ ; $V_{CC}$ at 3.0 V, 4.5 V, 5.5 V | 0          | 8                      | ns/V |

## DC ELECTRICAL CHARACTERISTICS

| Symbol           | Parameter                         |                 | Condition                                                   | V <sub>CCA</sub> | V <sub>CCB</sub>           | T <sub>A</sub> = 25°C |                   | T <sub>A</sub> = −40 to +85°C |      | Unit |
|------------------|-----------------------------------|-----------------|-------------------------------------------------------------|------------------|----------------------------|-----------------------|-------------------|-------------------------------|------|------|
|                  |                                   |                 |                                                             |                  |                            | Typ                   | Guaranteed Limits |                               |      |      |
| V <sub>IHA</sub> | Minimum HIGH Level Input Voltage  | An<br>OE<br>T/R | V <sub>OUT</sub> ≤ 0.1 V<br>or<br>≥ V <sub>CC</sub> − 0.1 V | 2.3              | 3.0                        |                       | 2.0               | 2.0                           | V    |      |
|                  |                                   |                 |                                                             | 3.0              | 3.6                        |                       | 2.0               | 2.0                           |      |      |
|                  |                                   |                 |                                                             | 3.6              | 5.5                        |                       | 2.0               | 2.0                           |      |      |
| V <sub>IHB</sub> |                                   | Bn              |                                                             |                  | 2.3                        | 3.0                   |                   | 2.00                          | 2.00 | V    |
|                  |                                   |                 |                                                             |                  | 3.0                        | 3.6                   |                   | 2.00                          | 2.00 |      |
|                  |                                   |                 |                                                             |                  | 3.6                        | 5.5                   |                   | 3.85                          | 3.85 |      |
| V <sub>ILA</sub> | Maximum LOW Level Input Voltage   | An<br>OE<br>T/R | V <sub>OUT</sub> ≤ 0.1 V<br>or<br>≥ V <sub>CC</sub> − 0.1 V | 2.3              | 3.0                        |                       | 0.8               | 0.8                           | V    |      |
|                  |                                   |                 |                                                             |                  | 3.0                        | 3.6                   |                   | 0.8                           |      | 0.8  |
|                  |                                   |                 |                                                             |                  | 3.6                        | 5.5                   |                   | 0.8                           |      | 0.8  |
| V <sub>ILB</sub> |                                   | Bn              |                                                             |                  | 2.3                        | 3.0                   |                   | 0.80                          | 0.80 | V    |
|                  |                                   |                 |                                                             |                  | 3.0                        | 3.6                   |                   | 0.80                          | 0.80 |      |
|                  |                                   |                 |                                                             |                  | 3.6                        | 5.5                   |                   | 1.65                          | 1.65 |      |
| V <sub>OHA</sub> | Minimum HIGH Level Output Voltage |                 | I <sub>OUT</sub> = −100 μA                                  | 3.0              | 3.0                        | 2.99                  | 2.90              | 2.90                          | V    |      |
|                  |                                   |                 | I <sub>OH</sub> = −12 mA                                    | 3.0              | 3.0                        | 2.85                  | 2.56              | 2.46                          |      |      |
|                  |                                   |                 | I <sub>OH</sub> = −24 mA                                    | 3.0              | 3.0                        | 2.65                  | 2.35              | 2.25                          |      |      |
|                  |                                   |                 | I <sub>OH</sub> = −12 mA                                    | 2.3              | 3.0                        | 2.50                  | 2.30              | 2.20                          |      |      |
|                  |                                   |                 | I <sub>OH</sub> = −24 mA                                    | 2.3              | 4.5                        | 2.30                  | 2.10              | 2.00                          |      |      |
| V <sub>OHB</sub> |                                   |                 |                                                             |                  | I <sub>OUT</sub> = −100 μA | 3.0                   | 3.0               | 2.99                          | 2.90 | 2.90 |
|                  | I <sub>OH</sub> = −12 mA          | 3.0             |                                                             |                  | 3.0                        | 2.85                  | 2.56              | 2.46                          |      |      |
|                  | I <sub>OH</sub> = −24 mA          | 3.0             |                                                             |                  | 3.0                        | 2.65                  | 2.35              | 2.25                          |      |      |
|                  | I <sub>OH</sub> = −24 mA          | 3.0             |                                                             |                  | 4.5                        | 4.25                  | 3.86              | 3.76                          |      |      |
|                  |                                   |                 |                                                             |                  |                            |                       |                   |                               |      |      |

# MC74LVXC3245

## DC ELECTRICAL CHARACTERISTICS

| Symbol                  | Parameter                                                  |             | Condition                                                                                                                    | V <sub>CCA</sub> | V <sub>CCB</sub> | T <sub>A</sub> = 25°C |                   | T <sub>A</sub> = -40 to +85°C | Unit |
|-------------------------|------------------------------------------------------------|-------------|------------------------------------------------------------------------------------------------------------------------------|------------------|------------------|-----------------------|-------------------|-------------------------------|------|
|                         |                                                            |             |                                                                                                                              |                  |                  | Typ                   | Guaranteed Limits |                               |      |
| V <sub>OLA</sub>        | Maximum LOW Level Output Voltage                           |             | I <sub>OUT</sub> = 100 μA                                                                                                    | 3.0              | 3.0              | 0.002                 | 0.10              | 0.10                          | V    |
| I <sub>OL</sub> = 24 mA |                                                            |             | 3.0                                                                                                                          | 3.0              | 0.21             | 0.36                  | 0.44              |                               |      |
| I <sub>OL</sub> = 12 mA |                                                            |             | 2.7                                                                                                                          | 3.0              | 0.11             | 0.36                  | 0.44              |                               |      |
| I <sub>OL</sub> = 24 mA |                                                            |             | 2.7                                                                                                                          | 4.5              | 0.22             | 0.42                  | 0.50              |                               |      |
| V <sub>OLB</sub>        |                                                            |             | I <sub>OUT</sub> = 100 μA                                                                                                    | 3.0              | 3.0              | 0.002                 | 0.10              | 0.10                          |      |
|                         | I <sub>OL</sub> = 24 mA                                    | 3.0         | 3.0                                                                                                                          | 0.21             | 0.36             | 0.44                  |                   |                               |      |
|                         | I <sub>OL</sub> = 24 mA                                    | 3.0         | 4.5                                                                                                                          | 0.18             | 0.36             | 0.44                  |                   |                               |      |
| I <sub>IN</sub>         | Max Input Leakage Current                                  | OE, T/R     | V <sub>I</sub> = V <sub>CCA</sub> , GND                                                                                      | 3.6<br>3.6       | 3.6<br>5.5       |                       | ±0.1<br>±0.1      | ±1.0<br>±1.0                  | μA   |
| I <sub>OZA</sub>        | Max 3-State Output Leakage                                 | An          | V <sub>I</sub> = V <sub>IH</sub> , V <sub>IL</sub><br>OE = V <sub>CCA</sub><br>V <sub>O</sub> = V <sub>CCA</sub> , GND       | 3.6<br>3.6       | 3.6<br>5.5       |                       | ±0.5<br>±0.5      | ±5.0<br>±5.0                  | μA   |
| I <sub>OZB</sub>        | Max 3-State Output Leakage                                 | Bn          | V <sub>I</sub> = V <sub>IH</sub> , V <sub>IL</sub><br>OE = V <sub>CCA</sub><br>V <sub>O</sub> = V <sub>CCB</sub> , GND       | 3.6<br>3.6       | 3.6<br>5.5       |                       | ±0.5<br>±0.5      | ±5.0<br>±5.0                  | μA   |
| ΔI <sub>CC</sub>        | Maximum I <sub>CC</sub> /Input                             | Bn          | V <sub>I</sub> = V <sub>CCB</sub> -2.1 V                                                                                     | 3.6              | 5.5              | 1.0                   | 1.35              | 1.5                           | mA   |
|                         |                                                            | All In-puts | V <sub>I</sub> = V <sub>CC</sub> -0.6 V                                                                                      | 3.6              | 3.6              |                       | 0.35              | 0.5                           | mA   |
| I <sub>CCA1</sub>       | Quiescent V <sub>CCA</sub> Supply Current as B Port Floats |             | An = V <sub>CCA</sub> or GND<br>Bn = Open,<br>OE = V <sub>CCA</sub> ,<br>T/R = V <sub>CCA</sub> ,<br>V <sub>CCB</sub> = Open | 3.6              | Open             |                       | 5                 | 50                            | μA   |
| I <sub>CCA2</sub>       | Quiescent V <sub>CCA</sub> Supply Current                  |             | An = V <sub>CCA</sub> or GND<br>Bn = V <sub>CCB</sub> or GND, OE = GND,<br>T/R = GND                                         | 3.6<br>3.6       | 3.6<br>5.5       |                       | 5<br>5            | 50<br>50                      | μA   |
| I <sub>CCB</sub>        | Quiescent V <sub>CCB</sub> Supply Current                  |             | An = V <sub>CCA</sub> or GND<br>Bn = V <sub>CCB</sub> or GND, OE = GND,<br>T/R = V <sub>CCA</sub>                            | 3.6<br>3.6       | 3.6<br>5.5       |                       | 5<br>8            | 50<br>80                      | μA   |
| V <sub>OLPA</sub>       | Quiet Output Max Dynamic V <sub>OL</sub>                   |             | Notes 1, 2                                                                                                                   | 3.3<br>3.3       | 3.3<br>5.0       |                       | 0.8<br>0.8        |                               | V    |
| V <sub>OLPB</sub>       |                                                            |             | Notes 1, 2                                                                                                                   | 3.3<br>3.3       | 3.3<br>5.0       |                       | 0.8<br>1.5        |                               | V    |
| V <sub>OLVA</sub>       | Quiet Output Min Dynamic V <sub>OL</sub>                   |             | Notes 1, 2                                                                                                                   | 3.3<br>3.3       | 3.3<br>5.0       |                       | -0.8<br>-0.8      |                               | V    |
| V <sub>OLVB</sub>       |                                                            |             | Notes 1, 2                                                                                                                   | 3.3<br>3.3       | 3.3<br>5.0       |                       | -0.8<br>-1.2      |                               | V    |
| V <sub>IHDA</sub>       | Min HIGH Level Dynamic Input Voltage                       |             | Notes 1, 3                                                                                                                   | 3.3<br>3.3       | 3.3<br>5.0       |                       | 2.0<br>2.0        |                               | V    |
| V <sub>IHDB</sub>       |                                                            |             | Notes 1, 3                                                                                                                   | 3.3<br>3.3       | 3.3<br>5.0       |                       | 2.0<br>3.5        |                               | V    |
| V <sub>ILDA</sub>       | Max LOW Level Dynamic Input Voltage                        |             | Notes 1, 3                                                                                                                   | 3.3<br>3.3       | 3.3<br>5.0       |                       | 0.8<br>0.8        |                               | V    |
| V <sub>ILDB</sub>       |                                                            |             | Notes 1, 3                                                                                                                   | 3.3<br>3.3       | 3.3<br>5.0       |                       | 0.8<br>1.5        |                               | V    |

1. Worst case package.

2. Max number of outputs defined as (n). Data inputs are driven 0 V to V<sub>CC</sub> level; one output at GND.

3. Max number of data inputs (n) switching. (n-1) inputs switching 0 V to V<sub>CC</sub> level. Input under test switching: V<sub>CC</sub> level to threshold (V<sub>IHD</sub>), 0 V to threshold (V<sub>ILD</sub>), f = 1 MHz.

# MC74LVXC3245

## AC ELECTRICAL CHARACTERISTICS

| Symbol                   | Parameter                                         | $T_A = -40 \text{ to } +85^{\circ}\text{C}; C_L = 50 \text{ pF}$               |                 |             |                                                                                |                 |             | Unit |
|--------------------------|---------------------------------------------------|--------------------------------------------------------------------------------|-----------------|-------------|--------------------------------------------------------------------------------|-----------------|-------------|------|
|                          |                                                   | $V_{CCA} = 2.7\text{--}3.6 \text{ V}$<br>$V_{CCB} = 4.5\text{--}5.5 \text{ V}$ |                 |             | $V_{CCA} = 2.7\text{--}3.6 \text{ V}$<br>$V_{CCB} = 3.0\text{--}3.6 \text{ V}$ |                 |             |      |
|                          |                                                   | Min                                                                            | Typ<br>(Note 4) | Max         | Min                                                                            | Typ<br>(Note 5) | Max         |      |
| $t_{PHL}$<br>$t_{PLH}$   | Propagation Delay A to B                          | 1.0<br>1.0                                                                     | 4.8<br>3.9      | 8.5<br>7.0  | 1.0<br>1.0                                                                     | 5.5<br>5.2      | 9.0<br>8.5  | ns   |
| $t_{PHL}$<br>$t_{PLH}$   | Propagation Delay B to A                          | 1.0<br>1.0                                                                     | 3.8<br>4.3      | 7.0<br>8.0  | 1.0<br>1.0                                                                     | 4.4<br>5.1      | 7.5<br>8.0  | ns   |
| $t_{PZL}$<br>$t_{PZH}$   | Output Enable Time $\overline{OE}$ to B           | 1.0<br>1.0                                                                     | 4.7<br>4.8      | 8.5<br>9.0  | 1.0<br>1.0                                                                     | 6.0<br>6.1      | 9.5<br>10.0 | ns   |
| $t_{PZL}$<br>$t_{PZH}$   | Output Enable Time $\overline{OE}$ to A           | 1.0<br>1.0                                                                     | 5.9<br>5.4      | 10.0<br>9.5 | 1.0<br>1.0                                                                     | 6.4<br>5.8      | 10.5<br>9.5 | ns   |
| $t_{PHZ}$<br>$t_{PLZ}$   | Output Disable Time $\overline{OE}$ to B          | 1.0<br>1.0                                                                     | 4.0<br>3.8      | 8.5<br>8.0  | 1.0<br>1.0                                                                     | 6.3<br>4.5      | 10.0<br>8.5 | ns   |
| $t_{PHZ}$<br>$t_{PLZ}$   | Output Disable Time $\overline{OE}$ to A          | 1.0<br>1.0                                                                     | 4.6<br>3.1      | 10.0<br>7.0 | 1.0<br>1.0                                                                     | 5.2<br>3.4      | 10.0<br>7.0 | ns   |
| $t_{OSHL}$<br>$t_{OSLH}$ | Output to Output Skew, Data to Output<br>(Note 6) |                                                                                | 1.0             | 1.5         |                                                                                | 1.0             | 1.5         | ns   |

4. Typical values at  $V_{CCA} = 3.3 \text{ V}$ ,  $V_{CCB} = 5.0 \text{ V}$  at  $25^\circ\text{C}$ .

5. Typical values at  $V_{CCA} = 3.3 \text{ V}$ ,  $V_{CCB} = 3.3 \text{ V}$  at  $25^\circ\text{C}$ .

6. Skew is defined as the absolute value of the difference between the actual propagation delay for any two separate outputs of the same device. The specification applies to any outputs switching in the same direction, either HIGH-to-LOW ( $t_{OSHL}$ ) or LOW-to-HIGH ( $t_{OSLH}$ ); parameter guaranteed by design.

## CAPACITIVE CHARACTERISTICS

| Symbol    | Parameter                                             | Condition                                                            | Typical  | Unit |
|-----------|-------------------------------------------------------|----------------------------------------------------------------------|----------|------|
| $C_{IN}$  | Input Capacitance                                     | $V_{CCA} = 3.3 \text{ V}; V_{CCB} = 5.0 \text{ V}$                   | 4.5      | pF   |
| $C_{I/O}$ | Input/Output Capacitance                              | $V_{CCA} = 3.3 \text{ V}; V_{CCB} = 5.0 \text{ V}$                   | 10       | pF   |
| $C_{PD}$  | Power Dissipation Capacitance<br>(Measured at 10 MHz) | A→B<br>B→A<br>$V_{CCB} = 5.0 \text{ V}$<br>$V_{CCA} = 3.3 \text{ V}$ | 50<br>40 | pF   |


## ORDERING INFORMATION

| Device            | Package                | Shipping <sup>†</sup> |
|-------------------|------------------------|-----------------------|
| MC74LVXC3245DWR2G | SOIC-24<br>(Pb-Free)   | 1000 Tape & Reel      |
| MC74LVXC3245DTG   | TSSOP-24*<br>(Pb-Free) | 62 Units / Rail       |
| MC74LVXC3245DTR2G | TSSOP-24*<br>(Pb-Free) | 2500 Tape & Reel      |

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

\*This package is inherently Pb-Free.

## MC74LVXC3245

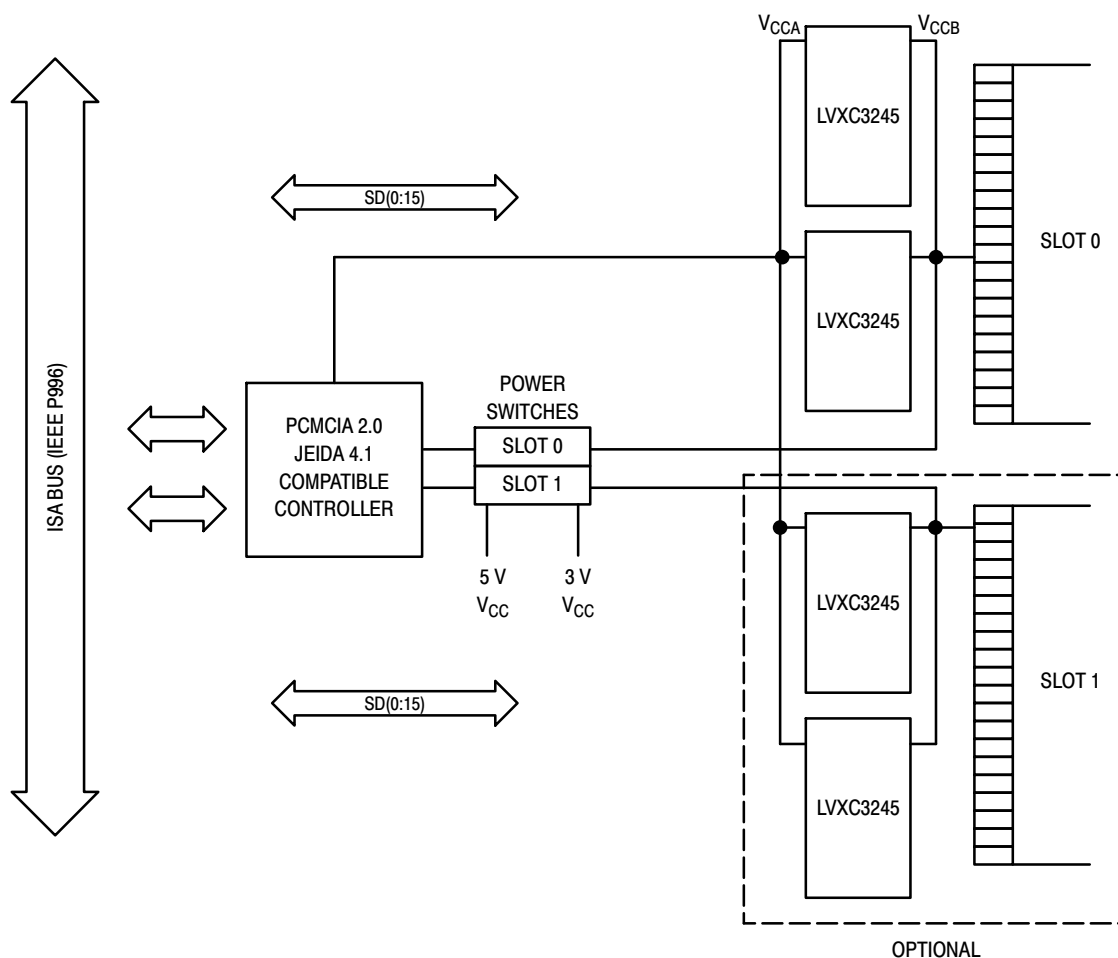

**Figure 3. Block Diagram**


### Configurable I/O Application for PCMCIA Cards

The 74LVXC3245 is a dual-supply device well suited for PCMCIA configurable I/O applications. The LVXC3245 consumes less than 1mW of quiescent power in all modes of operation, making it ideal for low power notebook designs. The LVXC3245 meets all PCMCIA I/O voltage requirements at 5.0 V and 3.3 V operation. By tying the  $V_{CCB}$  pin to the card voltage supply, the PCMCIA card will always have

rail-to-rail output swings, maximizing the reliability of the interface.


The  $V_{CCA}$  pin must always be tied to a 3.3 V power supply. This voltage connection provides internal references needed to account for variations in  $V_{CCB}$ . When connected as in the figure above, the LVXC3245 meets all the voltage and current requirements of the ISA bus standard (IEEE P996).

## MC74LVXC3245

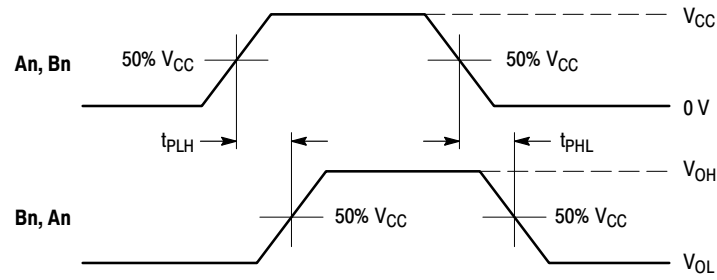

**WAVEFORM 1 - PROPAGATION DELAYS**


$t_R = t_F = 2.5$  ns, 10% to 90%;  $f = 1$  MHz;  $t_W = 500$  ns

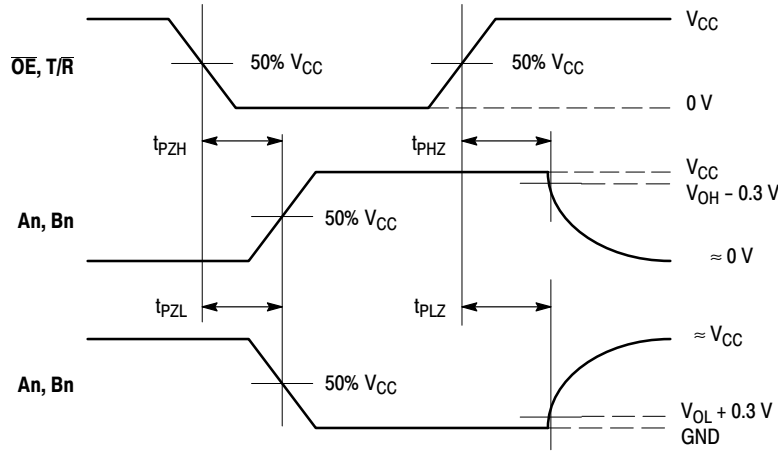

**WAVEFORM 2 - OUTPUT ENABLE AND DISABLE TIMES**

$t_R = t_F = 2.5$  ns, 10% to 90%;  $f = 1$  MHz;  $t_W = 500$  ns

**Figure 4. AC Waveforms**

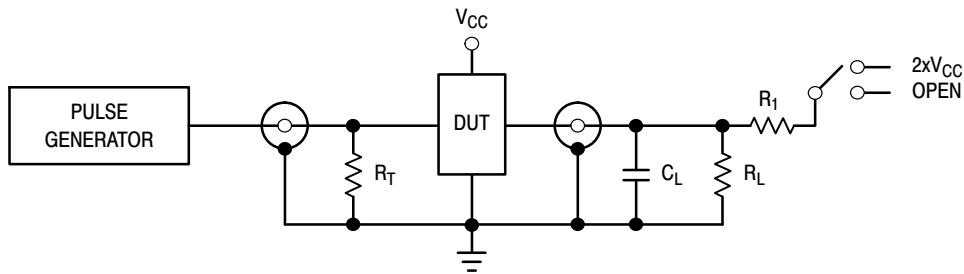

| TEST                                          | SWITCH            |
|-----------------------------------------------|-------------------|
| $t_{PLH}$ , $t_{PHL}$ , $t_{PZH}$ , $t_{PHZ}$ | Open              |
| $t_{PZL}$ , $t_{PLZ}$                         | $2 \times V_{CC}$ |

$C_L = 50$  pF or equivalent (Includes jig and probe capacitance)

$R_L = R_1 = 500 \Omega$  or equivalent


$R_T = Z_{OUT}$  of pulse generator (typically  $50 \Omega$ )

**Figure 5. Test Circuit**

# MC74LVXC3245

## PACKAGE DIMENSIONS

SOIC-24  
DW SUFFIX  
CASE 751E-04  
ISSUE E

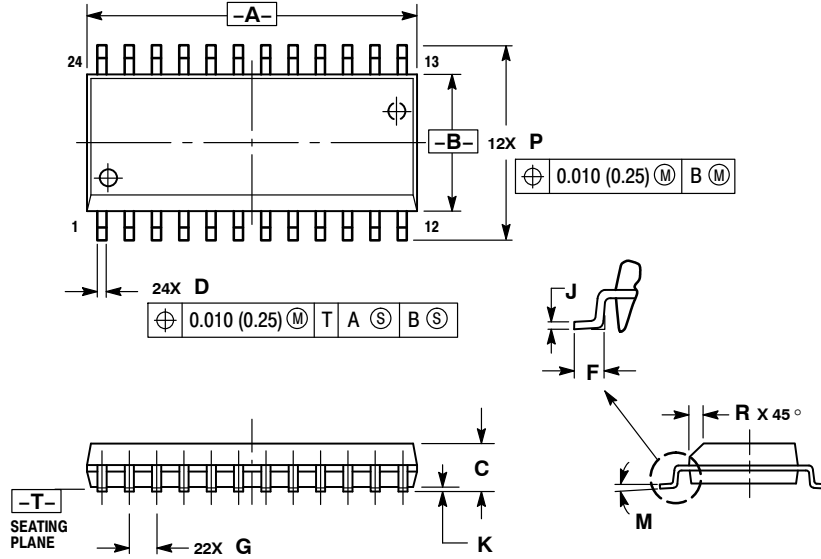


- NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
  2. CONTROLLING DIMENSION: MILLIMETER.
  3. DIMENSIONS A AND B DO NOT INCLUDE MOLD PROTRUSION.
  4. MAXIMUM MOLD PROTRUSION 0.15 (0.006) PER SIDE.
  5. DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.13 (0.005) TOTAL IN EXCESS OF D DIMENSION AT MAXIMUM MATERIAL CONDITION.

| DIM | MILLIMETERS |       | INCHES    |       |
|-----|-------------|-------|-----------|-------|
|     | MIN         | MAX   | MIN       | MAX   |
| A   | 15.25       | 15.54 | 0.601     | 0.612 |
| B   | 7.40        | 7.60  | 0.292     | 0.299 |
| C   | 2.35        | 2.65  | 0.093     | 0.104 |
| D   | 0.35        | 0.49  | 0.014     | 0.019 |
| F   | 0.41        | 0.90  | 0.016     | 0.035 |
| G   | 1.27 BSC    |       | 0.050 BSC |       |
| J   | 0.23        | 0.32  | 0.009     | 0.013 |
| K   | 0.13        | 0.29  | 0.005     | 0.011 |
| M   | 0°          | 8°    | 0°        | 8°    |
| P   | 10.05       | 10.55 | 0.395     | 0.415 |
| R   | 0.25        | 0.75  | 0.010     | 0.029 |

# MC74LVXC3245

## PACKAGE DIMENSIONS

TSSOP-24  
DT SUFFIX  
CASE 948H-01  
ISSUE A

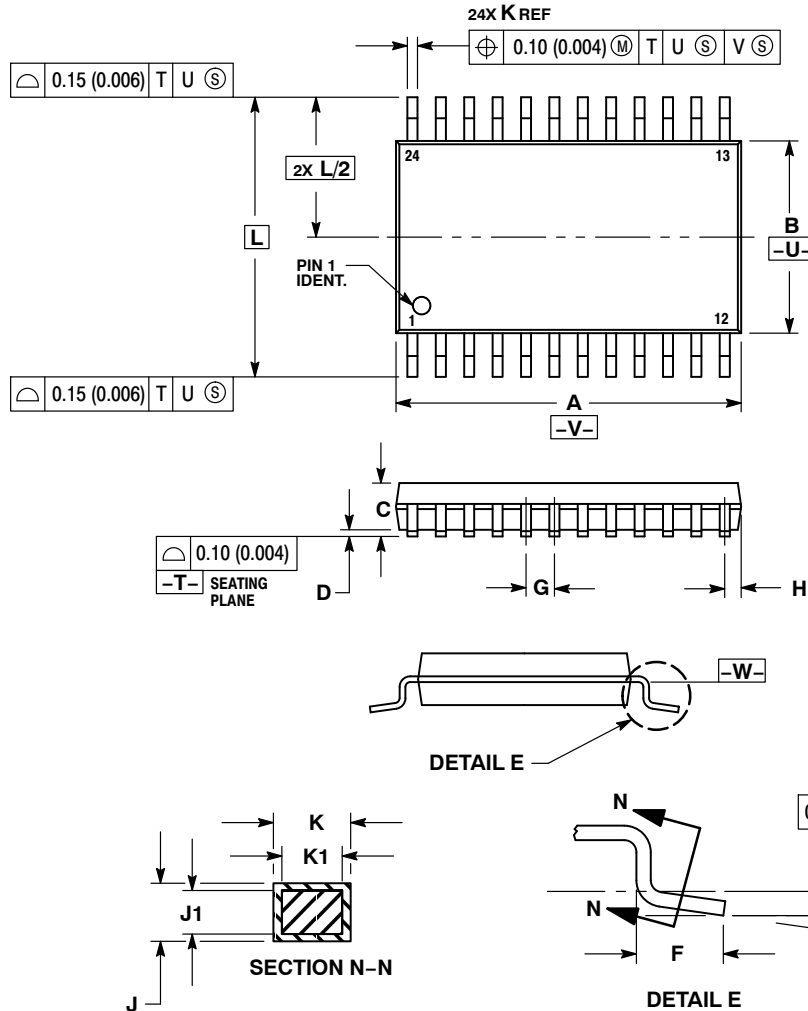

### NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DIMENSION A DOES NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS. MOLD FLASH OR GATE BURRS SHALL NOT EXCEED 0.15 (0.006) PER SIDE.
4. DIMENSION B DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSION. INTERLEAD FLASH OR PROTRUSION SHALL NOT EXCEED 0.25 (0.010) PER SIDE.
5. DIMENSION K DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.08 (0.003) TOTAL IN EXCESS OF THE K DIMENSION AT MAXIMUM MATERIAL CONDITION.
6. TERMINAL NUMBERS ARE SHOWN FOR REFERENCE ONLY.
7. DIMENSION A AND B ARE TO BE DETERMINED AT DATUM PLANE -W-.

| DIM | MILLIMETERS |      | INCHES    |       |
|-----|-------------|------|-----------|-------|
|     | MIN         | MAX  | MIN       | MAX   |
| A   | 7.70        | 7.90 | 0.303     | 0.311 |
| B   | 4.30        | 4.50 | 0.169     | 0.177 |
| C   | ---         | 1.20 | ---       | 0.047 |
| D   | 0.05        | 0.15 | 0.002     | 0.006 |
| F   | 0.50        | 0.75 | 0.020     | 0.030 |
| G   | 0.65 BSC    |      | 0.026 BSC |       |
| H   | 0.27        | 0.37 | 0.011     | 0.015 |
| J   | 0.09        | 0.20 | 0.004     | 0.008 |
| J1  | 0.09        | 0.16 | 0.004     | 0.006 |
| K   | 0.19        | 0.30 | 0.007     | 0.012 |
| K1  | 0.19        | 0.25 | 0.007     | 0.010 |
| L   | 6.40 BSC    |      | 0.252 BSC |       |
| M   | 0°          | 8°   | 0°        | 8°    |

ON Semiconductor and are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

### PUBLICATION ORDERING INFORMATION

#### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor  
P.O. Box 5163, Denver, Colorado 80217 USA  
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
Email: [orderlit@onsemi.com](mailto:orderlit@onsemi.com)

N. American Technical Support: 800-282-9855 Toll Free  
USA/Canada  
Europe, Middle East and Africa Technical Support:  
Phone: 421 33 790 2910  
Japan Customer Focus Center  
Phone: 81-3-5773-3850

ON Semiconductor Website: [www.onsemi.com](http://www.onsemi.com)

Order Literature: <http://www.onsemi.com/orderlit>

For additional information, please contact your local Sales Representative

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А