

Large Ferrule Crimping Dies

PANDUIT®

SPECIFICATION SHEET

specifications

Large ferrule crimping dies shall be designed to snap into the battery powered crimping tool CT-3001 or CT-3001/E and shall have a cycle time of three seconds. These crimping dies shall be used to install ferrules onto the stripped ends of #1 AWG to 500 kcmil flexible cable, classes DLO, H, I, K, and M. The ferrules shall be used to manage the individual wire strands comprising the bundle and prevent broken and turned back strands. Ferrules on mechanically terminated cable shall prevent generation of excessive heat. Ferrule crimping dies shall provide sufficient wire pullout tensile force and shall reduce the cable's outer profile to less than the ferrule's outside diameter. These crimping dies and ferrules shall be used to improve the efficiency and reliability of electrical distribution panels, switchgear, MCC panels, and transmission stations.



technical information

Die dimensions:	See table on next page
Die life:	50,000 cycles
Material:	4140 Steel/RC 32-35
Mounting style:	Snap-in
Plating:	Chrome
Weight approximately:	0.65 lb. per die set

key features and benefits

Interchangeable dies	Allows the use of one power tool for multiple wire sizes
Snap-in mounting	Delivers less than a 20 second exchange of die sets; no tools needed for additional labor savings
Durable material	Chrome plated steel to insure up to 50,000 cycles and protection against corrosion
Impressed die index number	Provides a quick post crimp inspection of ferrule for superior performance and quality assurance
Single stroke, short cycle time	2.9 second cycle time, 26% faster than most comparable tools to deliver quick and quality terminations
Die closure	Designed to minimize the profile of the crimped end of wire to assist feeding into connector wire entries
Die sets for #1 AWG to 500 kcmil	A wide range of the wire types and sizes for use in a variety of applications
6-ton tool frame of CT-3001	Provides sufficient compression of ferrules during crimping to prevent wire pullout and deliver a secure connection

applications

Panduit large ferrules and crimping dies are designed for electrical distribution panels, switchgear, motor control centers (MCC), transmission stations, and other applications that use large flex cable, #1 AWG to 500 kcmil, classes DLO, H, I, K, and M. These ferrules are used to improve the quality and the installation of flex cable in a variety of mechanical connectors, which are found on circuit breakers, contactors,

power distribution blocks, and other devices. The mechanical connectors can have circular or square wire entries and terminate conductors with a screw, screw-cage, or spring. The use of ferrules and their proper installation improves the efficiency, equipment reliability, and safety of the termination and overall equipment. The use of ferrules in industrial control panels is in accordance with UL 508A.

www.panduit.com

Large Ferrule Crimping Dies

Wire size AWG (mm²)	
1 – 1/0 (50):	CD-2001-F87
2/0 (70):	CD-2001-F89
3/0 (95):	CD-2001-F90
4/0 – 250	
kcmil (120):	CD-2001-F91
300 kcmil (150):	CD-2001-F92
350 kcmil (185):	CD-2001-F93
400 – 500 kcmil (240):	CD-2001-F94

Related Products

Large Ferrules Non-Insulated

Wire size AWG (mm²)	
1 – 1/0 (50):	F87-18-C
1 – 1/0 (50):	F87-22-C
1 – 1/0 (50):	F87-25-C
1 – 1/0 (50):	F87-32-C
2/0 (70):	F89-25-L
2/0 (70):	F89-32-L
3/0 (95):	F90-25-L
3/0 (95):	F90-30-L
3/0 (95):	F90-32-L
4/0 – 250	
kcmil (120):	F91-32-L
4/0 – 250	
kcmil (120):	F91-40-L
300 kcmil (150):	F92-32-L
300 kcmil (150):	F92-38-L
350 kcmil (185):	F93-32-Q
350 kcmil (185):	F93-40-Q
400 – 500 kcmil (240):	F94-40-Q

Large Insulated Ferrules DIN End Sleeve

Wire size AWG (mm²), DIN color	
1 – 1/0 (50) Blue:	FSD87-20-L
1 – 1/0 (50) Blue:	FSD87-25-Q
2/0 (70) Yellow:	FSD89-20-Q
2/0 (70) Yellow:	FSD89-27-Q
3/0 (95) Red:	FSD90-25-Q
4/0 – 250	
kcmil (120) Blue:	FSD91-27-Q
300 kcmil	
(150) Yellow:	FSD92-32-Q


6-Ton, In-Line Crimping Tool, Die Type, Lithium-Ion Powered Hydraulic

Charger Voltage	
120 VAC:	CT-3001
230 VAC:	CT-3001/E

Large Ferrule Crimping Dies

Part Number	Used with Tool*	Wire Size (AWG)	Wire Size (mm²)	Ferrule Series	Width A (In.)	Width A (mm)	Height Top B (In.)	Height Top B (mm.)	Height Bottom C (In.)	Height Bottom C (mm)	Depth (In.)	Depth (mm)
CD-2001-F87	CT-3001	1 AWG – 1/0	50.0	F87, FSD87	1.18	30.1	1.97	50.2	1.52	38.7	1.25	31.8
CD-2001-F89	CT-3001	2/0	70.0	F89, FSD89	1.18	30.1	1.93	49.0	1.52	38.7	1.25	31.8
CD-2001-F90	CT-3001	3/0	95.0	F90, FSD90	1.18	30.1	1.91	48.6	1.52	38.7	1.25	31.8
CD-2001-F91	CT-3001	4/0 – 250 kcmil	120.0	F91, FSD91	1.18	30.1	1.86	47.2	1.52	38.7	1.53	38.9
CD-2001-F92	CT-3001	300 kcmil	150.0	F92, FSD92	1.18	30.1	1.83	46.5	1.52	38.7	1.53	38.9
CD-2001-F93	CT-3001	350 kcmil	185.0	F93	1.18	30.1	1.75	44.5	1.58	40.1	1.53	38.9
CD-2001-F94	CT-3001	400 – 500 kcmil	240.0	F94	1.18	30.1	1.63	41.4	1.60	40.6	1.53	38.9

*Compatible with the CT-2001 and CT-3001/E

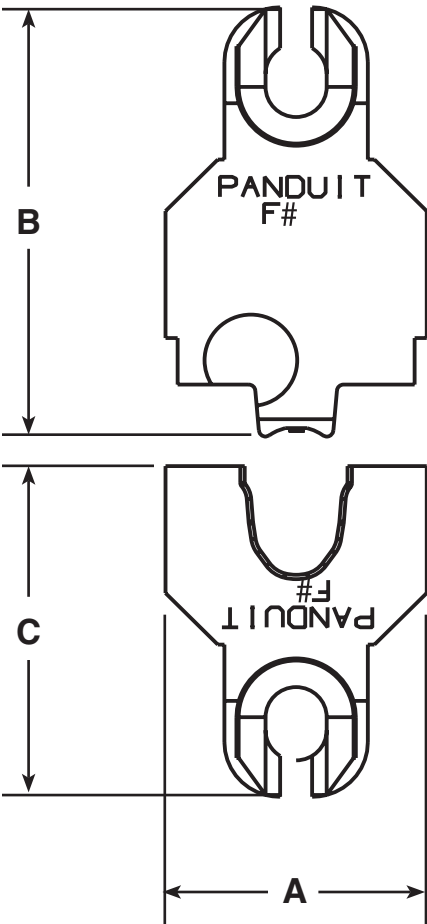

WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT CANADA Markham, Ontario cs-cdn@panduit.com Phone: 800.777.3300	PANDUIT EUROPE LTD. London, UK cs-emea@panduit.com Phone: 44.20.8601.7200	PANDUIT SINGAPORE PTE. LTD. Republic of Singapore cs-ap@panduit.com Phone: 65.6305.7575	PANDUIT JAPAN Tokyo, Japan cs-japan@panduit.com Phone: 81.3.6863.6000	PANDUIT LATIN AMERICA Guadalajara, Mexico cs-la@panduit.com Phone: 52.33.3777.6000	PANDUIT AUSTRALIA PTY. LTD. Victoria, Australia cs-aus@panduit.com Phone: 61.3.9794.9020
--	---	---	---	--	--

For a copy of Panduit product warranties, log on to www.panduit.com/warranty

For more information

Visit us at www.panduit.com

Contact Customer Service by email: cs@panduit.com
or by phone: 800.777.3300

©2014 Panduit Corp.
ALL RIGHTS RESERVED.
TMSP08--WW-ENG
Replaces TMSP06--SA-ENG
5/2014



Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А