

# CAS300M17BM2

## 1.7kV, 8.0 mΩ All-Silicon Carbide Half-Bridge Module

*C2M MOSFET and Z-Rec™ Diode*

$V_{DS}$	1.7 kV
$E_{sw, Total} @ 300A, 150 °C$	23.7 mJ
$R_{DS(on)}$	8.0 mΩ

### Features

- Ultra Low Loss
- High-Frequency Operation
- Zero Reverse Recovery Current from Diode
- Zero Turn-off Tail Current from MOSFET
- Normally-off, Fail-safe Device Operation
- Ease of Paralleling
- Copper Baseplate and Aluminum Nitride Insulator

### System Benefits

- Enables Compact and Lightweight Systems
- High Efficiency Operation
- Mitigates Over-voltage Protection
- Reduced Thermal Requirements
- Reduced System Cost

### Applications

- HF Resonant Converters/Inverters
- Solar and Wind Inverters
- UPS and SMPS
- Motor Drive
- Traction

**Package 62mm x 106mm x 30mm**



Part Number	Package	Marking
CAS300M17BM2	Half-Bridge Module	CAS300M17BM2

### Maximum Ratings ( $T_c = 25 °C$ unless otherwise specified)

Symbol	Parameter	Value	Unit	Test Conditions	Notes
$V_{DSmax}$	Drain - Source Voltage	1.7	kV		
$V_{GSmax}$	Gate - Source Voltage	-10/+25	V	Absolute maximum values	
$V_{GSop}$	Gate - Source Voltage	-5/20	V	Recommended operational values	
$I_D$	Continuous MOSFET Drain Current	325	A	$V_{GS} = 20 V, T_c = 25 °C$	Fig. 26
		225		$V_{GS} = 20 V, T_c = 90 °C$	
$I_{D(pulse)}$	Pulsed Drain Current	900	A	Pulse width $t_p$ limited by $T_{J(max)}$	
$I_F$	Continuous Diode Forward Current	556	A	$V_{GS} = -5 V, T_c = 25 °C$	Fig. 27
		353		$V_{GS} = -5 V, T_c = 90 °C$	
$T_{Jmax}$	Junction Temperature	-40 to +150	°C		
$T_c, T_{STG}$	Case and Storage Temperature Range	-40 to +125	°C		
$V_{isol}$	Case Isolation Voltage	4.5	kV	AC, 50 Hz, 1 min	
$L_{Stray}$	Stray Inductance	15	nH	Measured between terminals 2 and 3	
$P_D$	Power Dissipation	1760	W	$T_c = 25 °C, T_J = 150 °C$	Fig. 25



## Electrical Characteristics ( $T_c = 25^\circ\text{C}$ unless otherwise specified)

Symbol	Parameter	Min.	Typ.	Max.	Unit	Test Conditions	Note
$V_{(BR)DSS}$	Drain - Source Breakdown Voltage	1.7			kV	$V_{GS} = 0\text{ V}, I_D = 1\text{ mA}$	
$V_{GS(th)}$	Gate Threshold Voltage	1.8	2.3		V	$V_{DS} = 10\text{ V}, I_D = 15\text{ mA}$	Fig. 7
$I_{DSS}$	Zero Gate Voltage Drain Current		500	1000	$\mu\text{A}$	$V_{DS} = 1.7\text{ kV}, V_{GS} = 0\text{V}$	
			1500	3000	$\mu\text{A}$	$V_{DS} = 1.7\text{ kV}, V_{GS} = 0\text{V}, T_J = 150^\circ\text{C}$	
$I_{GSS}$	Gate-Source Leakage Current		1	600	nA	$V_{GS} = 20\text{ V}, V_{DS} = 0\text{V}$	
$R_{DS(on)}$	On State Resistance		8.0	10	$\text{m}\Omega$	$V_{GS} = 20\text{ V}, I_{DS} = 225\text{ A}$	Fig. 4, 5, 6
			16.2	20		$V_{GS} = 20\text{V}, I_{DS} = 225\text{ A}, T_J = 150^\circ\text{C}$	
$g_{fs}$	Transconductance		95		S	$V_{DS} = 20\text{ V}, I_{DS} = 225\text{ A}$	Fig. 8
			82			$V_{DS} = 20\text{ V}, I_D = 225\text{ A}, T_J = 150^\circ\text{C}$	
$C_{iss}$	Input Capacitance		20		nF	$V_{DS} = 1\text{ kV}, f = 200\text{ kHz}, V_{AC} = 25\text{ mV}$	Fig. 16, 17
$C_{oss}$	Output Capacitance		2.5				
$C_{rss}$	Reverse Transfer Capacitance		0.08				
$E_{on}$	Turn-On Switching Energy		13.0		mJ	$V_{DD} = 900\text{ V}, V_{GS} = -5\text{V}/+20\text{V}$ $I_D = 300\text{ A}, R_{G(ext)} = 2.5\ \Omega$ Load = $77\ \mu\text{H}, T_J = 150^\circ\text{C}$ Note: IEC 60747-8-4 Definitions	Fig. 19
$E_{off}$	Turn-Off Switching Energy		10.0				
$R_{G(int)}$	Internal Gate Resistance		3.7		$\Omega$	$f = 1\text{ MHz}, V_{AC} = 25\text{ mV}$	
$Q_{GS}$	Gate-Source Charge		273		nC	$V_{DD} = 900\text{ V}, V_{GS} = -5\text{V}/+20\text{V},$ $I_D = 300\text{ A},$ Per JEDEC24 pg 27	Fig. 15
$Q_{GD}$	Gate-Drain Charge		324				
$Q_G$	Total Gate Charge		1076				
$t_{d(on)}$	Turn-on delay time		105		ns	$V_{DD} = 900\text{V}, V_{GS} = -5/+20\text{V},$ $I_D = 300\text{ A}, R_{G(ext)} = 2.5\ \Omega,$ Timing relative to $V_{DS}$ Note: IEC 60747-8-4, pg 83 Inductive load	Fig. 24
$t_r$	Rise Time		72				
$t_{d(off)}$	Turn-off delay time		211				
$t_f$	Fall Time		56				
$V_{SD}$	Diode Forward Voltage		1.7	2.0	V	$I_F = 300\text{ A}, V_{GS} = 0$	Fig. 10
			2.2	2.5		$I_F = 300\text{ A}, V_{GS} = 0, T_J = 150^\circ\text{C}$	Fig. 11
$Q_C$	Total Capacitive Charge		4.4		$\mu\text{C}$	$I_{SD} = 300\text{ A}, V_{DS} = 900\text{ V}, T_J = 25^\circ\text{C}, di_{SD}/dt = 9\text{ kA}/\mu\text{s}, V_{GS} = -5\text{ V}$	

## Thermal Characteristics

Symbol	Parameter	Min.	Typ.	Max.	Unit	Test Conditions	Note
$R_{thJCM}$	Thermal Resistance Junction-to-Case for MOSFET		0.067	0.071	$^\circ\text{C}/\text{W}$		Fig. 27
$R_{thJCD}$	Thermal Resistance Junction-to-Case for Diode		0.060	0.065			Fig. 28

## Additional Module Data

Symbol	Parameter	Max.	Unit	Test Condition
W	Weight	300	g	
M	Mounting Torque	5	Nm	To heatsink and terminals
	Clearance Distance	12	mm	Terminal to terminal
	Creepage Distance	30	mm	Terminal to terminal
		40	mm	Terminal to baseplate

# Typical Performance

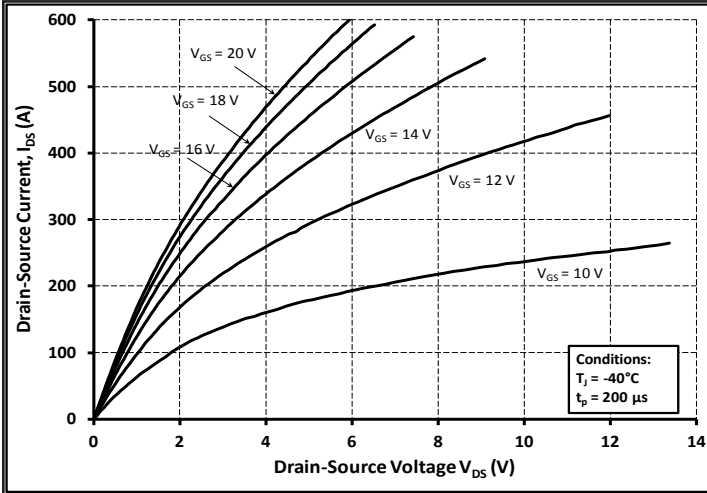


Figure 1. Output Characteristics  $T_j = -40\text{ }^\circ\text{C}$

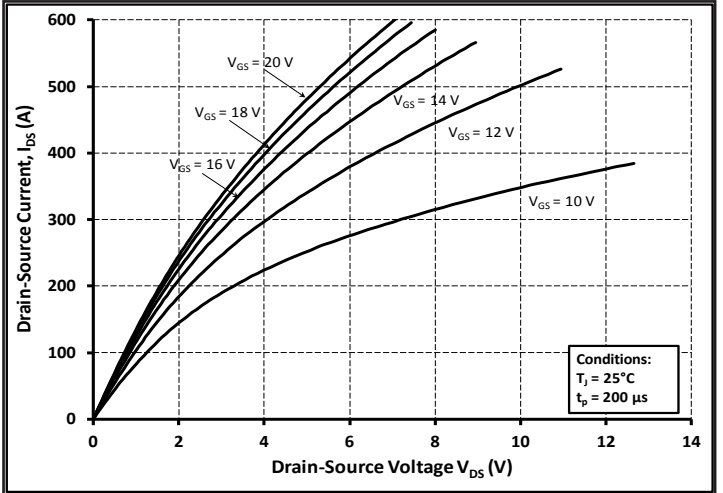


Figure 2. Output Characteristics  $T_j = 25\text{ }^\circ\text{C}$

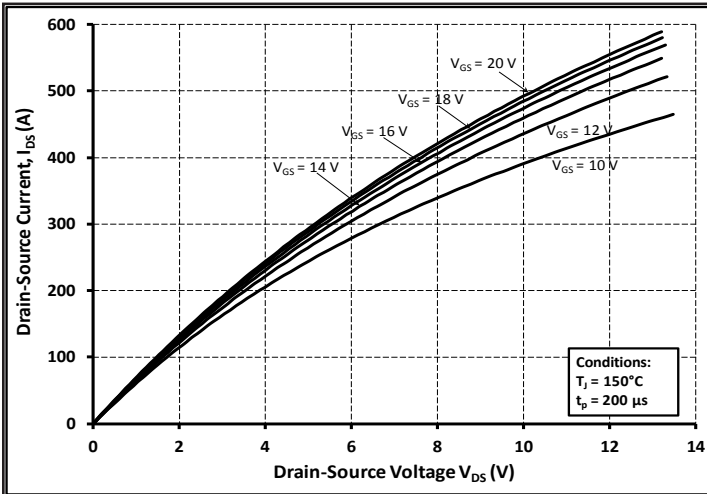


Figure 3. Output Characteristics  $T_j = 150\text{ }^\circ\text{C}$

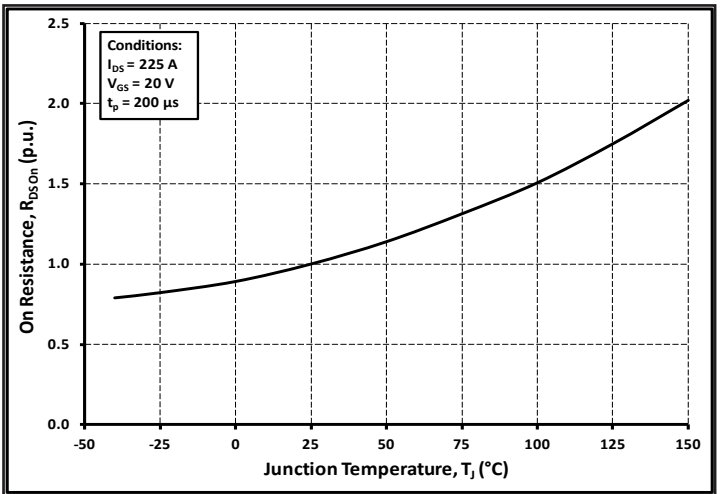


Figure 4. Normalized On-Resistance vs. Temperature

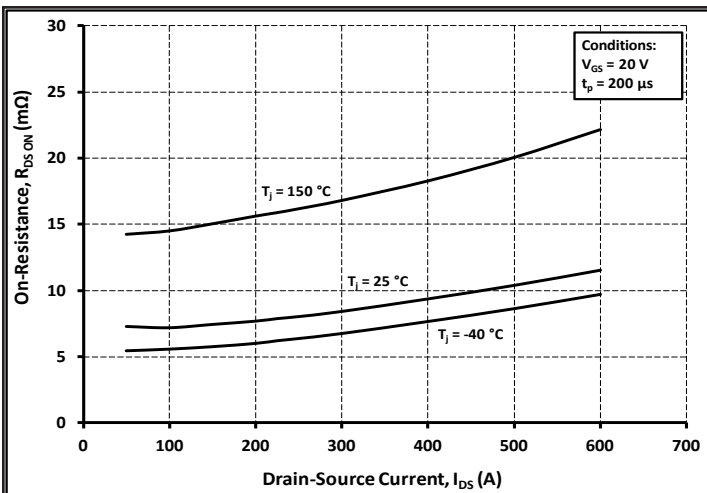


Figure 5. On-Resistance vs. Drain Current For Various Temperatures

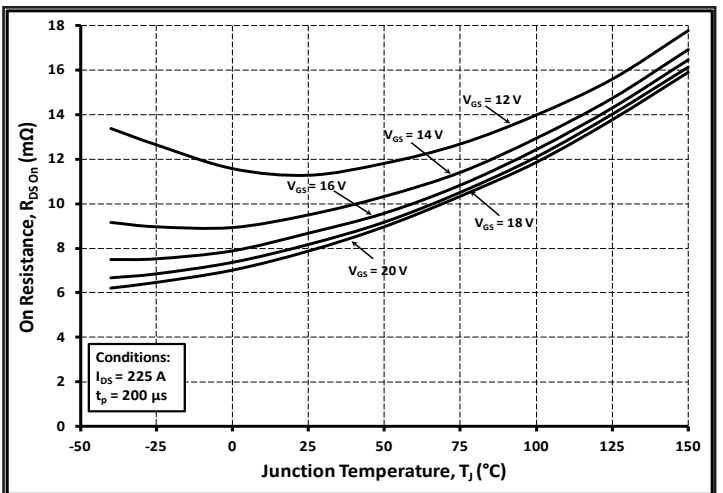


Figure 6. On-Resistance vs. Temperature for Various Gate-Source Voltage

## Typical Performance

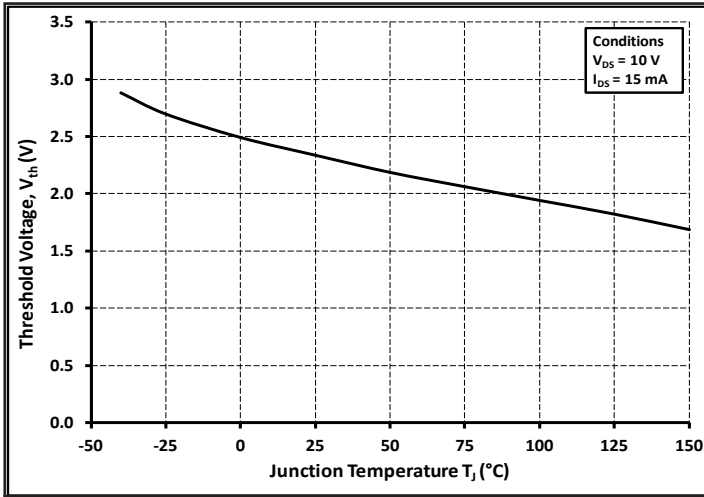


Figure 7. Threshold Voltage vs. Temperature

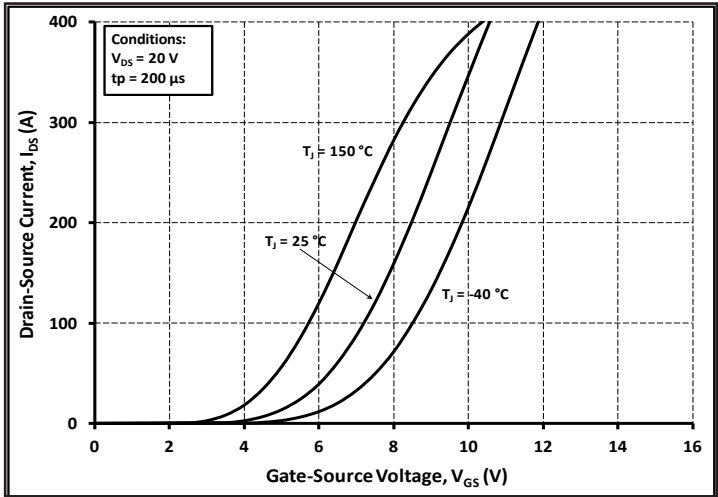


Figure 8. Transfer Characteristic for Various Junction Temperatures

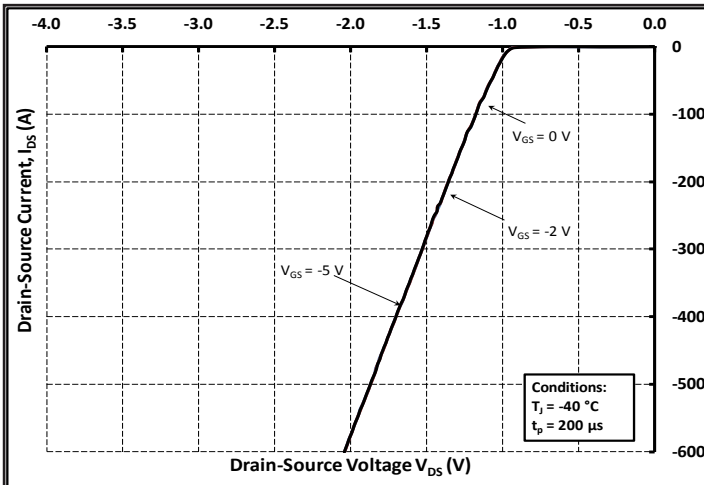


Figure 9. Diode Characteristic at -40 °C

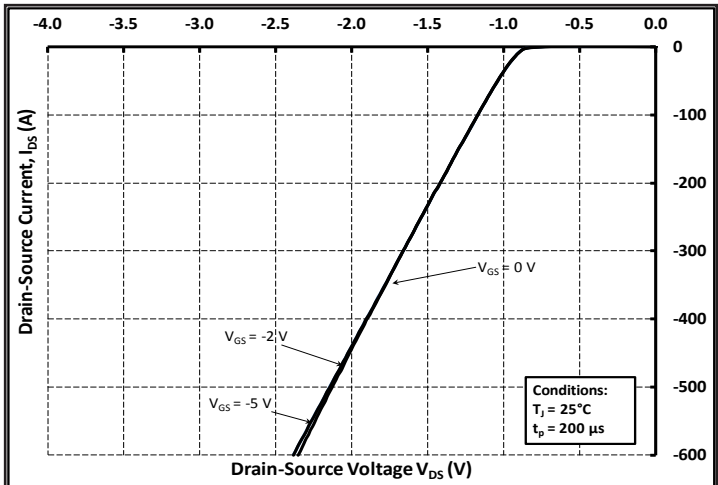


Figure 10. Diode Characteristic at 25 °C

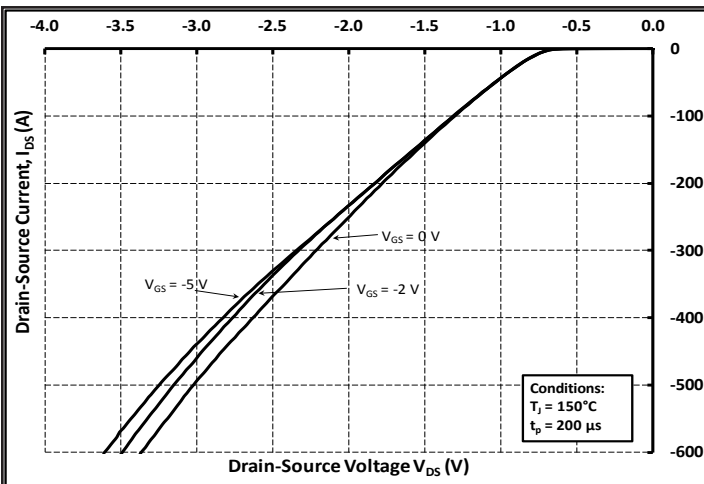


Figure 11. Diode Characteristic at 150 °C

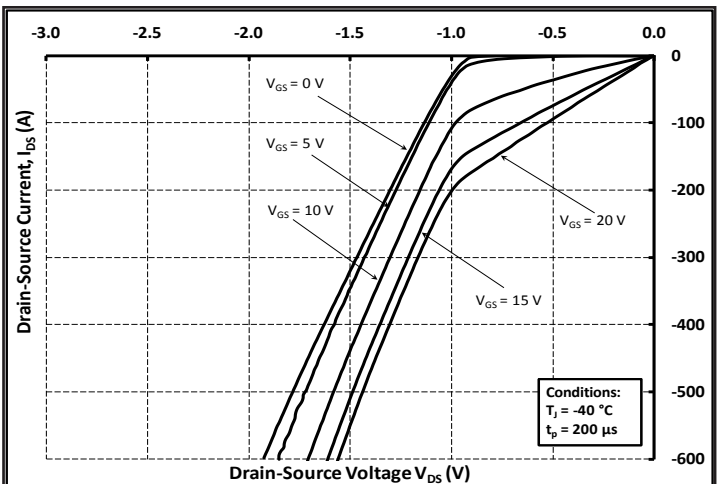


Figure 12. 3<sup>rd</sup> Quadrant Characteristic at -40 °C

# Typical Performance

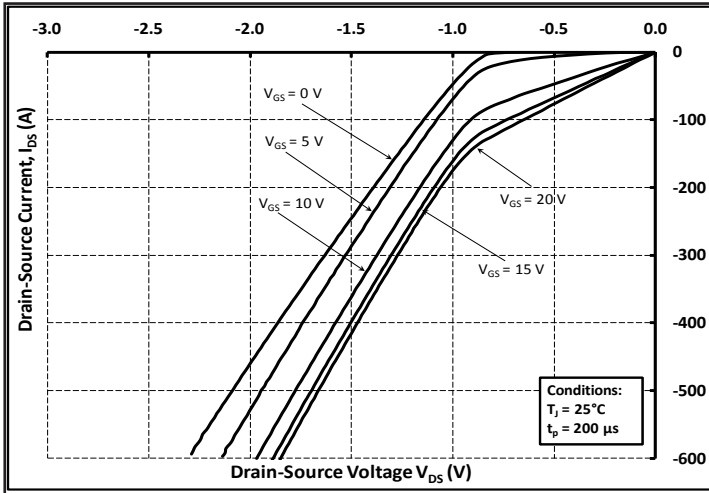


Figure 13. 3<sup>rd</sup> Quadrant Characteristic at 25 °C

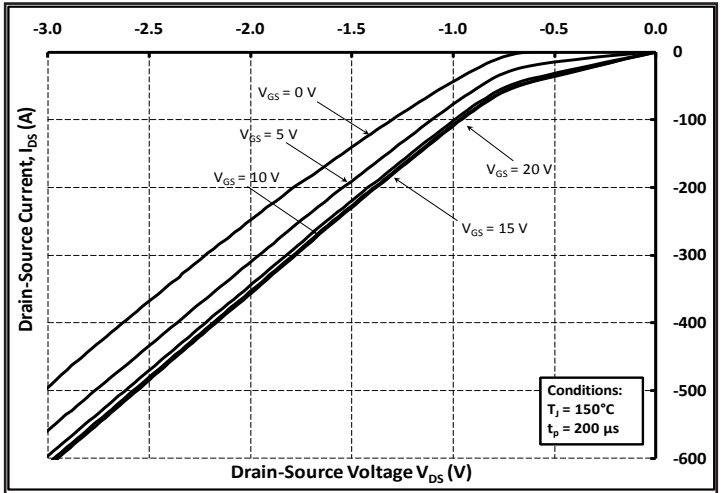


Figure 14. 3<sup>rd</sup> Quadrant Characteristic at 150 °C

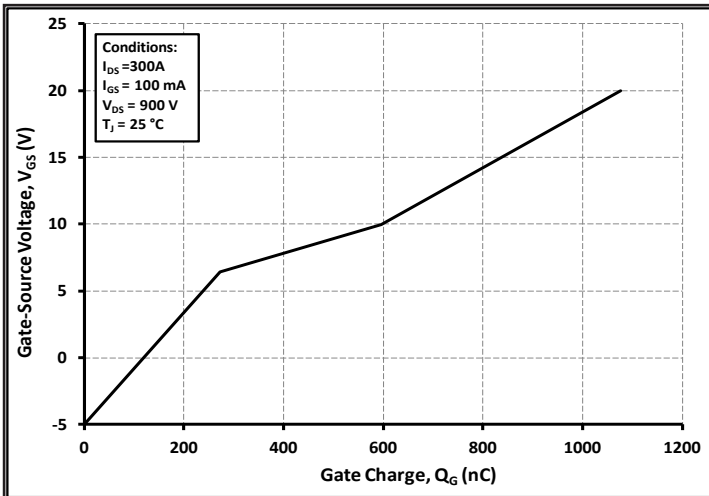


Figure 15. Gate Charge Characteristics

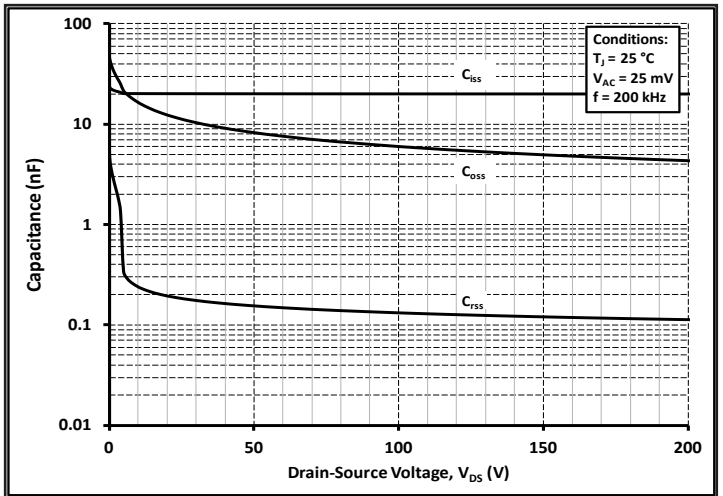


Figure 16. Capacitances vs. Drain-Source Voltage (0 - 200 V)

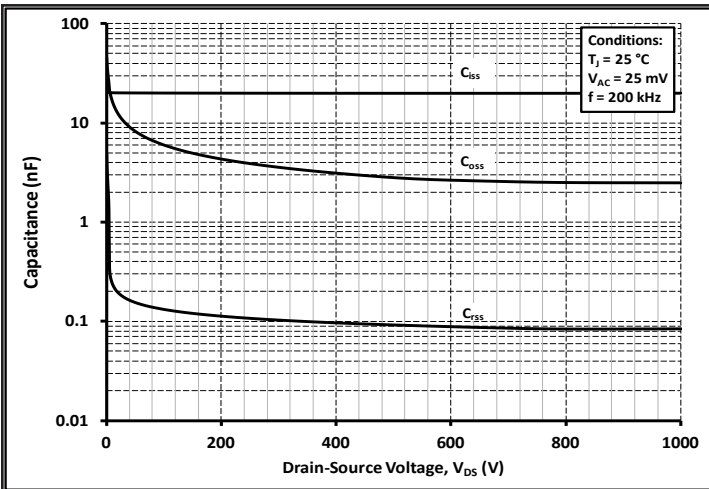


Figure 17. Capacitances vs. Drain-Source Voltage (0 - 1 kV)

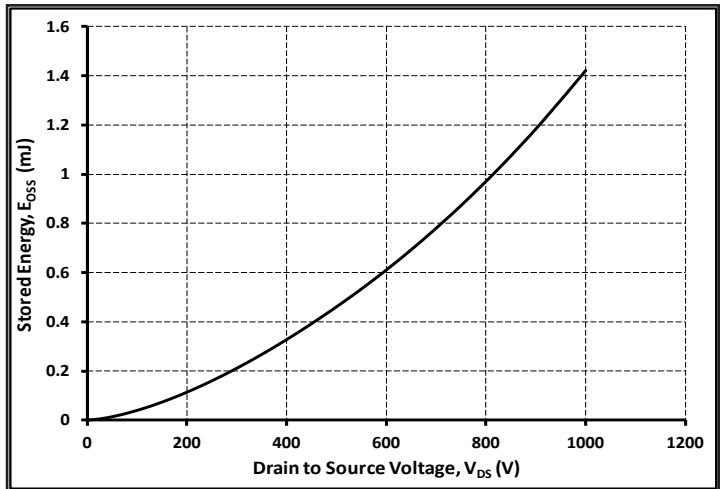


Figure 18. Output Capacitor Stored Energy

## Typical Performance

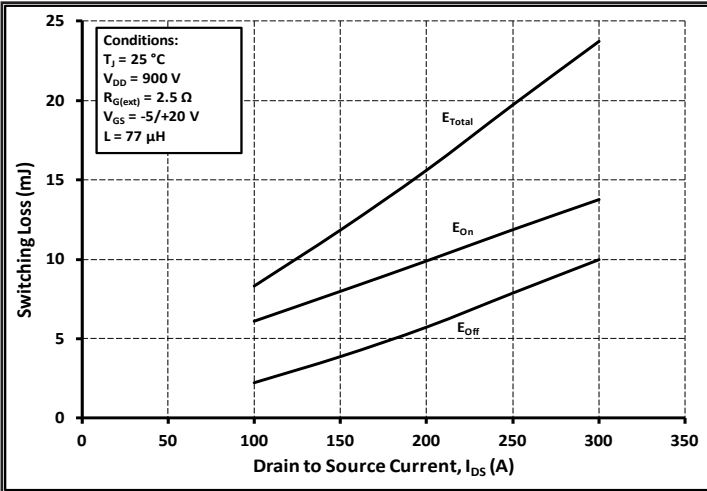


Figure 19. Inductive Switching Energy vs. Drain Current For  $V_{DS} = 900V$ ,  $R_G = 2.5 \Omega$

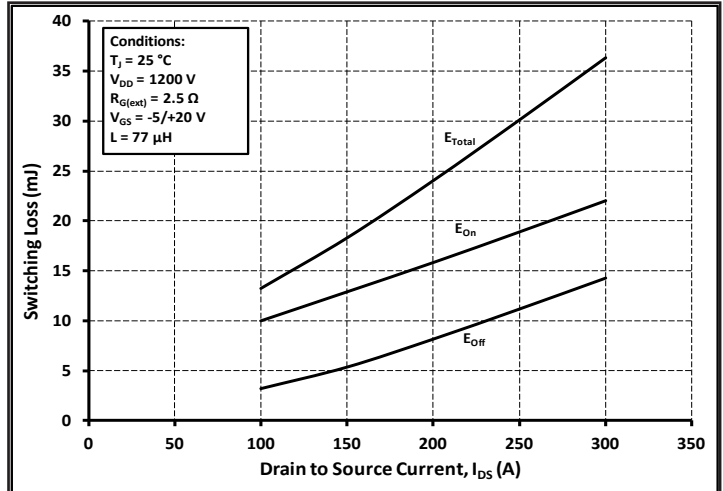


Figure 20. Inductive Switching Energy vs. Drain Current For  $V_{DS} = 1200V$ ,  $R_G = 2.5 \Omega$

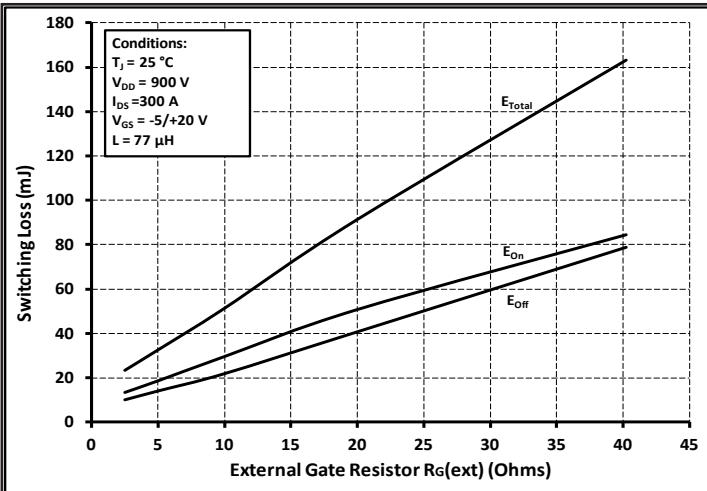


Figure 21. Inductive Switching Energy vs.  $R_{G(ext)}$

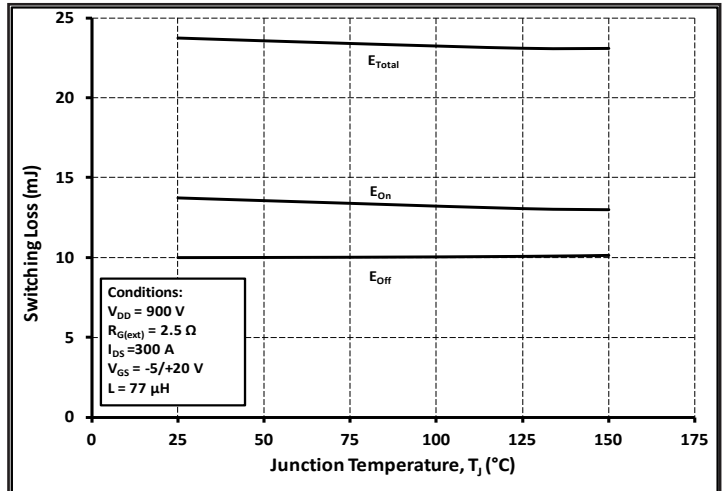


Figure 22. Inductive Switching Energy vs. Temperature

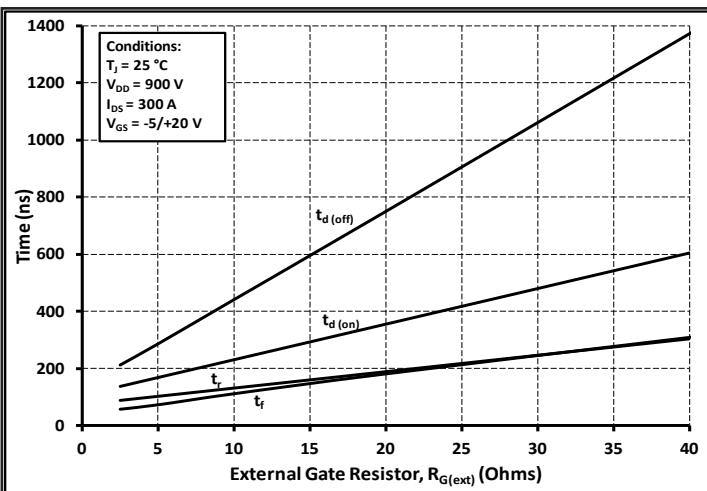


Figure 23. Timing vs.  $R_{G(ext)}$

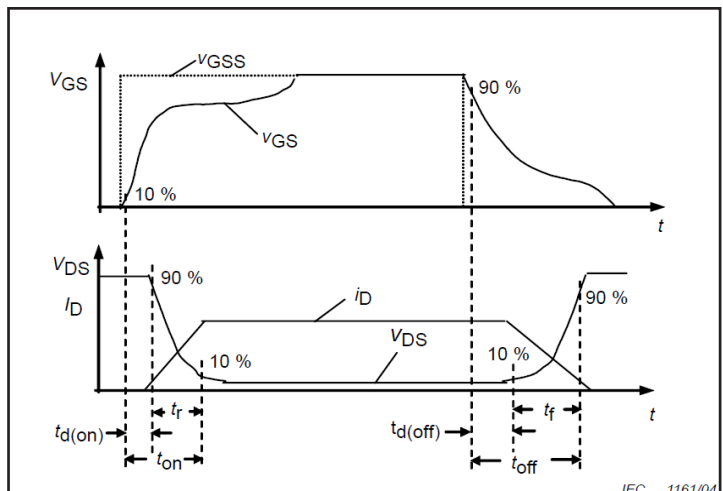


Figure 24. Resistive Switching Time Description

IEC 1161/04

# Typical Performance

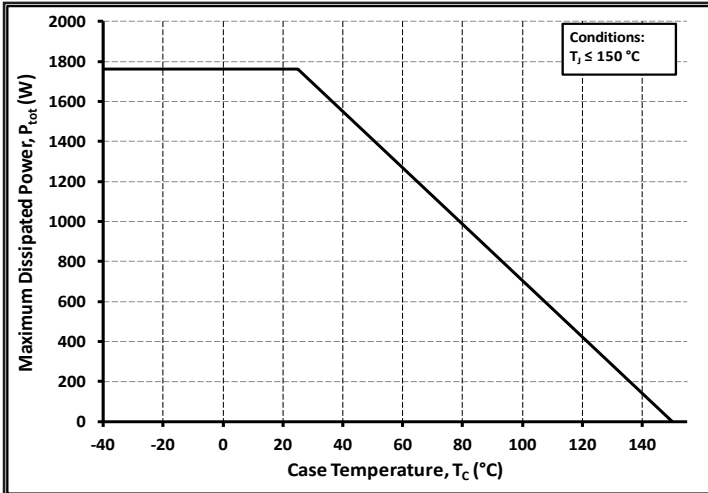


Figure 25. Maximum Power Dissipation (MOSFET) Derating vs. Case Temperature

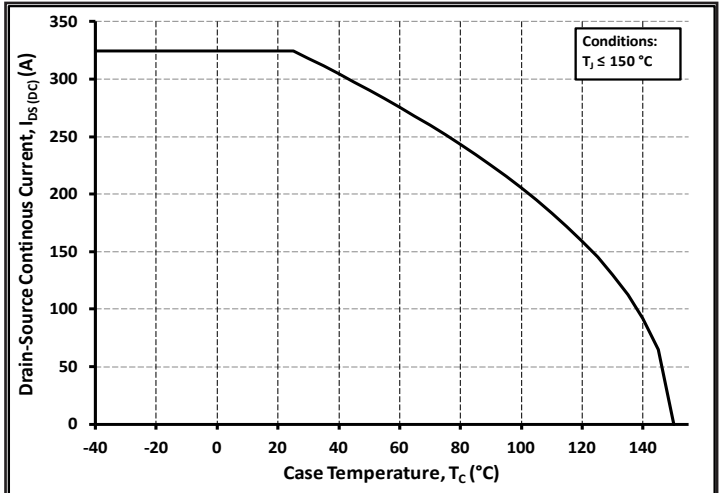


Figure 26. Continuous Drain Current Derating vs Case Temperature

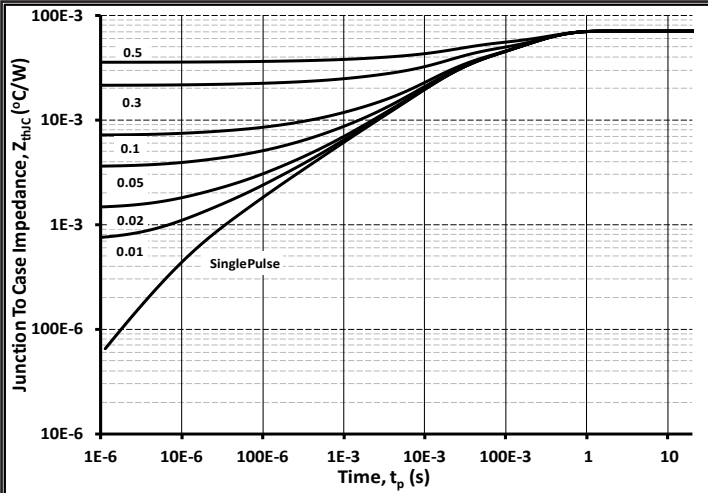


Figure 27. MOSFET Junction to Case Thermal Impedance

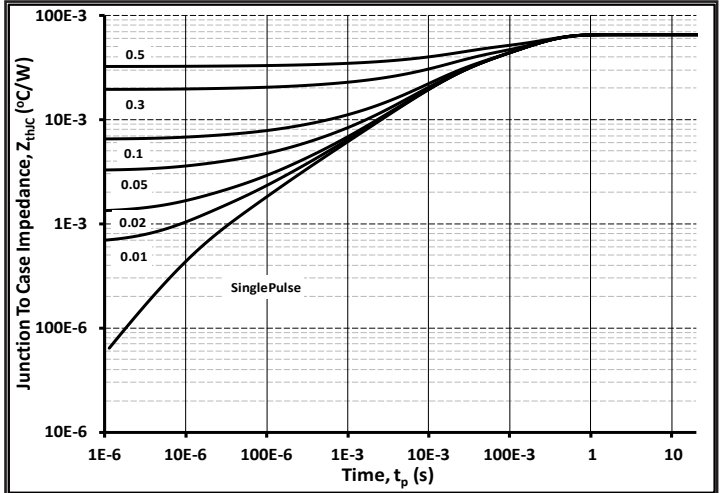


Figure 28. Diode Junction to Case Thermal Impedance



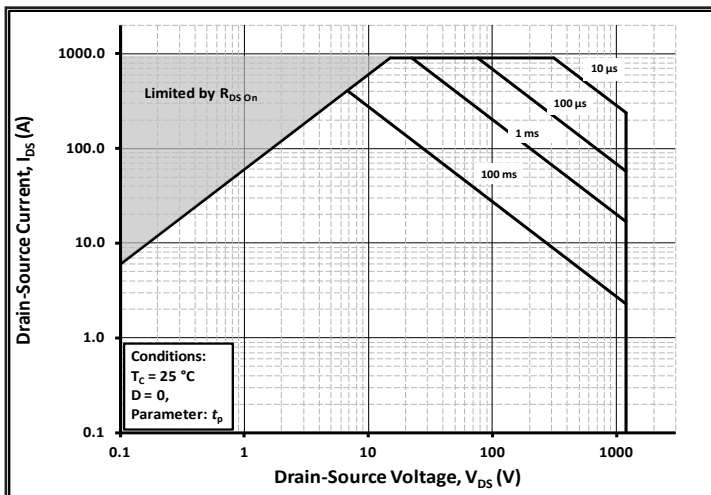


Figure 29. Maximum Power Dissipation (MOSFET) Derating vs. Case Temperature

**Schematic**

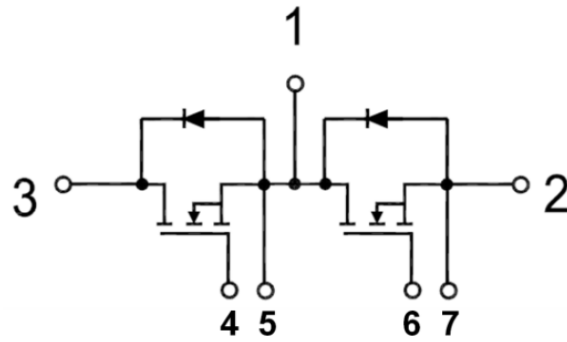

**Package Dimensions (mm)**

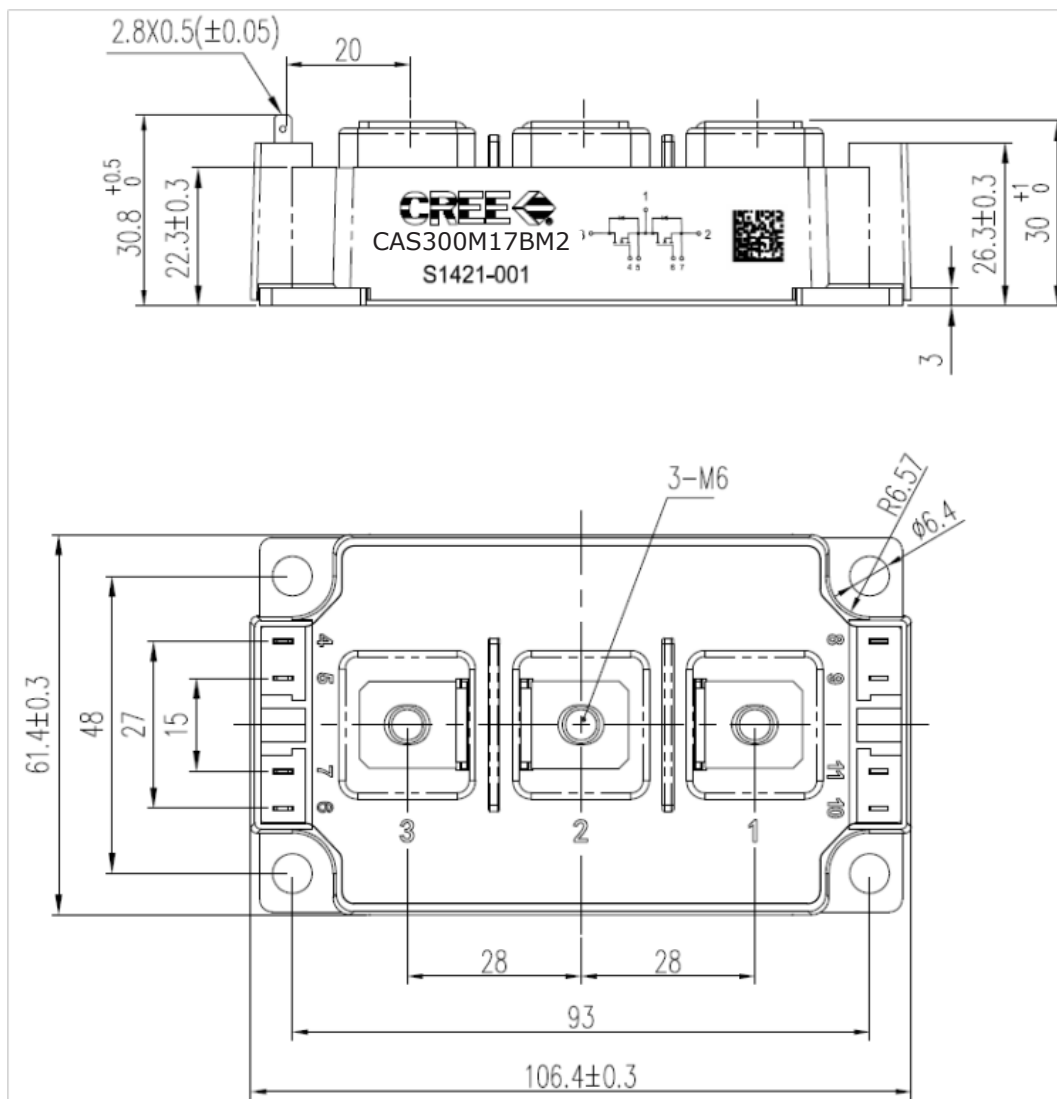





## Notes

---

- **RoHS Compliance**

The levels of RoHS restricted materials in this product are below the maximum concentration values (also referred to as the threshold limits) permitted for such substances, or are used in an exempted application, in accordance with EU Directive 2011/65/EC (RoHS2), as implemented January 2, 2013. RoHS Declarations for this product can be obtained from your Cree representative or from the Product Documentation sections of [www.cree.com](http://www.cree.com).

- **REACH Compliance**

REACH substances of high concern (SVHCs) information is available for this product. Since the European Chemical Agency (ECHA) has published notice of their intent to frequently revise the SVHC listing for the foreseeable future, please contact a Cree representative to insure you get the most up-to-date REACH SVHC Declaration. REACH banned substance information (REACH Article 67) is also available upon request.

- This product has not been designed or tested for use in, and is not intended for use in, applications implanted into the human body nor in applications in which failure of the product could lead to death, personal injury or property damage, including but not limited to equipment used in the operation of nuclear facilities, life-support machines, cardiac defibrillators or similar emergency medical equipment, aircraft navigation or communication or control systems, air traffic control systems.

### Module Application Note:

---

The SiC MOSFET module switches at speeds beyond what is customarily associated with IGBT based modules. Therefore, special precautions are required to realize the best performance. The interconnection between the gate driver and module housing needs to be as short as possible. This will afford the best switching time and avoid the potential for device oscillation. Also, great care is required to insure minimum inductance between the module and link capacitors to avoid excessive  $V_{DS}$  overshoots.

Please Refer to application note: Design Considerations when using Cree SiC Modules Part 1 and Part 2. [CPWR-AN12, CPWR-AN13]

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А