

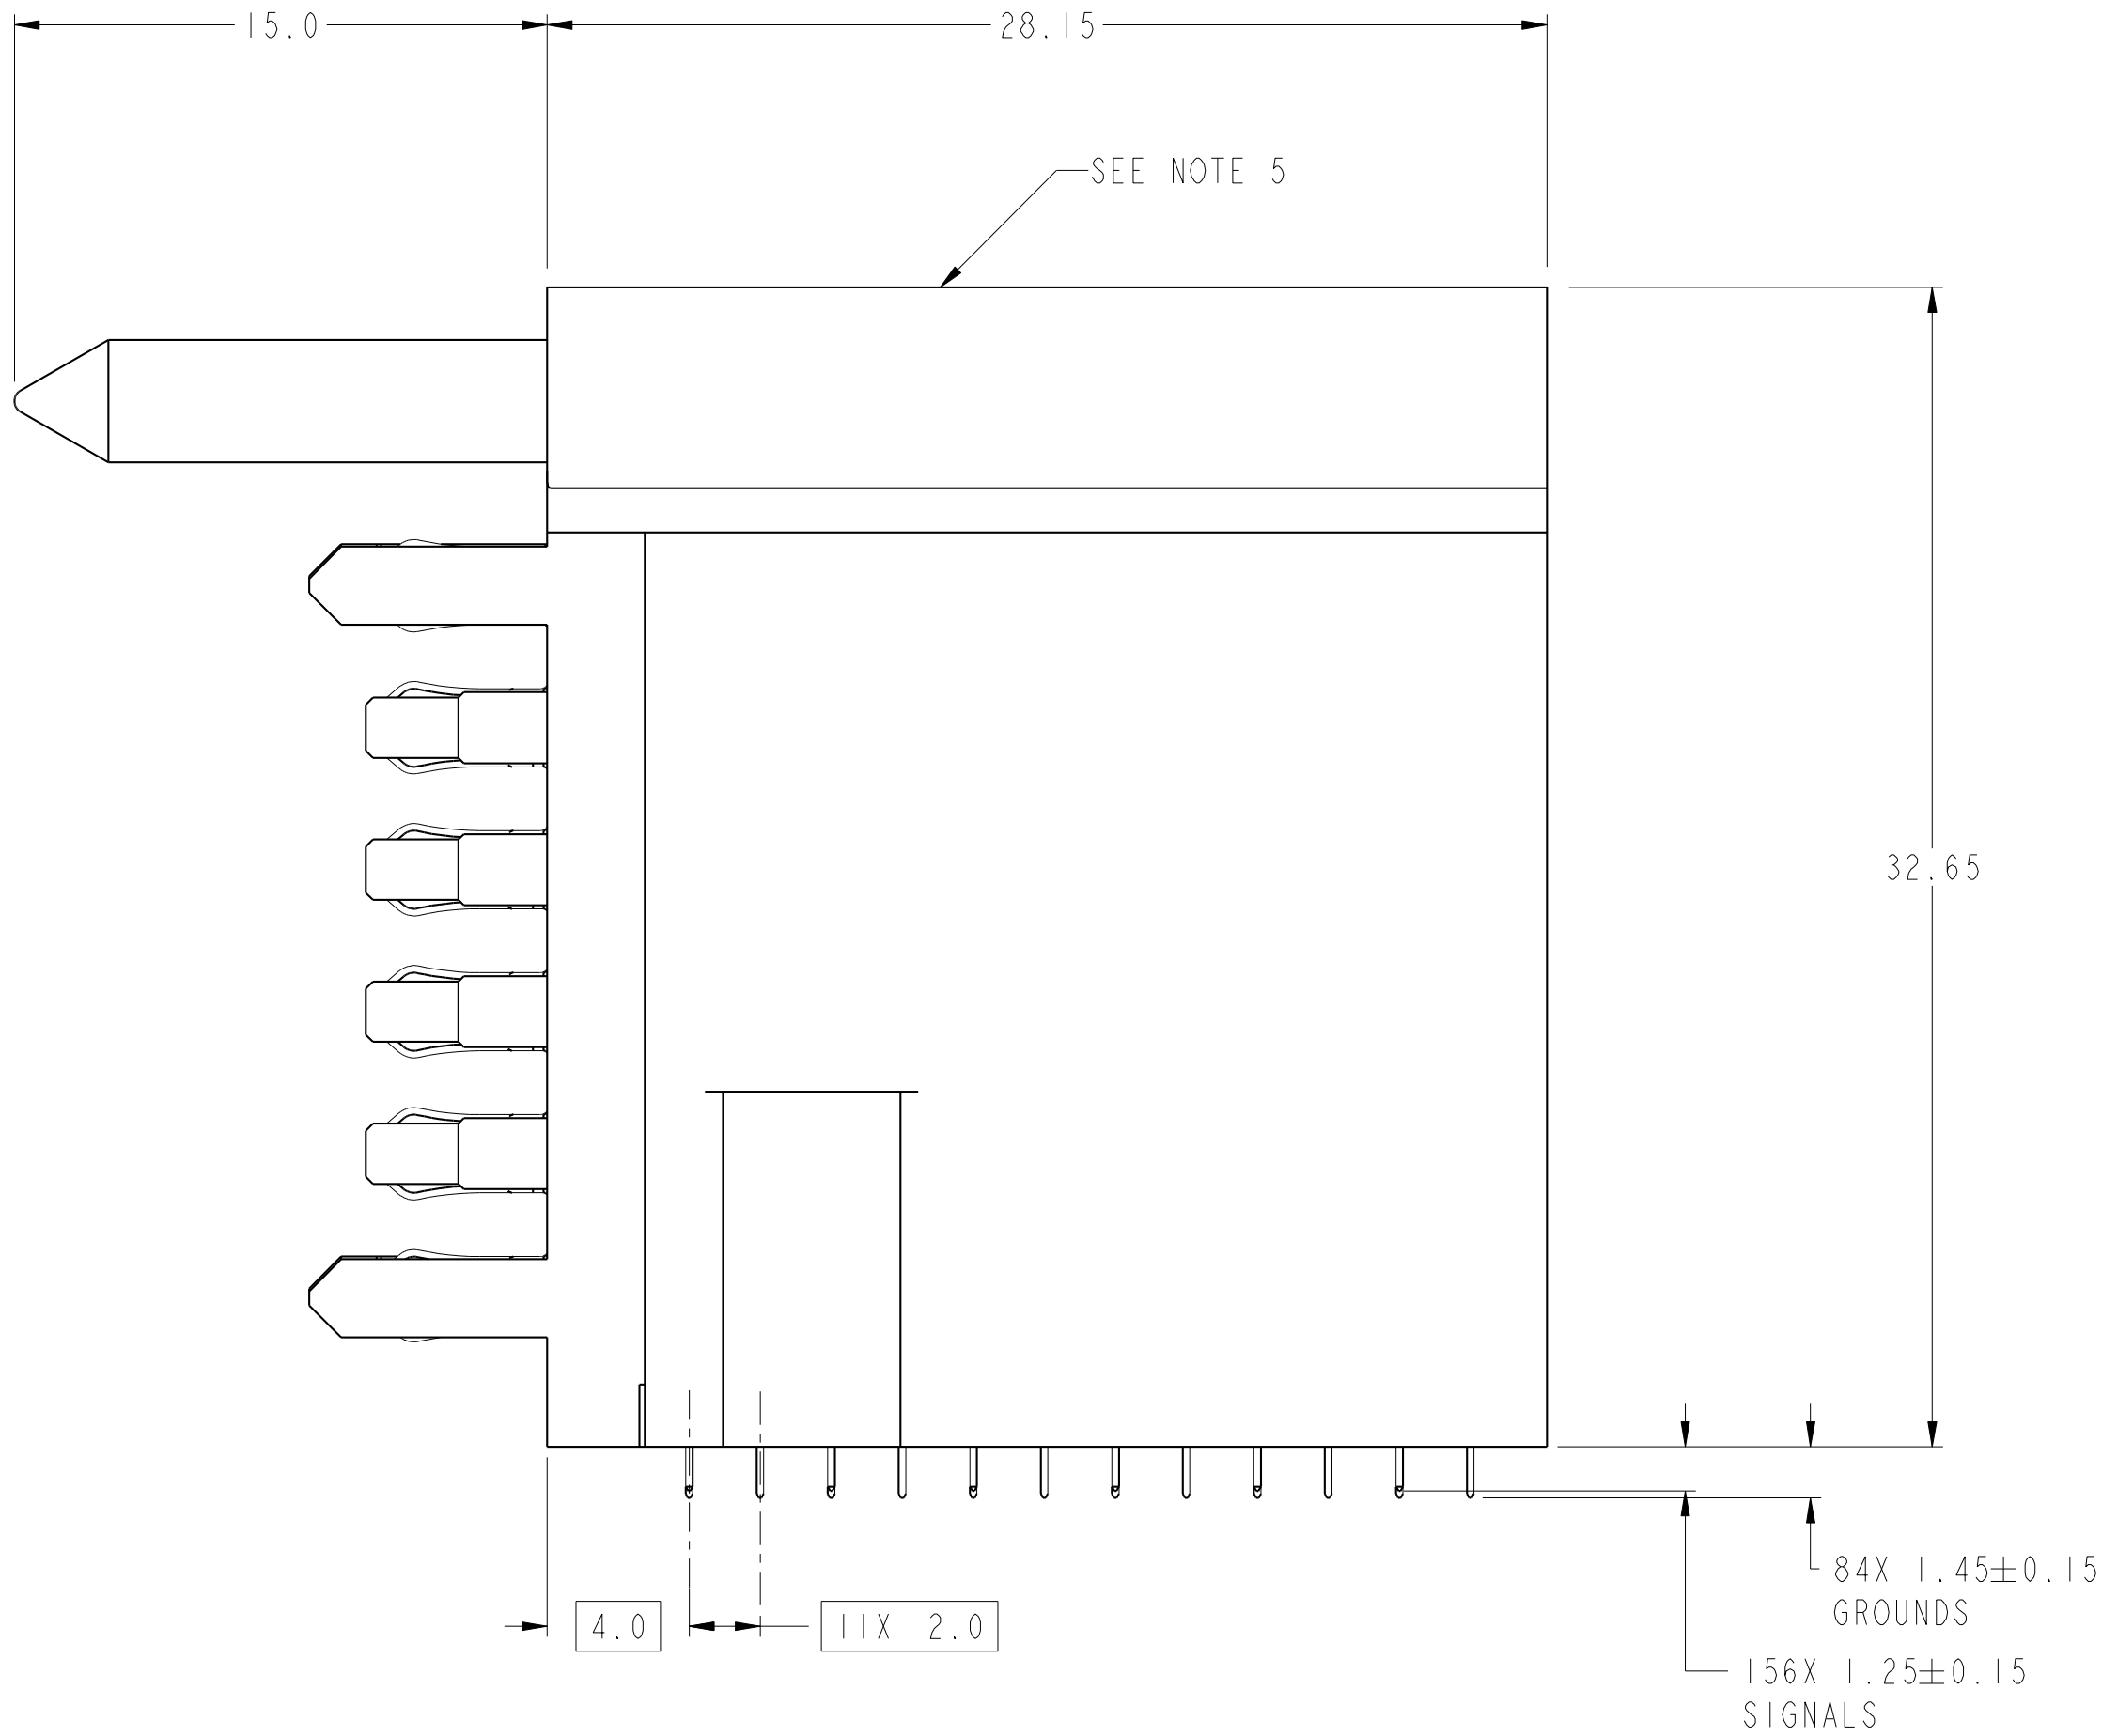
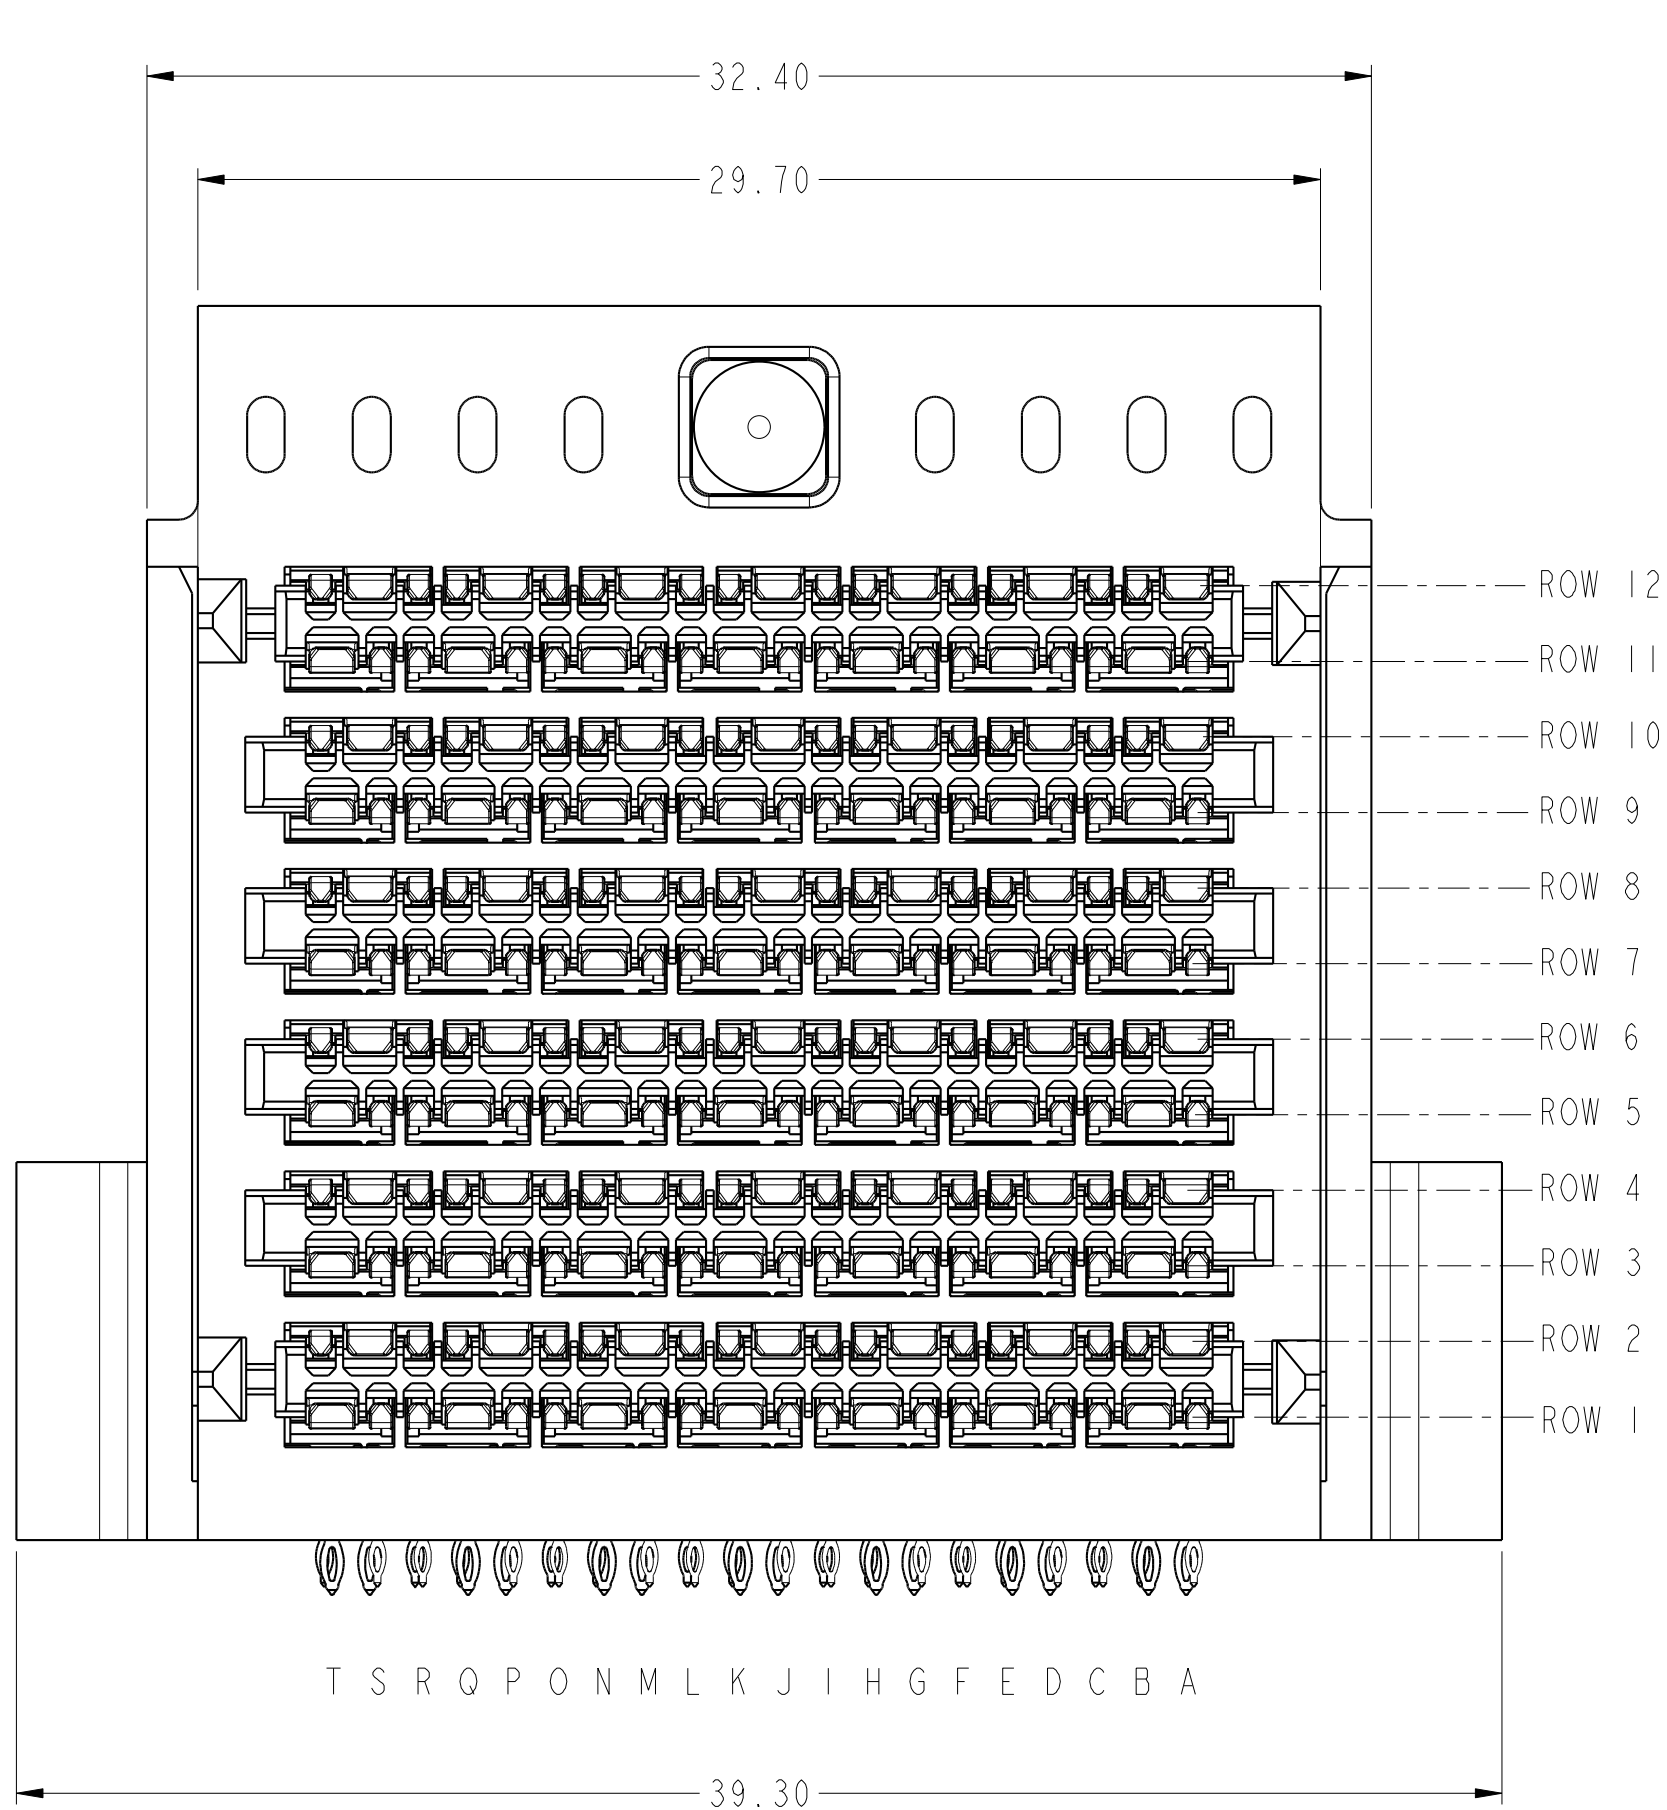


PRODUCT NUMBER	DESCRIPTION
10129181-101LF	WITH GUIDE PIN AND PCB SCREW MOUNTS

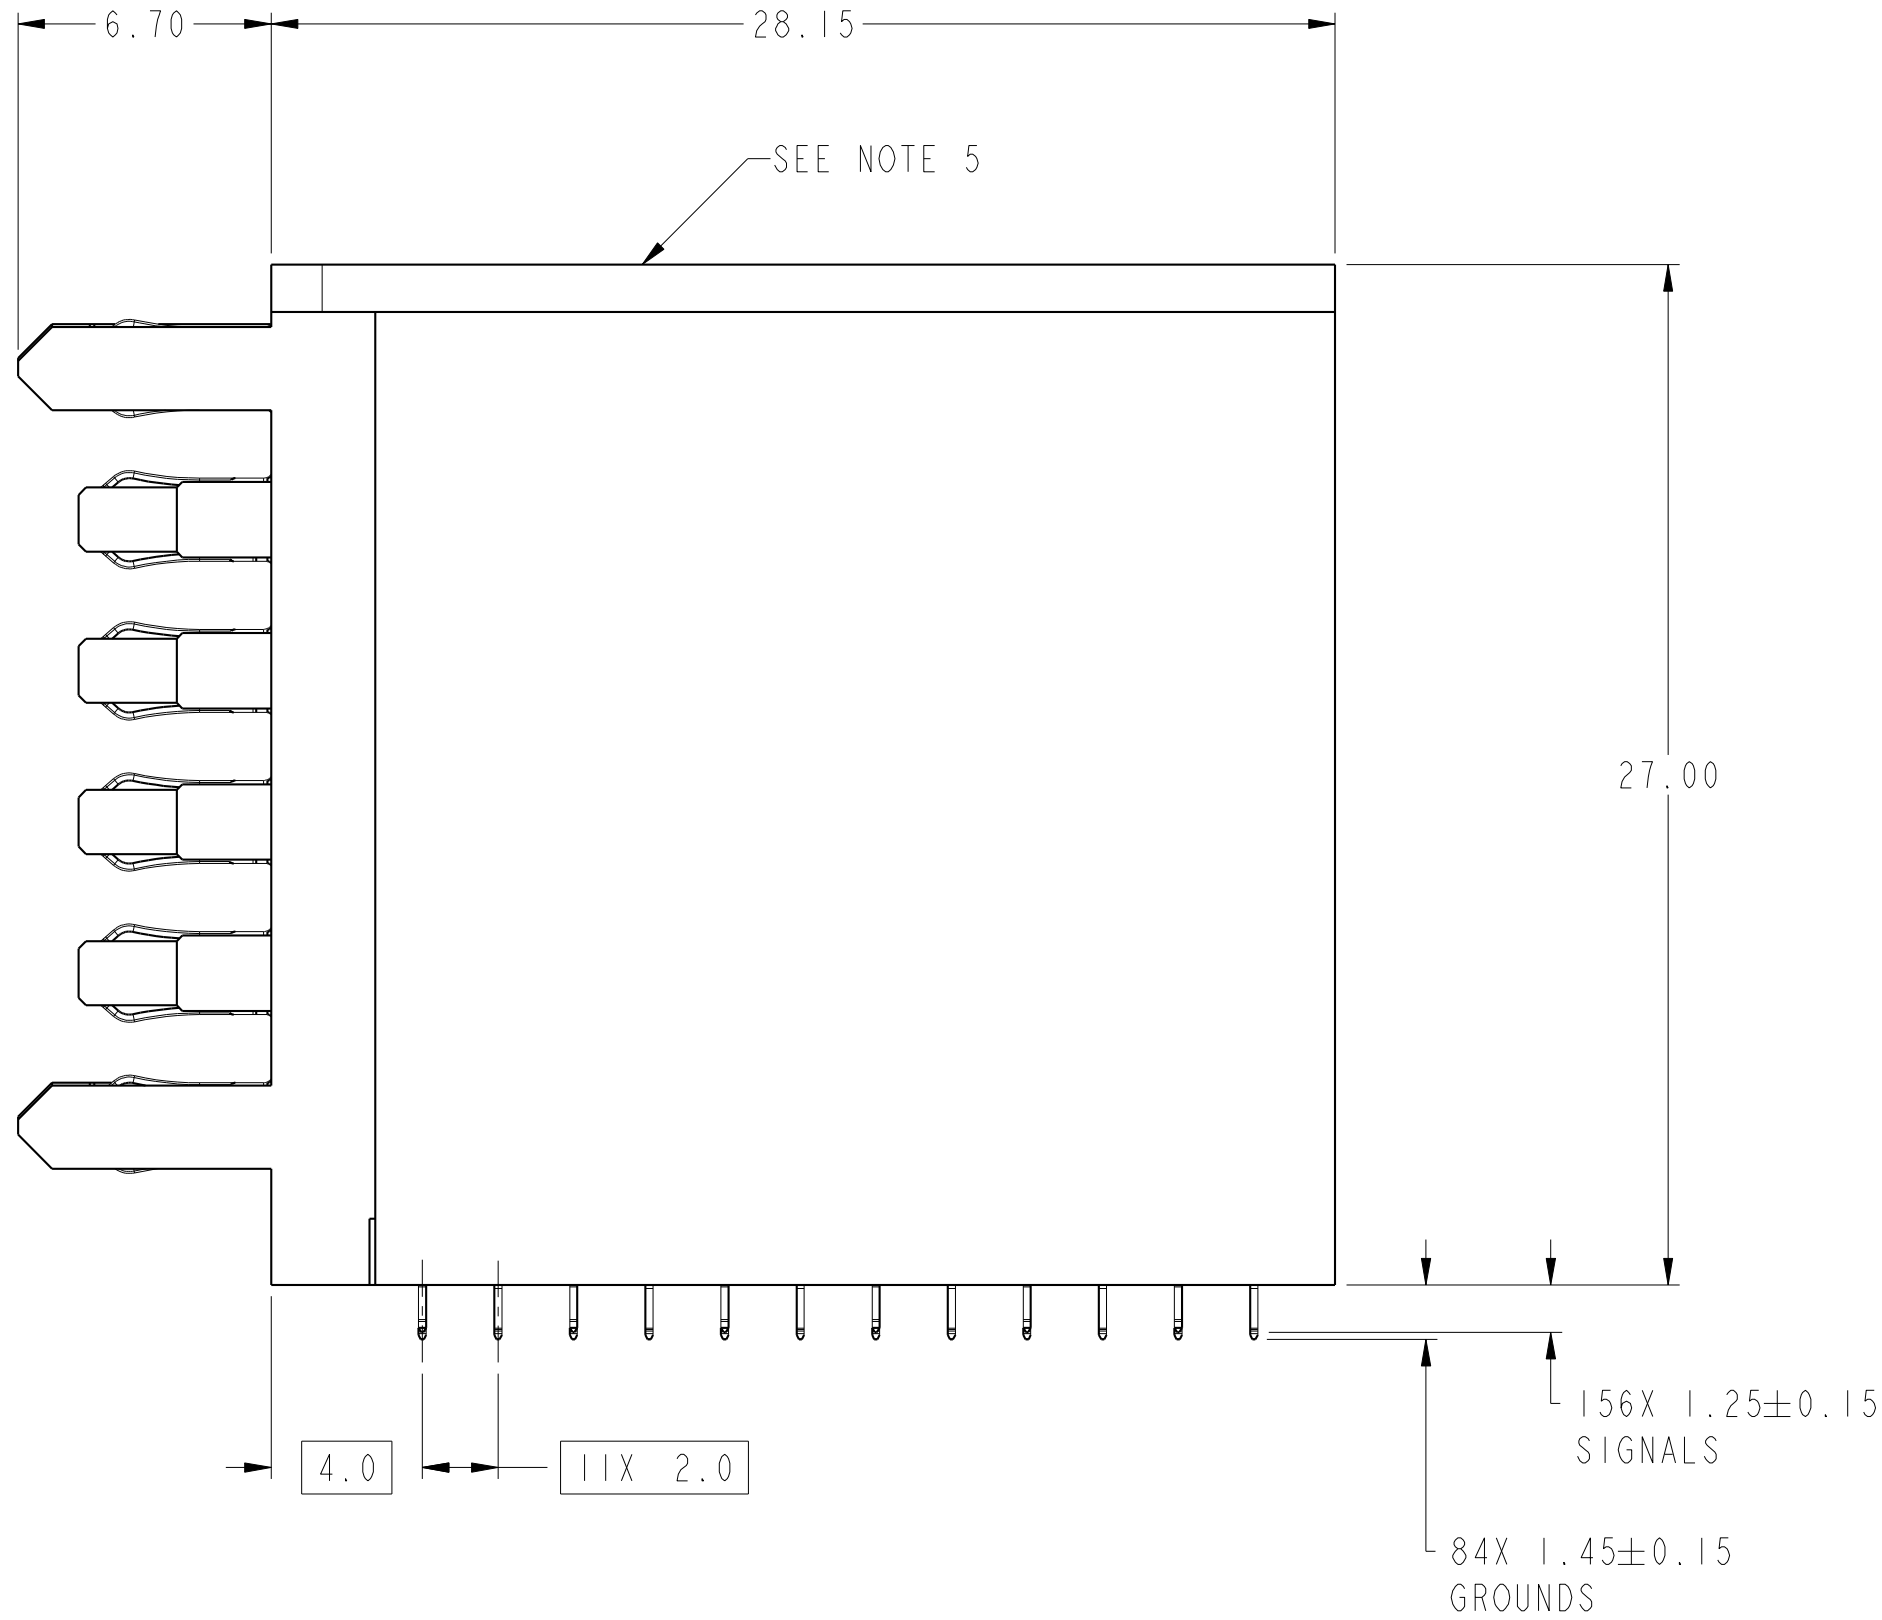


spec ref	---	dr	Mark R Gray	2014/02/24	projection	MM	size	A2	scale	5:1
tolerance std	ASME Y14.5M	eng	Peng-Bing Fu	2017/11/10	chr	Justin Chen	2017/11/29	ecn no	ELX-DG-28422-1	
		appr	Heaven Cen	2017/11/30	product family	rel level	Released			
surface	✓	linear	0.X	±.3	Amphenol FCi	title	ExaMAX Orthogonal R.A. Header	dwg no	10129181	rev
			0.XX	±.10			6 PAIR, 12 IMLA (240 Position) ASS'Y			B
			0.XXX	±.050						
		angular	0°	±°		cat. no.	Product - Customer Drw	sheet 1 of 7		

PRODUCT NUMBER	DESCRIPTION
10129181-102LF	NO GUIDE PIN, NO PCB SCREW MOUNTS

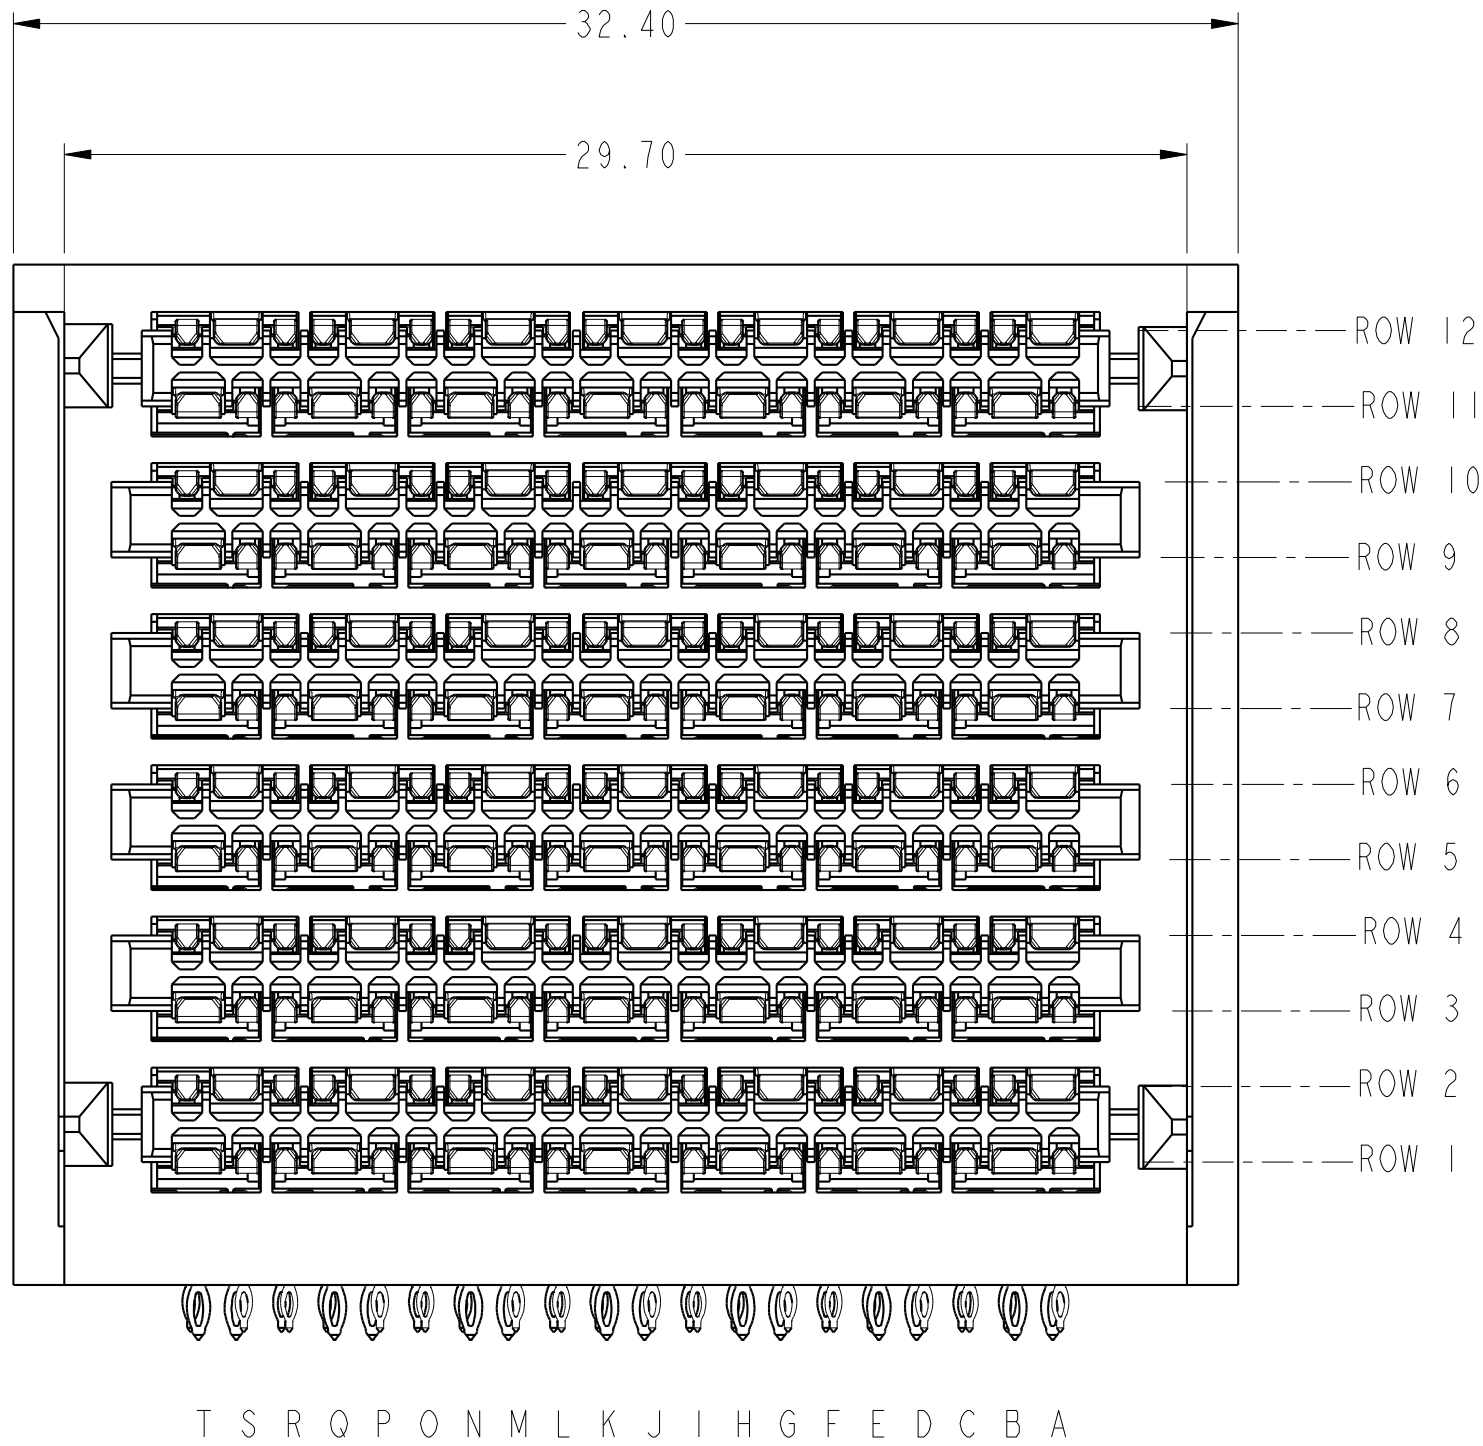

spec ref	---	dr	Mark R Gray	2014/02/24	projection	MM	size	A2	scale	5:1
tolerance std	ASME Y14.5M	eng	Peng-Bing Fu	2017/11/10	chr	Justin Chen	2017/11/29	ecn no	ELX-DG-28422-1	
		appr	Heaven Cen	2017/11/30	product family	-	rel level	Released		
surface	✓	linear	0.X	±.3	Amphenol FCi	title	ExaMAX Orthogonal R.A. Header	dwg no	10129181	rev
			0.XX	±.10			6 PAIR, 12 IMLA (240 Position) ASS'Y			B
		angular	0°	±°		cat. no.	-	Product - Customer Drw	sheet 2 of 7	

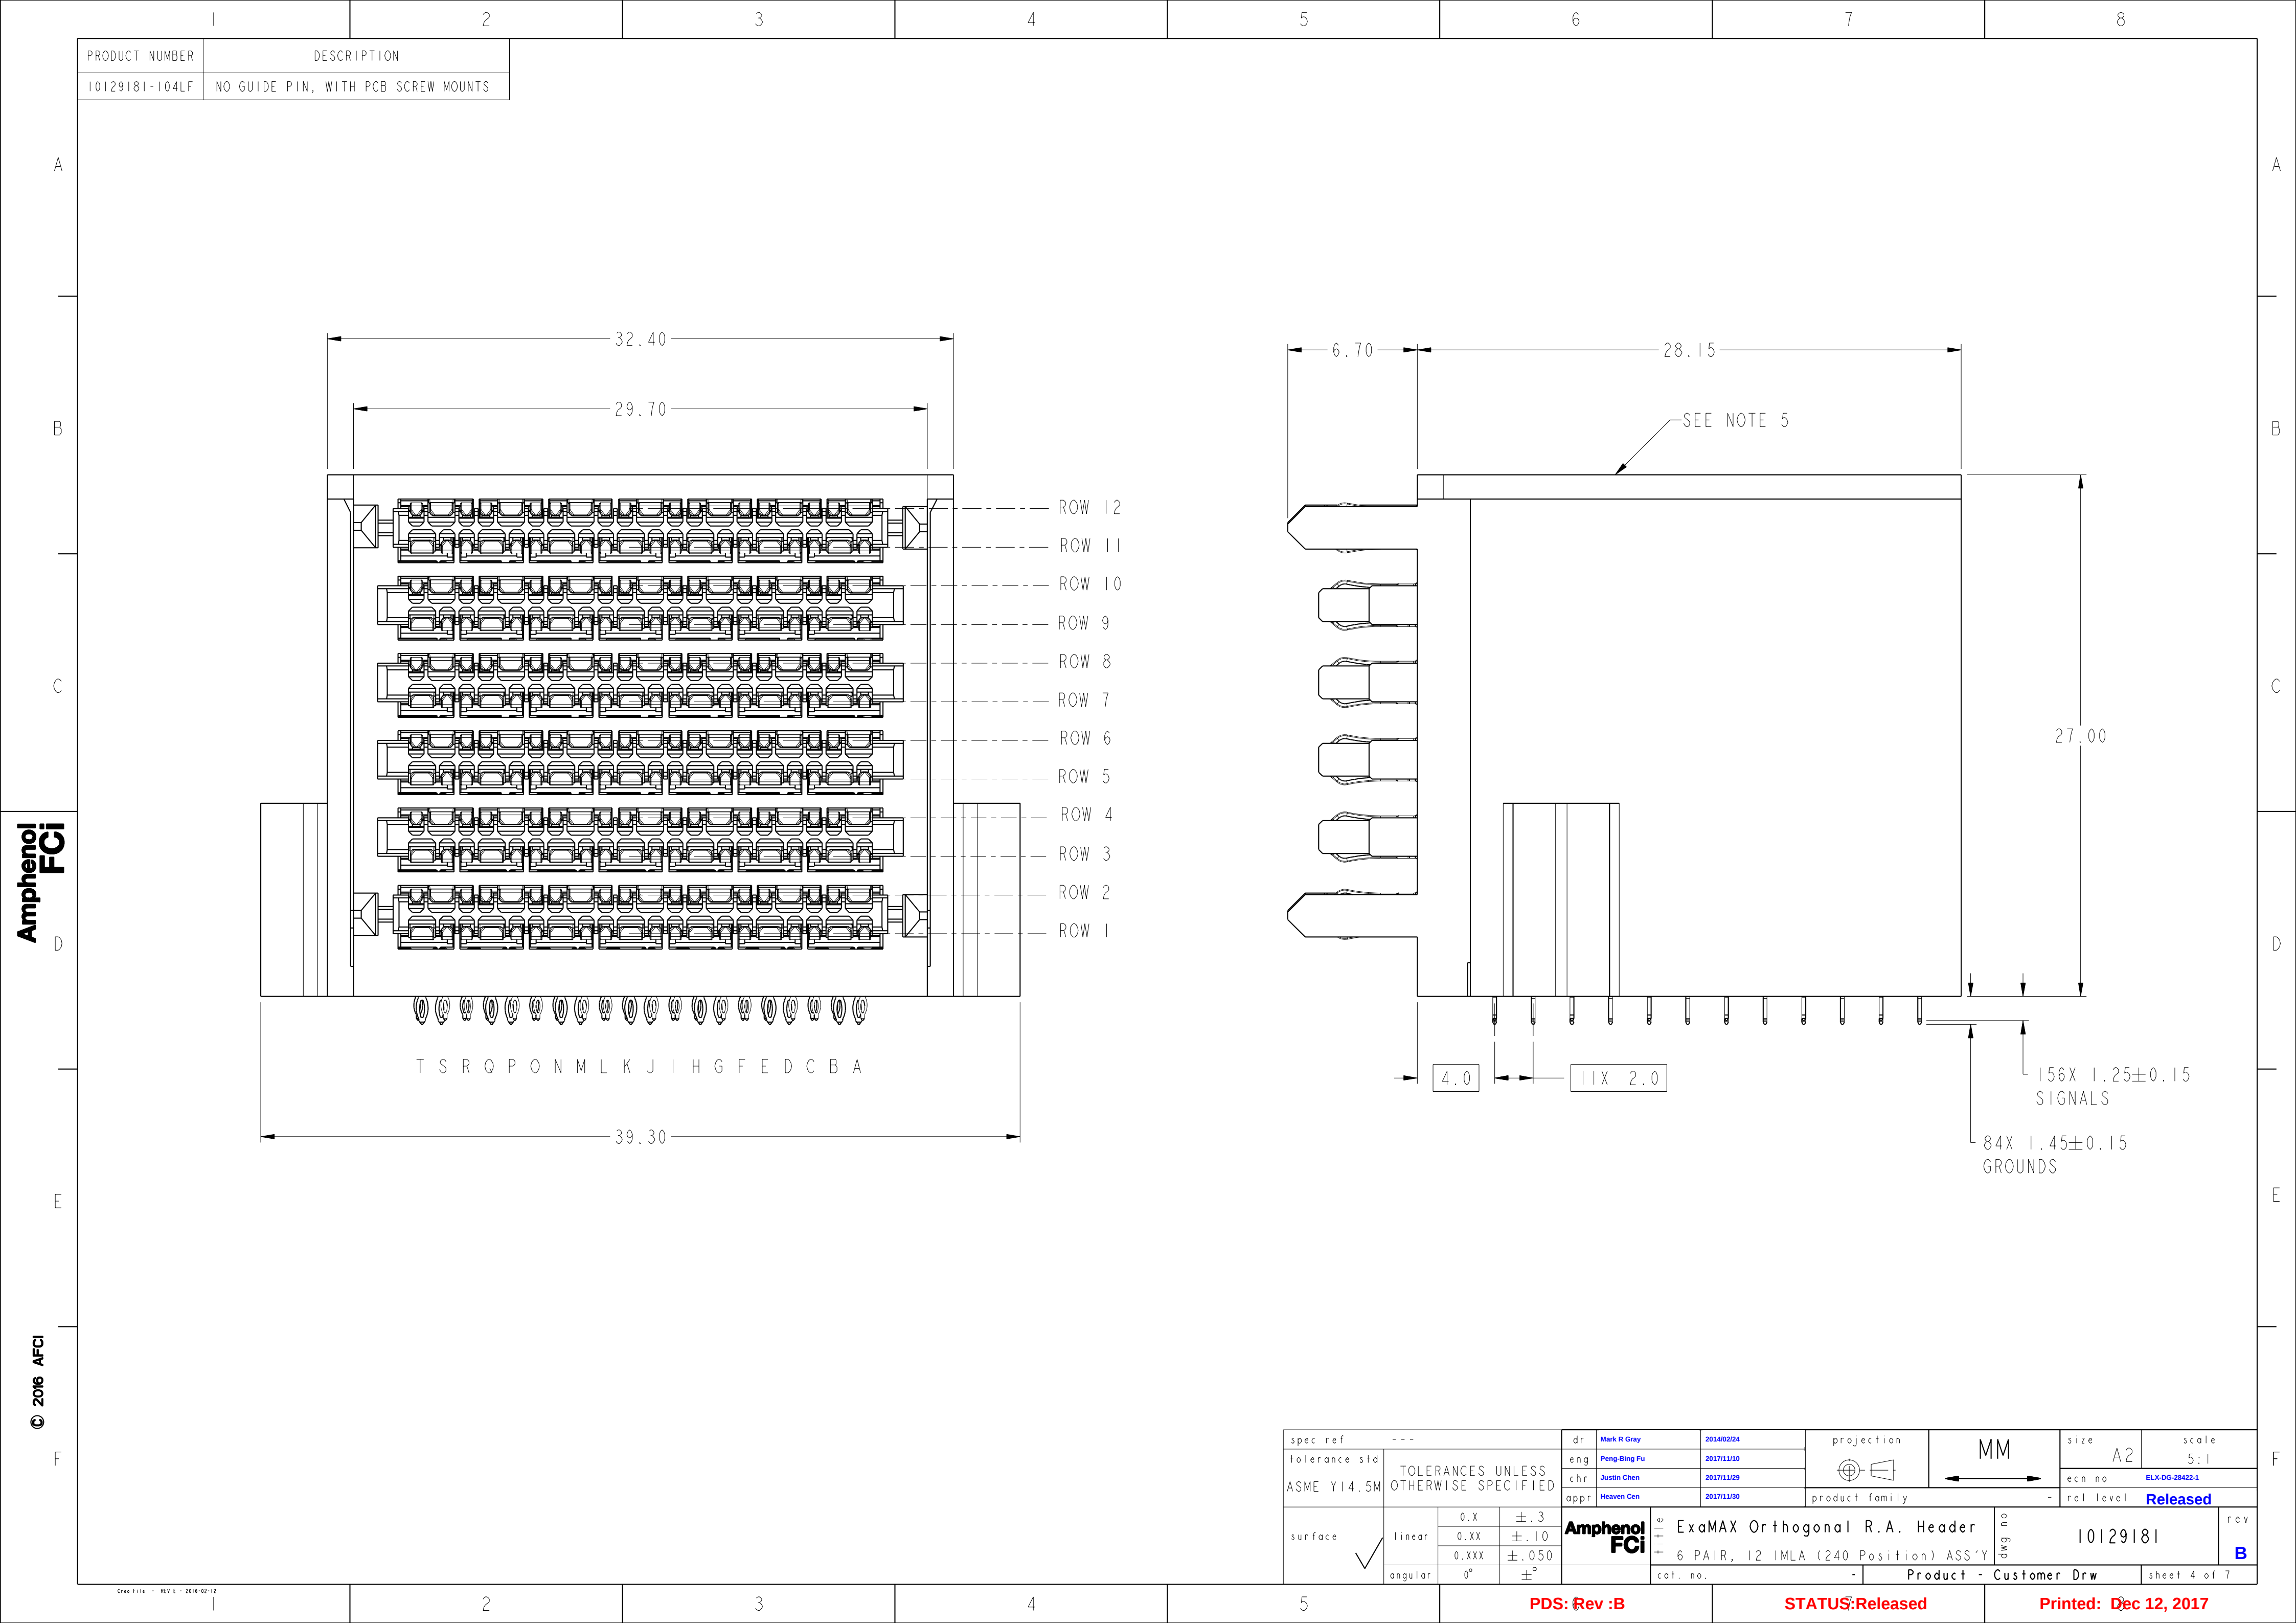

PRODUCT NUMBER	DESCRIPTION
10129181-104LF	NO GUIDE PIN, WITH PCB SCREW MOUNTS

spec ref	---	dr	Mark R Gray	201402/24	projection	MM	size	A2	scale	5:1
tolerance std	ASME Y14.5M	eng	Peng-Bing Fu	2017/11/10	chr	Justin Chen	2017/11/29	ecn no	ELX-DG-28422-1	
		appr	Heaven Cen	2017/11/30	product family	-	rel level	Released		
surface	linear	0.X	±.3	Amphenol FCI	title	ExaMAX Orthogonal R.A. Header	dwg no	10129181	rev	B
		0.XX	±.10			6 PAIR, 12 IMLA (240 Position) ASS'Y				
		0.XXX	±.050							
	angular	0°	±°		cat. no.	-	Product - Customer Drw	sheet 4 of 7		

Amphenol
FCI

© 2016 APCI



PDS: Rev :B

STATUS:Released

Printed: Dec 12, 2017



Amphenol
FCi

© 2016 APCI

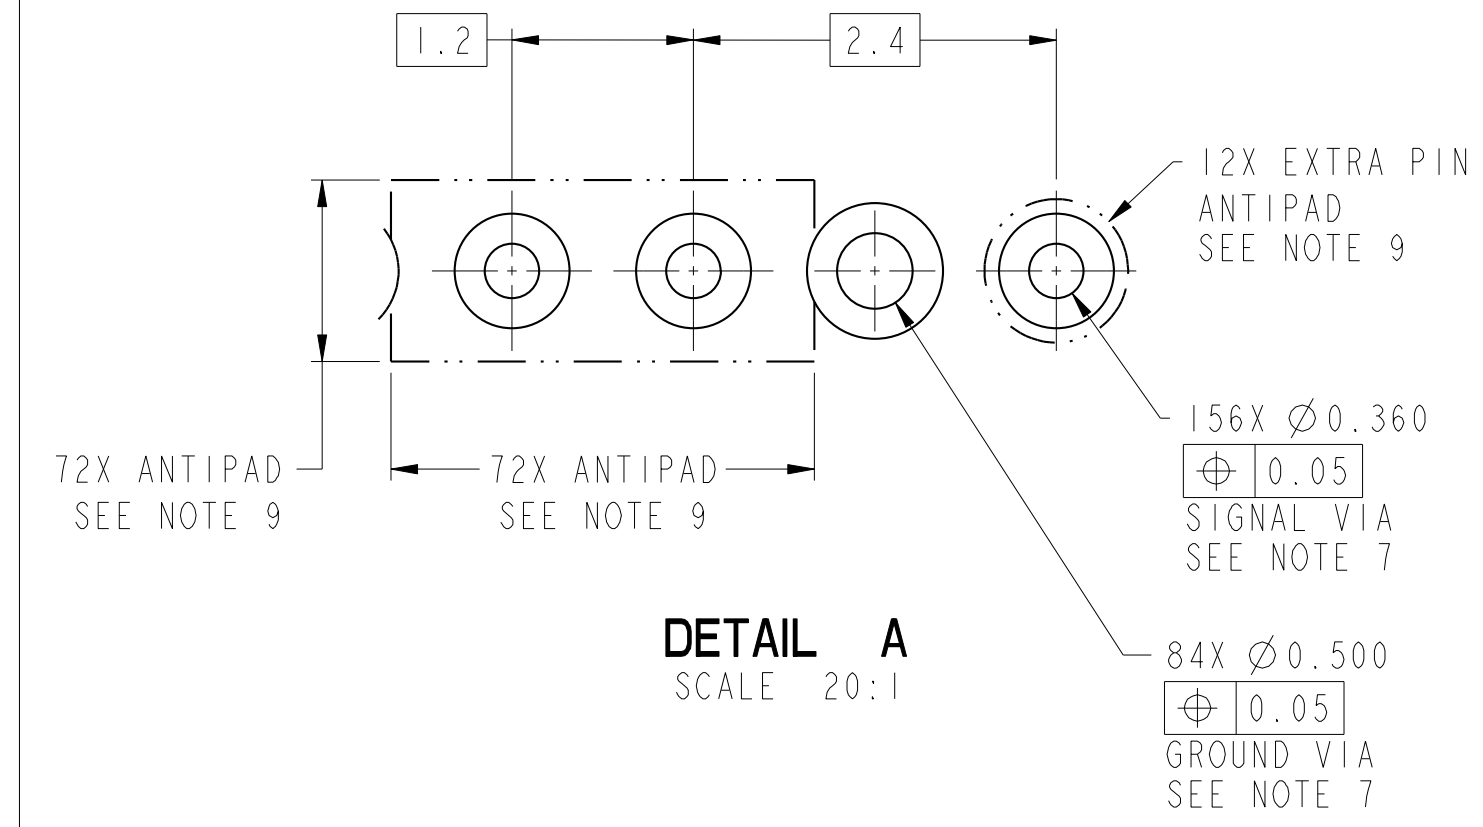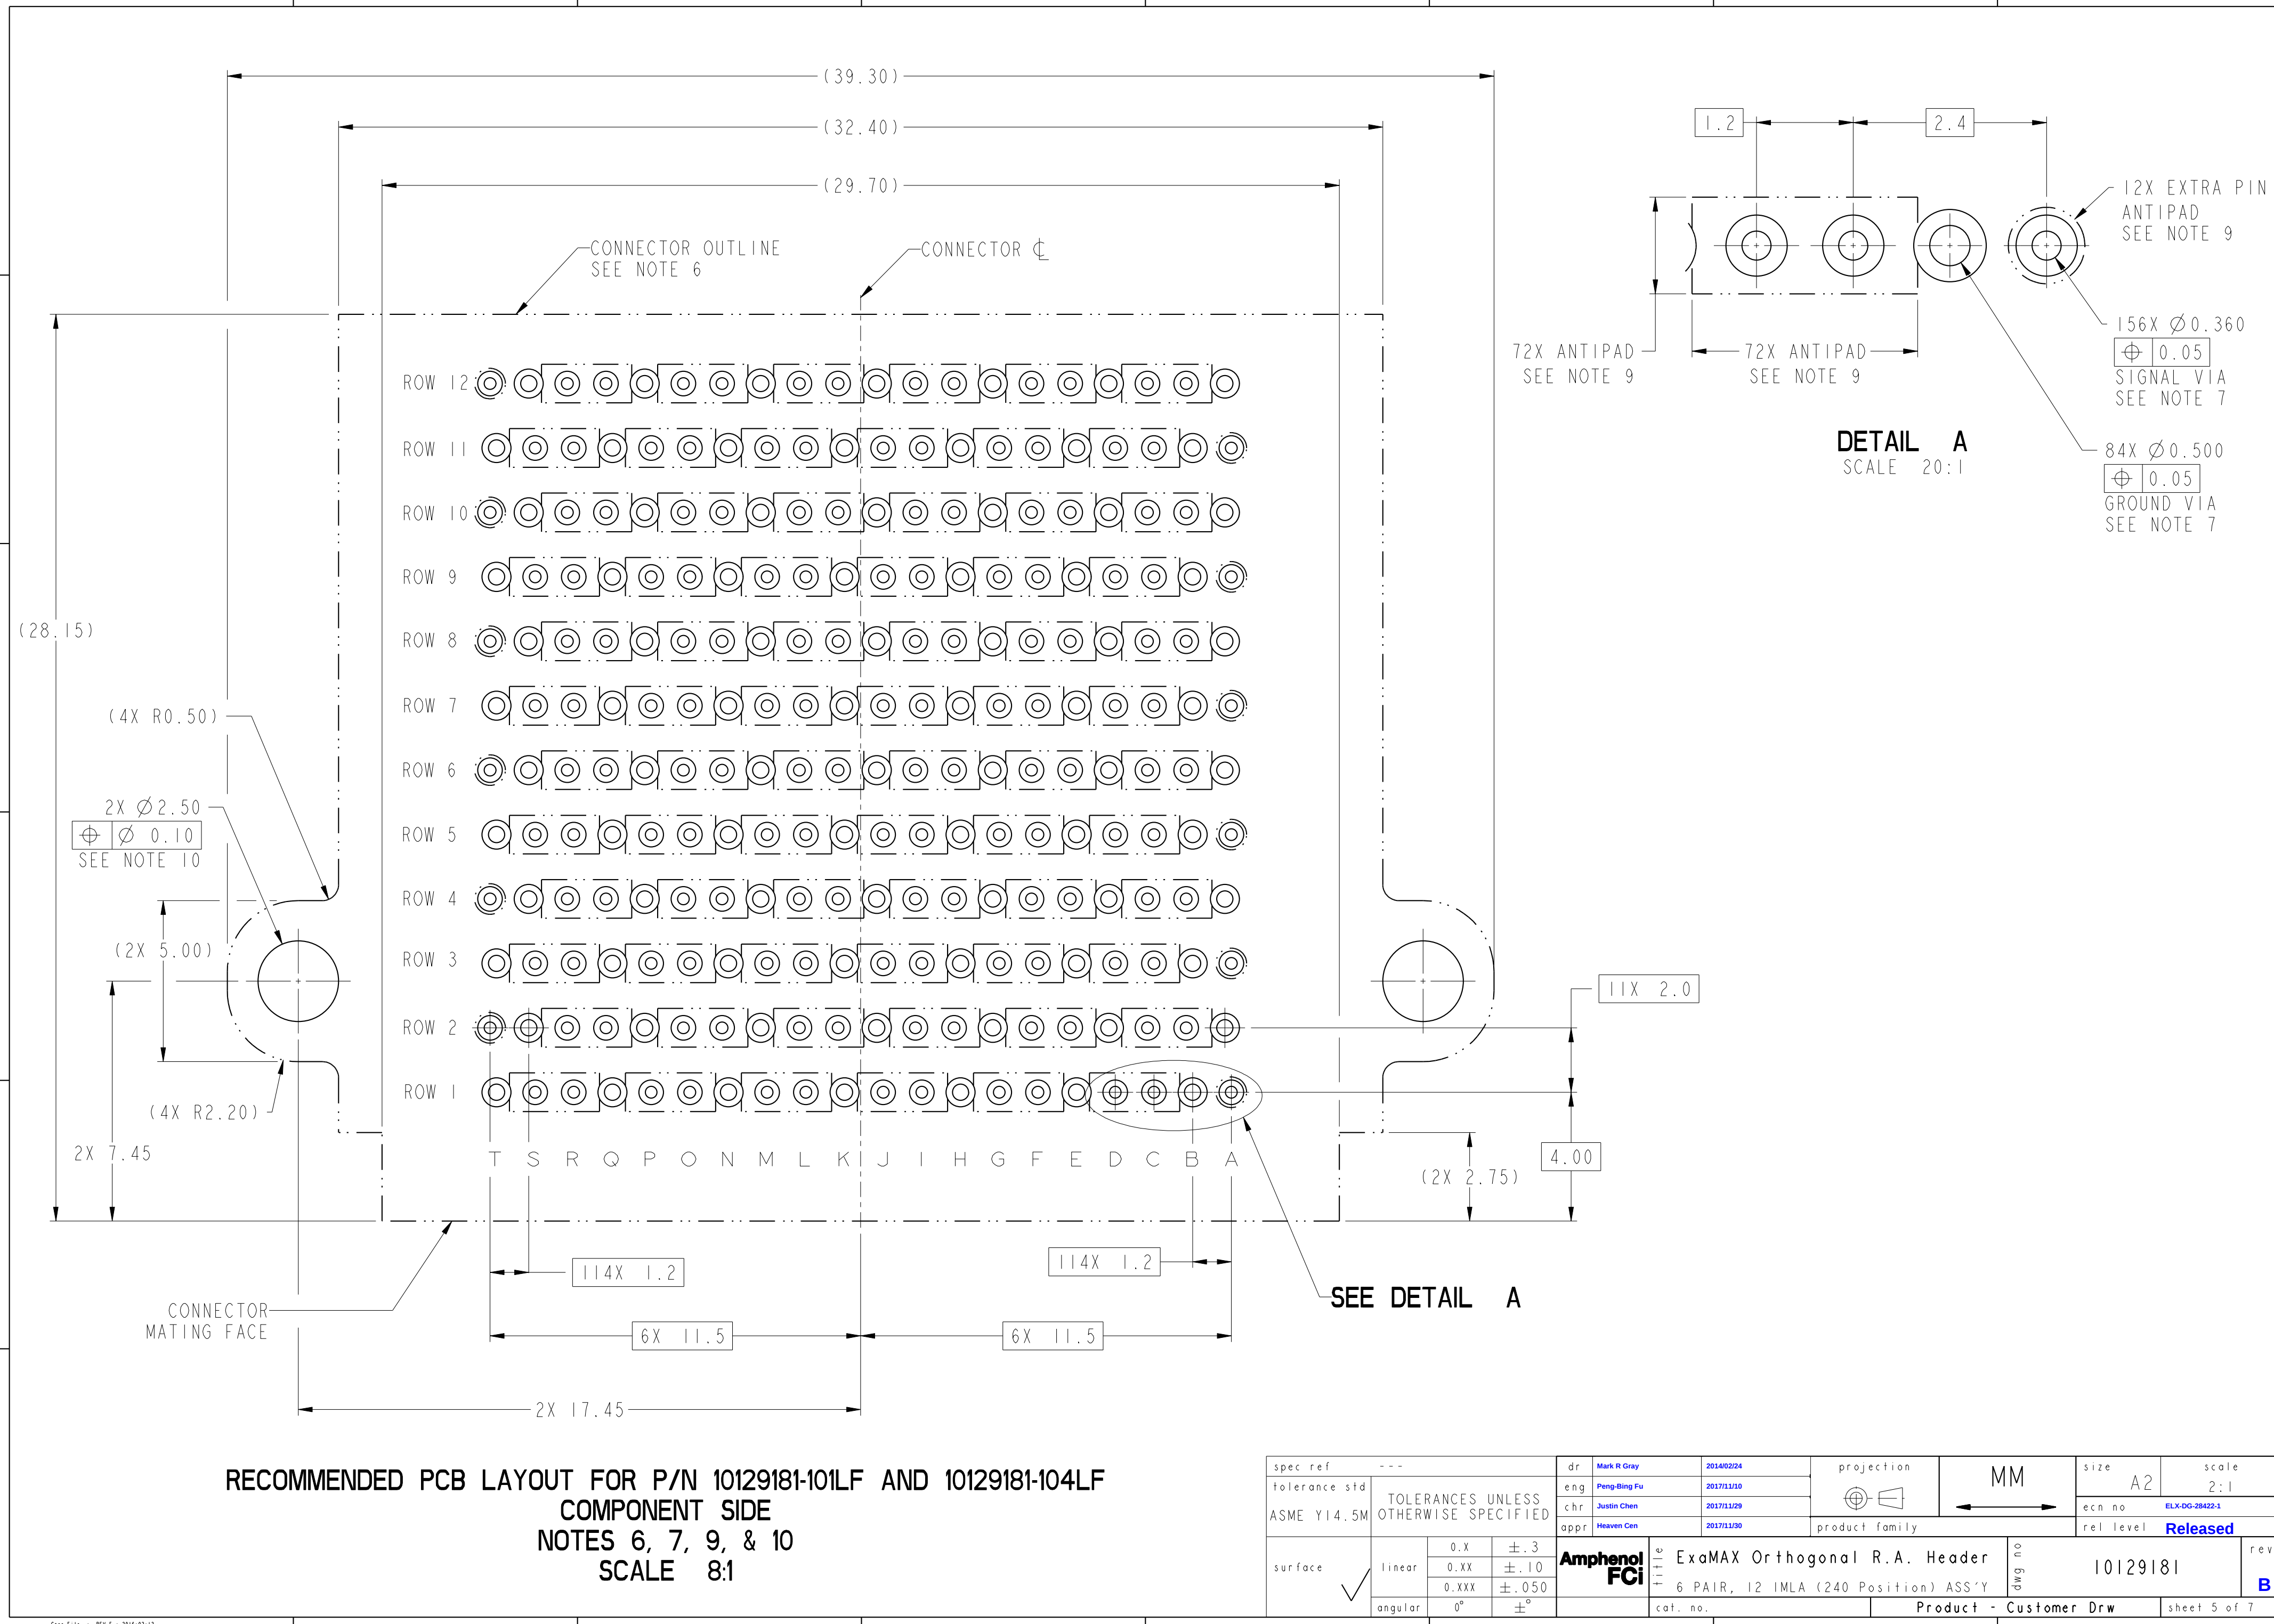


RECOMMENDED PCB LAYOUT FOR P/N 10129181-101LF AND 10129181-104LF
COMPONENT SIDE
NOTES 6, 7, 9, & 10
SCALE 8:1

spec ref	---	dr	Mark R Gray	2014/02/24	projection	MM	size	A2	scale	2:1
tolerance std	ASME Y14.5M	eng	Peng-Bing Fu	2017/11/10	chr	Justin Chen	2017/11/29	ecn no	ELX-DG-28422-1	
surface	✓	appr	Heaven Cen	2017/11/30	product family	ExaMAX Orthogonal R.A. Header	6 PAIR, 12 IMLA (240 Position) ASS'Y	rel level	Released	
linear	0.X	±.3			cat. no.	Product - Customer Drw	sheet 5 of 7			
0.XX	±.10									
0.XXX	±.050									
angular	0°	±°								

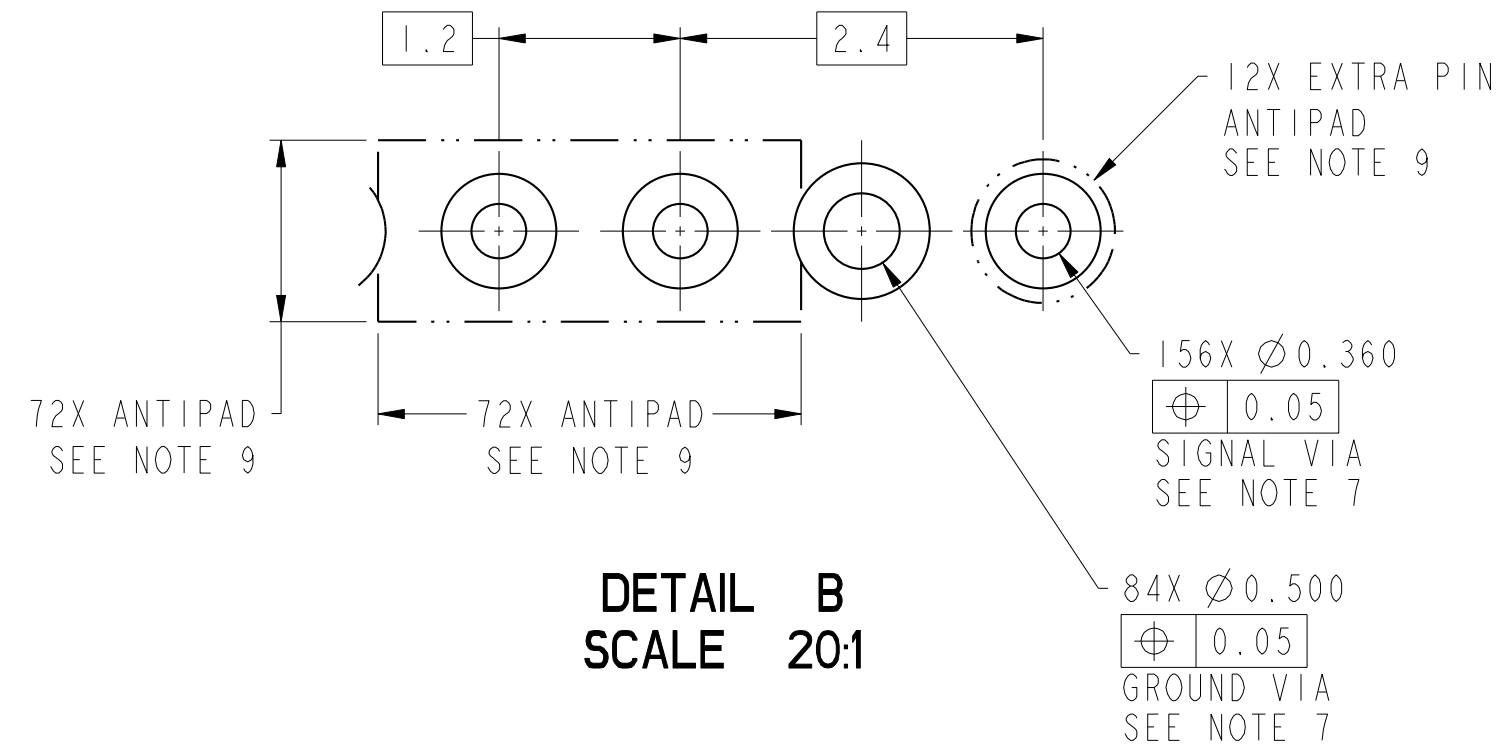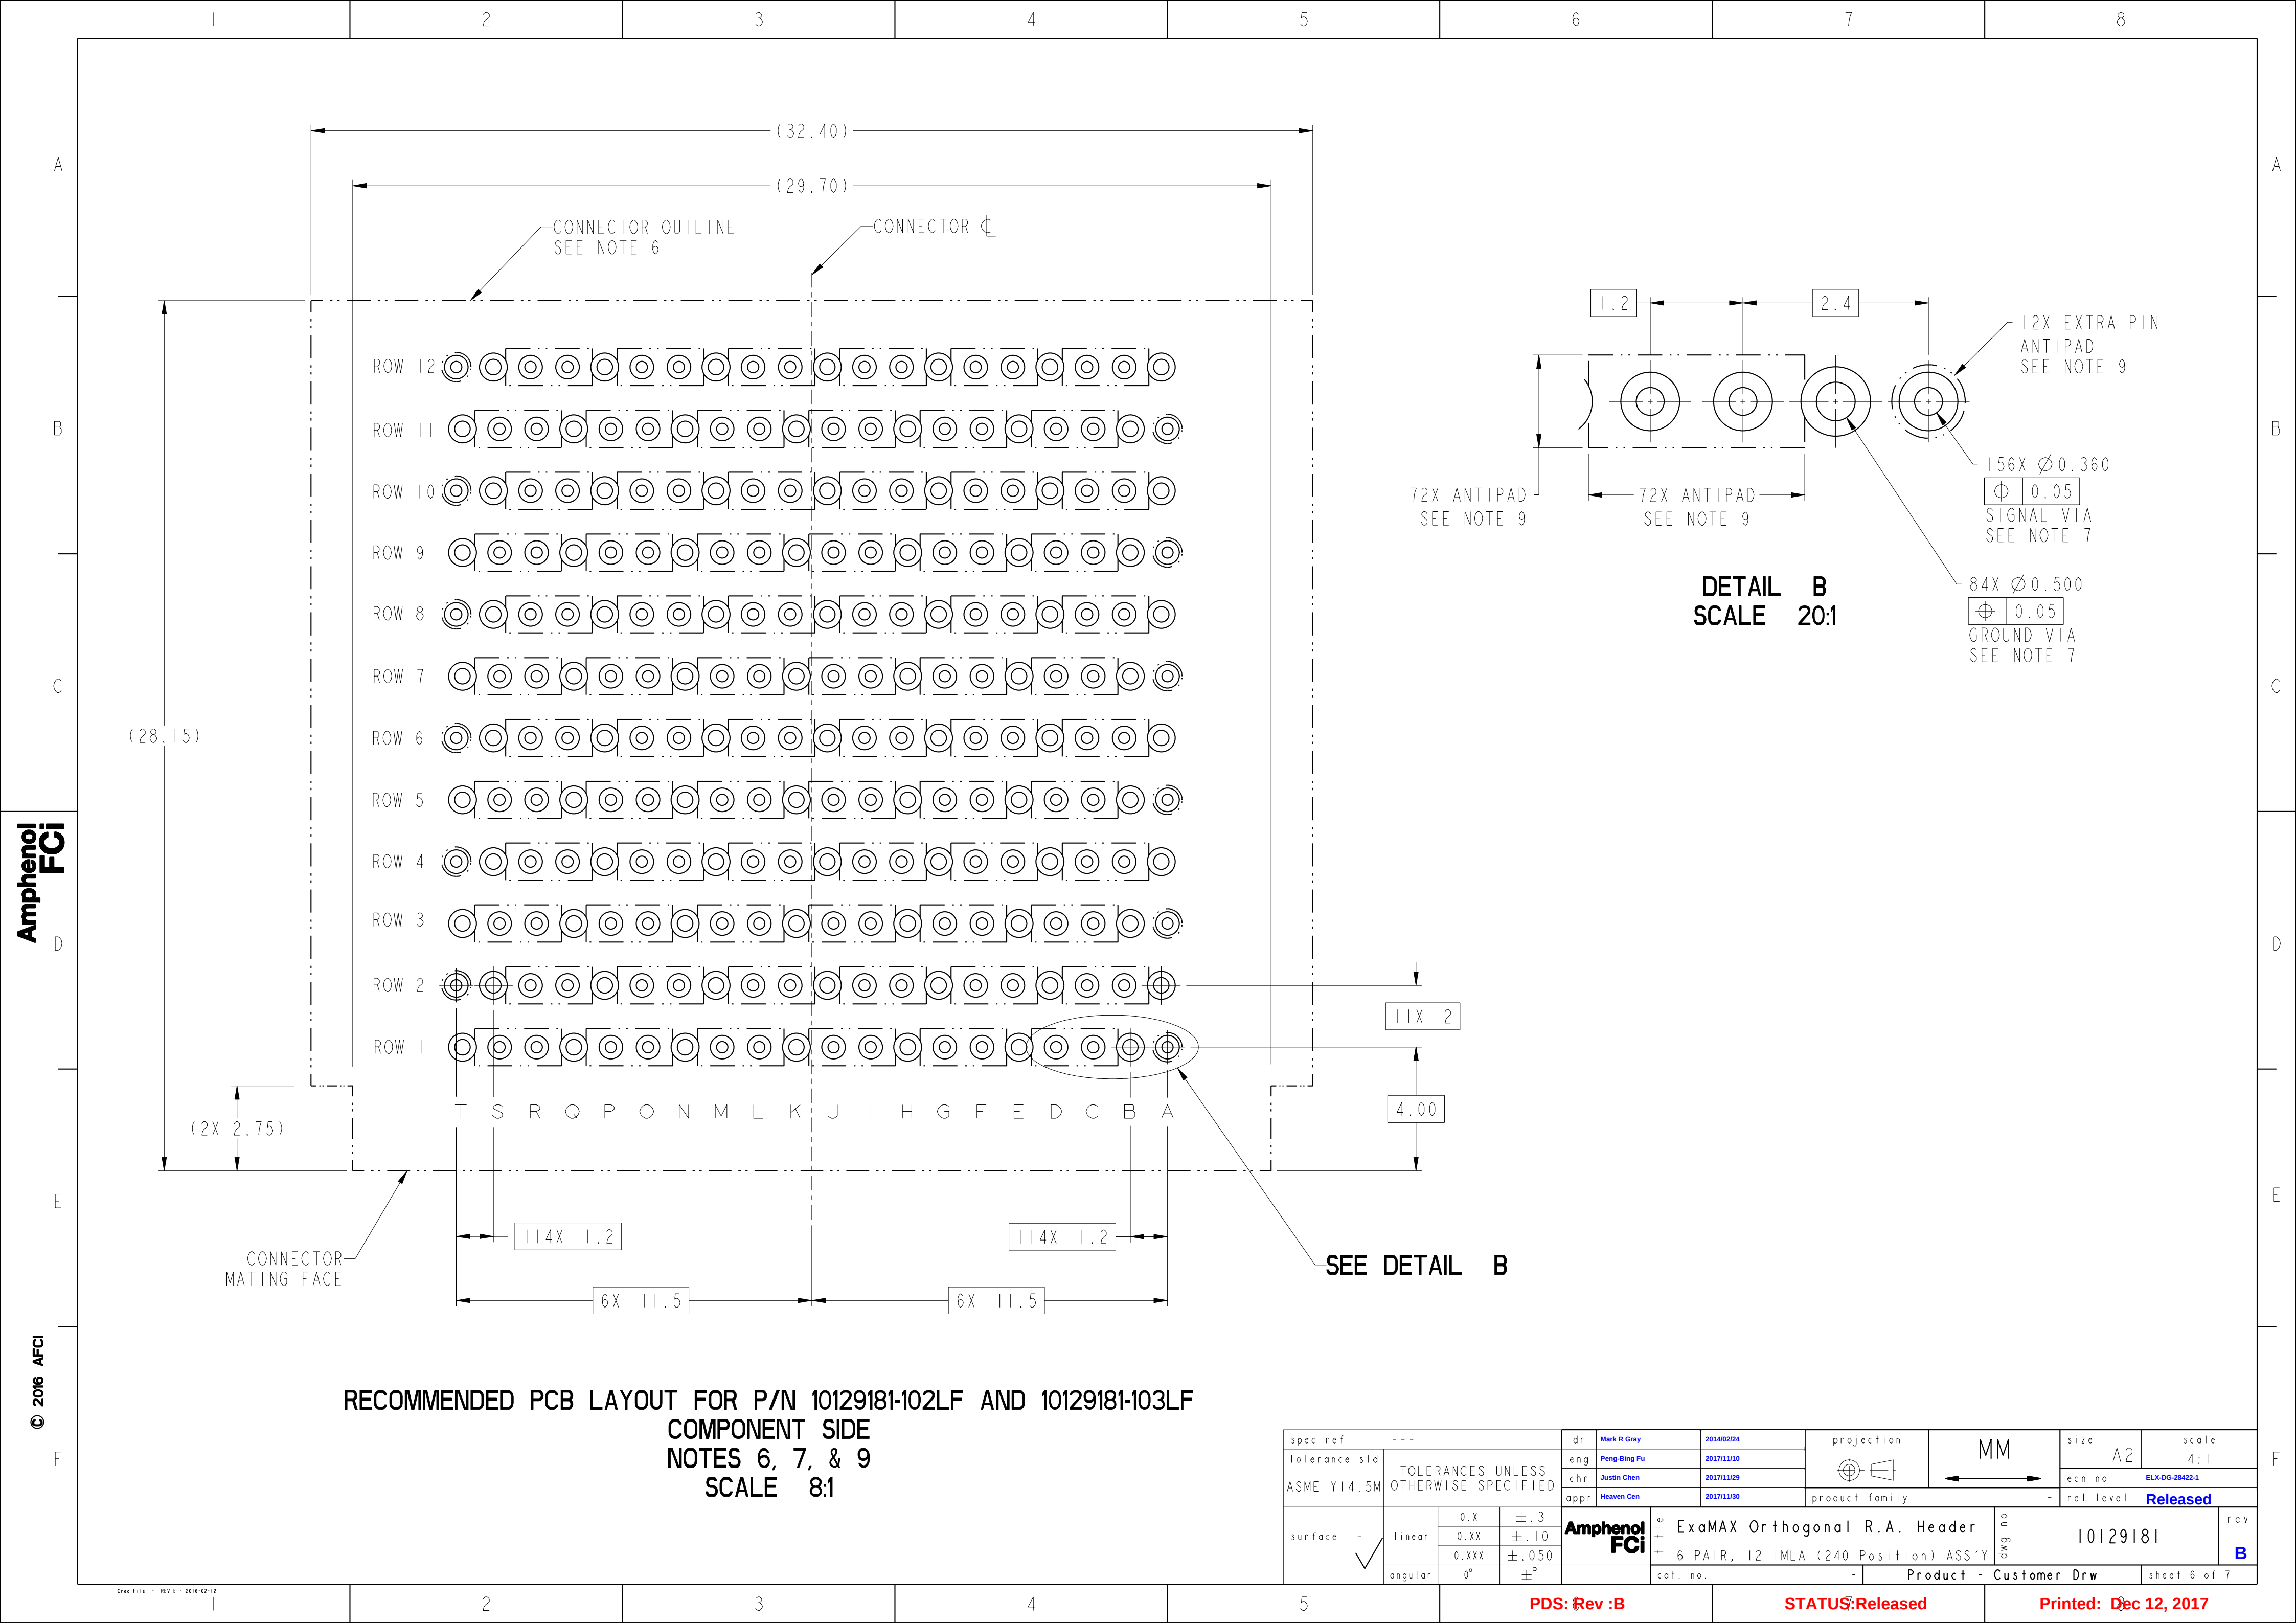


RECOMMENDED PCB LAYOUT FOR P/N 10129181-102LF AND 10129181-103LF
COMPONENT SIDE
NOTES 6, 7, & 9
SCALE 8:1

spec ref		---		dr		Mark R Gray		2014/02/24		projection		MM		size		A2		scale		4:1					
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED		eng		Peng-Bing Fu		2017/11/10						ecn no		ELX-DG-28422-1									
chr				Justin Chen		2017/11/29		product family						-		rel level		Released							
oppr				Heaven Chen		2017/11/30																			
surface		-				linear		0.X		±.3		Amphenol FCI		title		ExaMAX Orthogonal R.A. Header		dwg no		10129181		rev		B	
		0.XX						±.10																	
		0.XXX						±.050																	
		angular						0°		±°															


NOTES:

- 1 - CONNECTOR MATERIALS:
FRONT HOUSING: HIGH TEMP THERMOPLASTIC, BLACK, UL94-V0
ORGANIZER: HIGH TEMP THERMOPLASTIC, BLACK, UL94-V0
IMLA PLASTIC: HIGH TEMP THERMOPLASTIC, BLACK, UL94-V0
CONTACT: COPPER ALLOY
GUIDE PIN: STAINLESS STEEL
MACHINE SCREW AND LOCK WASHER: STAINLESS STEEL
- 2 - CONTACT PLATING:
SEPARABLE INTERFACE:
PERFORMANCE-BASED PLATING, QUALIFIED TO MEET THE
REQUIREMENTS OF FCI PRODUCT SPECIFICATION GS-12-1096
INCLUDING TELCORDIA GR-1217-CORE (NOVEMBER 1995)
CENTRAL OFFICE TEST SEQUENCE


PRESS-FIT TAILS: TIN OVER NICKEL (LEAD FREE)
- 3 - PRODUCT SPECIFICATION: GS-12-1096
- 4 - PACKAGING MEETS GS-14-920 LEAD FREE LABELING
SPECIFICATION.
- 5 - PRODUCT MARKING, (PART NUMBER & LOT CODE), ON THIS SURFACE.
- 6 - CONNECTOR OUTLINE MAY BE SCREEN PRINTED ONTO CUSTOMER PCB TO
BE USED AS A GUIDE FOR MANUAL CONNECTOR PLACEMENT.
- 7 - REFER TO CUSTOMER DRAWING 10119933 FOR INFORMATION
ON PCB HOLE DIAMETERS AND PLATING OPTIONS
- 8 - LEAD FREE PRODUCT MEETS THE EUROPEAN UNION DIRECTIVES &
OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-47-0004
- 9 - REFER TO ROUTING GUIDE GS-20-0511 FOR RECOMMENDATIONS
ON OPTIMIZATION OF FOOTPRINT AND TRACE ROUTING LAYOUT.
- 10 - IT IS RECOMMENDED THAT CONNECTORS WITH THE OPTIONAL SCREW MOUNTS USE A
TRI-ROUNDULAR, OR TRILOBULAR® SHAPED M1.91 OR M2 THREAD FORMING SCREW DESIGNED
SPECIFICALLY FOR PLASTIC MATERIAL TO SECURE THE CONNECTOR TO THE PCB. THE
SCREW LENGTH SHOULD BE 4.00mm TO 8.00mm LONG PLUS THE BOARD THICKNESS.
- 11 - THE CONNECTOR WILL WITHSTAND EXPOSURE TO 260° C PEAK TEMPERATURE FOR 10-30
SECONDS IN A CONVECTION, INFRA-RED, OR VAPOR PHASE REFLOW OVEN.

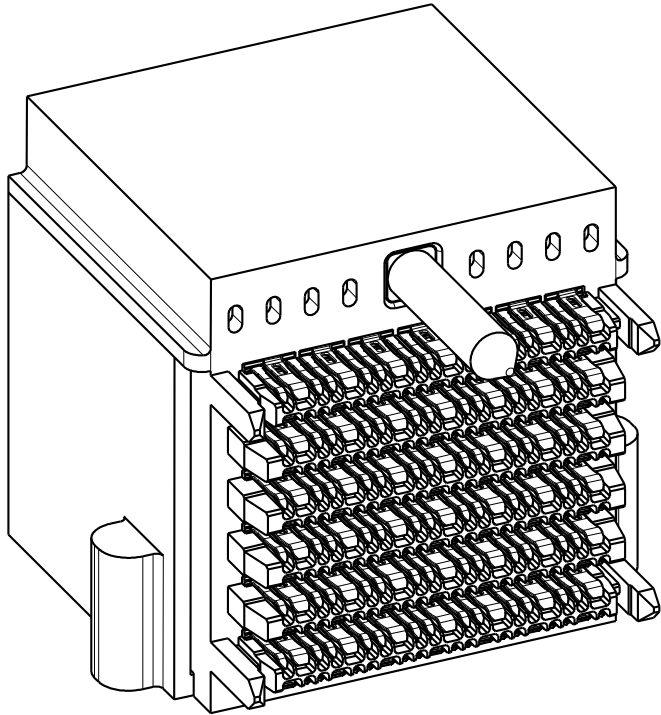


10129181-101LF

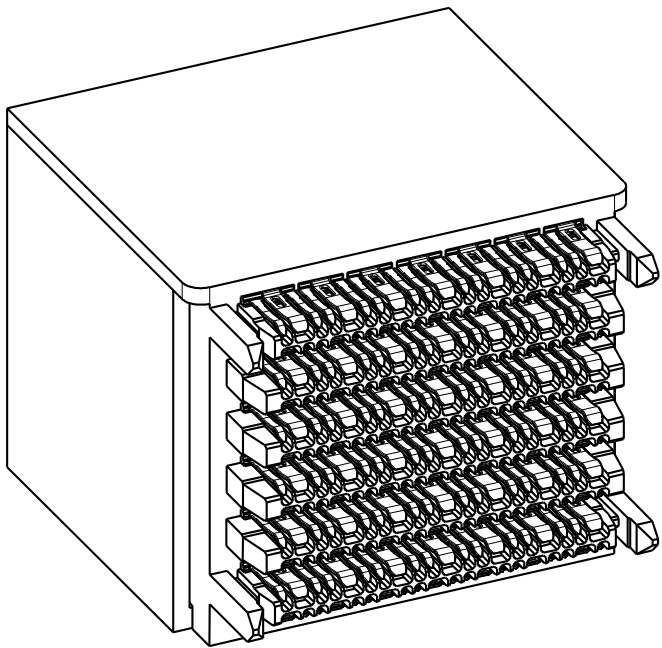

10129181-102LF

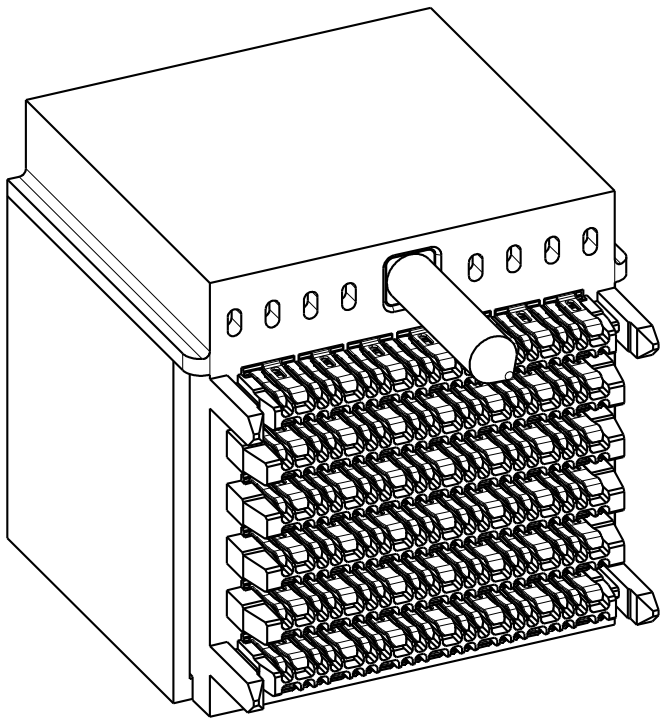

10129181-103LF

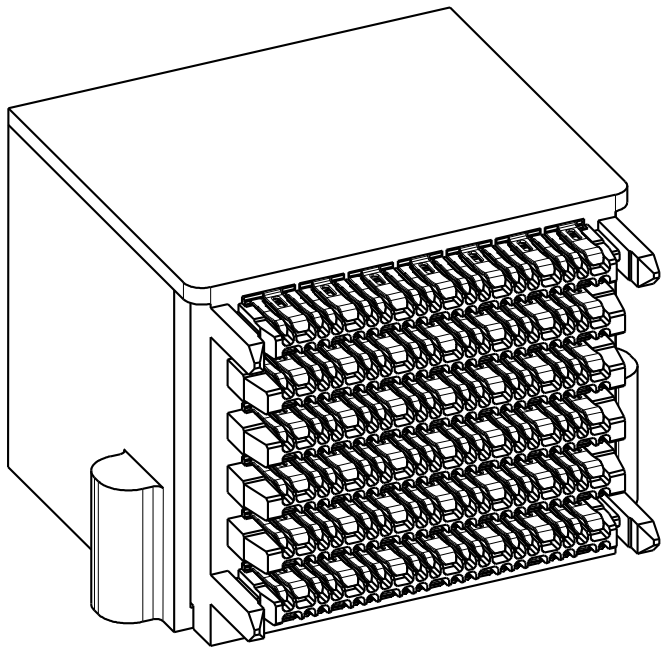

10129181-104LF

spec ref				---		dr		Mark R Gray		2014/02/24		projection		MM		size		A2		scale		2:1													
tolerance std				TOLERANCES UNLESS OTHERWISE SPECIFIED						eng		Peng-Bing Fu		2017/11/10						ecn no				ELX-DG-28422-1											
ASME Y14.5M										chr		Justin Chen		2017/11/29																					
										appr		Heaven Cen		2017/11/30												product family									
surface				linear		0.X		±.3		Amphenol FCI		title		ExaMAX Orthogonal R.A. Header						dwg no		10129181		rev		B									
																												0.XX		±.10					
																																0.XXX		±.050	

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А