

Fast Recovery Diodes (T-Modules), 40 A/70 A/85 A



D-55

FEATURES

- Fast recovery time characteristics
- Electrically isolated base plate
- 3500 V_{RMS} isolating voltage
- Standard JEDEC package
- Simplified mechanical designs, rapid assembly
- Large creepage distances
- UL E78996 approved 
- Compliant to RoHS directive 2002/95/EC
- Designed and qualified for industrial level



RoHS
COMPLIANT

PRODUCT SUMMARY

$I_{F(AV)}$	40 A/70 A/85 A
Type	Modules - Diode, Fast

DESCRIPTION

The series of T-modules uses fast recovery power diodes in a single diode configuration. The semiconductors are electrically isolated from the metal base, allowing common heatsink and compact assemblies to be built.

These single diode modules can be used in conjunction with the thyristor modules as a freewheel diode. Application includes self-commutated inverters, DC choppers, motor control, inductive heating and electronic welders. These modules are intended for those applications where very fast recovery characteristics are required and for general power switching applications.

MAJOR RATINGS AND CHARACTERISTICS

SYMBOL	CHARACTERISTICS	T40HFL	T70HFL	T85HFL	UNITS
$I_{F(AV)}$		40	70	85	A
$I_{F(RMS)}$		63	110	133	A
I_{FSM}	50 Hz	475	830	1300	A
	60 Hz	500	870	1370	
I^2t	50 Hz	1130	3460	8550	A ² s
	60 Hz	1030	3160	7810	
V_{RRM}	Range	100 to 1000			V
t_{rr}	Range	200 to 1000			ns
T_J	Range	- 40 to 125			°C

T40HFL, T70HFL, T85HFL Series

Vishay Semiconductors

Fast Recovery Diodes
(T-Modules), 40 A/70 A/85 A



ELECTRICAL SPECIFICATIONS

VOLTAGE RATINGS					
TYPE NUMBER	VOLTAGE CODE	t_{rr} CODE	V_{RRM} , MAXIMUM REPETITIVE PEAK REVERSE VOLTAGE V	V_{RSM} , MAXIMUM NON-REPETITIVE PEAK REVERSE VOLTAGE V	I_{RRM} MAXIMUM AT $T_J = 25^\circ\text{C}$ μA
T40HFL.. T70HFL.. T85HFL..	10	S02, S05, S10	100	150	100
	20	S02, S05, S10	200	300	
	40	S02, S05, S10	400	500	
	60	S02, S05, S10	600	700	
	80	S05, S10	800	900	
	100	S05, S10	1000	1100	

FORWARD CONDUCTION								
PARAMETER	SYMBOL	TEST CONDITIONS			T40HFL	T70HFL	T85HFL	UNITS
Maximum average forward current at case temperature	I _{F(AV)}	180° conduction, half sine wave			40	70	85	A
					70			°C
Maximum RMS forward current	I _{F(RMS)}				63	110	133	A
Maximum peak, one-cycle forward, non-repetitive surge current	I _{FSM}	t = 10 ms	No voltage reapplied	Sinusoidal half wave, initial T _J = T _J maximum	475	830	1300	A
		t = 8.3 ms			500	870	1370	
		t = 10 ms	100 % V _{RRM} reapplied		400	700	1100	
		t = 8.3 ms			420	730	1150	
Maximum I ² t for fusing	I ² t	t = 10 ms	No voltage reapplied		1130	3460	8550	A ² s
		t = 8.3 ms			1030	3160	7810	
		t = 10 ms	100 % V _{RRM} reapplied		800	2450	6050	
		t = 8.3 ms			730	2230	5520	
Maximum I ² √t for fusing	I ² √t	t = 0.1 ms to 10 ms, no voltage reapplied			11 300	34 600	85 500	A ² √s
Low level value of threshold voltage	V _{F(TO)1}	T _J = 25 °C, (16.7 % × π × I _{F(AV)} < I < π × I _{F(AV)})			0.82	0.87	0.84	V
High level value of threshold voltage	V _{F(TO)2}	T _J = 25 °C, (I > π × I _{F(AV)})			0.84	0.90	0.86	
Low level value of forward slope resistance	r _{f1}	T _J = 25 °C, (16.7 % × π × I _{F(AV)} < I < π × I _{F(AV)})			7.0	2.77	2.15	mΩ
High level value of forward slope resistance	r _{f2}	T _J = 25 °C, (I > π × I _{F(AV)})			6.8	2.67	2.07	
Maximum forward voltage drop	V _{FM}	I _{FM} = π × I _{F(AV)} , T _J = 25 °C, t _p = 400 μs square wave Average power = V _{F(TO)} × I _{F(AV)} + r _f × (I _{F(RMS)}) ²			1.60	1.73	1.55	V



T40HFL, T70HFL, T85HFL Series

Fast Recovery Diodes
(T-Modules), 40 A/70 A/85 A

Vishay Semiconductors

REVERSE RECOVERY CHARACTERISTICS												
PARAMETER	SYMBOL	TEST CONDITIONS ⁽¹⁾	T40HFL			T70HFL			T85HFL			UNITS
			S02	S05	S10	S02	S05	S10	S02	S05	S10	
Maximum reverse recovery time	t_{rr}	$T_J = 25\text{ }^{\circ}\text{C}$, $-di_F/dt = 100\text{ A}/\mu\text{s}$ $I_F = 1\text{ A}$ to $V_R = 30\text{ V}$	70	110	270	70	110	270	80	120	290	ns
		$T_J = 25\text{ }^{\circ}\text{C}$, $-di_F/dt = 25\text{ A}/\mu\text{s}$ $I_{FM} = \pi \times \text{rated } I_{F(AV)}$, $V_R = -30\text{ V}$	200	500	1000	200	500	1000	200	500	1000	
Maximum reverse recovery charge	Q_{rr}	$T_J = 25\text{ }^{\circ}\text{C}$, $-di_F/dt = 100\text{ A}/\mu\text{s}$ $I_F = 1\text{ A}$ to $V_R = 30\text{ V}$	0.25	0.4	1.35	0.25	0.4	1.35	0.3	0.6	1.6	μC
		$T_J = 25\text{ }^{\circ}\text{C}$, $-di_F/dt = 25\text{ A}/\mu\text{s}$ $I_{FM} = \pi \times \text{rated } I_{F(AV)}$, $V_R = -30\text{ V}$	0.55	2.0	8.0	0.6	2.1	8.5	0.8	3.5	1.5	

Note

⁽¹⁾ Tested on LEM 300 A diodometer tester

BLOCKING						
PARAMETER	SYMBOL	TEST CONDITIONS	T40HFL	T70HFL	T85HFL	UNITS
Maximum peak reverse leakage current	I_{RRM}	$T_J = 125\text{ }^{\circ}\text{C}$	20			mA
RMS isolation voltage	V_{ISOL}	50 Hz, circuit to base, all terminals shorted, $T_J = 25\text{ }^{\circ}\text{C}$, $t = 1\text{ s}$	3500			V

THERMAL AND MECHANICAL SPECIFICATIONS						
PARAMETER	SYMBOL	TEST CONDITIONS	T40HFL	T70HFL	T85HFL	UNITS
Junction operating temperature range	T _J		- 40 to 125			°C
Storage temperature range	T _{Stg}		- 40 to 150			
Maximum internal thermal resistance, junction to case per module	R _{thJC}	DC operation	0.85	0.53	0.46	K/W
Thermal resistance, case to heatsink per module	R _{thCS}	Mounting surface, flat, smooth and greased	0.2			
Mounting torque ± 10 %	base to heatsink	M3.5 mounting screws ⁽¹⁾ Non-lubricated threads	1.3 ± 10 %			Nm
	busbar to terminal	M5 screws terminals Non-lubricated threads	3 ± 10 %			
Approximate weight		See dimensions - link at the end of datasheet	54			g
			19			oz.
Case style			D-55 (T-module)			

Note

⁽¹⁾ A mounting compound is recommended and the torque should be rechecked after a period of about 3 hours to allow for the spread of the compound

ΔR CONDUCTION											
DEVICES	SINUSOIDAL CONDUCTION AT T_J MAXIMUM					RECTANGULAR CONDUCTION AT T_J MAXIMUM					UNITS
	180°	120°	90°	60°	30°	180°	120°	90°	60°	30°	
T40HFL	0.06	0.08	0.10	0.14	0.24	0.05	0.08	0.10	0.15	0.24	K/W
T70HFL	0.05	0.06	0.08	0.11	0.19	0.04	0.06	0.08	0.12	0.19	
T85HFL	0.04	0.05	0.06	0.09	0.15	0.03	0.05	0.07	0.09	0.015	

Note

- The table above shows the increment of thermal resistance R_{thJC} when devices operate at different conduction angles than DC

T40HFL, T70HFL, T85HFL Series

Vishay Semiconductors

Fast Recovery Diodes
(T-Modules), 40 A/70 A/85 A

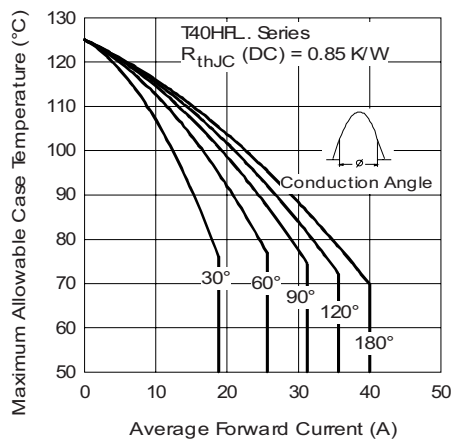


Fig. 1 - Current Ratings Characteristics

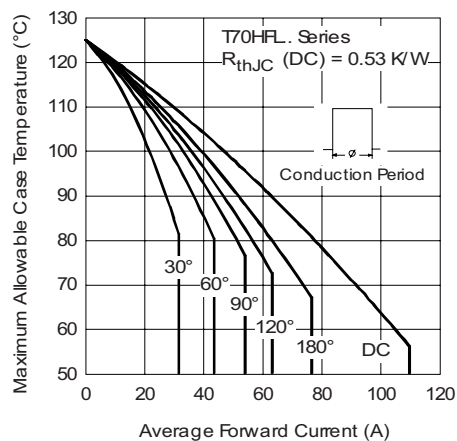


Fig. 4 - Current Ratings Characteristics

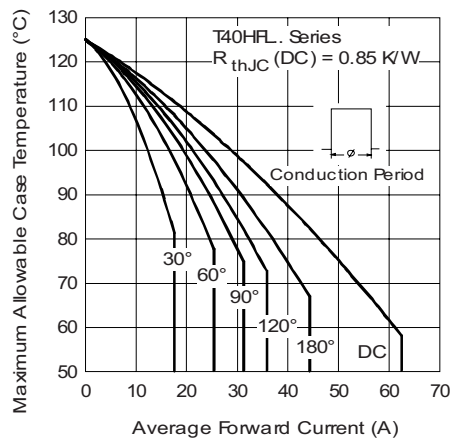


Fig. 2 - Current Ratings Characteristics

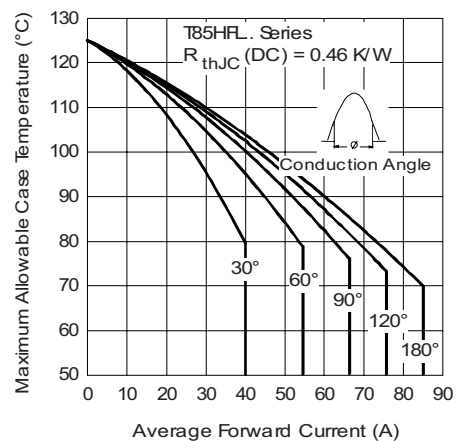


Fig. 5 - Current Ratings Characteristics

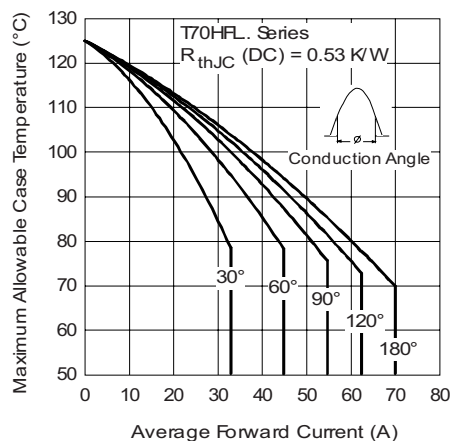


Fig. 3 - Current Ratings Characteristics

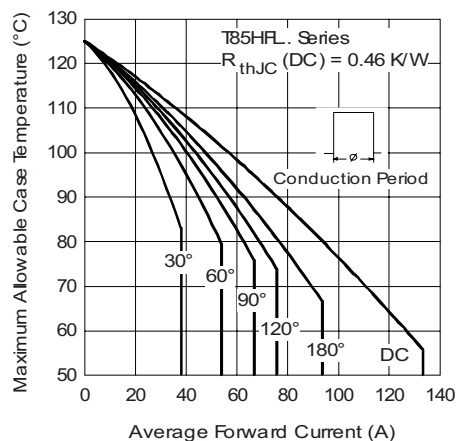


Fig. 6 - Current Ratings Characteristics

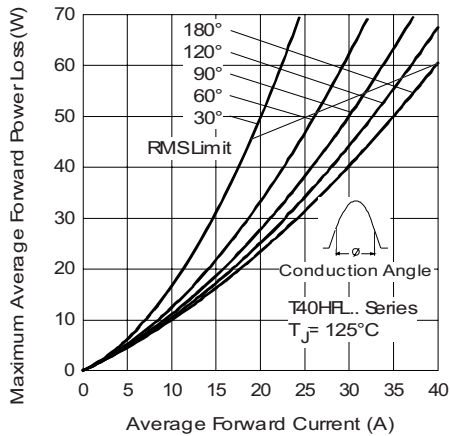


Fig. 7 - Forward Power Loss Characteristics

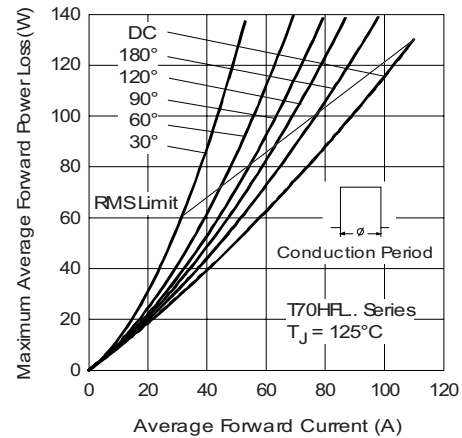


Fig. 10 - Forward Power Loss Characteristics

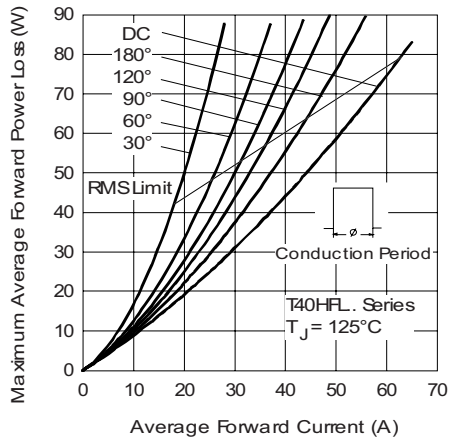


Fig. 8 - Forward Power Loss Characteristics

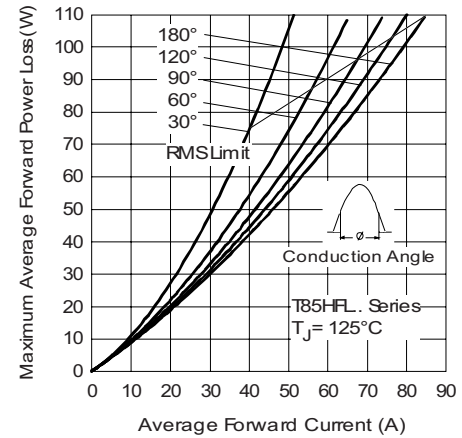


Fig. 11 - Forward Power Loss Characteristics

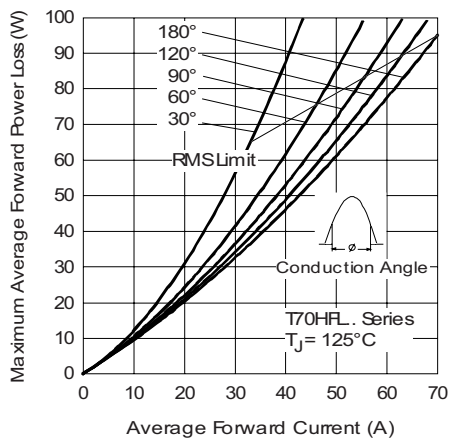


Fig. 9 - Forward Power Loss Characteristics

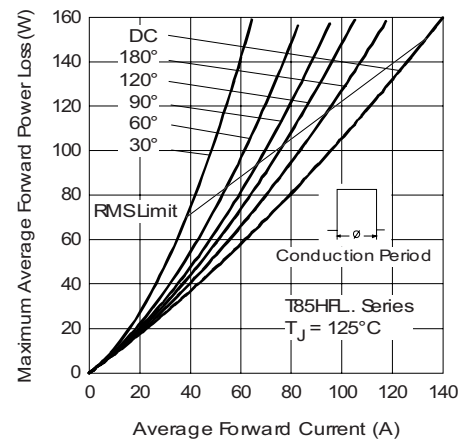


Fig. 12 - Forward Power Loss Characteristics

T40HFL, T70HFL, T85HFL Series

Vishay Semiconductors

Fast Recovery Diodes
(T-Modules), 40 A/70 A/85 A

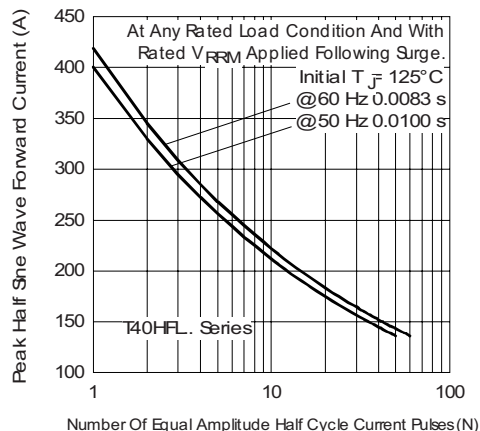


Fig. 13 - Maximum Non-Repetitive Surge Current

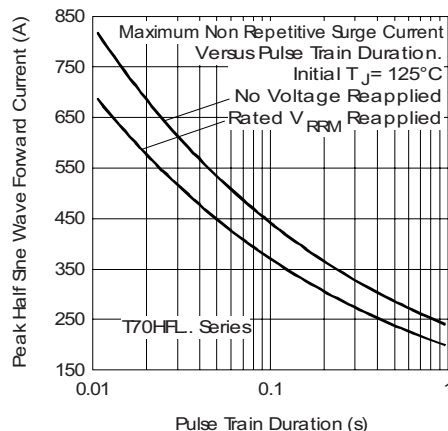


Fig. 16 - Maximum Non-Repetitive Surge Current

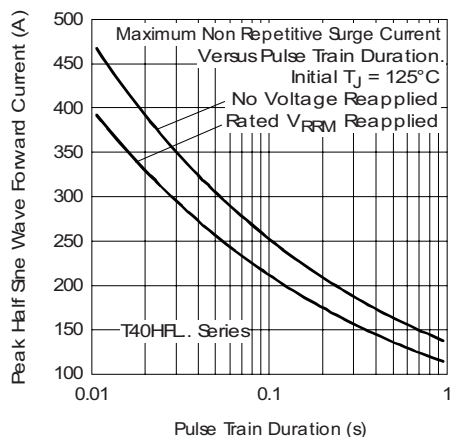


Fig. 14 - Maximum Non-Repetitive Surge Current

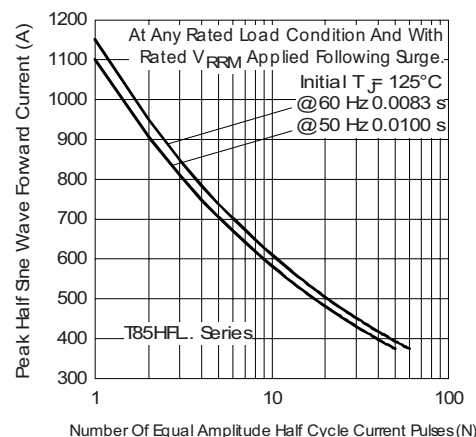


Fig. 17 - Maximum Non-Repetitive Surge Current

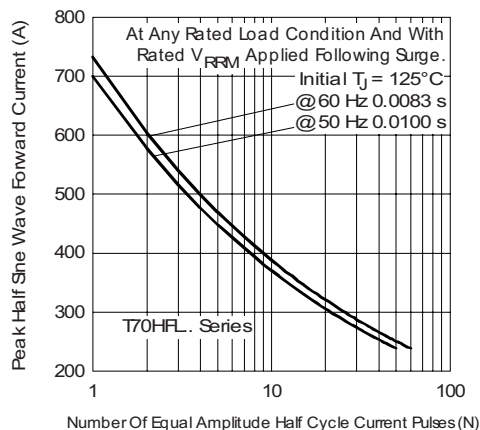


Fig. 15 - Maximum Non-Repetitive Surge Current

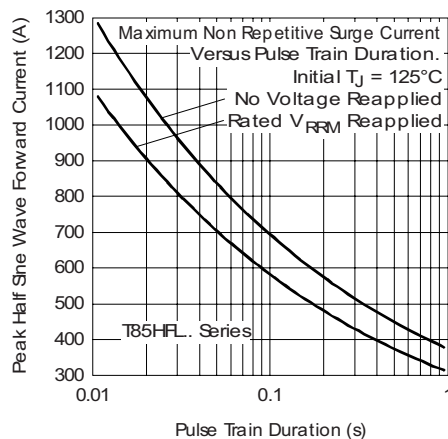


Fig. 18 - Maximum Non-Repetitive Surge Current

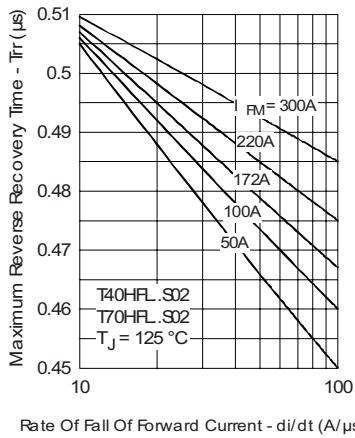


Fig. 19 - Recovery Time Characteristics

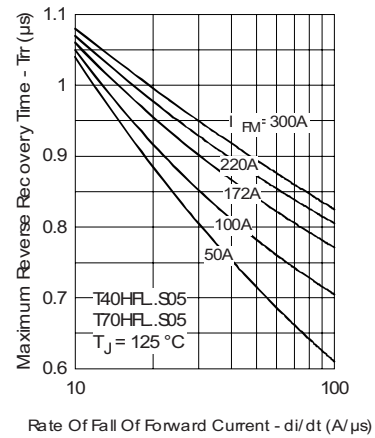


Fig. 22 - Recovery Time Characteristics

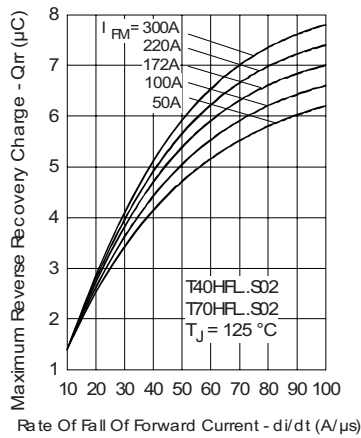


Fig. 20 - Recovery Charge Characteristics

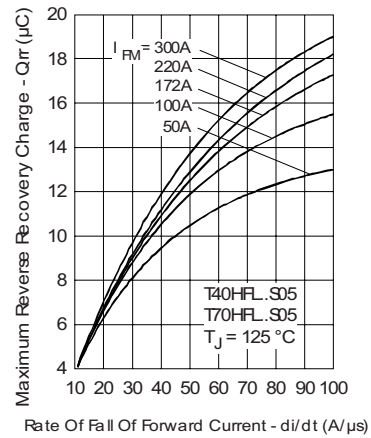


Fig. 23 - Recovery Charge Characteristics

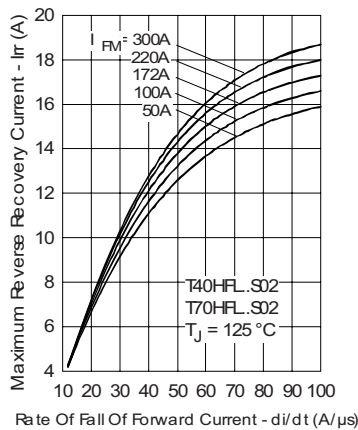


Fig. 21 - Recovery Current Characteristics

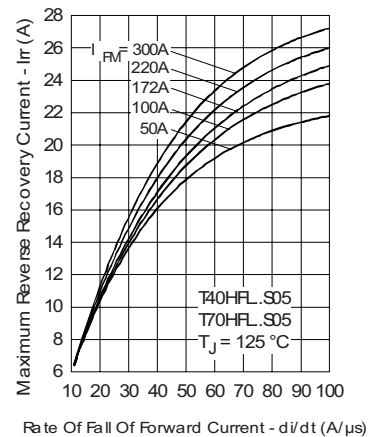


Fig. 24 - Recovery Current Characteristics

T40HFL, T70HFL, T85HFL Series

Vishay Semiconductors

Fast Recovery Diodes
(T-Modules), 40 A/70 A/85 A

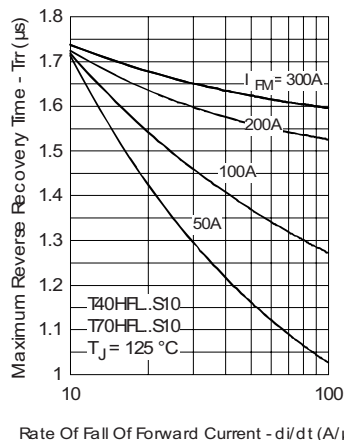


Fig. 25 - Recovery Time Characteristics

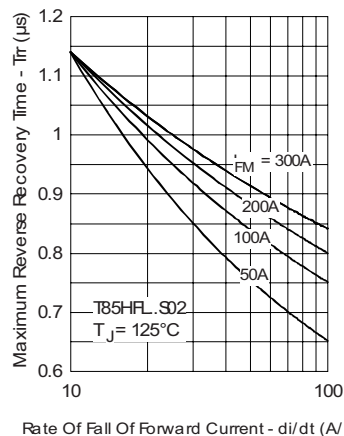


Fig. 28 - Recovery Time Characteristics

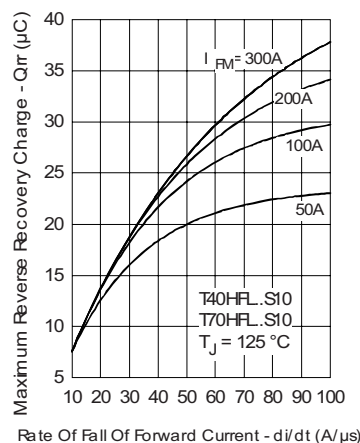


Fig. 26 - Recovery Charge Characteristics

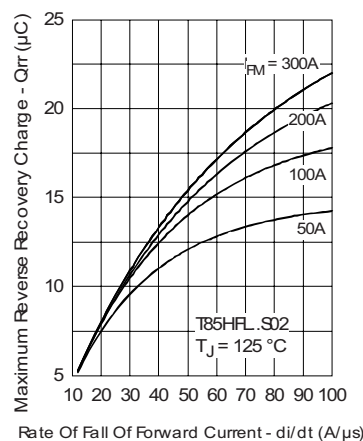


Fig. 29 - Recovery Charge Characteristics

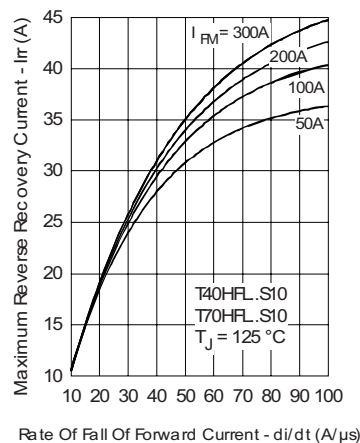


Fig. 27 - Recovery Current Characteristics

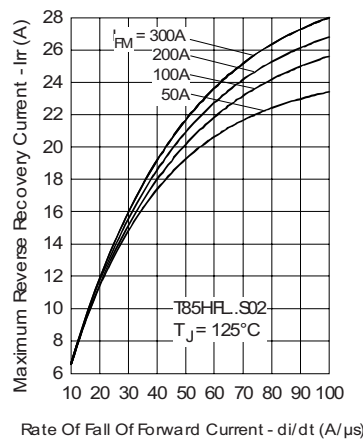


Fig. 30 - Recovery Current Characteristics

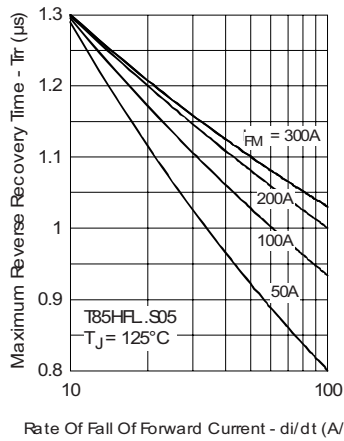


Fig. 31 - Recovery Time Characteristics

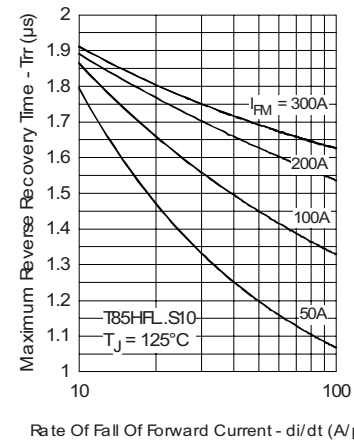


Fig. 34 - Recovery Time Characteristics

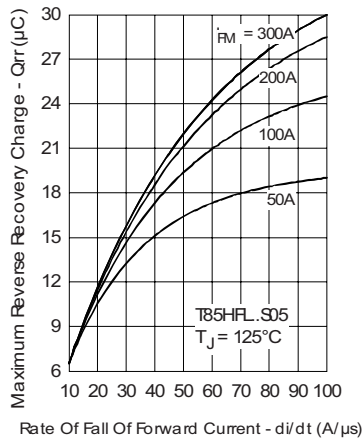


Fig. 32 - Recovery Charge Characteristics

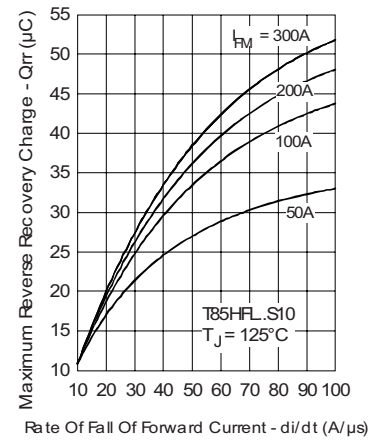


Fig. 35 - Recovery Charge Characteristics

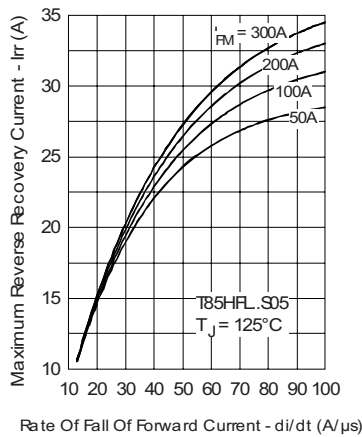


Fig. 33 - Recovery Current Characteristics

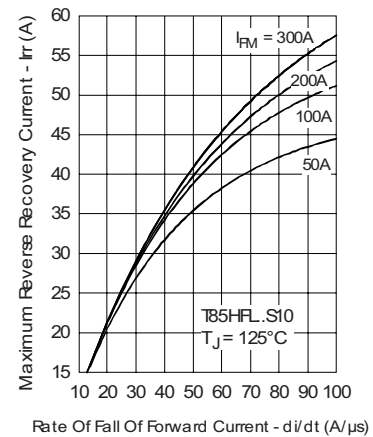


Fig. 36 - Recovery Current Characteristics

T40HFL, T70HFL, T85HFL Series

Vishay Semiconductors

Fast Recovery Diodes
(T-Modules), 40 A/70 A/85 A

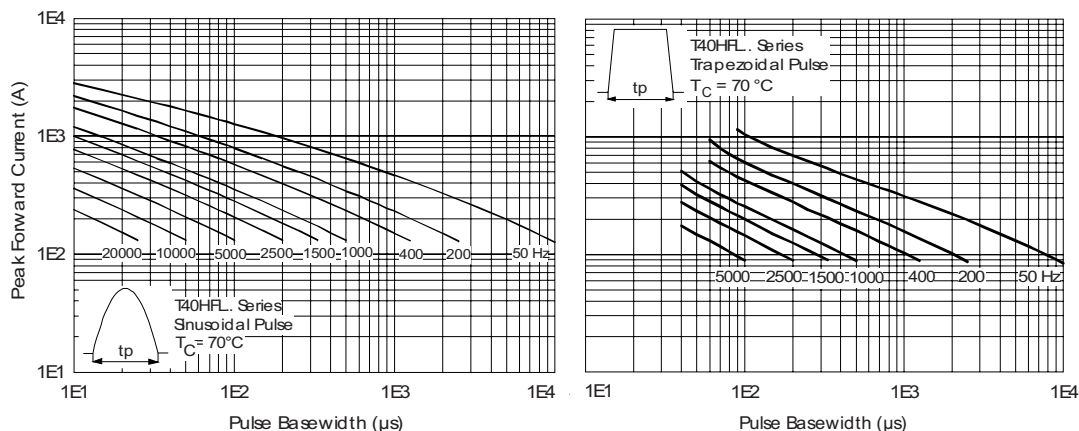


Fig. 37 - Frequency Characteristics

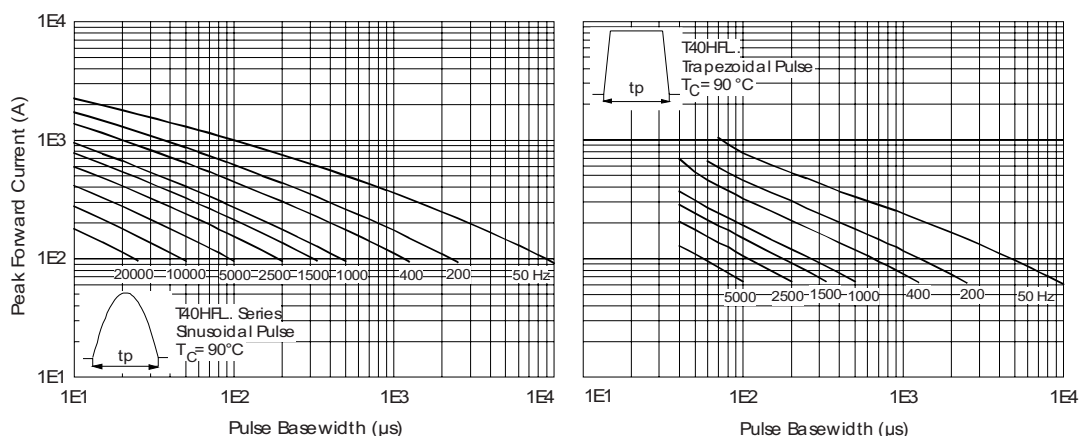


Fig. 38 - Frequency Characteristics

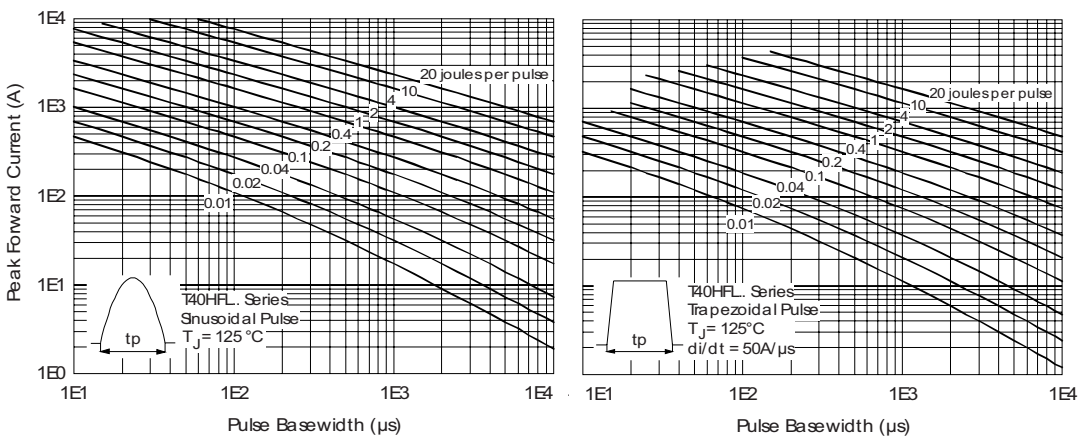


Fig. 39 - Maximum Forward Energy Power Loss Characteristics

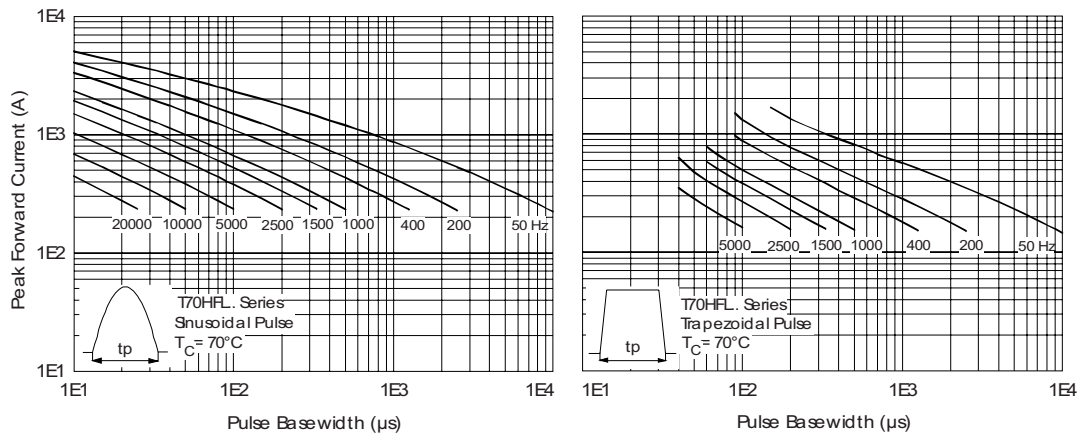


Fig. 40 - Frequency Characteristics

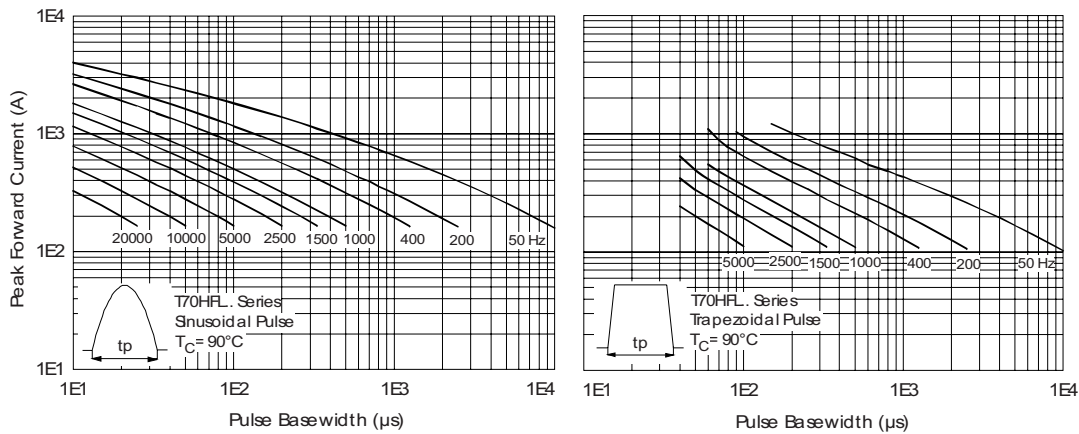


Fig. 41 - Frequency Characteristics

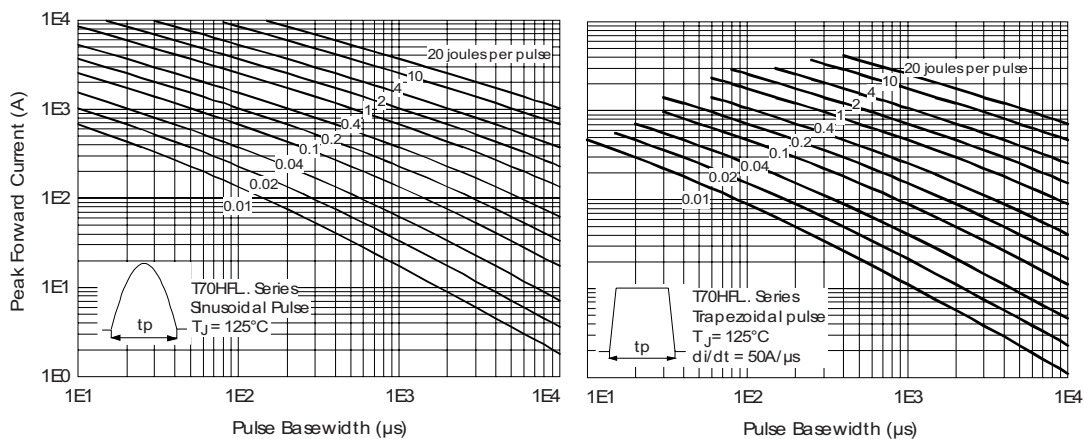


Fig. 42 - Maximum Forward Energy Power Loss Characteristics

T40HFL, T70HFL, T85HFL Series

Vishay Semiconductors

Fast Recovery Diodes
(T-Modules), 40 A/70 A/85 A

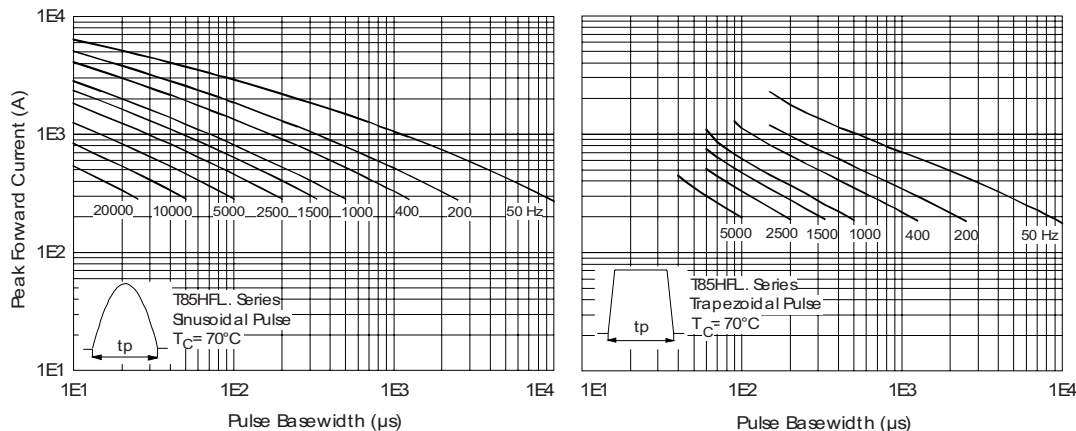


Fig. 43 - Frequency Characteristics

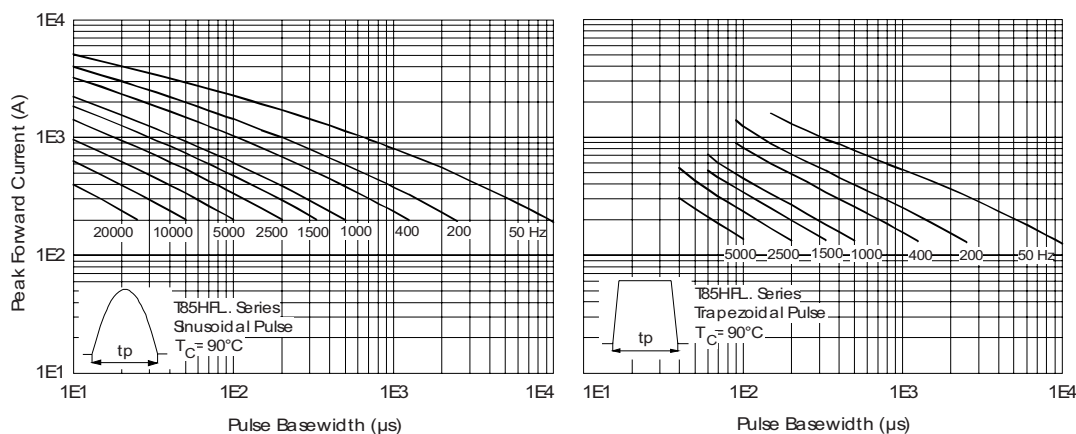


Fig. 44 - Frequency Characteristics

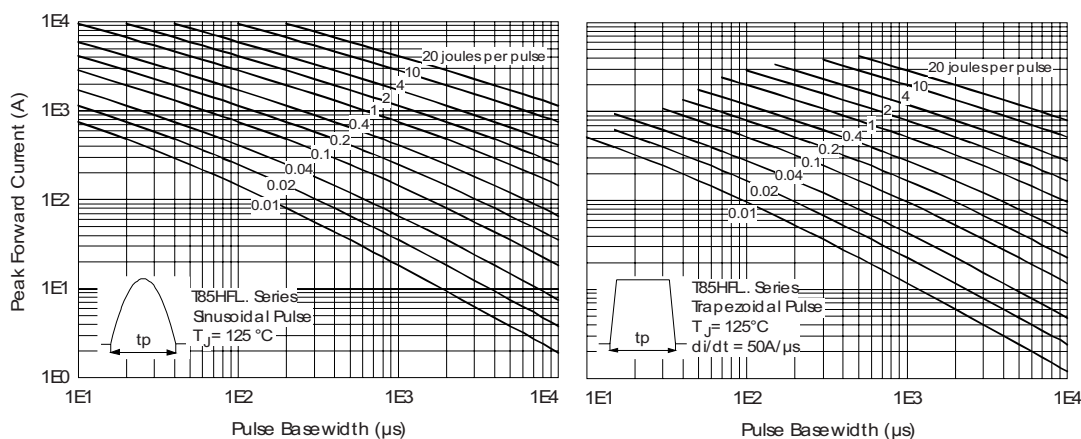


Fig. 45 - Maximum Forward Energy Power Loss Characteristics

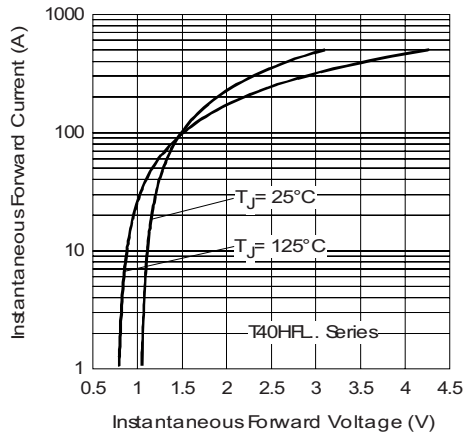


Fig. 46 - Forward Voltage Drop Characteristics

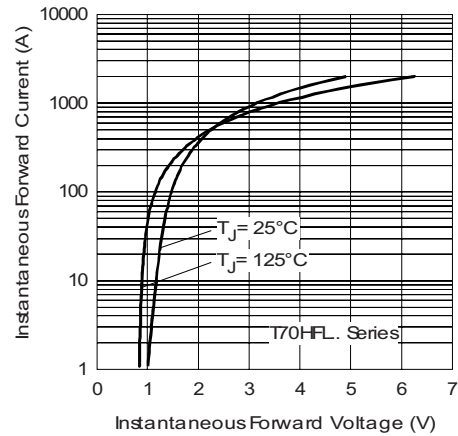


Fig. 47 - Forward Voltage Drop Characteristics

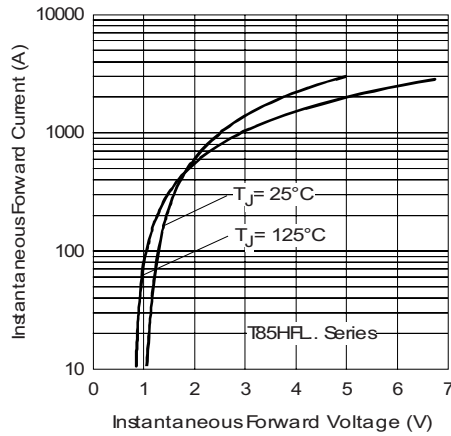


Fig. 48 - Forward Voltage Drop Characteristics

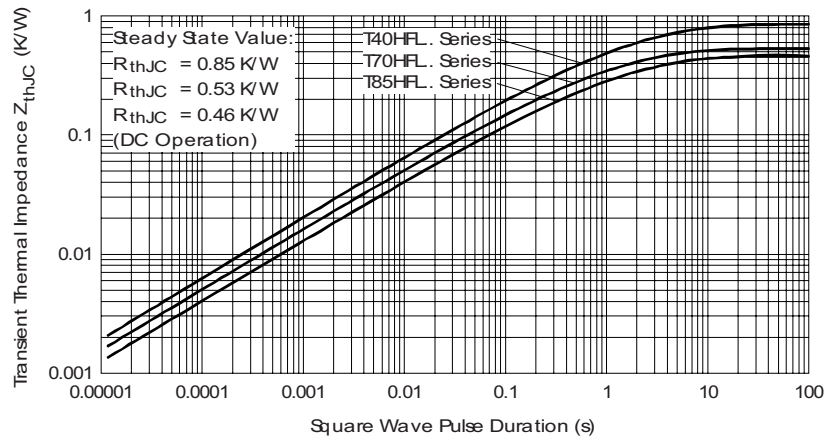


Fig. 49 - Thermal Impedance Z_{thJC} Characteristics

T40HFL, T70HFL, T85HFL Series

Vishay Semiconductors

Fast Recovery Diodes
(T-Modules), 40 A/70 A/85 A



ORDERING INFORMATION TABLE

Device code	T	40	HFL	100	S10
	①	②	③	④	⑤
①	-	Module type			
②	-	Current rating			
③	-	Fast recovery diode			
④	-	Voltage code x 10 = V_{RRM}			
⑤	-	t_{rr} code			
					40 = 40 A (average) 70 = 70 A (average) 85 = 85 A (average)
					S02 = 200 ns S05 = 500 ns S10 = 1000 ns

CIRCUIT CONFIGURATION		
CIRCUIT	CIRCUIT CONFIGURATION CODE	CIRCUIT DRAWING
Single switch diode	N/A	

LINKS TO RELATED DOCUMENTS	
Dimensions	www.vishay.com/doc?95313

DIMENSIONS in millimeters (inches)





Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk and agree to fully indemnify and hold Vishay and its distributors harmless from and against any and all claims, liabilities, expenses and damages arising or resulting in connection with such use or sale, including attorneys fees, even if such claim alleges that Vishay or its distributor was negligent regarding the design or manufacture of the part. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А