

# ATC 800 B Series NPO Ceramic, High RF Power Ultra-Low ESR Multilayer Capacitors

- Case B Size (.110" x .110")
- Rugged, reliable NPO dielectric
- Case optimized for highest self resonant frequency
- Capacitance Range 0.1 pF to 1000 pF
- Lowest ESR
- Capable of highest RF Power
- RoHS Compliant / Lead-Free

ATC's 800 B Series offers superb performance in demanding high RF power applications requiring consistent and reliable operation. The combination of highly conductive metal electrode systems, optimized case geometries, and proprietary dielectrics, yields the lowest ESR. ATC's new NPO low loss rugged dielectrics are designed to provide superior heat transfer in high RF power applications. Ultra-low ESR and superior thermal performance insure that the 800 B Series products are your best choice for high RF power applications from VHF through microwave frequencies.

Typical applications: VHF / UHF / HDTV Broadcast Transmitters, Wireless Communications, Public Safety Radio, Avionics, Telecom, WiMAX, Microwave Communication Systems and Satellite Systems.

Typical circuit applications: High RF Power Filter Networks, Combiners, Couplers, Matching Networks, Output Coupling, Antenna Coupling, and DC Blocking and Bypassing.

## ENVIRONMENTAL TESTS

ATC 800 B Series Capacitors are designed and manufactured to meet and exceed the requirements of EIA-198, MIL-PRF-55681 and MIL-PRF-123.

### THERMAL SHOCK:

MIL-STD-202, Method 107, Condition A

### MOISTURE RESISTANCE:


MIL-STD-202, Method 106

### LOW VOLTAGE HUMIDITY:

MIL-STD-202, Method 103, Condition A, with 1.5 Volts DC applied while subjected to an environment of 85°C with 85% relative humidity for 240 hours min.

### LIFE TEST:

MIL-STD-202, Method 108, for 2000 hours, at 125°C 200% WVDC applied

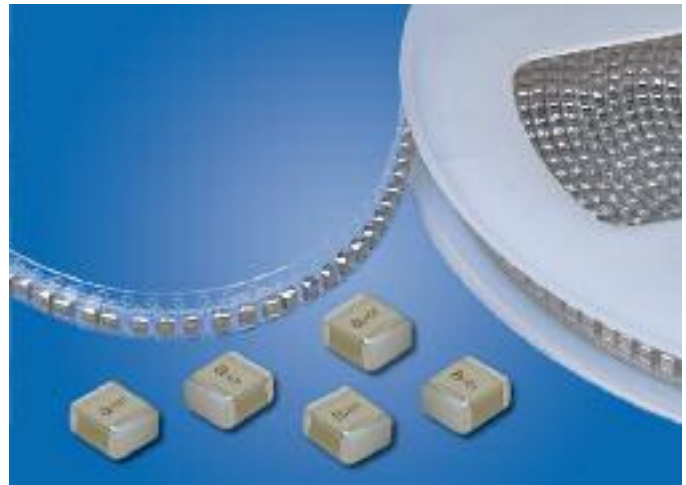

## ELECTRICAL AND MECHANICAL SPECIFICATIONS

**QUALITY FACTOR (Q):** > 2000 @ 1 MHz

**TEMPERATURE COEFFICIENT OF CAPACITANCE (TCC):**  
0 ±30 PPM/°C (-55°C to +125°C)

### INSULATION RESISTANCE (IR):

0.1 pF to 1000 pF:  
10<sup>5</sup> Megohms min. @ +25°C at rated WVDC  
10<sup>4</sup> Megohms min. @ +125°C at rated WVDC

### WORKING VOLTAGE (WVDC):

See Capacitance Values Table, page 2

### DIELECTRIC WITHSTANDING VOLTAGE (DWV):

Case B: 250% of rated WVDC for 5 secs

**RETRACE:** Less than ±(0.02% or 0.02 pF), whichever is greater

**AGING EFFECTS:** None

### PIEZOELECTRIC EFFECTS:

None  
(No capacitance variation with voltage or pressure)

**CAPACITANCE DRIFT:** ±(0.02% or 0.02 pF), whichever is greater

### OPERATING TEMPERATURE RANGE:

From -55°C to +125°C (No derating of working voltage)

### TERMINATION STYLES:

RoHS Compliant and Solder Plate  
See Mechanical Configurations, page 3

**TERMINAL STRENGTH:** Terminations for chips withstand a pull of 5 lbs. min., 15 lbs. typical, for 5 seconds in direction perpendicular to the termination surface of the capacitor. Test per MIL-STD-202, method 211.



**AMERICAN**  
ATC North America  
sales@atceramics.com

**TECHNICAL**  
ATC Europe  
saleseur@atceramics.com

**CERAMICS**  
ATC Asia  
sales@atceramics-asia.com

 **THE ENGINEERS' CHOICE®**  
ISO 9001 REGISTERED COMPANY

**THE ENGINEERS' CHOICE™**

**www.atceramics.com**

# ATC 800 B Capacitance Values

CAP. CODE	CAP. (pF)	TOL.	RATED WVDC	CAP. CODE	CAP. (pF)	TOL.	RATED WVDC	CAP. CODE	CAP. (pF)	TOL.	RATED WVDC	CAP. CODE	CAP. (pF)	TOL.	RATED WVDC
0R1	0.1	B	500	2R4	2.4	B, C, D	500	200	20	F, G, J, K, M	500	151	150	F, G, J, K, M	300
0R2	0.2	B, C		2R7	2.7			220	22			161	160		
0R3	0.3			3R0	3.0			240	24			181	180		
0R4	0.4	B, C, D		3R3	3.3			270	27			201	200		
0R5	0.5			3R6	3.6			300	30			221	220		
0R6	0.6			3R9	3.9			330	33			241	240		
0R7	0.7			4R3	4.3			360	36			271	270		
0R8	0.8			4R7	4.7			390	39			301	300		
0R9	0.9			5R1	5.1			430	43			331	330		
1R0	1.0			5R6	5.6			470	47			361	360		
1R1	1.1		6R2	6.2	510	51	391	390							
1R2	1.2	B, C, D	6R8	6.8	560	56	431	430							
1R3	1.3		7R5	7.5	620	62	471	470							
1R4	1.4	F, G, J, K, M	8R2	8.2	680	68	511	510							
1R5	1.5		9R1	9.1	750	75	561	560							
1R6	1.6		100	10	820	82	621	620							
1R7	1.7		110	11	910	91	681	680							
1R8	1.8		120	12	101	100	751	750							
1R9	1.9		130	13	111	110	821	820							
2R0	2.0		150	15	121	120	911	910							
2R1	2.1		160	16	131	130	102	1000							
2R2	2.2	180	18												

VRMS = 0.707 X WVDC

• SPECIAL VALUES, TOLERANCES, HIGHER WVDC AND MATCHING AVAILABLE. PLEASE CONSULT FACTORY.

## ATC PART NUMBER CODE

Series \_\_\_\_\_ ATC800

Case Size \_\_\_\_\_ B

Capacitance Code: \_\_\_\_\_ 91

First 2 significant digits for capacitance.  
R=Decimal Point

Indicates number of zeros following digits of capacitance in picofarads except for decimal values. \_\_\_\_\_ 0

Capacitance Tolerance \_\_\_\_\_ J

\_\_\_\_\_ T

\_\_\_\_\_ 500

\_\_\_\_\_ X

\_\_\_\_\_ T

\_\_\_\_\_ Packaging

T - Tape & Reel: 500 and 1000 pc. qty. std.\*

TV - Vertical Orientation of Product, Tape & Reel: 500 and 1000 pc. qty. std.\*

I - Special Packaging. Consult Factory.

\*Consult ATC for other quantities

\_\_\_\_\_ Laser Marking

\_\_\_\_\_ WVDC

\_\_\_\_\_ Termination Code

CAPACITANCE TOLERANCE								
Code	B	C	D	F	G	J	K	M
Tol.	±0.1 pF	±0.25 pF	±0.5 pF	±1%	±2%	±5%	±10%	±20%

The above part number refers to a 800 B Series (case size B) 91 pF capacitor, J tolerance (±5%), 500 WVDC, with T termination (Tin Plated over Nickel Barrier Termination, RoHS Compliant), laser marking and tape and reel packaging.

ATC accepts orders for our parts using designations *with* or *without* the "ATC" prefix. Both methods of defining the part number are equivalent, i.e., part numbers referenced with the "ATC" prefix are interchangeable to parts referenced without the "ATC" prefix. Customers are free to use either in specifying or procuring parts from American Technical Ceramics.

For additional information and catalogs contact your ATC representative or call direct at (+1-631) 622-4700.

Consult factory for additional performance data.



A M E R I C A N T E C H N I C A L C E R A M I C S

ATC North America  
sales@atceramics.com



ATC Europe  
sales@atceramics.com

ATC Asia  
sales@atceramics-asia.com


## ATC 800 B Capacitors: Mechanical Configurations

ATC SERIES & CASE SIZE	ATC TERM. CODE	CASE SIZE & TYPE	OUTLINES W/T IS A TERMINATION SURFACE	BODY DIMENSIONS Inches (mm)			LEAD AND TERMINATION DIMENSIONS AND MATERIALS	
				LENGTH (L)	WIDTH (W)	THICKNESS (T)	OVERLAP (Y)	MATERIAL
800B	T	B Solderable Nickel Barrier		.110 +.020 -.010 (2.79 +0.51 -0.25)	.110 ±.015 (2.79 ±0.38)	.070 (1.78) max.	.015 (0.38) ±.010 (0.25)	<b>RoHS Compliant</b> Tin Plated over Nickel Barrier Termination
800B	W	B Solder Plate		.110 +.020 -.010 (2.79 +0.51 -0.25)	.110 ±.015 (2.79 ±0.38)	.070 (1.78) max.	.015 (0.38) ±.010 (0.25)	Tin/Lead Solder Plated over Nickel Barrier Termination

## ATC 800 B Capacitors: Non-Magnetic Mechanical Configurations

ATC SERIES & CASE SIZE	ATC TERM. CODE	CASE SIZE & TYPE	OUTLINES W/T IS A TERMINATION SURFACE	BODY DIMENSIONS Inches (mm)			LEAD AND TERMINATION DIMENSIONS AND MATERIALS	
				LENGTH (L)	WIDTH (W)	THICKNESS (T)	OVERLAP (Y)	MATERIAL
800B	TN	B  Non-Mag Solderable Barrier		.110 +.020 -.010 (2.79 +0.51 -0.25)	.110 ±.015 (2.79 ±0.38)	.070 (1.78) max.	.015 (0.38) ±.010 (0.25)	<b>RoHS Compliant</b> Tin Plated over Non-Magnetic Barrier Termination


## Suggested Mounting Pad Dimensions

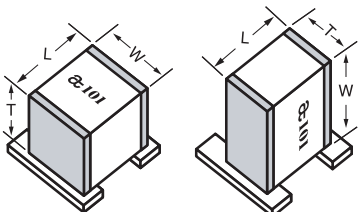


**Case B Vertical Mount**

Cap Value	Pad Size	A Min	B Min	C Min	D Min
All Values	Normal	.090 (2.29)	.050 (1.27)	.075 (1.91)	.175 (4.45)
	High Density	.070 (1.78)	.030 (.762)	.075 (1.91)	.135 (3.43)

Horizontal  
Electrode Orientation



Vertical  
Electrode Orientation





**Case B Horizontal Mount**

Cap Value	Pad Size	A Min	B Min	C Min	D Min
All Values	Normal	.130 (3.30)	.050 (1.27)	.075 (1.91)	.175 (4.45)
	High Density	.110 (2.79)	.030 (.762)	.075 (1.91)	.135 (3.43)

*inches (mm)*

# ATC 800 B Performance Data

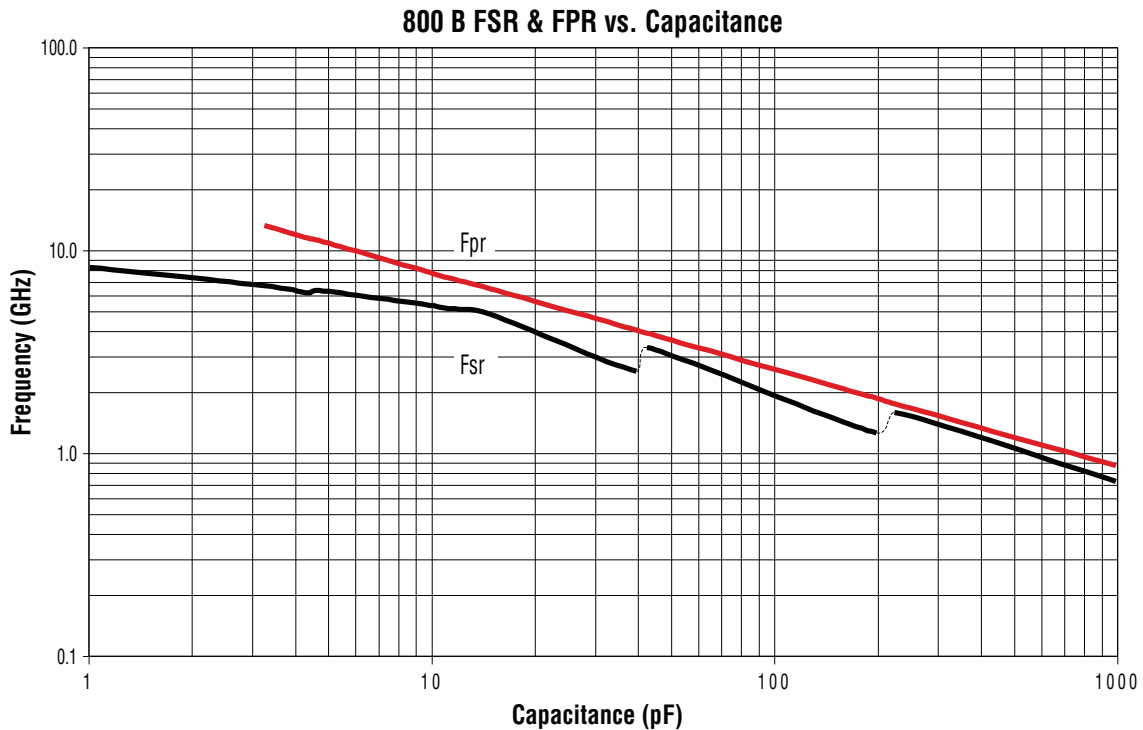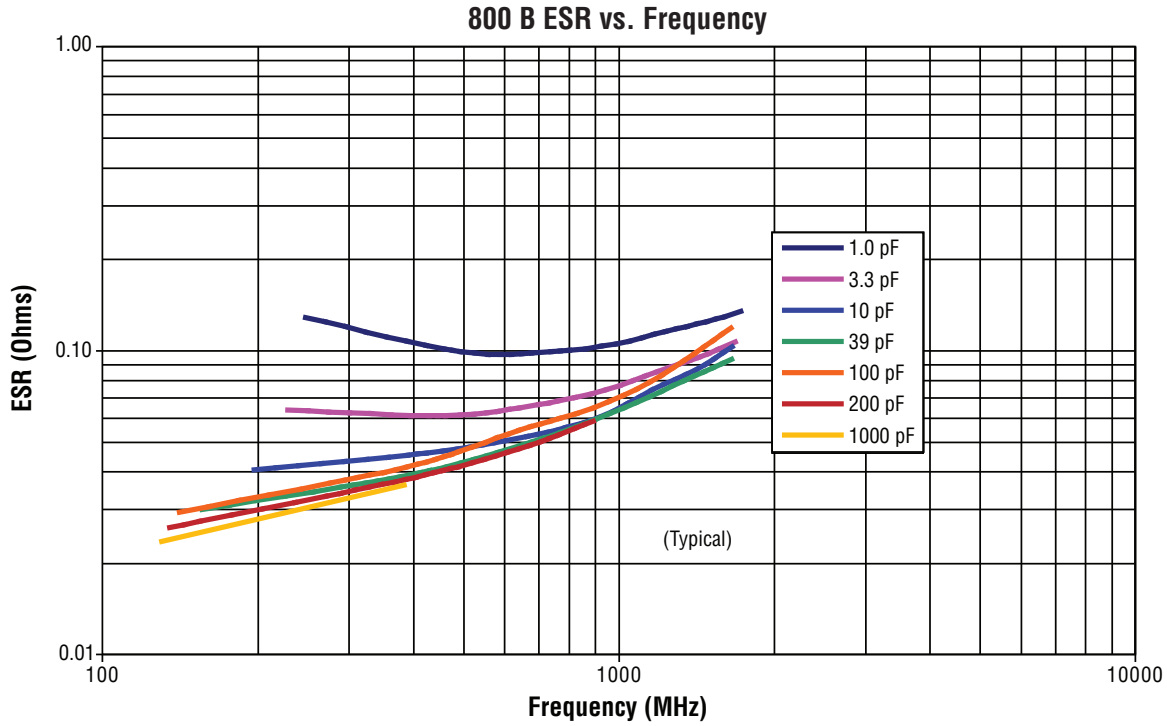

#### ATC 800 B Series Data Sheet Test Condition Description

Capacitors vertically mounted in series microstrip configuration on 23.3-mil thick Rogers RO4350<sup>®</sup> softboard, 52-mils wide 1/2 oz. Cu traces.

**FSR** = lowest frequency at which S11 response, referenced at capacitor edge, crosses real axis on Smith Chart.

**FPR** = lowest frequency at which there is a notch in S21 magnitude response.


**A M E R I C A N T E C H N I C A L C E R A M I C S**

ATC North America  
sales@atceramics.com

ATC Europe  
sales@atceramics.com

ATC Asia  
sales@atceramics-asia.com

# ATC 800 B Performance Data

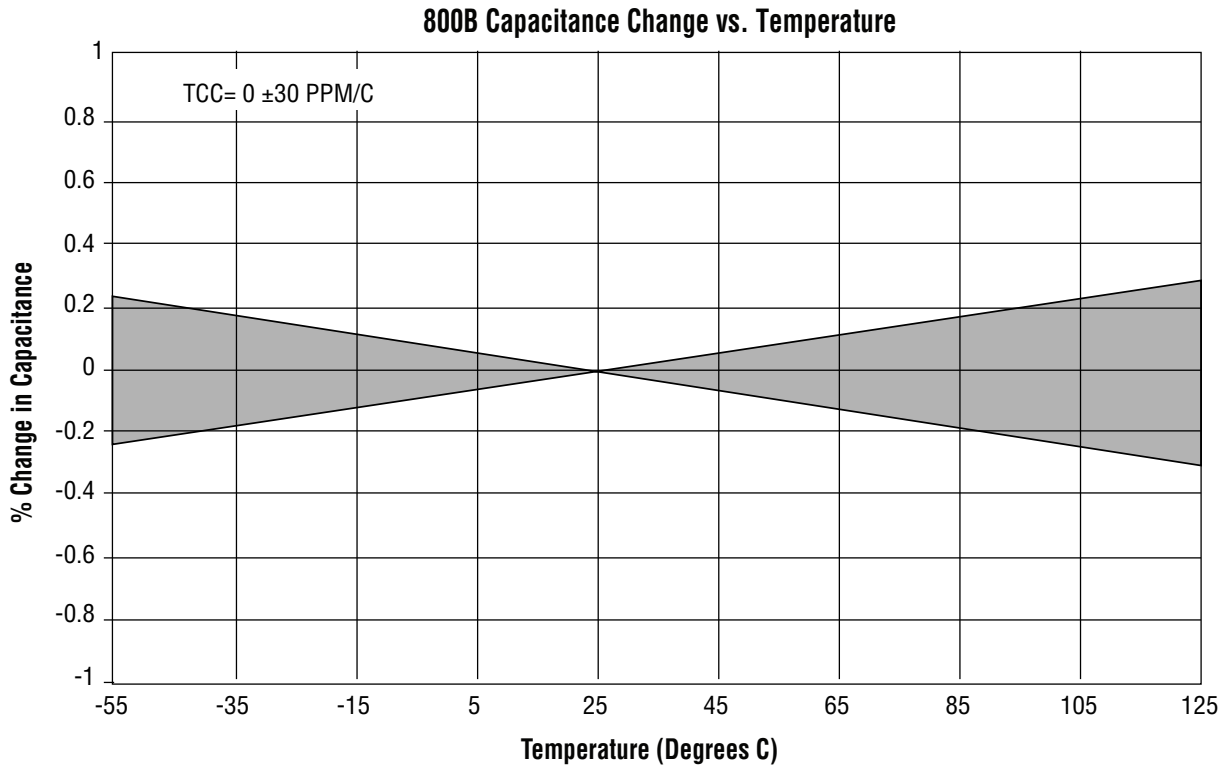

Sales of ATC products are subject to the terms and conditions contained in American Technical Ceramics Corp. Terms and Conditions of Sale (ATC document #001-992 Rev. B; 12/05). Copies of these terms and conditions will be provided upon request. They may also be viewed on ATC's website at [www.atceramics.com/productfinder/default.asp](http://www.atceramics.com/productfinder/default.asp). Click on the link for Terms and Conditions of Sale.

ATC has made every effort to have this information as accurate as possible. However, no responsibility is assumed by ATC for its use, nor for any infringements of rights of third parties which may result from its use. ATC reserves the right to revise the content or modify its product without prior notice.

© 2006 American Technical Ceramics Corp. All Rights Reserved.

ATC # 001-1033 Rev. I, 6/13

**A M E R I C A N   T E C H N I C A L   C E R A M I C S**

ATC North America  
sales@atceramics.com

ATC Europe  
saleseur@atceramics.com

ATC Asia  
sales@atceramics-asia.com

[www.atceramics.com](http://www.atceramics.com)

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А