

# NHD-10.1-1024600AF-LSXV#-CTP

## TFT (Thin-Film-Transistor) Color Liquid Crystal Display Module

|          |   |
|----------|---|
| NHD-     | Newhaven Display                        |
| 10.1-    | 10.1" Diagonal                          |
| 1024600- | 1024xRGBx600 Pixels                     |
| AF-      | Model                                   |
| L-       | LVDS Interface                          |
| S-       | High Brightness, White LED Backlight    |
| X-       | TFT                                     |
| V-       | MVA, Transmissive, Standard Temperature |
| #-       | <b>RoHS Compliant</b>                   |
| CTP-     | Capacitive Touch Panel with Controller  |

### Newhaven Display International, Inc.

2661 Galvin Ct.

Elgin IL, 60124

Ph: 847-844-8795

Fax: 847-844-8796

[www.newhavendisplay.com](http://www.newhavendisplay.com)

[nhtech@newhavendisplay.com](mailto:nhtech@newhavendisplay.com)

[nhsales@newhavendisplay.com](mailto:nhsales@newhavendisplay.com)

## Document Revision History

| Revision | Date    | Description   | Changed by |
|----------|---------|---|------------|
| 0        | 5/17/17 | Initial Release   | SB         |
| 1        | 8/14/17 | Backlight Characteristics Added, Pin Descriptions Updated | SB         |
| 2        | 11/8/17 | CTP Characteristics Updated                               | SB         |
| 3        | 3/6/18  | Backlight Characteristics Updated                         | SB         |
| 4        | 7/1/18  | Backlight Redesign  | SB         |
| 5        | 5/6/19  | Display Thickness Correction                              | SB         |
| 6        | 7/10/19 | Electrical Characteristics Updated                        | SB         |

## Functions and Features




- 1024xRGBx600 resolution
- LED backlight
  - Built-in LED driver
  - PWM brightness control
- LVDS interface
  - 4 LVDS Channels
- 262K colors
- Wide Viewing Angles
- Capacitive touch panel with controller
  - 10-point multi-touch input
  - Gesture input
    - Zoom In/Out
    - Swipe Up/Down/Left/Right

| SYMBOL | REVISION | DATE |
|--------|----------|------|
|        |          |      |
|        |          |      |

**Pin Assignment**


| PIN No. | SYMBOL  |
|---------|---------|
| 1       | GND     |
| 2       | VDD     |
| 3       | VDD     |
| 4       | V_EDID  |
| 5       | GND     |
| 6       | SCL     |
| 7       | SDA     |
| 8       | Rin0-   |
| 9       | Rin0+   |
| 10      | GND     |
| 11      | Rin1-   |
| 12      | Rin1+   |
| 13      | GND     |
| 14      | Rin2-   |
| 15      | Rin2+   |
| 16      | GND     |
| 17      | CLKIN-  |
| 18      | CLKIN+  |
| 19      | GND     |
| 20      | Rin3-   |
| 21      | Rin3+   |
| 22      | GND     |
| 23      | INSEL   |
| 24      | GND     |
| 25      | GND     |
| 26      | UPDN    |
| 27      | SHLR    |
| 28      | GND     |
| 29      | RESET   |
| 30      | STBYB   |
| 31      | LED-GND |
| 32      | LED-GND |
| 33      | LED-GND |
| 34      | GND     |
| 35      | LED_PWM |
| 36      | LED_EN  |
| 37      | BIST    |
| 38      | LED_VDD |
| 39      | LED_VDD |
| 40      | LED_VDD |

| PIN  | SYMBOL |
|------|--------|
| PIN1 | VDD    |
| PIN2 | GND    |
| PIN3 | SCL    |
| PIN4 | SDA    |
| PIN5 | INT    |
| PIN6 | RESET  |

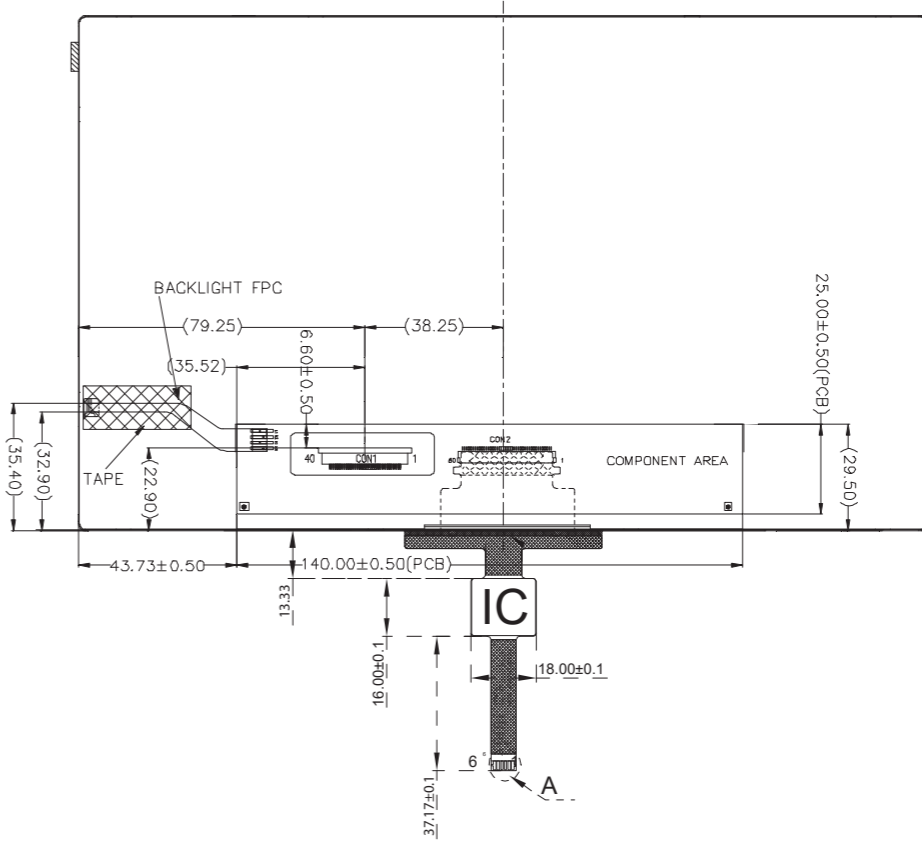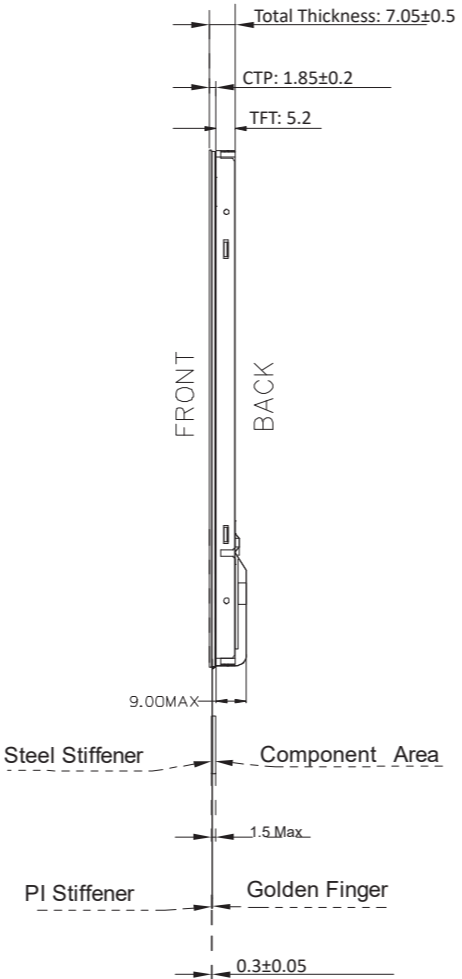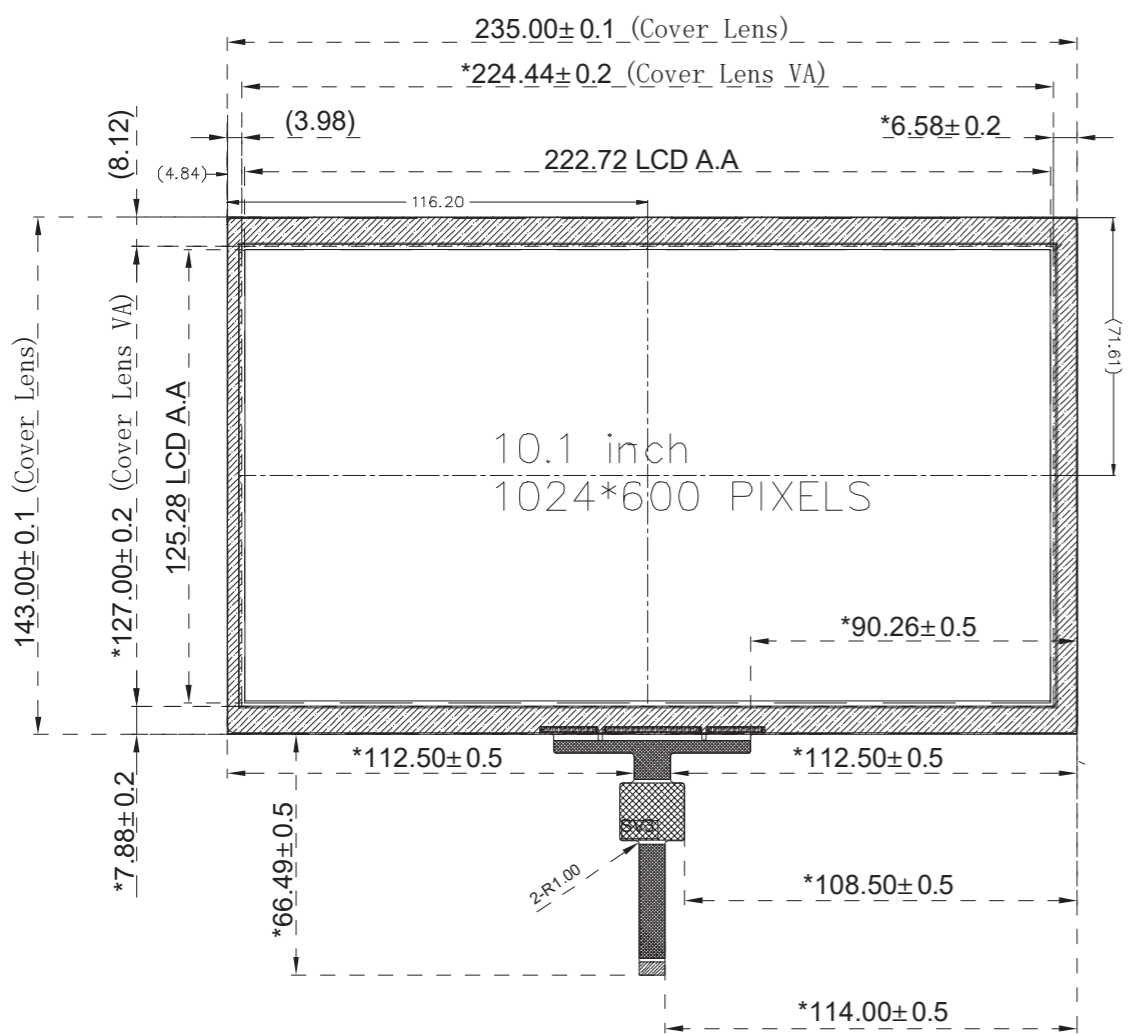

- Notes:**
- 1. Display Size: 10.1" TFT
  - 2. Display Resolution: 1024 x 600 Pixels
  - 3. Display Mode: Transmissive / Normally White / Anti-Glare
  - 4. Optimal View: Full View
  - 5. Driver IC: HX8282 - LVDS Interface
  - 6. Power Supply Voltage: 3.3V
  - 7. Backlight: White LED
  - 8. Luminance: 700 cd/m<sup>2</sup> (Typ)
  - 9. Touch Panel: PCAP

**Backlight Circuit**

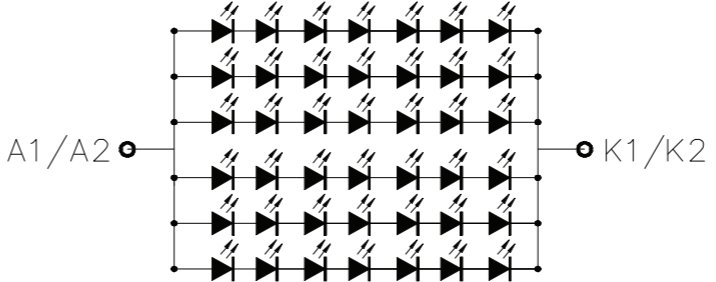

|   |  |                       |                         |                          |
|---|--|-----------------------|-------------------------|--------------------------|
| STANDARD TOLERANCES (UNLESS OTHERWISE SPECIFIED)  |  |                       |                         |                          |
| LINEAR:<br>XX. ±0.3 mm<br>XX.X ±0.3 mm<br>XX.XX ±0.3 mm   |  |                       |                         |                          |
| UNLESS OTHERWISE SPECIFIED  |  | DRAWN BY:<br>S. Baxi  | CHECKED BY:<br>S. Baxi  | APPROVED BY:<br>S. Baxi  |
| - DIMENSIONS ARE IN MILLIMETERS   |  | DRAWN DATE:<br>5/6/19 | CHECKED DATE:<br>5/6/19 | APPROVED DATE:<br>5/6/19 |
| - THIRD ANGLE PROJECTION  |  | DO NOT SCALE DRAWING  |                         | SHEET 1 OF 1             |
| THIS DRAWING IS SOLELY THE PROPERTY OF NEWHAVEN DISPLAY INTERNATIONAL, INC. THE INFORMATION IT CONTAINS IS NOT TO BE DISCLOSED, REPRODUCED OR COPIED IN WHOLE OR PART WITHOUT WRITTEN APPROVAL FROM NEWHAVEN DISPLAY. |  |                       |                         |                          |

## Pin Description

### TFT:

| Pin No. | Symbol              | Connection   | Function Description  |
|---------|---------------------|--------------|---|
| 1       | GND                 | Power Supply | Ground  |
| 2-3     | V <sub>DD</sub>     | Power Supply | Supply voltage for LCD (+3.3V)  |
| 4       | V <sub>EDID</sub>   | Power Supply | Supply voltage for EDID (+3.3V)   |
| 5       | GND                 | Power Supply | Ground  |
| 6       | SCL                 | MPU          | Serial Clock  |
| 7       | SDA                 | MPU          | Serial Data   |
| 8       | Rin0-               | MPU          | -LVDS differential data input CH0   |
| 9       | Rin0+               | MPU          | +LVDS differential data input CH0   |
| 10      | GND                 | Power Supply | Ground  |
| 11      | Rin1-               | MPU          | -LVDS differential data input CH1   |
| 12      | Rin1+               | MPU          | +LVDS differential data input CH1   |
| 13      | GND                 | Power Supply | Ground  |
| 14      | Rin2-               | MPU          | -LVDS differential data input CH2   |
| 15      | Rin2+               | MPU          | +LVDS differential data input CH2   |
| 16      | GND                 | Power Supply | Ground  |
| 17      | CLKIN-              | MPU          | -LVDS differential Clock  |
| 18      | CLKIN+              | MPU          | +LVDS differential Clock  |
| 19      | GND                 | Power Supply | Ground  |
| 20      | Rin3-               | MPU          | -LVDS differential data input CH3   |
| 21      | Rin3+               | MPU          | +LVDS differential data input CH3   |
| 22      | GND                 | Power Supply | Ground  |
| 23      | INSEL (HSD)         | MPU          | Data Input Format:<br>INSEL = L 8-Bit LVDS Input (Default)<br>INSEL = H 6-Bit LVDS Input          |
| 24-25   | GND                 | Power Supply | Ground  |
| 26      | UPDN                | MPU          | Gate Driver Up/Down Scan Setting:<br>UPDN = H: Reverse Scan<br>UPDN = L: Normal Scan (Default)    |
| 27      | SHLR                | MPU          | Gate Driver Left/Right Scan Setting:<br>SHLR = H: Normal Scan (Default)<br>SHLR = L: Reverse Scan |
| 28      | GND                 | Power Supply | Ground  |
| 29      | RESET               | MPU          | Active Low Reset Signal   |
| 30      | STBYB               | MPU          | Active Low Standby Signal   |
| 31-33   | LED_GND             | Power Supply | Ground for Backlight Driver   |
| 34      | GND                 | Power Supply | Ground  |
| 35      | LED_PWM             | MPU          | Backlight PWM Signal Input (See Table on Page 6)  |
| 36      | LED_EN              | MPU          | Backlight Enable; H: Backlight On; L: Backlight Off   |
| 37      | BIST                | MPU          | Built in Self-Test<br>BIST = H: Self-Test Enabled<br>BIST = L: Normal Operation (Default)         |
| 38-40   | LED_V <sub>DD</sub> | Power Supply | Supply Voltage for Backlight Driver   |

**LCD connector:** 0.5mm pitch 40-Conductor FFC.

**Recommended cable:** 40 POS FFC

### Capacitive Touch Panel:

| Pin No. | Symbol | External Connection | Function Description                             |
|---------|--------|---------------------|--|
| 1       | VDD    | Power Supply        | Power Supply (3.3V)                              |
| 2       | GND    | Power Supply        | Ground   |
| 3       | SCL    | MPU                 | Serial I2C Clock (Requires pull-up resistor)     |
| 4       | SDA    | MPU                 | Serial I2C Data (Requires pull-up resistor)      |
| 5       | /INT   | MPU                 | Interrupt signal from touch panel module to host |
| 6       | /RESET | MPU                 | Active LOW Reset signal.                         |

**Recommended connector:** 1.0mm pitch 6-Conductor FFC. Molex p/n: 52271-0679

## Electrical Characteristics (T<sub>OP</sub> = 25°C)

| Item   | Symbol              | Condition               | Min.   | Typ.   | Max. | Unit |
|--|---------------------|-------------------------|--------|--------|------|------|
| Operating Temperature Range                      | T <sub>OP</sub>     | Absolute Max            | 0      | -      | +50  | °C   |
| Storage Temperature Range                        | T <sub>ST</sub>     | Absolute Max            | -20    | -      | +60  | °C   |
| Supply Voltage for LCD                           | V <sub>DD</sub>     | -                       | 3.0    | 3.3    | 3.6  | V    |
| Supply Voltage for EDID                          | V <sub>EDID</sub>   | -                       | 3.0    | 3.3    | 3.6  | V    |
| Supply Current for LCD                           | I <sub>DD</sub>     | V <sub>DD</sub> = 3.3V  | 50     | 120    | 180  | mA   |
| LVDS Differential input HIGH Voltage             | RxVTH               | -                       | -      | -      | +100 | mV   |
| LVDS Differential input LOW Voltage              | RxVTL               | -                       | -100   | -      | -    | mV   |
| LVDS Differential input Common Voltage           | RxVCM               | -                       | 0.7    | -      | 1.6  | V    |
| LVDS Differential Voltage                        | VID                 | -                       | 200    | -      | 600  | mV   |
| Supply Voltage for Backlight Driver              | LED_V <sub>DD</sub> | -                       | 5.0    | 12.0   | 22.4 | V    |
| Supply Current for Backlight Driver <sup>1</sup> | LED_I <sub>DD</sub> | -                       | 160    | 360    | 1200 | mA   |
| Backlight Enable                                 | LED_EN              | -                       | 2.5    | 3.3    | 5.5  | V    |
| Backlight PWM Voltage                            | LED_PWM             | I <sub>PWM</sub> ≤ 5 mA | 2.5    | 3.3    | 5.5  | V    |
| Backlight Lifetime <sup>2</sup>                  | -                   | T <sub>OP</sub> = 25° C | 20,000 | 50,000 | -    | Hrs. |

<sup>1</sup>Minimum supply current occurs when supply voltage is at max; maximum supply current when supply voltage is at minimum.

<sup>2</sup>Backlight lifetime is rated as Hours until **half-brightness**, under normal operating conditions.

## Capacitive Touch Panel:

| Item                        | Symbol          | Condition                                       | Min.                  | Typ. | Max.                  | Unit |
|-----------------------------|-----------------|---|-----------------------|------|-----------------------|------|
| Operating Temperature Range | T <sub>OP</sub> | Absolute Max                                    | -20                   | -    | +70                   | °C   |
| Storage Temperature Range   | T <sub>ST</sub> | Absolute Max                                    | -30                   | -    | +80                   | °C   |
| Supply Voltage              | V <sub>DD</sub> | -   | 3.0                   | 3.3  | 3.6                   | V    |
| Supply Current – Operating  | I <sub>DD</sub> | T <sub>OP</sub> =25°C,<br>V <sub>DD</sub> =3.3V | 8                     | 15   | 23                    | mA   |
| Supply Current – Hibernate  | I <sub>DD</sub> |   | -                     | 1.0  | -                     | μA   |
| “H” Level Input             | V <sub>OH</sub> | -   | 0.7 * V <sub>DD</sub> | -    | V <sub>DD</sub>       | V    |
| “L” Level Input             | V <sub>IL</sub> | -   | V <sub>SS</sub>       | -    | 0.3 * V <sub>DD</sub> | V    |
| “H” Level Output            | V <sub>OH</sub> | -   | 0.7 * V <sub>DD</sub> | -    | V <sub>DD</sub>       | V    |
| “L” Level Output            | V <sub>OL</sub> | -   | V <sub>SS</sub>       | -    | 0.3 * V <sub>DD</sub> | V    |

## Optical Characteristics

| Item                   | Symbol         | Condition                       | Min.                   | Typ.  | Max.  | Unit              |    |
|------------------------|----------------|---------------------------------|------------------------|-------|-------|-------------------|----|
| Optimal Viewing Angles | Top            | CR ≥ 10                         | -                      | 75    | -     | °                 |    |
|                        | Bottom         |                                 | -                      | 75    | -     | °                 |    |
|                        | Left           |                                 | -                      | 75    | -     | °                 |    |
|                        | Right          |                                 | -                      | 75    | -     | °                 |    |
| Contrast Ratio         | CR             | -                               | 450                    | 750   | -     | -                 |    |
| Luminance              | L <sub>v</sub> | -                               | 500                    | 700   | -     | cd/m <sup>2</sup> |    |
| Response Time          | Rise + Fall    | T <sub>R</sub> + T <sub>F</sub> | T <sub>OP</sub> = 25°C |       | -     | 8                 | ms |
| Chromaticity           | Red            | X <sub>R</sub>                  | -                      | 0.565 | 0.605 | 0.635             | -  |
|                        |                | Y <sub>R</sub>                  | -                      | 0.309 | 0.349 | 0.379             | -  |
|                        | Green          | X <sub>G</sub>                  | -                      | 0.286 | 0.326 | 0.356             | -  |
|                        |                | Y <sub>G</sub>                  | -                      | 0.565 | 0.605 | 0.635             | -  |
|                        | Blue           | X <sub>B</sub>                  | -                      | 0.112 | 0.152 | 0.182             | -  |
|                        |                | Y <sub>B</sub>                  | -                      | 0.075 | 0.115 | 0.145             | -  |
| White                  | X <sub>W</sub> | -                               | 0.257                  | 0.297 | 0.327 | -                 |    |
|                        | Y <sub>W</sub> | -                               | 0.283                  | 0.323 | 0.353 | -                 |    |

## LED\_PWM Signal Operating Frequency:

| PWM Frequency (F) | Duty Cycle (Min.) | Duty Cycle (Max.) |
|-------------------|-------------------|-------------------|
| 100Hz < F < 500Hz | 5%                | 100%              |
| 500Hz < F < 20KHz | 10%               | 100%              |

## Capacitive Touch Panel Characteristics:

| Property           | Requirement | Unit |
|--------------------|-------------|------|
| Surface Hardness   | ≥6          | H    |
| Light transmission | ≥82%        | -    |
| Operating Humidity | 20~85%      | RH   |
| Storage Humidity   | 20~85%      | RH   |
| Number of Touches  | 10          | -    |

## Driver Information

Built-in HX8282-A14 Source Driver: <http://www.newhavendisplay.com/appnotes/datasheets/LCDs/HX8282-A01.pdf>

Built-in HX8696-A00 Gate Driver: <http://www.newhavendisplay.com/appnotes/datasheets/LCDs/HX8696-A.pdf>

## Capacitive Touch Panel:

Built-in FocalTech FT5526EEZ controller.

Please download specification at <http://www.newhavendisplay.com/appnotes/datasheets/touchpanel/FT5x26.pdf>

## Capacitive Touch Panel Registers

| Register No | Register Name      | Bits  | Value     | Description                          |
|-------------|--------------------|-------|-----------|--------------------------------------|
| 00h         | Device Mode        | [2:0] | 000b      | Normal Operating Mode                |
|             |                    |       | 100b      | Test Mode - read raw data (reserved) |
|             |                    |       | 001b      | System Information Mode (reserved)   |
| 01h         | Gesture ID         | [7:0] | 48h       | Zoom In                              |
|             |                    |       | 49h       | Zoom Out                             |
|             |                    |       | 00h       | No Gesture                           |
| 02h         | Touch Points       | [3:0] | 000b      | 0 touch points detected              |
|             |                    |       | 001b      | 1 touch point detected               |
|             |                    |       | 010b      | 2 touch points detected              |
|             |                    |       | 011b      | 3 touch points detected              |
|             |                    |       | 100b      | 4 touch points detected              |
|             |                    |       | 101b      | 5 touch points detected              |
| 03h         | Touch 1 Event Flag | [7:6] | 00b       | Put Down                             |
|             |                    |       | 01b       | Put Up                               |
|             |                    |       | 10b       | Contact                              |
|             |                    |       | 11b       | Reserved                             |
| 03h         | TOUCH1_XH          | [3:0] | 0h - 1h   | Upper 4 bits of X touch coordinate   |
| 04h         | TOUCH1_XL          | [7:0] | 00h - FFh | Lower 8 bits of X touch coordinate   |
| 05h         | TOUCH1_YH          | [3:0] | 0h - 1h   | Upper 4 bits of Y touch coordinate   |
| 06h         | TOUCH1_YL          | [7:0] | 00h - FFh | Lower 8 bits of Y touch coordinate   |
| 09h         | Touch 2 Event Flag | [7:6] | 00b       | Put Down                             |
|             |                    |       | 01b       | Put Up                               |
|             |                    |       | 10b       | Contact                              |
|             |                    |       | 11b       | Reserved                             |
| 09h         | TOUCH2_XH          | [3:0] | 0h - 1h   | Upper 4 bits of X touch coordinate   |
| 0Ah         | TOUCH2_XL          | [7:0] | 00h - FFh | Lower 8 bits of X touch coordinate   |
| 0Bh         | TOUCH2_YH          | [3:0] | 0h - 1h   | Upper 4 bits of Y touch coordinate   |
| 0Ch         | TOUCH2_YL          | [7:0] | 00h - FFh | Lower 8 bits of Y touch coordinate   |
| 0Fh         | Touch 3 Event Flag | [7:6] | 00b       | Put Down                             |
|             |                    |       | 01b       | Put Up                               |
|             |                    |       | 10b       | Contact                              |
|             |                    |       | 11b       | Reserved                             |
| 0Fh         | TOUCH3_XH          | [3:0] | 0h - 1h   | Upper 4 bits of X touch coordinate   |
| 10h         | TOUCH3_XL          | [7:0] | 00h - FFh | Lower 8 bits of X touch coordinate   |
| 11h         | TOUCH3_YH          | [3:0] | 0h - 1h   | Upper 4 bits of Y touch coordinate   |
| 12h         | TOUCH3_YL          | [7:0] | 00h - FFh | Lower 8 bits of Y touch coordinate   |
| 15h         | Touch 4 Event Flag | [7:6] | 00b       | Put Down                             |
|             |                    |       | 01b       | Put Up                               |
|             |                    |       | 10b       | Contact                              |
|             |                    |       | 11b       | Reserved                             |
| 15h         | TOUCH4_XH          | [3:0] | 0h - 1h   | Upper 4 bits of X touch coordinate   |
| 16h         | TOUCH4_XL          | [7:0] | 00h - FFh | Lower 8 bits of X touch coordinate   |
| 17h         | TOUCH4_YH          | [3:0] | 0h - 1h   | Upper 4 bits of Y touch coordinate   |
| 18h         | TOUCH4_YL          | [7:0] | 00h - FFh | Lower 8 bits of Y touch coordinate   |




| Register No | Register Name           | Bits  | Value                           | Description  |
|-------------|-------------------------|-------|---------------------------------|--|
| 18h         | Touch 5 Event Flag      | [7:6] | 00b<br>01b<br>10b<br>11b        | Put Down<br>Put Up<br>Contact<br>Reserved  |
| 18h         | TOUCH5_XH               | [3:0] | 0h - 1h                         | Upper 4 bits of X touch coordinate   |
| 1Ch         | TOUCH5_XL               | [7:0] | 00h - FFh                       | Lower 8 bits of X touch coordinate   |
| 1Dh         | TOUCH5_YH               | [3:0] | 0h - 1h                         | Upper 4 bits of Y touch coordinate   |
| 1Eh         | TOUCH5_YL               | [7:0] | 00h - FFh                       | Lower 8 bits of Y touch coordinate   |
| 80h         | ID_G_THGROUP            | [7:0] | 00h - FFh                       | Valid touching detect threshold<br>Actual value will be 4 times register's value<br>Recommended: 46h   |
| 81h         | ID_G_THPEAK             | [7:0] | 00h - FFh                       | valid touching peak detect threshold<br>Recommended: 3Ch   |
| 82h         | ID_G_THCAL              | [7:0] | 00h - FFh                       | Touch focus threshold<br>Recommended: 1Dh  |
| 83h         | ID_G_THWATER            | [7:0] | 00h - FFh                       | threshold when there is surface water<br>Recommended: D3h  |
| 84h         | ID_G_THTEMP             | [7:0] | 00h - FFh                       | threshold of temperature compensation<br>Recommended: EBh  |
| 85h         | ID_G_THDIFF             | [7:0] | 00h - FFh                       | Touch difference threshold<br>Actual value is 32 times the register's value<br>Recommended: A0h  |
| 86h         | ID_G_CTRL               | [1:0] | 00h<br>01h                      | Power Control Mode: Not Auto Jump<br>Power Control Mode: Auto Jump   |
| 87h         | ID_G_TIME_ENTER_MONITOR | [7:0] | 00h-FFh                         | Delay to enter 'Monitor' status (s)<br>Recommended: C8h  |
| 88h         | ID_G_PERIODACTIVE       | [3:0] | 3h-Eh                           | Period of 'Active' status (ms)<br>Recommended: 6h  |
| 89h         | ID_G_PERIODMONITOR      | [7:0] | 1Eh-FFh                         | Timer to enter 'idle' when in 'Monitor' (ms)<br>Recommended: 28h   |
| A0h         | ID_G_AUTO_CLB_MODE      | [7:0] | 00h<br>FFh                      | Auto calibration mode: Enable auto calibration<br>Auto calibration mode: Disable auto calibration  |
| A1h         | ID_G_LIB_VERSION_H      | [7:0] | 30h                             | Firmware Library Version H byte  |
| A2h         | ID_G_LIB_VERSION_L      | [7:0] | 01h                             | Firmware Library Version L byte  |
| A3h         | ID_G_CIPHER             | [7:0] | 54h                             | Chip vendor ID   |
| A4h         | ID_G_MODE               | [0:0] | 00h<br>01h                      | Interrupt status: Enable interrupt to host<br>Interrupt status: Disable interrupt to host  |
| A5h         | ID_G_PMODE              | [1:0] | 00h<br>01h<br>03h               | 'Active' Mode<br>'Monitor' Mode<br>'Hibernate' Mode  |
| A6h         | ID_G_FIRMID             | [7:0] | 06h                             | Firmware ID  |
| A7h         | ID_G_STATE              | [7:0] | 00h<br>01h<br>02h<br>03h<br>04h | Running State: Configure<br>Running State: Work<br>Running State: Calibration<br>Running State: Factory<br>Running State: Auto-calibration         |
| A8h         | ID_G_FT5201ID           | [7:0] | 79h                             | CTPM Vendor's Chip ID  |
| A9h         | ID_G_ERR                | [7:0] | 00h<br>03h<br>05h<br>1Ah        | Error Code: OK<br>Error Code: Chip register writing inconsistent with reading<br>Error Code: Chip start fail<br>Error Code: Calibration match fail |




# Timing Characteristics: Display

| Parameter              | Symbol             | Spec |                            |      | Unit | Condition   |
|------------------------|--------------------|------|----------------------------|------|------|---|
|                        |                    | Min. | Typ.                       | Max. |      |   |
| Clock frequency        | R <sub>XFLK</sub>  | 20   | -                          | 71   | MHz  | -   |
| Input data skew margin | T <sub>RSKM</sub>  | 500  | -                          | -    | pS   | VID  = 400mV<br>R <sub>XVCM</sub> = 1.2V<br>R <sub>XFLK</sub> = 71MHz |
| Clock high time        | T <sub>LVCH</sub>  | -    | 4/(7 * R <sub>XFLK</sub> ) | -    | nS   | -   |
| Clock low time         | T <sub>LVCL</sub>  | -    | 3/(7 * R <sub>XFLK</sub> ) | -    | nS   | -   |
| PLL wake-up time       | T <sub>emPLL</sub> | -    | -                          | 150  | μS   | -   |


| Parameter            | Symbol            | Spec |      |      | Unit | Condition           |
|----------------------|-------------------|------|------|------|------|---------------------|
|                      |                   | Min. | Typ. | Max. |      |                     |
| Modulation Frequency | SSC <sub>MF</sub> | 23   | -    | 93   | KHz  | -                   |
| Modulation Rate      | SSC <sub>MR</sub> | -    | -    | ±3   | %    | LVDS Clock = 71 MHz |

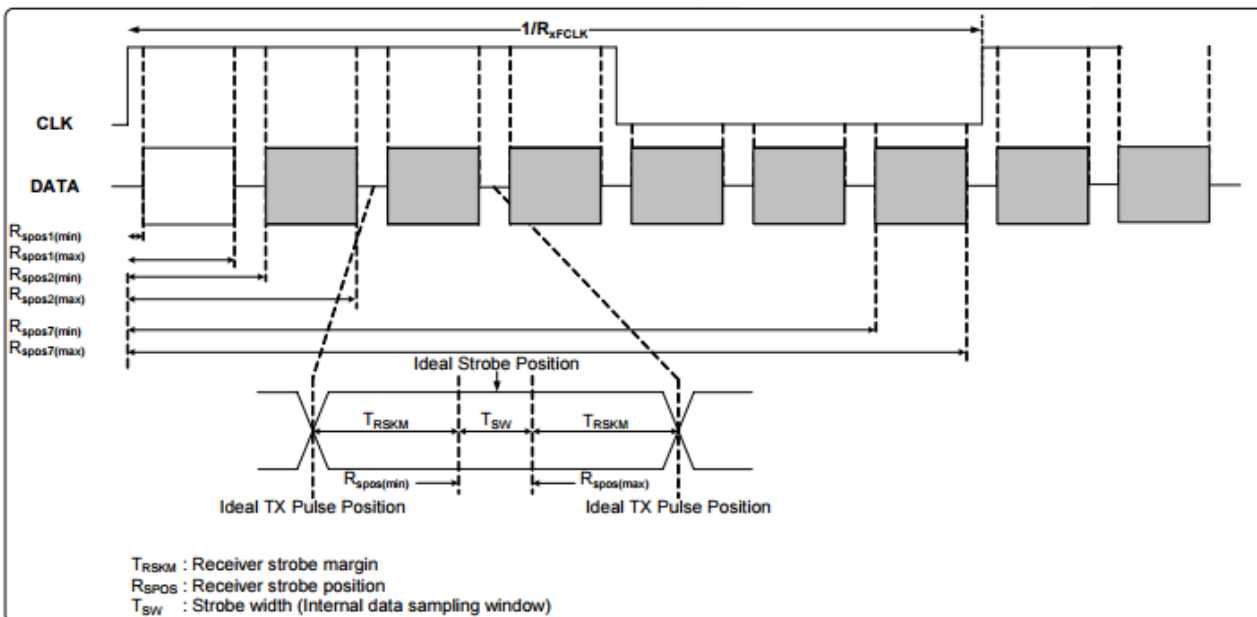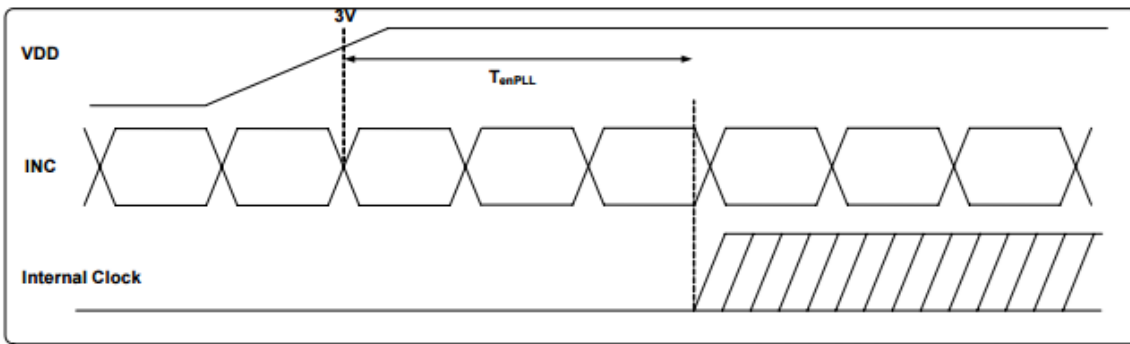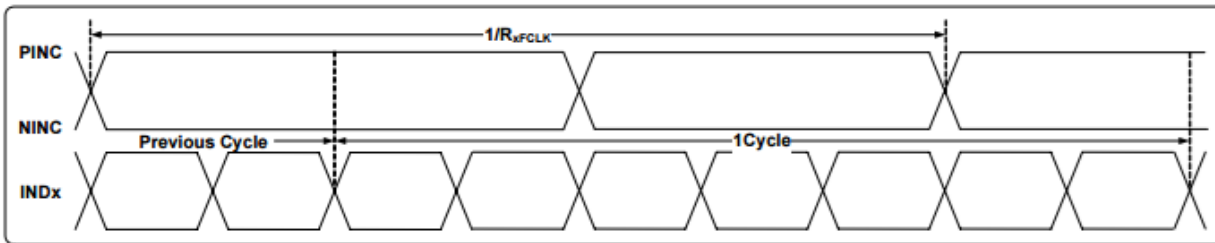

### 6-bit LVDS data input format:


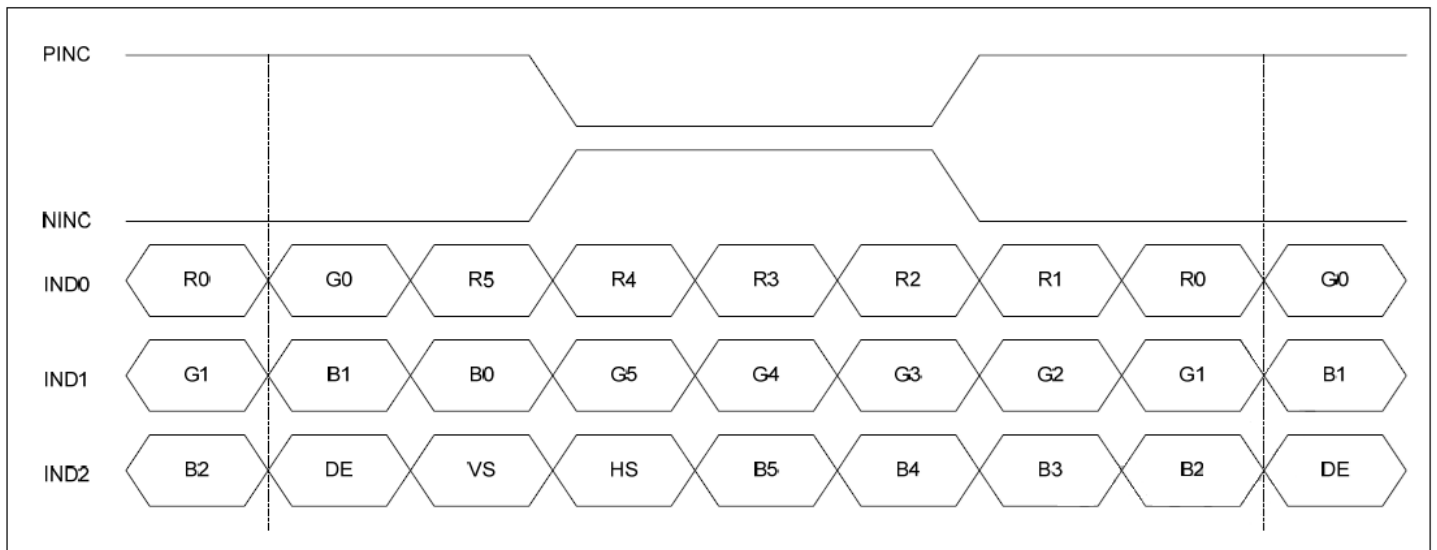


### 8-Bit LVDS Data Input Format:

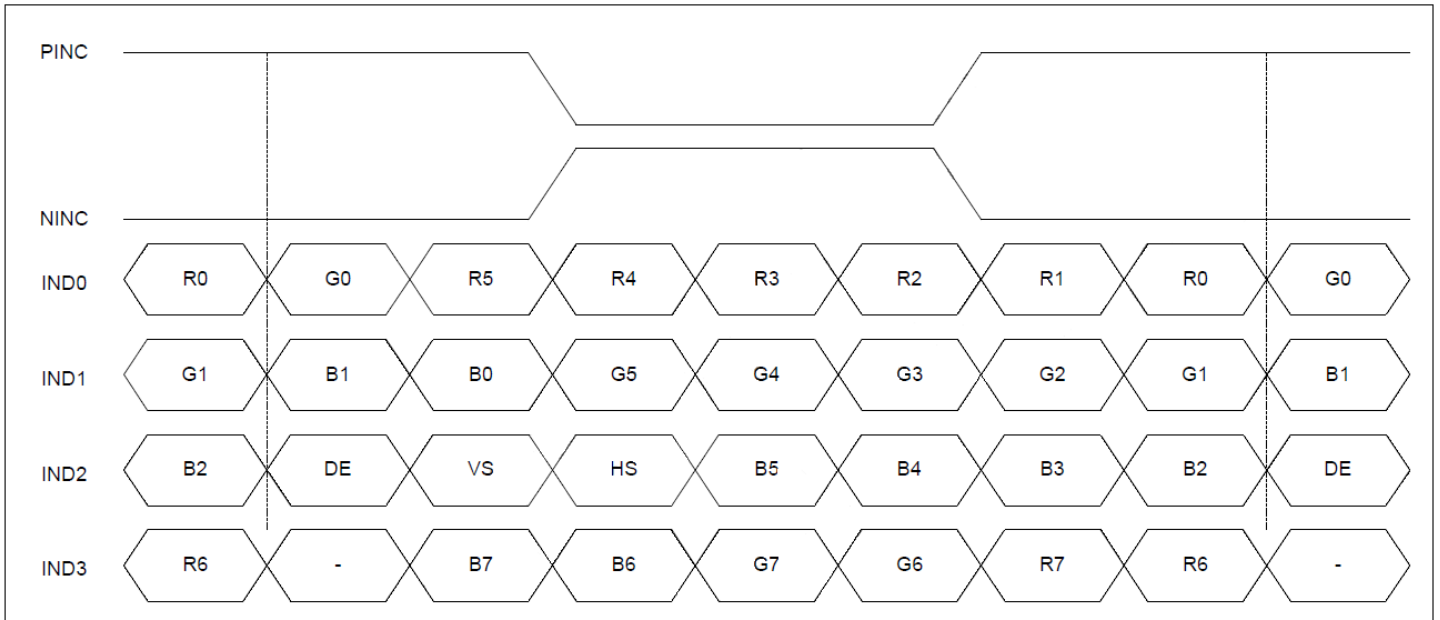


# Timing Characteristics: Capacitive Touch Panel

## Data Transfer Format

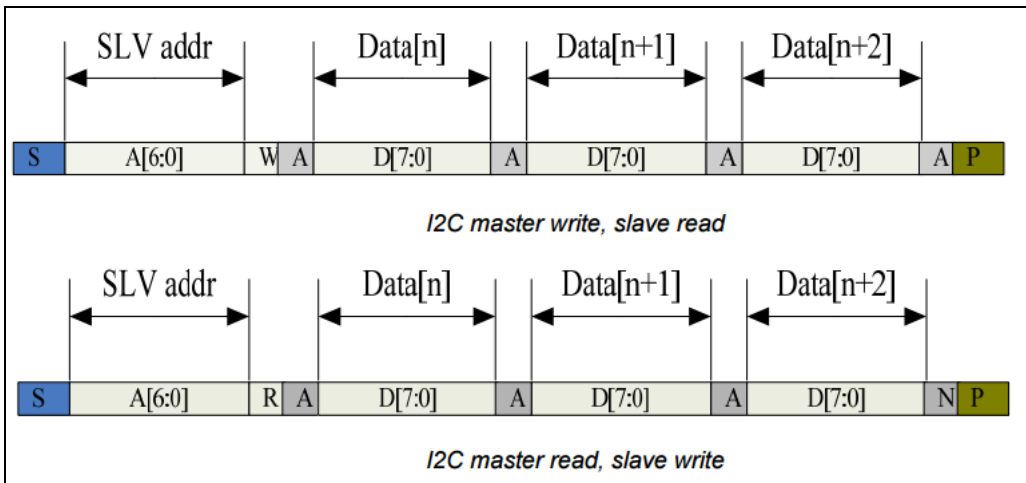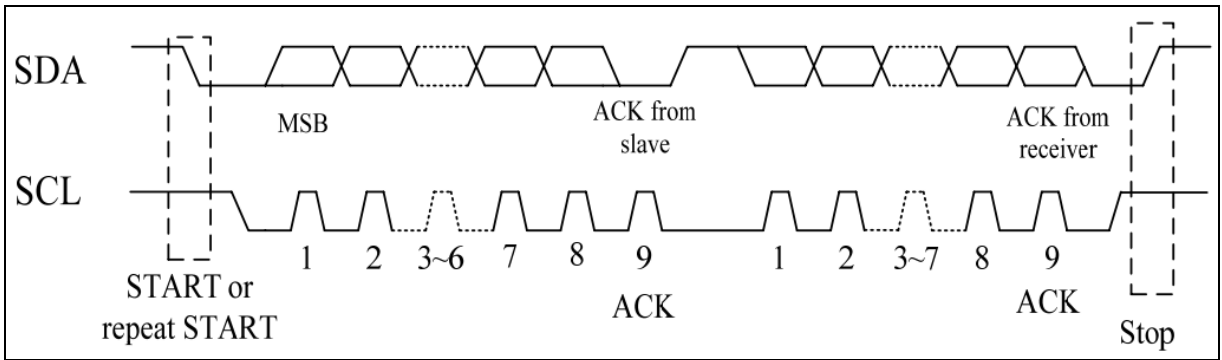


| Parameter  | Min | Max | Unit |
|--|-----|-----|------|
| SCL Frequency                                    | 0   | 400 | KHz  |
| Bus free time between a STOP and START Condition | 1.3 | -   | μs   |
| Hold Time (repeated) START Condition             | 0.6 | -   | μs   |
| Data Setup Time                                  | 100 | -   | ns   |
| Setup Time for a repeated START Condition        | 0.6 | -   | μs   |
| Setup Time for STOP Condition                    | 0.6 | -   | μs   |

## Power ON Sequence

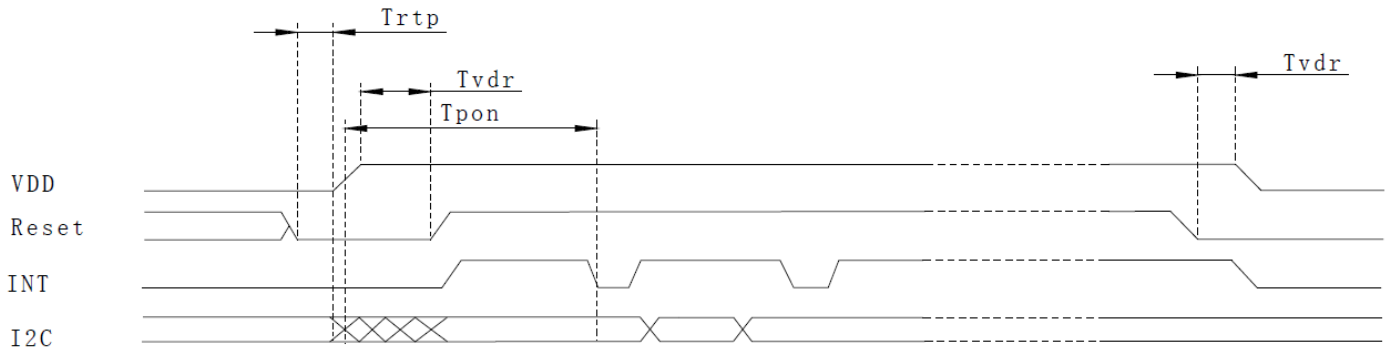

## Reset Sequence

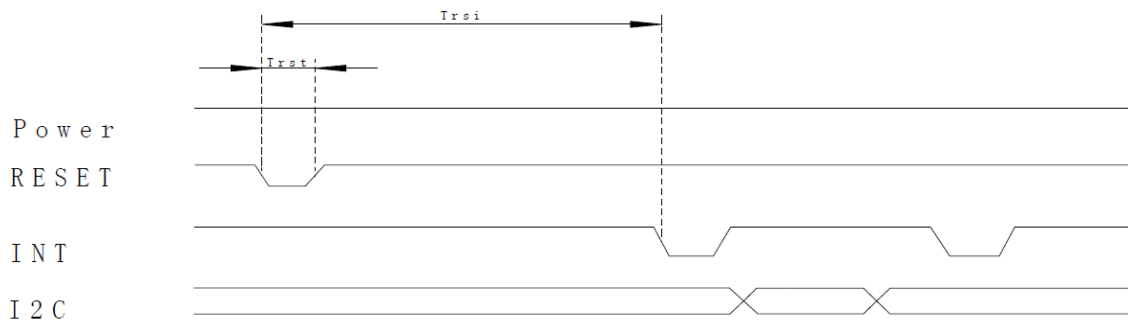

| Parameter | Description   | Min | Max | Unit    |
|-----------|---|-----|-----|---------|
| $T_{ris}$ | Rise time from $0.1 \cdot V_{DD}$ to $0.9 \cdot V_{DD}$ | -   | 5   | ms      |
| $T_{pdt}$ | Time for voltage supply below $0.3 \cdot V_{DD}$        | 5   | -   | ms      |
| $T_{rtp}$ | Time to hold reset low Before Applying Power            | 100 | -   | $\mu s$ |
| $T_{pon}$ | Time of starting to report point after powering on      | -   | 200 | ms      |
| $T_{vdr}$ | Reset time after $V_{DD}$ power on                      | 1   | -   | ms      |
| $T_{rsi}$ | Time of starting to report point after Reset            | -   | 200 | ms      |
| $T_{rst}$ | Reset Time  | 1   | -   | ms      |

### Sample code to read touch data:

```
i2c_start();
i2c_tx(0x70);           //Slave Address (Write)
i2c_tx(0x00);          //Start reading address
i2c_stop();

i2c_start();
i2c_tx(0x71);          //Slave Address (Read)
for(i=0x00;i<0x1F;i++)
{touchdata_buffer[i] = i2c_rx(1);}
i2c_stop();
```

### Sample code to overwrite default register values:

```
i2c_start();
i2c_tx(0x70);           //Slave Address (Write)
i2c_tx(0xA4);          //ID_G_Mode
i2c_tx(0x01);          //Disable interrupt status to host
i2c_stop();
```

## Quality Information

| Test Item                             | Content of Test   | Test Condition   | Note |
|---------------------------------------|---|--|------|
| High Temperature storage              | Endurance test applying the high storage temperature for a long time.   | +60°C , 240 hrs.   | 2    |
| Low Temperature storage               | Endurance test applying the low storage temperature for a long time.  | -20°C , 240 hrs.   | 1,2  |
| High Temperature Operation            | Endurance test applying the electric stress (voltage & current) and the high thermal stress for a long time.                    | +50°C, 120 hrs.  | 2    |
| Low Temperature Operation             | Endurance test applying the electric stress (voltage & current) and the low thermal stress for a long time.                     | 0°C , 120 hrs.   | 1,2  |
| High Temperature / Humidity Operation | Endurance test applying the electric stress (voltage & current) and the high thermal with high humidity stress for a long time. | +50°C , 85% RH , 120 hrs.  | 1,2  |
| Thermal Shock resistance              | Endurance test applying the electric stress (voltage & current) during a cycle of low and high thermal stress.                  | 0°C, 30min->25°C, 5min -> 50°C, 30min<br>10 cycles                                   |      |
| Vibration test                        | Endurance test applying vibration to simulate transportation and use.   | 10-55Hz , 1.5mm amplitude.<br>60 sec in each of 3 directions X,Y,Z<br>For 15 minutes | 3    |
| Static electricity test               | Endurance test applying electric static discharge.  | Air: V <sub>s</sub> =8KV, Contact: V <sub>s</sub> =4KV<br>10 Times                   |      |

**Note 1:** No condensation to be observed.

**Note 2:** Conducted after 4 hours of storage at 25°C, 0%RH.

**Note 3:** Test performed on product itself, not inside a container.

## Precautions for using LCDs/LCMs

See Precautions at [www.newhavendisplay.com/specs/precautions.pdf](http://www.newhavendisplay.com/specs/precautions.pdf)

## Warranty Information and Terms & Conditions

[http://www.newhavendisplay.com/index.php?main\\_page=terms](http://www.newhavendisplay.com/index.php?main_page=terms)

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А