

### ■ OUTLINE

The R1160N Series are voltage regulator ICs with high output voltage accuracy, low supply current, and low ON-resistance by CMOS process. Each of these voltage regulator ICs consists of a voltage reference unit, an error amplifier, resistors for setting Output Voltage, a current limit circuit, and a chip enable circuit.

These ICs perform with low dropout voltage and a chip enable function. To prevent the destruction by over current, current limit circuit is included. The R1160N Series have 3-mode. One is standby mode with CE or standby control pin. Other two modes are realized with ECO pin™. Fast Transient Mode (FT mode) and Low Power Mode (LP mode) are alternative with ECO pin™. Consumption current is reduced to 1/10 at Low Power Mode compared with Fast Transient Mode. Output voltage is maintained between FT mode and LP mode.

The output voltage of these ICs is internally fixed with high accuracy. Since the package for these ICs is SOT-23-5 package, high density mounting of the ICs on boards is possible.

### ■ FEATURES

- Ultra-Low Supply Current..... TYP. 3.5μA(Low Power Mode, V<sub>OUT</sub>≤1.5V),  
..... TYP. 40μA (Fast Transient Mode)
- Standby Mode ..... TYP. 0.1μA
- Low Dropout Voltage ..... TYP. 0.30V(I<sub>OUT</sub>=200mA Output Voltage=1.0V Type)  
..... TYP. 0.20V(I<sub>OUT</sub>=200mA Output Voltage=1.5V Type)  
..... TYP. 0.14V(I<sub>OUT</sub>=200mA Output Voltage=3.0V Type)
- High Ripple Rejection ..... TYP. 70dB(f=1kHz, FT Mode)
- Low Temperature-Drift Coefficient of Output Voltage TYP. ±100ppm/°C
- Excellent Line Regulation ..... TYP. 0.05%/V
- High Output Voltage Accuracy..... ±2.0%(±3.0% at LP Mode)
- Small Package ..... SOT-23-5(Super Mini-mold)
- Output Voltage..... Stepwise setting with a step of 0.1V in the range of 0.8V to 3.3V is possible
- Input Voltage ..... MIN. 1.4V
- Built-in fold-back protection circuit.....TYP. 50mA (Current at short mode)

### ■ APPLICATIONS

- Precision Voltage References.
- Power source for electrical appliances such as cameras, VCRs and hand-held communication equipment.
- Power source for battery-powered equipment.

## ■ BLOCK DIAGRAM




## ■ SELECTION GUIDE

The output voltage, chip enable polarity, and the taping type for the ICs can be selected at the user's request. The selection can be available by designating the part number as shown below;

R1160NXX1X-XX      ←Part Number  
                   ↑ ↑    ↑ ↑  
                   a b c d

| Code | Contents   |
|------|--|
| a    | Designation of Package Type :<br>N:SOT-23-5 (Mini-mold)  |
| b    | Setting Output Voltage ( $V_{OUT}$ ) :<br>Stepwise setting with a step of 0.1V in the range of 0.8V to 3.3V is possible. |
| c    | Designation of Chip Enable Option :<br>A: "L" active type.<br>B: "H" active type.  |
| d    | Designation of Taping Type :<br>Refer to Taping Specifications; TR type is the standard direction.                       |

## ■ PIN CONFIGURATION

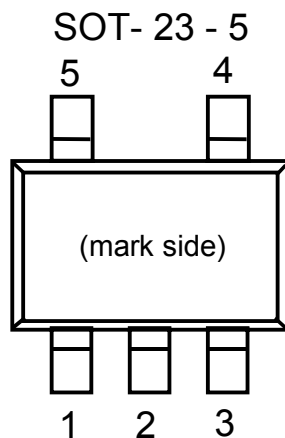

## ■ PIN DESCRIPTION

| Pin No. | Symbol                       | Description          |
|---------|------------------------------|----------------------|
| 1       | V <sub>DD</sub>              | Input Pin            |
| 2       | GND                          | Ground Pin           |
| 3       | $\overline{\text{CE}}$ or CE | Chip Enable Pin      |
| 4       | ECO                          | MODE alternative pin |
| 5       | V <sub>OUT</sub>             | Output pin           |

## ■ ABSOLUTE MAXIMUM RATINGS

| Item   | Symbol           | Rating                      | Unit |
|--|------------------|-----------------------------|------|
| Input Voltage                                  | V <sub>IN</sub>  | 6.5                         | V    |
| Input Voltage(ECO Pin)                         | V <sub>ECO</sub> | -0.3 ~ V <sub>IN</sub> +0.3 | V    |
| Input Voltage( $\overline{\text{CE}}$ /CE Pin) | V <sub>CE</sub>  | -0.3 ~ V <sub>IN</sub> +0.3 | V    |
| Output Voltage                                 | V <sub>OUT</sub> | -0.3 ~ V <sub>IN</sub> +0.3 | V    |
| Output Current                                 | I <sub>OUT</sub> | 250                         | mA   |
| Power Dissipation                              | P <sub>D</sub>   | 250                         | mW   |
| Operating Temperature Range                    | T <sub>opt</sub> | -40 ~ 85                    | °C   |
| Storage Temperature Range                      | T <sub>stg</sub> | -55 ~ 125                   | °C   |

## ■ ELECTRICAL CHARACTERISTICS

### ● R1160NXX1A

Topt=25°C

| Symbol                               | Item                                      | Conditions   | MIN.                                 | TYP. | MAX.                                | Unit       |
|--------------------------------------|---|--|--------------------------------------|------|-------------------------------------|------------|
| V <sub>OUT</sub>                     | Output Voltage                            | V <sub>IN</sub> = Set V <sub>OUT</sub> +1V V <sub>ECO</sub> =V <sub>IN</sub><br>1μA ≤ I <sub>OUT</sub> ≤ 30mA(Note 1)                | V <sub>OUT</sub><br>×0.98<br>(-30mV) |      | V <sub>OUT</sub><br>×1.02<br>(30mV) | V          |
|                                      |   | V <sub>IN</sub> = Set V <sub>OUT</sub> +1V V <sub>ECO</sub> =GND<br>1μA ≤ I <sub>OUT</sub> ≤ 30mA(Note 2)                            | V <sub>OUT</sub><br>×0.97<br>(-45mV) |      | V <sub>OUT</sub><br>×1.03<br>(45mV) | V          |
| I <sub>OUT</sub>                     | Output Current                            | V <sub>IN</sub> - V <sub>OUT</sub> = 0.5V<br>V <sub>IN</sub> ≥ 1.5V, V <sub>OUT</sub> ≤ 1.0V   | 200                                  |      |                                     | mA         |
| ΔV <sub>OUT</sub> /ΔI <sub>OUT</sub> | Load Regulation(FT Mode)                  | V <sub>IN</sub> = Set V <sub>OUT</sub> +1V, V <sub>ECO</sub> =V <sub>IN</sub><br>1mA ≤ I <sub>OUT</sub> ≤ 200mA                      |                                      | 20   | 40                                  | mV         |
| ΔV <sub>OUT</sub> /ΔI <sub>OUT</sub> | Load Regulation(LP Mode)                  | V <sub>IN</sub> = Set V <sub>OUT</sub> +1V, V <sub>ECO</sub> =GND<br>1mA ≤ I <sub>OUT</sub> ≤ 100mA                                  |                                      | 10   | 40                                  | mV         |
| V <sub>DIF</sub>                     | Dropout Voltage                           | Refer to the ELECTRICAL CHARACTERISTICS by OUTPUT VOLTAGE  |                                      |      |                                     |            |
| I <sub>SS1</sub>                     | Supply Current(FT Mode)                   | V <sub>IN</sub> = Set V <sub>OUT</sub> +1V<br>V <sub>ECO</sub> =V <sub>IN</sub>  |                                      | 40   | 70                                  | μA         |
| I <sub>SS2</sub>                     | Supply Current(LP Mode)                   | V <sub>IN</sub> = Set V <sub>OUT</sub> +1V,<br>V <sub>OUT</sub> ≤ 1.5V, V <sub>ECO</sub> =GND  |                                      | 3.5  | 6.0                                 | μA         |
|                                      |   | V <sub>IN</sub> = Set V <sub>OUT</sub> +1V<br>V <sub>OUT</sub> ≥ 1.6V, V <sub>ECO</sub> =GND   |                                      | 4.5  | 8.0                                 | μA         |
| I <sub>standby</sub>                 | Supply Current (Standby)                  | V <sub>IN</sub> = V <sub>CE</sub> = Set V <sub>OUT</sub> +1V   |                                      | 0.1  | 1.0                                 | μA         |
| ΔV <sub>OUT</sub> /ΔV <sub>IN</sub>  | Line Regulation(FT Mode)                  | Set V <sub>OUT</sub> +0.5V ≤ V <sub>IN</sub> ≤ 6V<br>I <sub>OUT</sub> = 30mA, V <sub>ECO</sub> =V <sub>IN</sub>                      |                                      | 0.05 | 0.20                                | %/V        |
| ΔV <sub>OUT</sub> /ΔV <sub>IN</sub>  | Line Regulation(LP Mode)                  | Set V <sub>OUT</sub> +0.5V ≤ V <sub>IN</sub> ≤ 6V<br>I <sub>OUT</sub> = 30mA, V <sub>ECO</sub> =GND                                  |                                      | 0.10 | 0.30                                | %/V        |
| RR                                   | Ripple Rejection(FT Mode)                 | f = 1kHz, Ripple 0.2Vp-p<br>V <sub>IN</sub> = Set V <sub>OUT</sub> +1V<br>I <sub>OUT</sub> = 30mA, V <sub>ECO</sub> =V <sub>IN</sub> |                                      | 70   |                                     | dB         |
| V <sub>IN</sub>                      | Input Voltage                             |  | 1.4                                  |      | 6.0                                 | V          |
| ΔV <sub>OUT</sub> /ΔT                | Output Voltage<br>Temperature Coefficient | I <sub>OUT</sub> = 30mA<br>-40°C ≤ Topt ≤ 85°C   |                                      | ±100 |                                     | ppm<br>/°C |
| I <sub>lim</sub>                     | Short Current Limit                       | V <sub>OUT</sub> = 0V  |                                      | 50   |                                     | mA         |
| R <sub>PU</sub>                      | CE Pull-up Resistance                     |  | 2.0                                  | 5.0  | 14.0                                | MΩ         |
| R <sub>PD</sub>                      | ECO Pull-down Resistance                  |  | 1.5                                  | 5.0  | 14.0                                | MΩ         |
| V <sub>CEH</sub>                     | CE, ECO Input Voltage "H"                 |  | 1.0                                  |      | V <sub>IN</sub>                     | V          |
| V <sub>CEL</sub>                     | CE, ECO Input Voltage "L"                 |  | 0.0                                  |      | 0.3                                 | V          |

Note1: ±30mV tolerance for V<sub>OUT</sub> ≤ 1.5V.

Note2: ±45mV tolerance for V<sub>OUT</sub> ≤ 1.5V.

● R1160NXX1B

Topt=25°C

| Symbol                               | Item                                   | Conditions   | MIN.                                 | TYP. | MAX.                                | Unit   |
|--------------------------------------|--|--|--------------------------------------|------|-------------------------------------|--------|
| V <sub>OUT</sub>                     | Output Voltage                         | V <sub>IN</sub> = Set V <sub>OUT</sub> +1V V <sub>ECO</sub> =V <sub>IN</sub><br>1μA ≤ I <sub>OUT</sub> ≤ 30mA(Note 1)                | V <sub>OUT</sub><br>×0.98<br>(-30mV) |      | V <sub>OUT</sub><br>×1.02<br>(30mV) | V      |
|                                      |  | V <sub>IN</sub> = Set V <sub>OUT</sub> +1V<br>V <sub>ECO</sub> =GND<br>1μA ≤ I <sub>OUT</sub> ≤ 30mA(Note 2)                         | V <sub>OUT</sub><br>×0.97<br>(-45mV) |      | V <sub>OUT</sub><br>×1.03<br>(45mV) | V      |
| I <sub>OUT</sub>                     | Output Current                         | V <sub>IN</sub> - V <sub>OUT</sub> = 0.5V<br>V <sub>IN</sub> ≥1.5V, V <sub>OUT</sub> ≤1.0V   | 200                                  |      |                                     | mA     |
| ΔV <sub>OUT</sub> /ΔI <sub>OUT</sub> | Load Regulation(FT Mode)               | V <sub>IN</sub> = Set V <sub>OUT</sub> +1V, V <sub>ECO</sub> =V <sub>IN</sub><br>1mA ≤ I <sub>OUT</sub> ≤ 200mA                      |                                      | 20   | 40                                  | mV     |
| ΔV <sub>OUT</sub> /ΔI <sub>OUT</sub> | Load Regulation(LP Mode)               | V <sub>IN</sub> = Set V <sub>OUT</sub> +1V, V <sub>ECO</sub> =GND<br>1mA ≤ I <sub>OUT</sub> ≤ 100mA                                  |                                      | 10   | 40                                  | mV     |
| V <sub>DIF</sub>                     | Dropout Voltage                        | Refer to the ELECTRICAL CHARACTERISTICS by OUTPUT VOLTAGE  |                                      |      |                                     |        |
| I <sub>SS1</sub>                     | Supply Current(FT Mode)                | V <sub>IN</sub> = Set V <sub>OUT</sub> +1V<br>V <sub>ECO</sub> =V <sub>IN</sub>  |                                      | 40   | 70                                  | μA     |
| I <sub>SS2</sub>                     | Supply Current(LP Mode)                | V <sub>IN</sub> = Set V <sub>OUT</sub> +1V,<br>V <sub>OUT</sub> ≤ 1.5V, V <sub>ECO</sub> =GND  |                                      | 3.5  | 6.0                                 | μA     |
|                                      |  | V <sub>IN</sub> = Set V <sub>OUT</sub> +1V,<br>V <sub>OUT</sub> ≥ 1.6V, V <sub>ECO</sub> =GND  |                                      | 4.5  | 8.0                                 | μA     |
| I <sub>standby</sub>                 | Supply Current (Standby)               | V <sub>IN</sub> = Set V <sub>OUT</sub> +1V, V <sub>CE</sub> =GND   |                                      | 0.1  | 1.0                                 | μA     |
| ΔV <sub>OUT</sub> /ΔV <sub>IN</sub>  | Line Regulation(FT Mode)               | Set V <sub>OUT</sub> +0.5V ≤ V <sub>IN</sub> ≤ 6V<br>I <sub>OUT</sub> = 30mA, V <sub>ECO</sub> =V <sub>IN</sub>                      |                                      | 0.05 | 0.20                                | %/V    |
| ΔV <sub>OUT</sub> /ΔV <sub>IN</sub>  | Line Regulation(LP Mode)               | Set V <sub>OUT</sub> +0.5V ≤ V <sub>IN</sub> ≤ 6V<br>I <sub>OUT</sub> = 30mA, V <sub>ECO</sub> =GND                                  |                                      | 0.10 | 0.30                                | %/V    |
| RR                                   | Ripple Rejection(FT Mode)              | f = 1kHz, Ripple 0.2Vp-p<br>V <sub>IN</sub> = Set V <sub>OUT</sub> +1V<br>I <sub>OUT</sub> = 30mA, V <sub>ECO</sub> =V <sub>IN</sub> |                                      | 70   |                                     | dB     |
| V <sub>IN</sub>                      | Input Voltage                          |  | 1.4                                  |      | 6.0                                 | V      |
| ΔV <sub>OUT</sub> /ΔT                | Output Voltage Temperature Coefficient | I <sub>OUT</sub> = 30mA<br>-40°C ≤ Topt ≤ 85°C   |                                      | ±100 |                                     | ppm/°C |
| I <sub>lim</sub>                     | Short Current Limit                    | V <sub>OUT</sub> = 0V  |                                      | 50   |                                     | mA     |
| R <sub>PDC</sub>                     | CE Pull-down Resistance                |  | 2.0                                  | 5.0  | 14.0                                | MΩ     |
| R <sub>PDE</sub>                     | ECO Pull-down Resistance               |  | 1.5                                  | 5.0  | 14.0                                | MΩ     |
| V <sub>CEH</sub>                     | CE, ECO Input Voltage "H"              |  | 1.0                                  |      | V <sub>IN</sub>                     | V      |
| V <sub>CEL</sub>                     | CE, ECO Input Voltage "L"              |  | 0.0                                  |      | 0.3                                 | V      |

Note1: ±30mV tolerance for V<sub>OUT</sub>≤1.5V.

Note2: ±45mV tolerance for V<sub>OUT</sub>≤1.5V.

● ELECTRICAL CHARACTERISTICS by OUTPUT VOLTAGE

Topt = 25°C

| Output Voltage<br>V <sub>OUT</sub> (V) | Dropout Voltage          |      |   |
|--|--------------------------|------|---|
|  | V <sub>DIF</sub> (V)     |      |   |
|  | Condition                | TYP. | MAX.  |
| 0.8 ≤ V <sub>OUT</sub> ≤ 0.9           | I <sub>OUT</sub> = 200mA | 0.40 | 0.70  |
| 1.0 ≤ V <sub>OUT</sub> ≤ 1.4           |                          | 0.30 | 0.50  |
| 1.5 ≤ V <sub>OUT</sub> ≤ 2.5           |                          | 0.20 | 0.30  |
| 2.6 ≤ V <sub>OUT</sub>                 |                          | 0.14 | 0.20 (V <sub>ECO</sub> ="H")<br>0.25(V <sub>ECO</sub> ="L") |

## TECHNICAL NOTES

When using these ICs, consider the following points:

### Phase Compensation

In these ICs, phase compensation is made for securing stable operation even if the load current is varied. For this purpose, be sure to use a 2.2 $\mu$ F or more capacitor C<sub>OUT</sub> with good frequency characteristics and ESR (Equivalent Series Resistance). (Note: When the additional ceramic capacitors are connected to the Output Pin with Output capacitor for phase compensation, the operation might be unstable. Because of this, test these ICs with as same external components as ones to be used on the PCB.)

### PCB Layout

Make VDD and GND line sufficient. When the impedance of these is high, it would be a cause of picking up the noise or unstable operation. Connect a capacitor with as much as 1.0 $\mu$ F capacitor between VDD and GND pin as close as possible. Set external components, especially output capacitor as close as possible to the ICs and make wiring shortest.

## TEST CIRCUITS

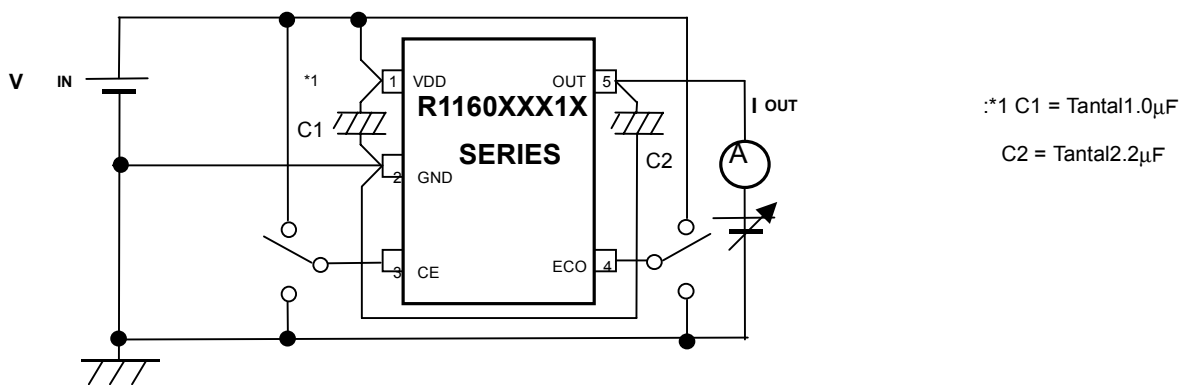


Fig.1 Output Voltage vs. Output Current Test Circuit

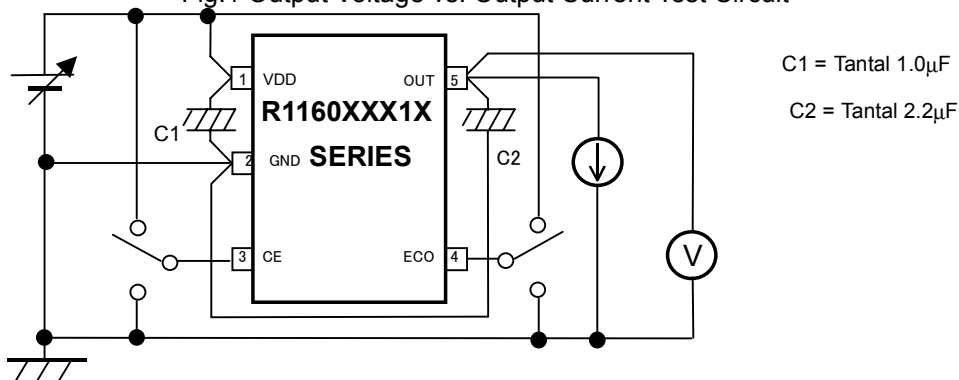


Fig.2 Output Voltage vs. Input Voltage Test Circuit



Fig.3 Supply Current vs. Input Voltage Test Circuit

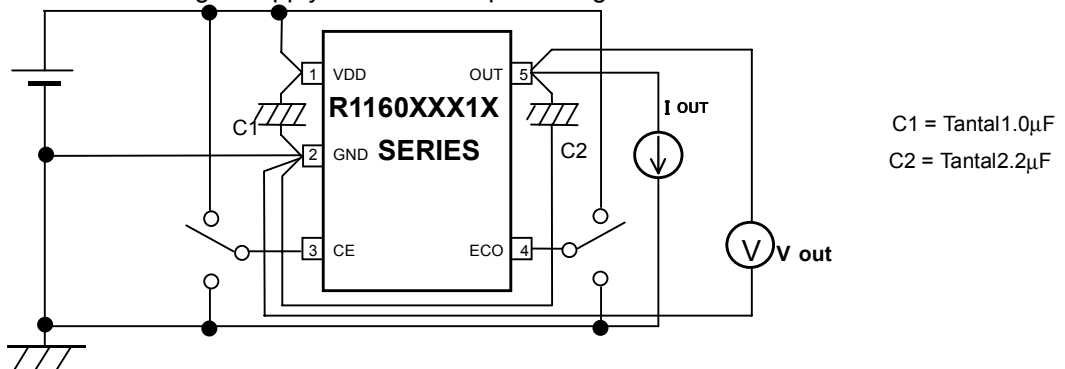


Fig.4 Output Voltage vs. Temperature Test Circuit

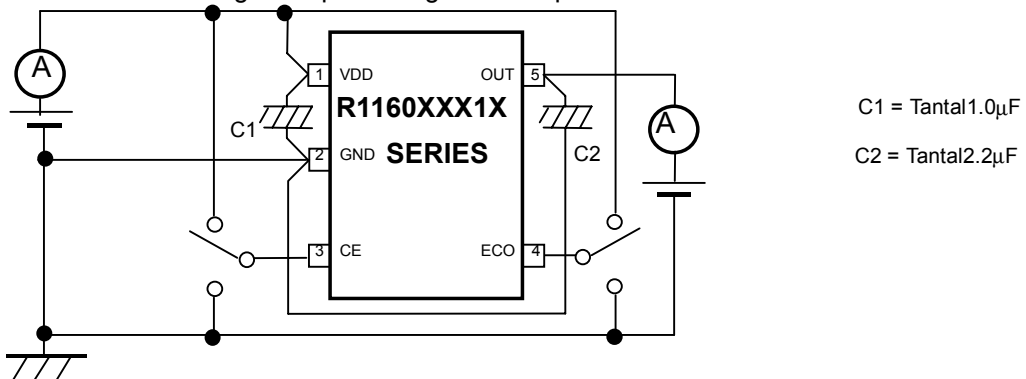


Fig.5 Supply Current vs. Temperature Test Circuit

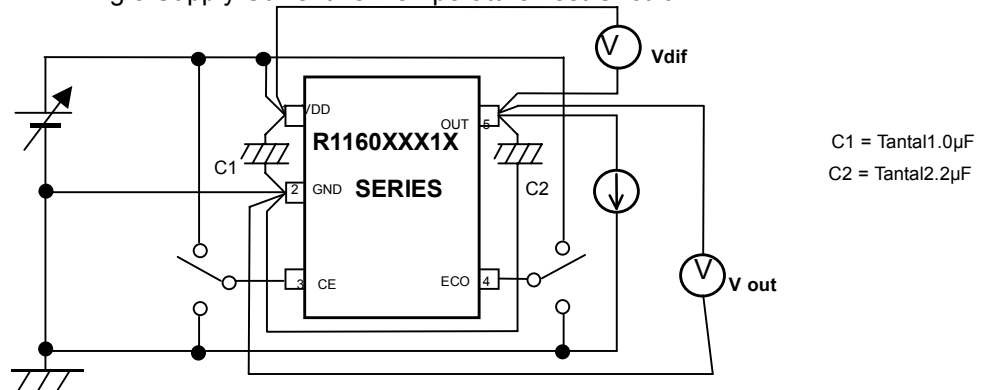


Fig. 6 Dropout Voltage vs. Output Current/ Set Output Voltage Test Circuit



Fig. 7 Ripple Rejection Test Circuit

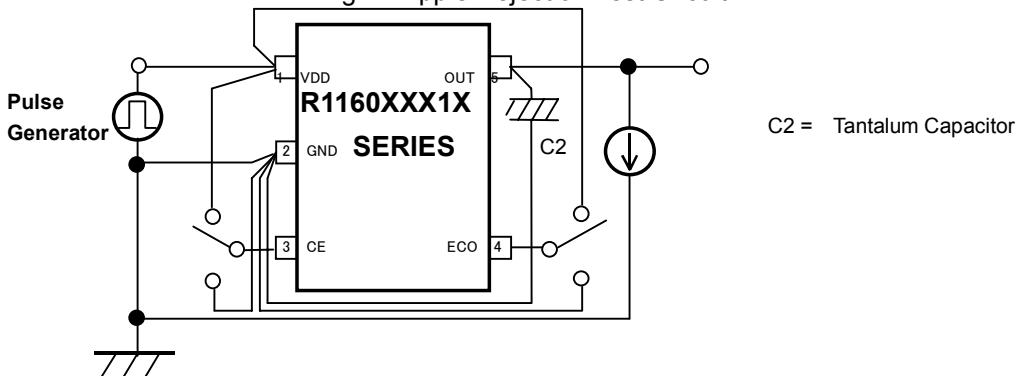


Fig.8 Input Transient Response Test Circuit

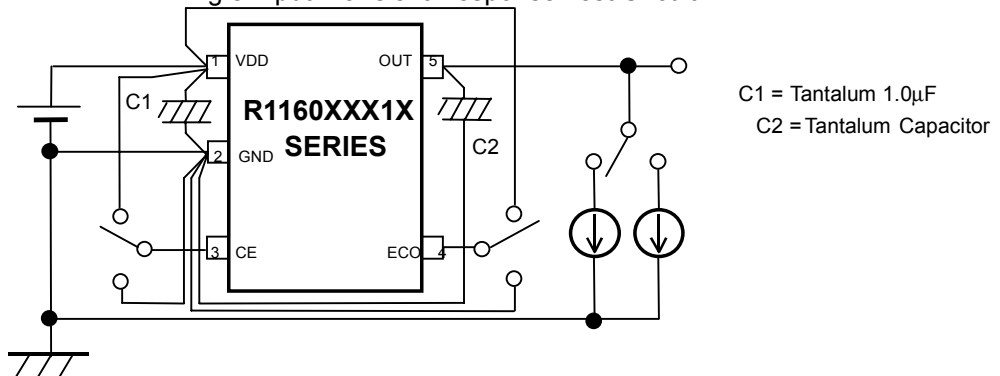


Fig.9 Load Transient Response Test Circuit

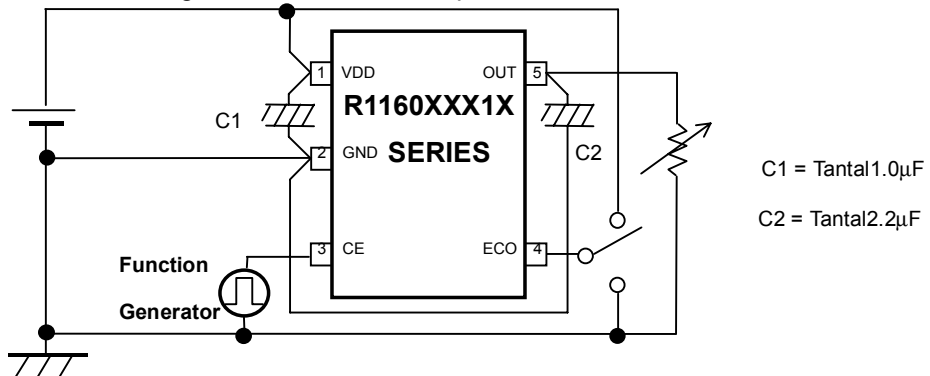


Fig.10 Turn on Speed with CE pin Test Circuit




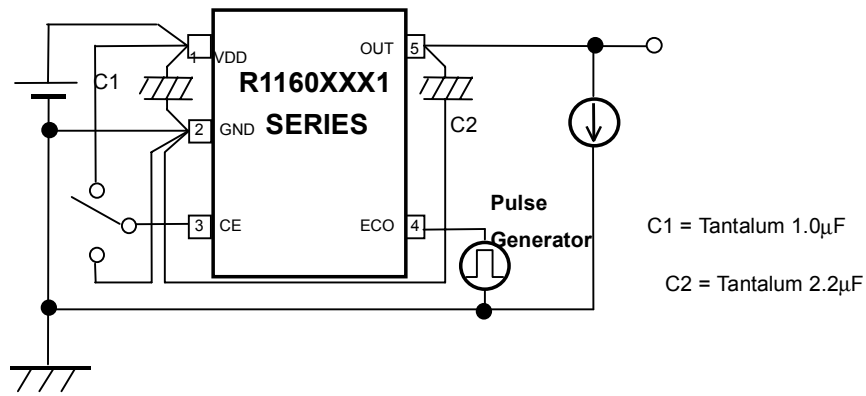


Fig.11 MODE Transient Response Test Circuit



Fig.12 Output Noise Test Circuit(IOUT vs. ESR)

## ■ TYPICAL APPLICATION

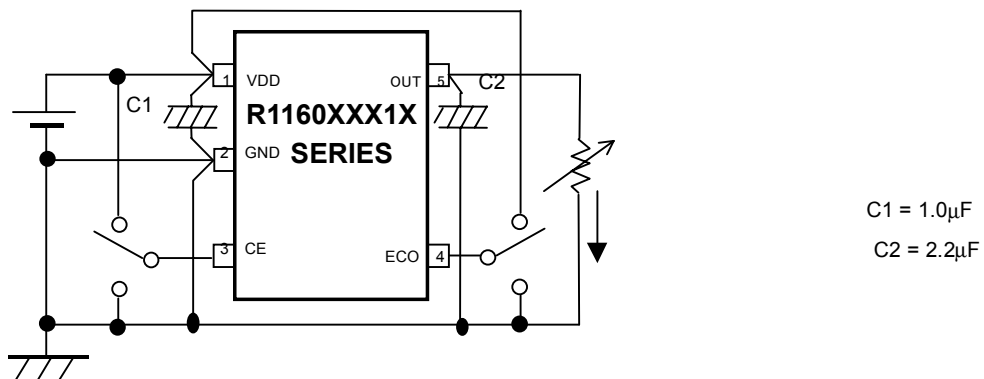

(External Components)  
Output Capacitor; Tantalum Type

## TYPICAL CHARACTERISTICS

### 1) Output Voltage vs. Output Current

R1160N081X ECO=H



R1160N081X ECO=L



R1160N151X ECO=H



R1160N151X ECO=L



R1160N261X ECO=H




R1160N261X ECO=L



R1160N331X ECO=H




R1160N331X ECO=L

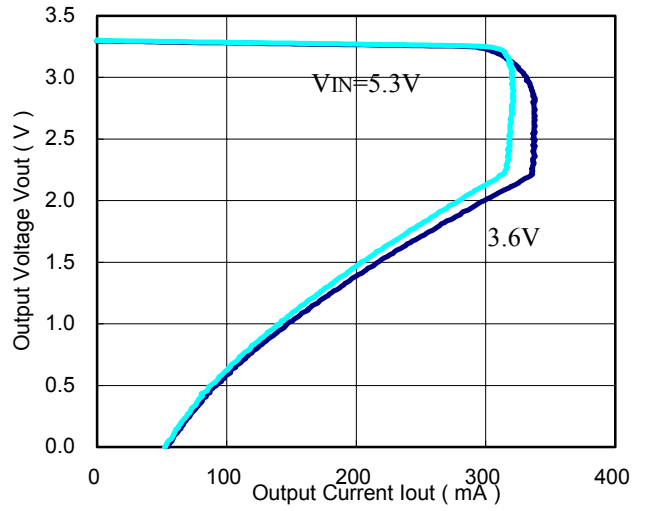


2) Output Voltage vs. Input Voltage

R1160N081X ECO=H

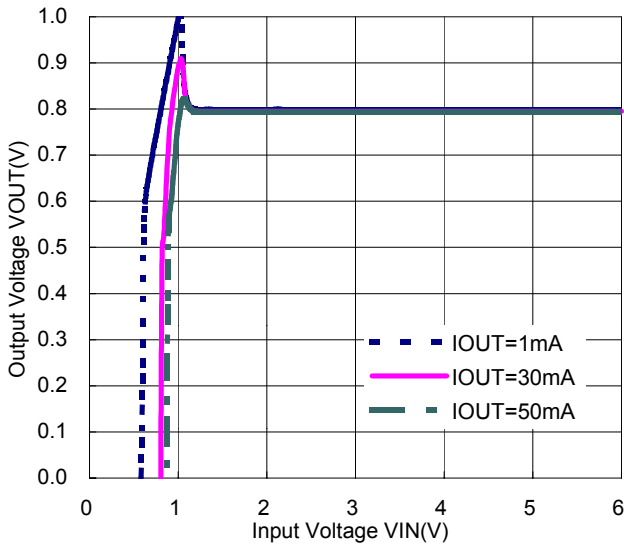


R1160N081X ECO=L

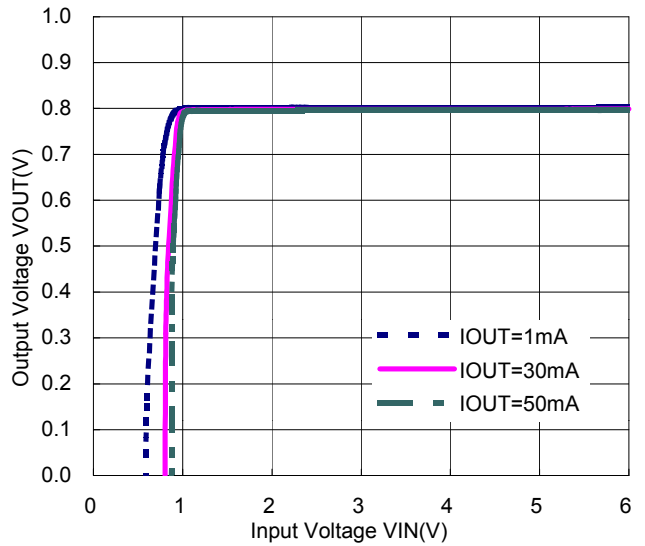

R1160N151X ECO=H



R1160N151X ECO=L

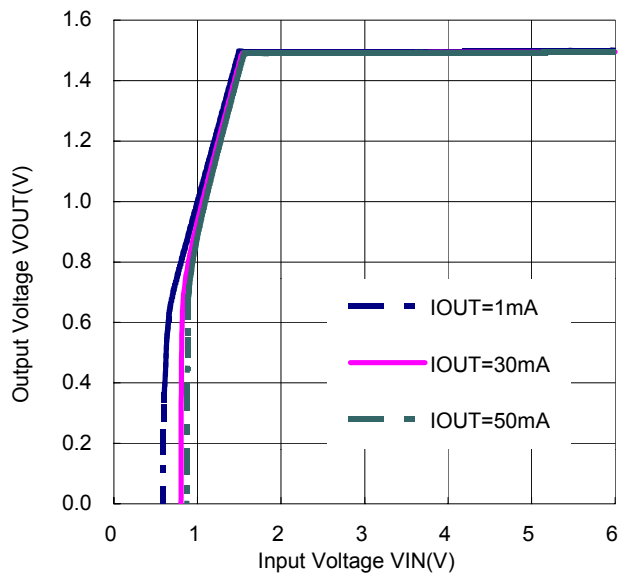

R1160N261X ECO=H



R1160N261X ECO=L



R1160N331X ECO=H



R1160N331X ECO=L




3) Supply Current vs. Input Voltage


R1160N081X ECO=H




R1160N081X ECO=L

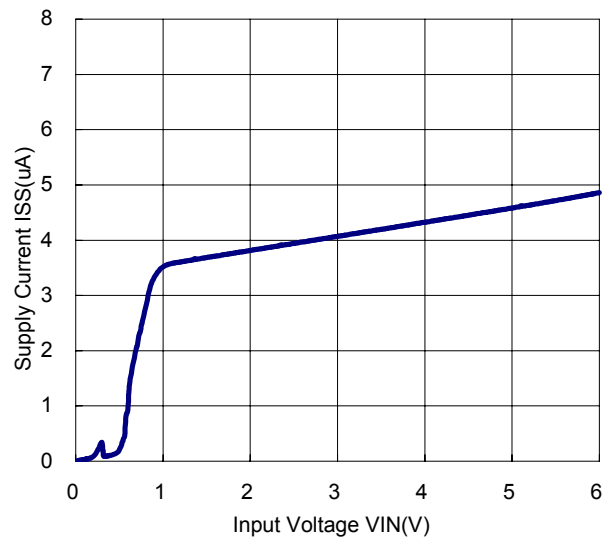


R1160N151X ECO=H

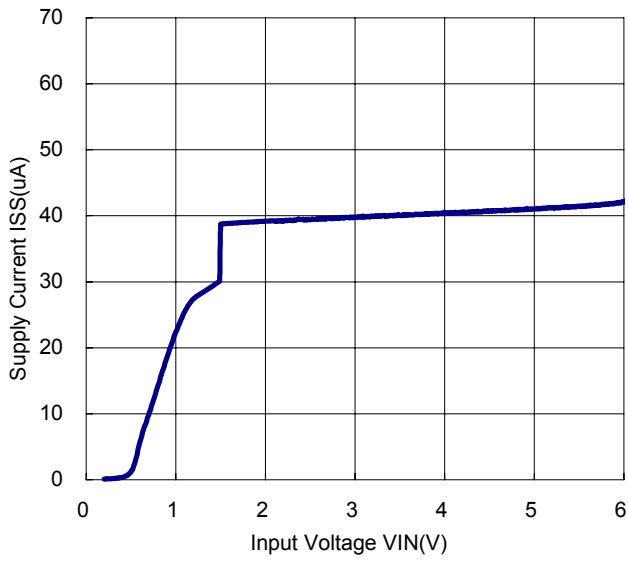


R1160N151X ECO=L

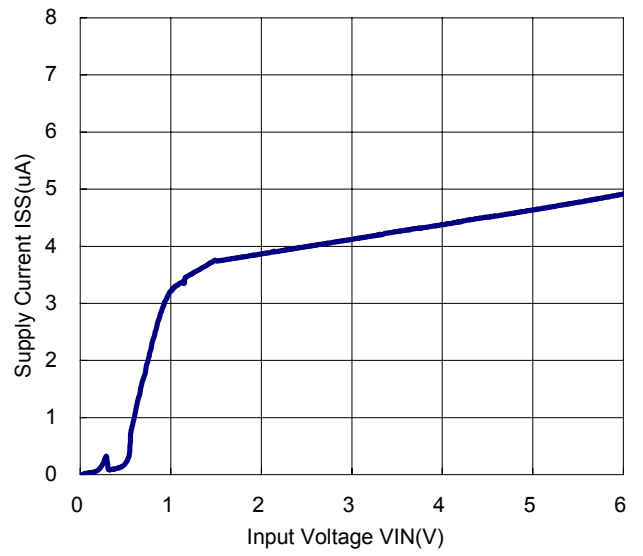


R1160N261X ECO=H

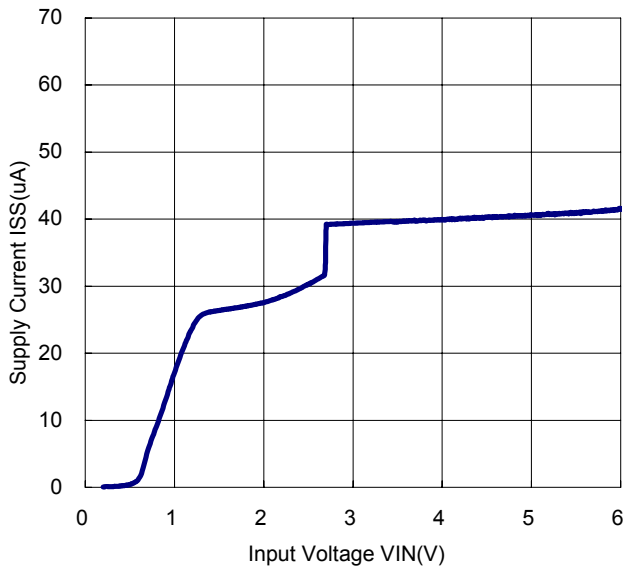


R1160N261X ECO=L

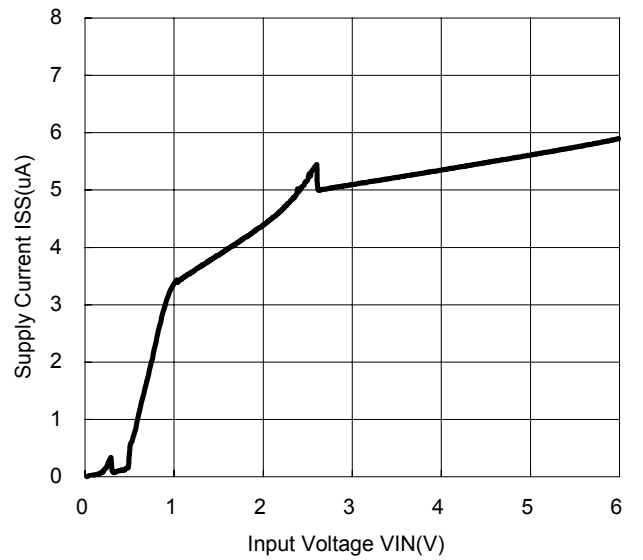

R1160N331X ECO=H

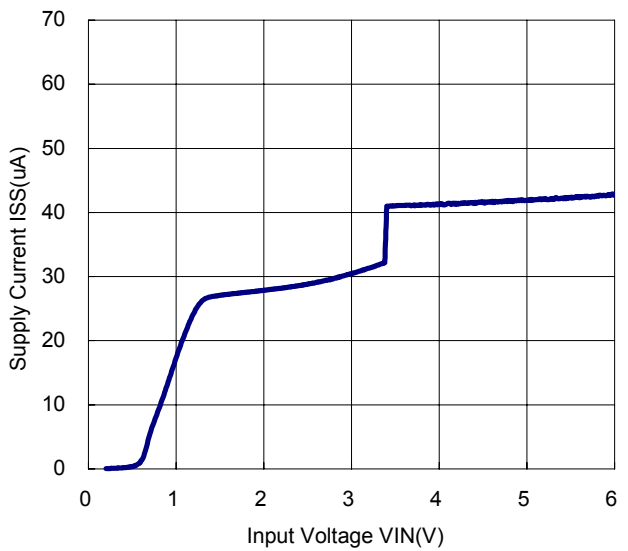


R1160N331X ECO=L

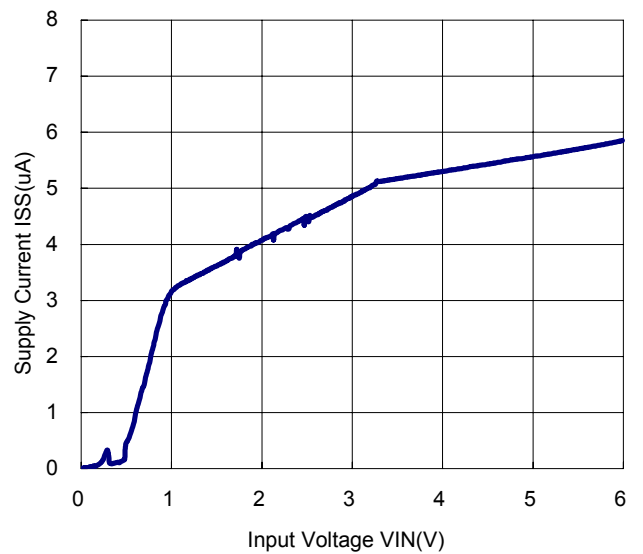


4) Output Voltage vs. Temperature

R1160N081X ECO=H

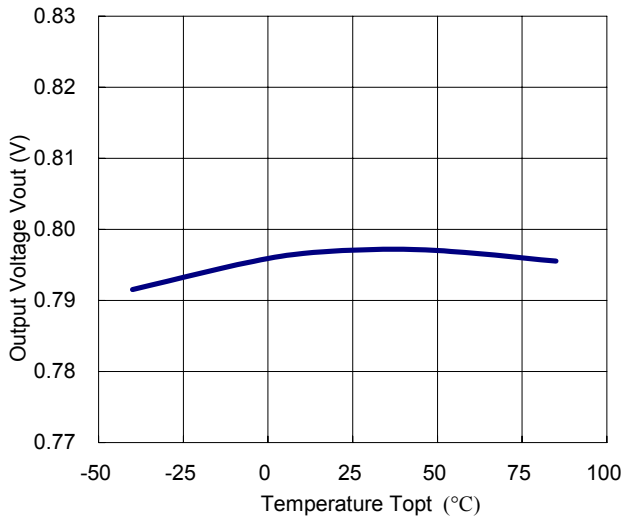


R1160N081X ECO=L

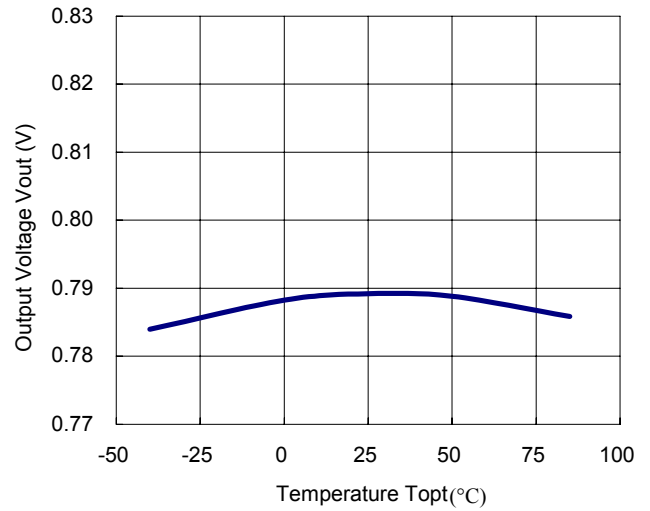


R1160N151X ECO=H




R1160N151X ECO=L

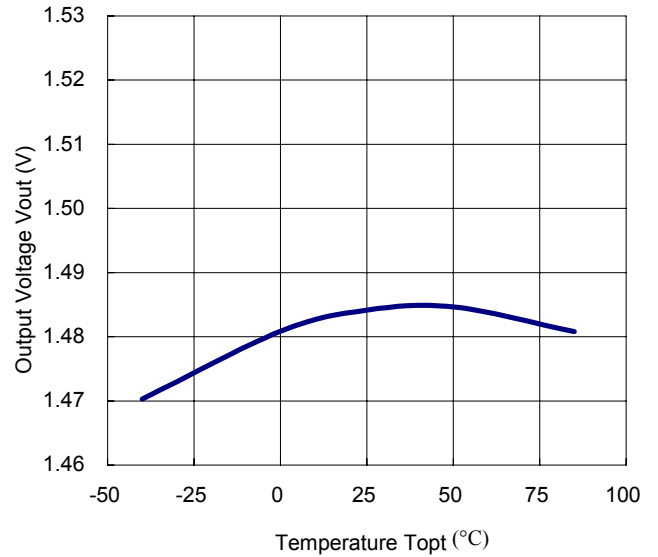

R1160N261X ECO=H

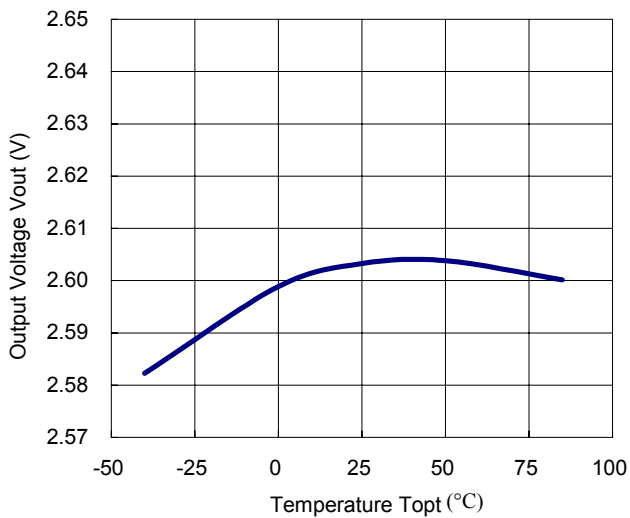


R1160N261X ECO=L

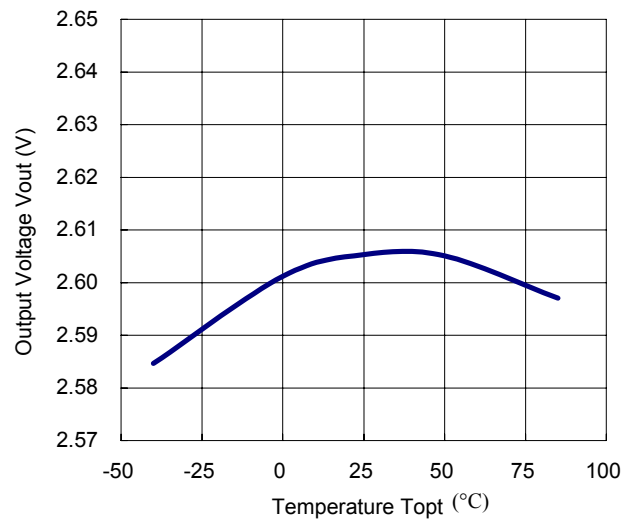

R1160N331X ECO=H




R1160N331X ECO=L

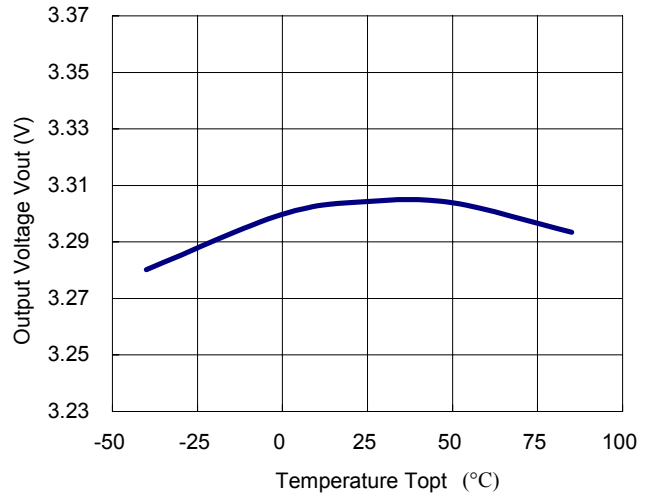


5) Supply Current vs. Temperature


R1160N081X ECO=H

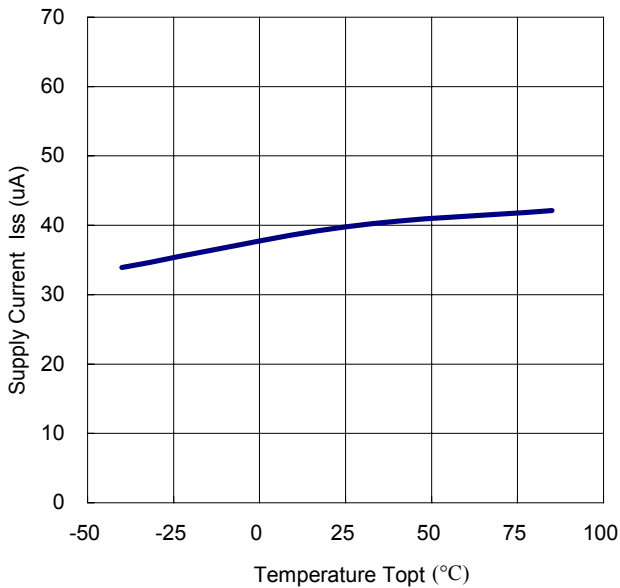


R1160N081X ECO=L

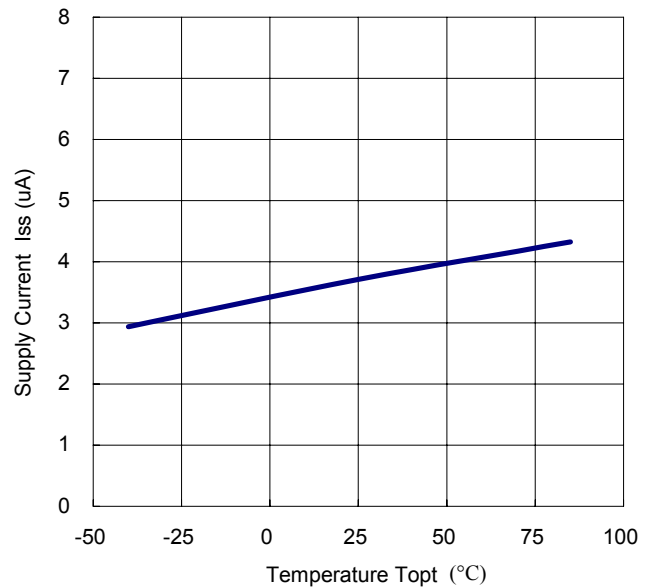

R1160N151X ECO=H

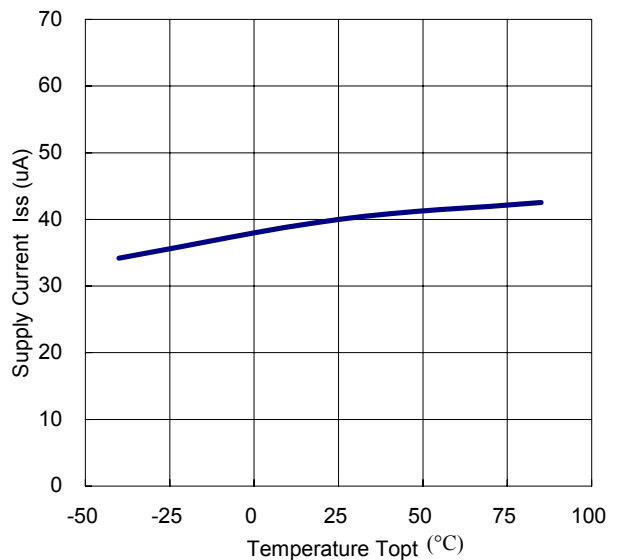

R1160N151X ECO=L

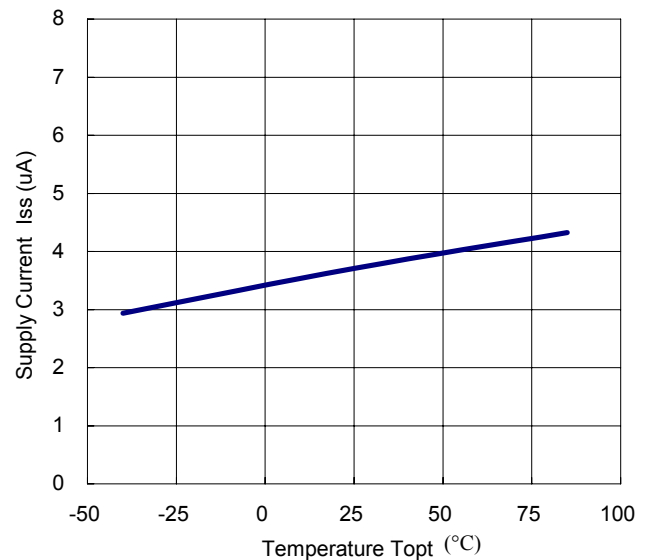

R1160N261X ECO=H




R1160N261X ECO=L



R1160N331X ECO=H



R1160N331X ECO=L

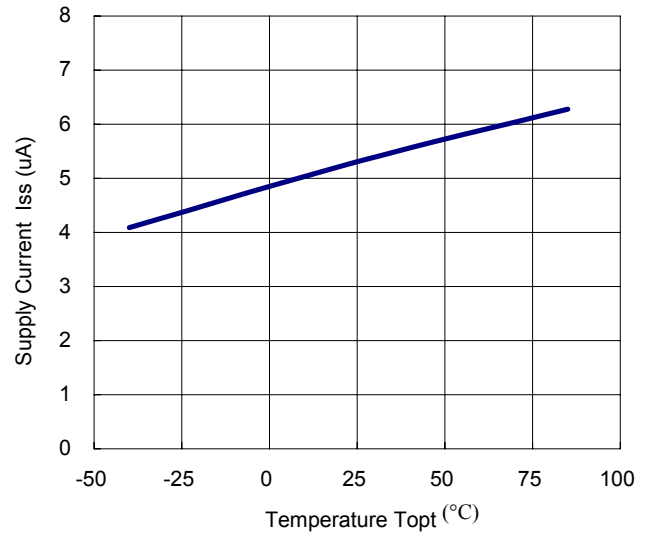


6) Dropout Voltage vs. Output Current

R1160N081X ECO=H



R1160N081X ECO=L

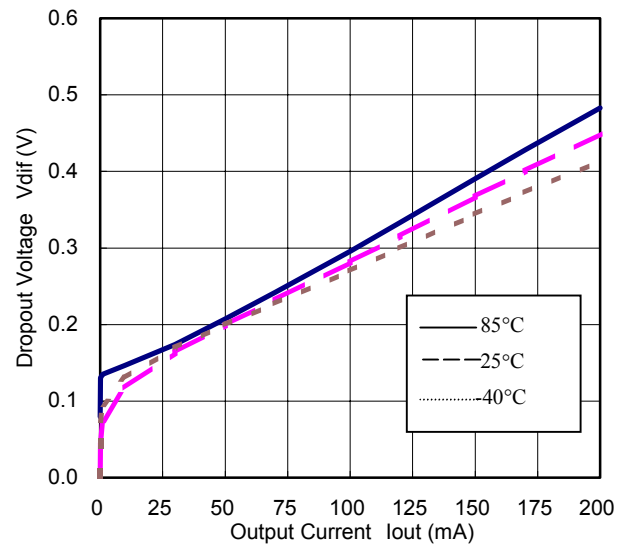




R1160N101X ECO=H



R1160N101X ECO=L

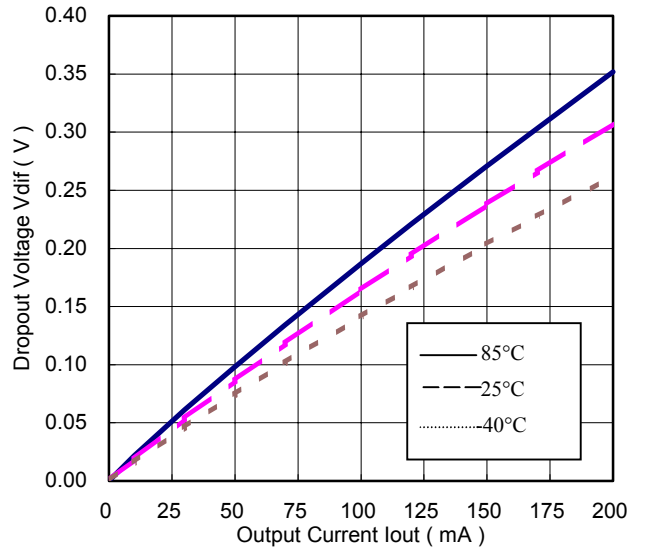

R1160N151X ECO=H



R1160N151X ECO=L



R1160N261X ECO=H




R1160N261X ECO=L




R1160N331X ECO=H




R1160N331X ECO=L

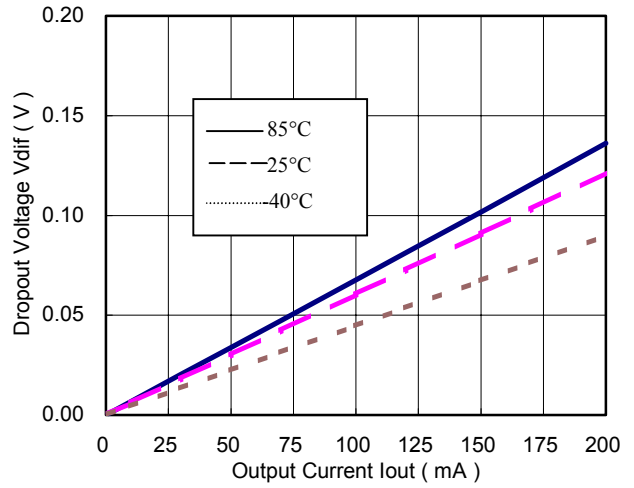


7) Dropout Voltage vs. Set Output Voltage (Topt=25°C)  
R1160NXX1X ECO=H

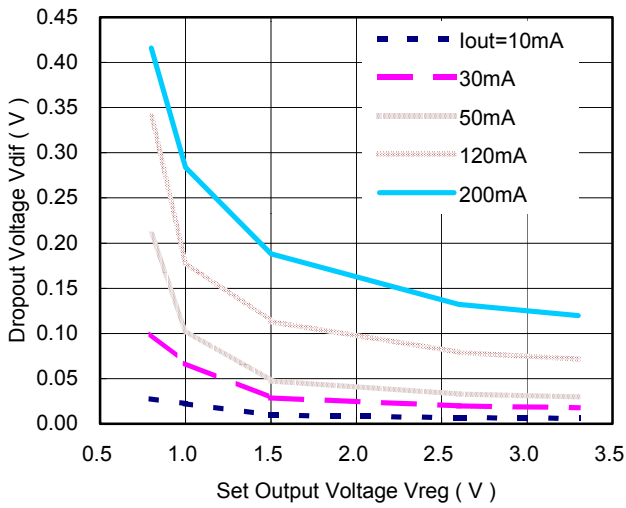


R1160NXX1X ECO=L

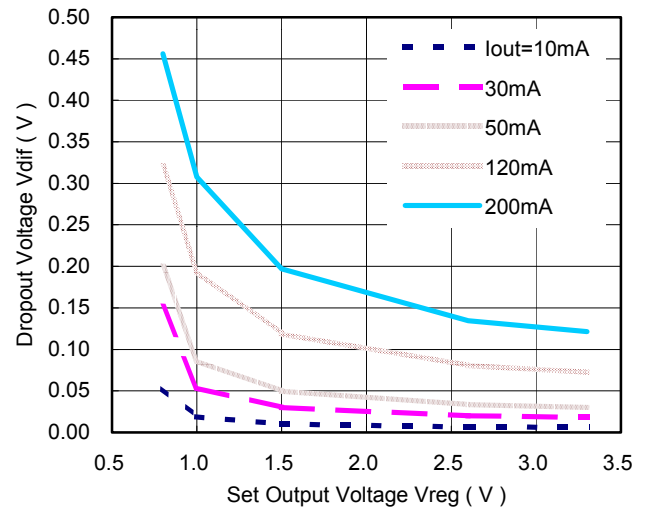


8) Ripple Rejection vs. Input Bias (Topt=25°C)  
R1160N261X Ripple 0.2Vp-p  
Iout=1mA CIN; none COUT=Tantal2.2μF

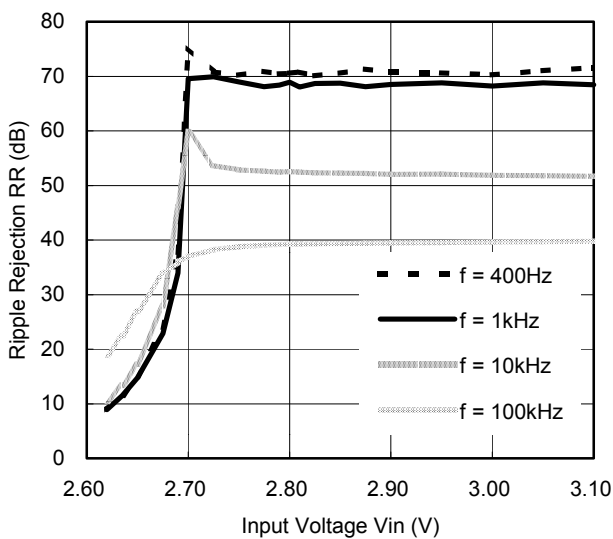

R1160N261X Ripple 0.5Vp-p  
Iout=1mA CIN; none COUT=Tantal2.2μF

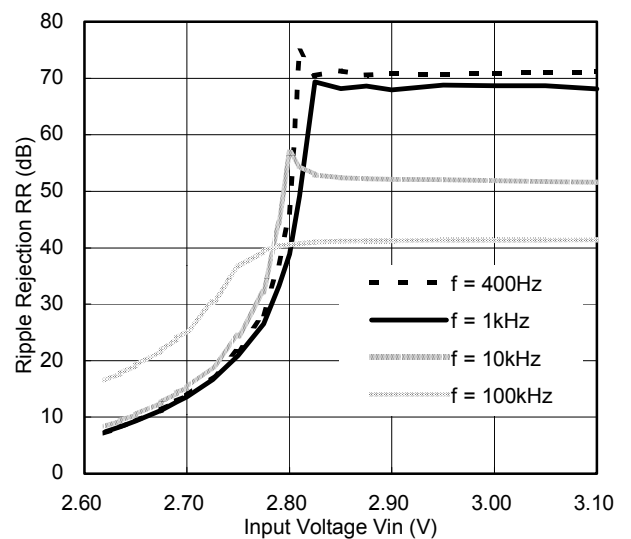


R1160N261X Ripple 0.2Vp-p  
 $I_{out}=30mA$   $C_{IN}$ ; none  $C_{OUT}=Tantal2.2\mu F$

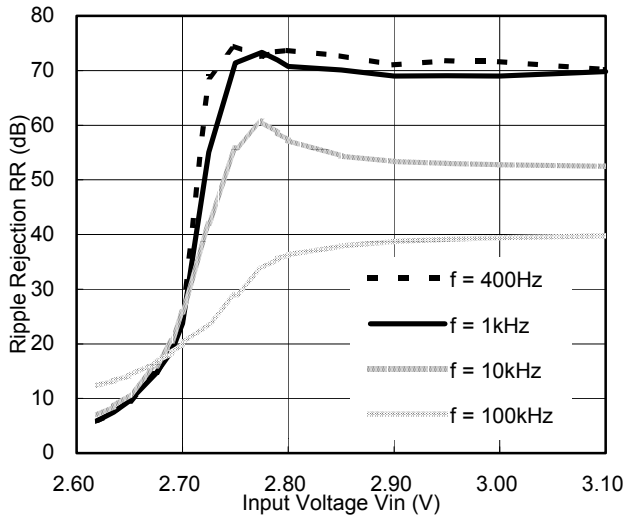


R1160N261X Ripple 0.5Vp-p  
 $I_{out}=30mA$   $C_{IN}$ ; none  $C_{OUT}=Tantal2.2\mu F$



R1160N261X Ripple 0.2Vp-p  
 $I_{out}=50mA$   $C_{IN}$ ; none  $C_{OUT}=Tantal2.2\mu F$

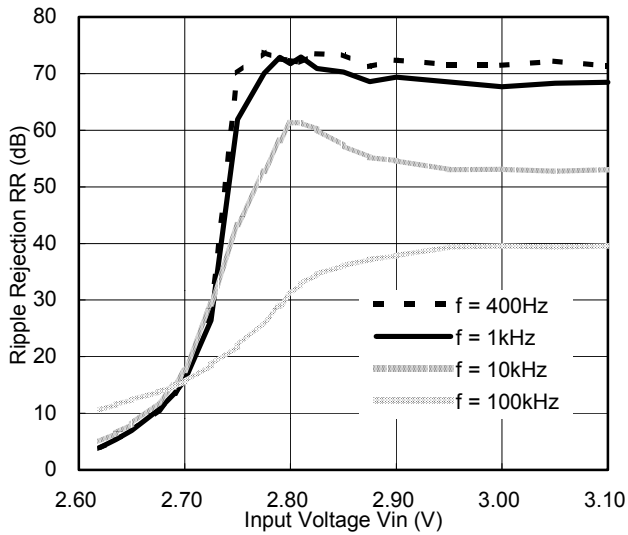

R1160N261X Ripple 0.5Vp-p  
 $I_{out}=50mA$   $C_{IN}$ ; none  $C_{OUT}=Tantal2.2\mu F$

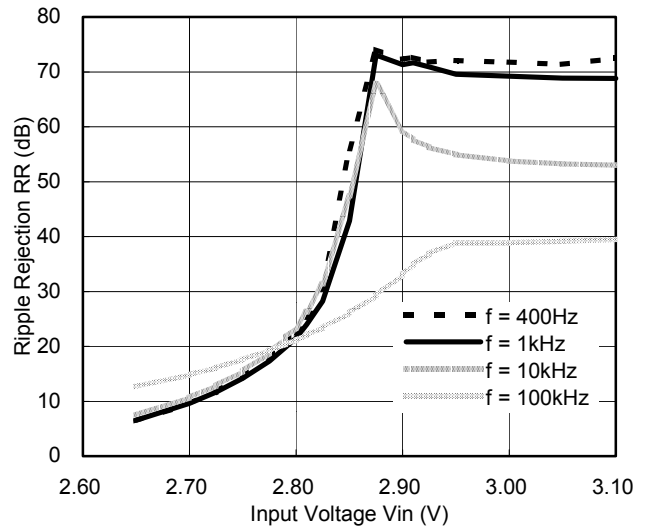

9) Ripple Rejection vs. Frequency


R1160N081X ECO=H

$V_{IN}=1.8V_{DC}+0.2V_{p-p}$ ,  $C_{IN}$ ; none,  $C_{OUT}=tantal2.2\mu F$



R1160N081X ECO=L

$V_{IN}=1.8V_{DC}+0.2V_{p-p}$ ,  $C_{IN}$ ; none,  $C_{OUT}=tantal2.2\mu F$

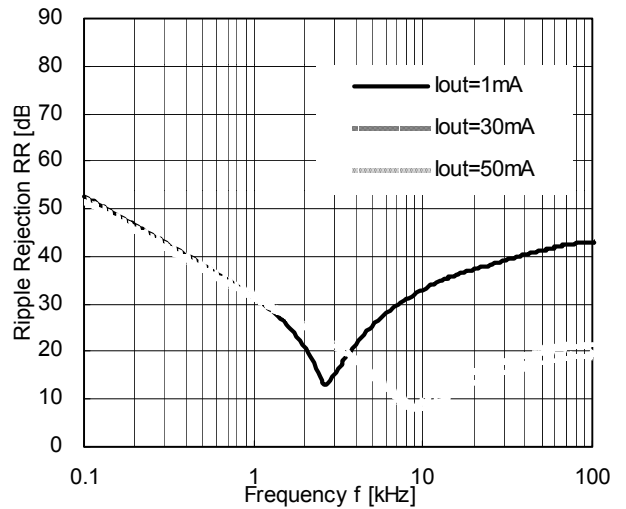

R1160N151X ECO=H

V<sub>IN</sub>=2.5VDC+0.2Vp-p, C<sub>IN</sub>; none, C<sub>OUT</sub>=tantal2.2μF




R1160N151X ECO=L

V<sub>IN</sub>=2.5VDC+0.2Vp-p, C<sub>IN</sub>; none, C<sub>OUT</sub>=tantal2.2μF




R1160N261X ECO=H

V<sub>IN</sub>=3.6VDC+0.2Vp-p, C<sub>IN</sub>; none, C<sub>OUT</sub>=tantal1.0μF

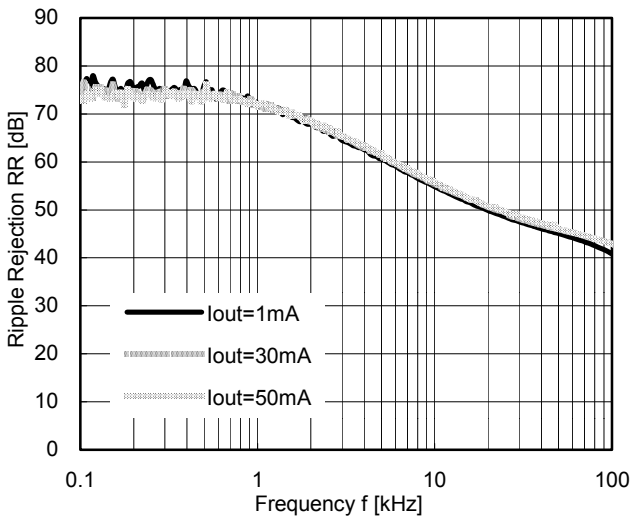


R1160N261X ECO=L

V<sub>IN</sub>=3.6VDC+0.2Vp-p, C<sub>IN</sub>; none, C<sub>OUT</sub>=tantal1.0μF

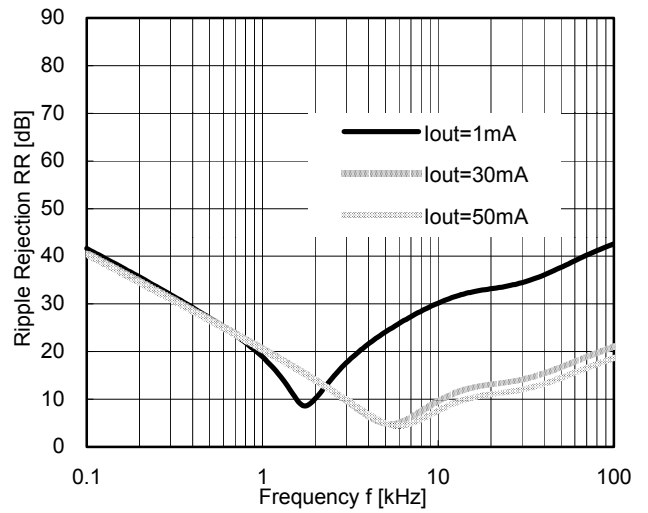


R1160N261X ECO=H

V<sub>IN</sub>=3.6VDC+0.2Vp-p, C<sub>IN</sub>; none, C<sub>OUT</sub>=tantal2.2μF

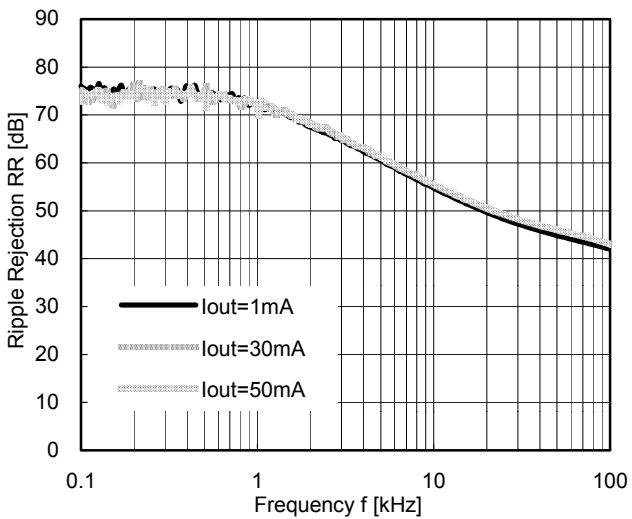

R1160N261X ECO=L

V<sub>IN</sub>=3.6VDC+0.2Vp-p, C<sub>IN</sub>; none, C<sub>OUT</sub>=tantal2.2μF

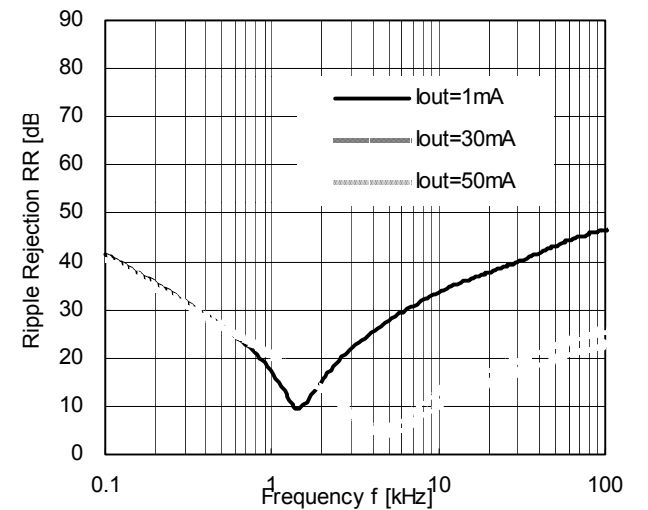


R1160N331X ECO=H

V<sub>IN</sub>=4.3VDC+0.2Vp-p, C<sub>IN</sub>; none, C<sub>OUT</sub>=tantal1.0μF




R1160N331X ECO=L

V<sub>IN</sub>=4.3VDC+0.2Vp-p, C<sub>IN</sub>; none, C<sub>OUT</sub>=tantal1.0μF

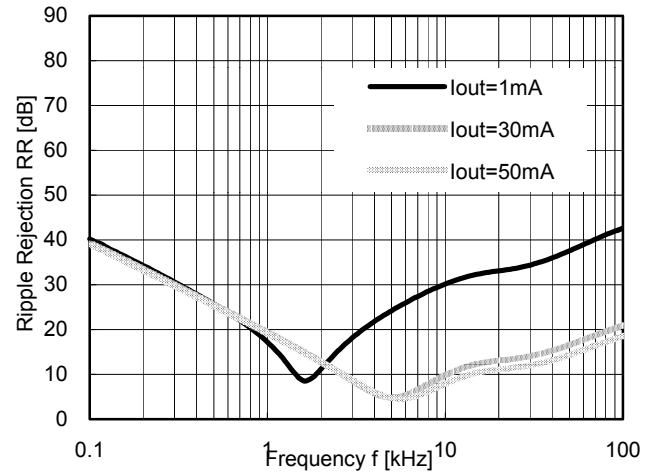


R1160N331X ECO=H

V<sub>IN</sub>=4.3VDC+0.2Vp-p, C<sub>IN</sub>; none, C<sub>OUT</sub>=tantal2.2μF

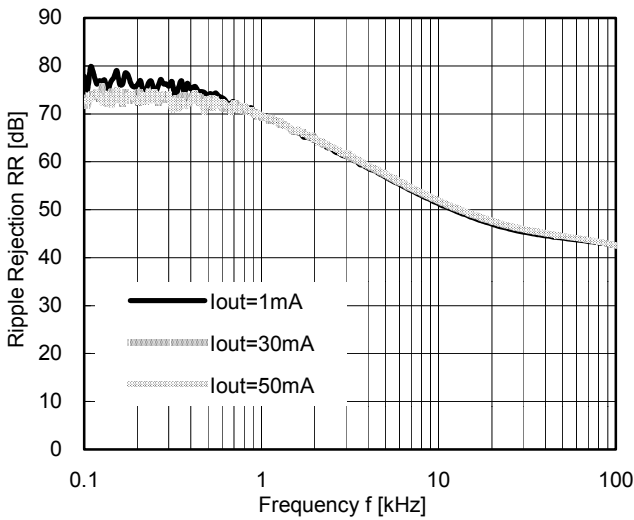

R1160N331X ECO=L

V<sub>IN</sub>=4.3VDC+0.2Vp-p, C<sub>IN</sub>; none, C<sub>OUT</sub>=tantal2.2μF

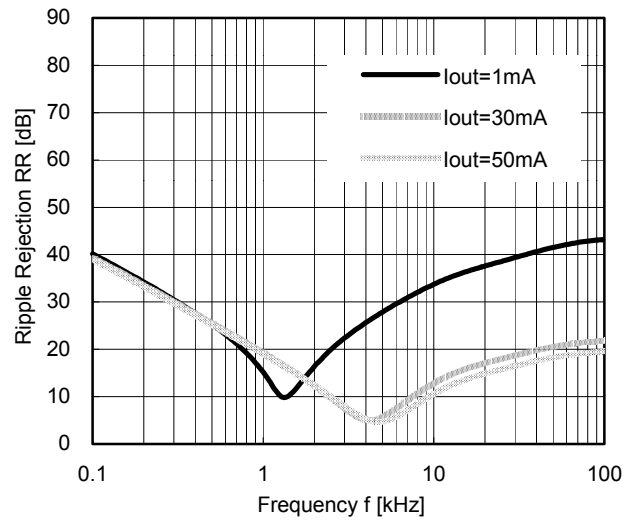

10) Input Transient Response

R1160N261X ECO=H

I<sub>OUT</sub>=30mA, tr=tf=5μs, C<sub>OUT</sub>=tantal1.0μF



R1160N261X ECO=L

I<sub>OUT</sub>=10mA, tr=tf=5μs, C<sub>OUT</sub>=tantal1.0μF



R1160N261X ECO=H

I<sub>OUT</sub>=30mA, tr=tf=5μs, C<sub>OUT</sub>= tantal 2.2μF




R1160N261X ECO=L

I<sub>OUT</sub>=10mA, tr=tf=5μs, C<sub>OUT</sub>= tantal 2.2μF




R1160N261X ECO=H

I<sub>OUT</sub>=30mA, tr=tf=5μs, C<sub>OUT</sub>= tantal 4.7μF

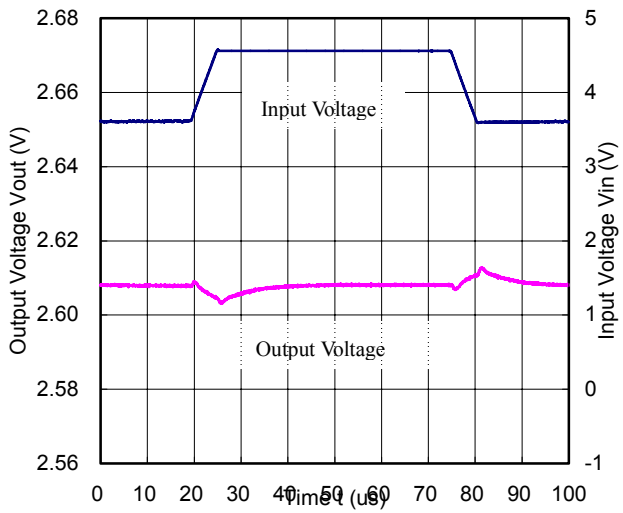

R1160N261X ECO=L


I<sub>OUT</sub>=10mA, tr=tf=5μs, C<sub>OUT</sub>= tantal 4.7μF

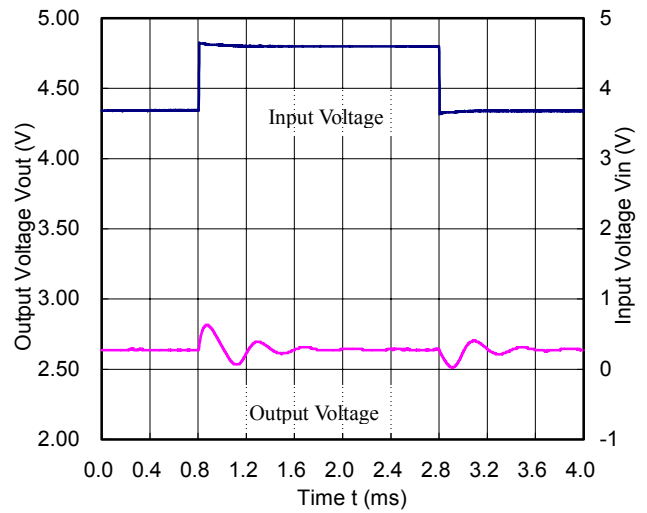

11) Load Transient Response


R1160n261x Eco=H

V<sub>IN</sub>=3.6V, C<sub>IN</sub>=Tantal 1.0μF, C<sub>OUT</sub>= Tantal 1.0μF

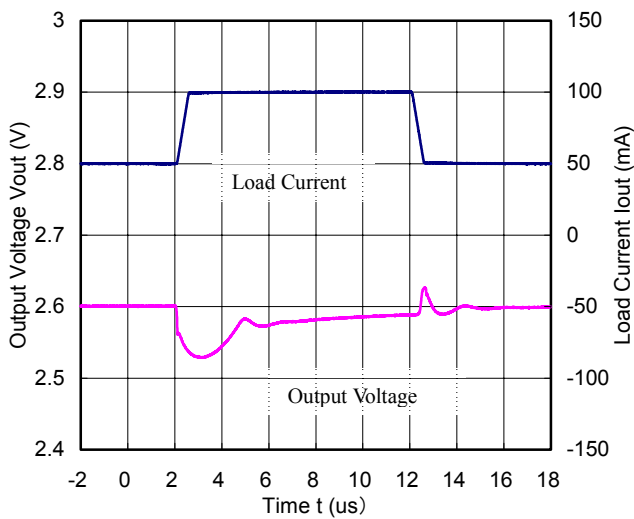

R1160n261x Eco=L

V<sub>IN</sub>=3.6V, C<sub>IN</sub>=Tantal 1.0μF, C<sub>OUT</sub>= Tantal 1.0μF

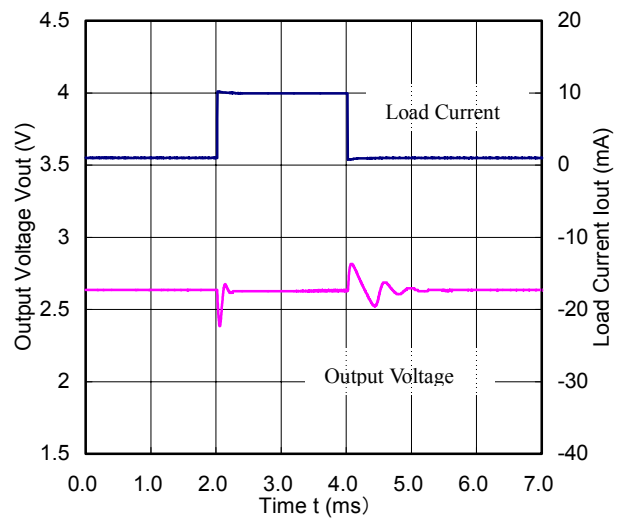


R1160N261X ECO=H

V<sub>IN</sub>=3.6V, C<sub>IN</sub>=tantal 1.0μF, C<sub>OUT</sub>= tantal 2.2μF




R1160N261X ECO=L

V<sub>IN</sub>=3.6V, C<sub>IN</sub>=tantal 1.0μF, C<sub>OUT</sub>= tantal 2.2μF

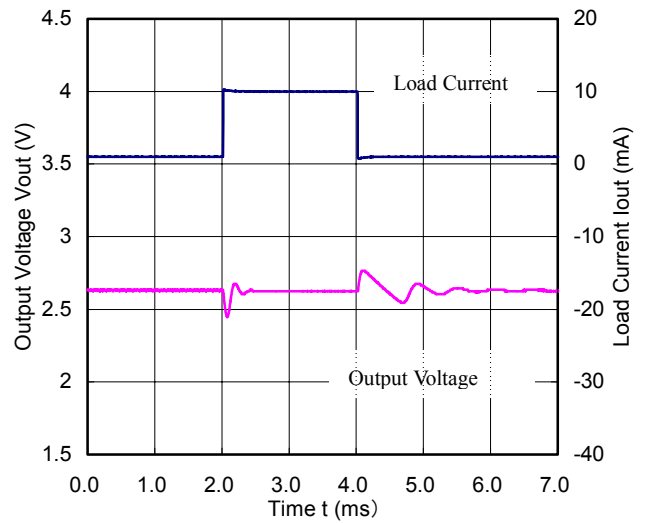


R1160N261X ECO=H

V<sub>IN</sub>=3.6V, C<sub>IN</sub>=tantal 1.0μF, C<sub>OUT</sub>= tantal 4.7μF

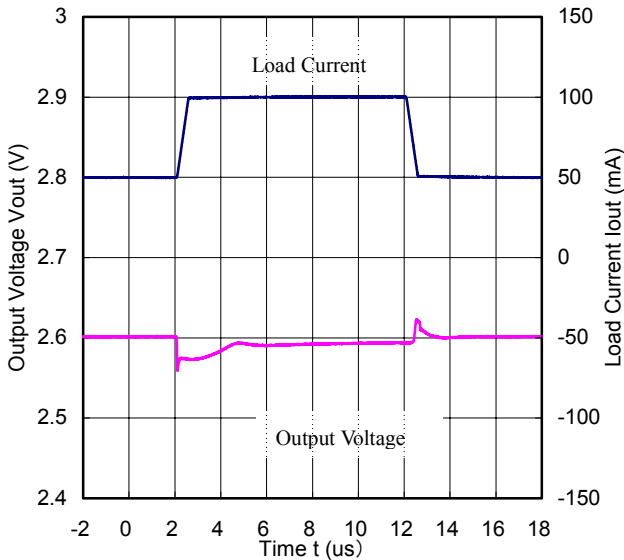

R1160N261X ECO=L

V<sub>IN</sub>=3.6V, C<sub>IN</sub>=tantal 1.0μF, C<sub>OUT</sub>= tantal 4.7μF

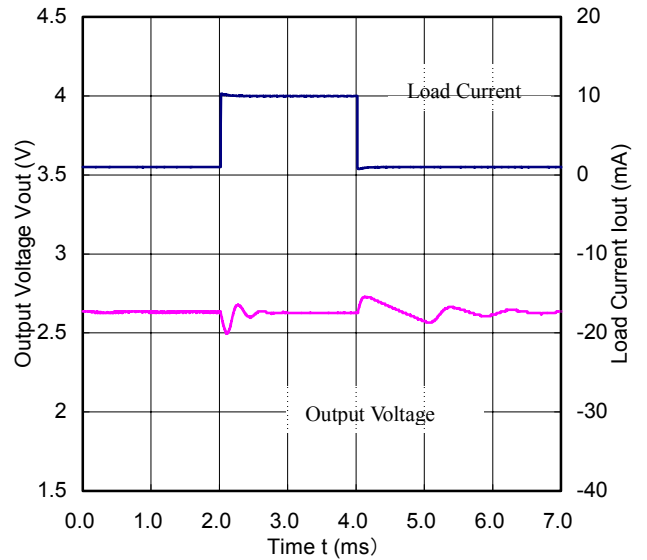

12) Turn on speed with CE pin


R1160N081B ECO=H

V<sub>IN</sub>=1.8V, C<sub>IN</sub>=tantal 1.0μF, C<sub>OUT</sub>= tantal 2.2μF



R1160N081B ECO=L

V<sub>IN</sub>=1.8V, C<sub>IN</sub>=tantal 1.0μF, C<sub>OUT</sub>= tantal 2.2μF

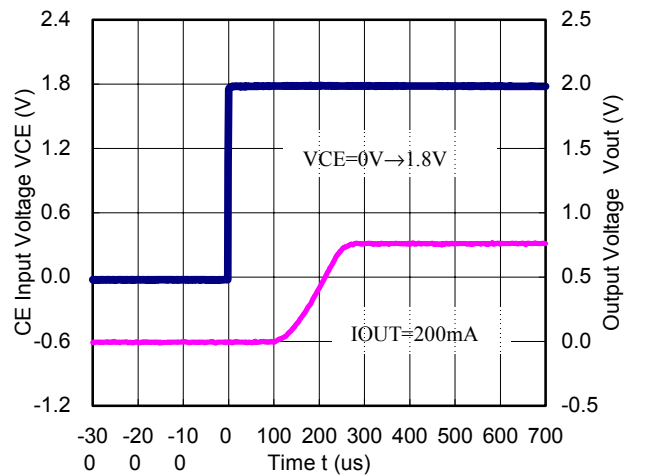


R1160N151B ECO=H

V<sub>IN</sub>=2.5V, C<sub>IN</sub>=tantal 1.0μF, C<sub>OUT</sub>= tantal 2.2μF




R1160N151B ECO=L

V<sub>IN</sub>=2.5V, C<sub>IN</sub>=tantal 1.0μF, C<sub>OUT</sub>= tantal 2.2μF

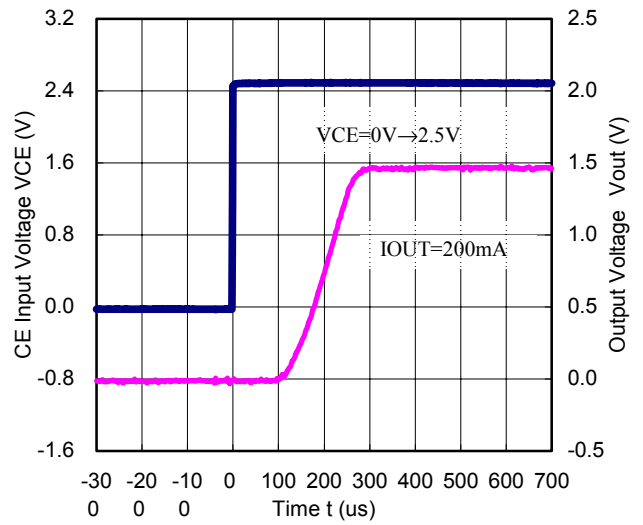


R1160N261B ECO=H

V<sub>IN</sub>=3.6V, C<sub>IN</sub>=tantal 1.0μF, C<sub>OUT</sub>= tantal 2.2μF

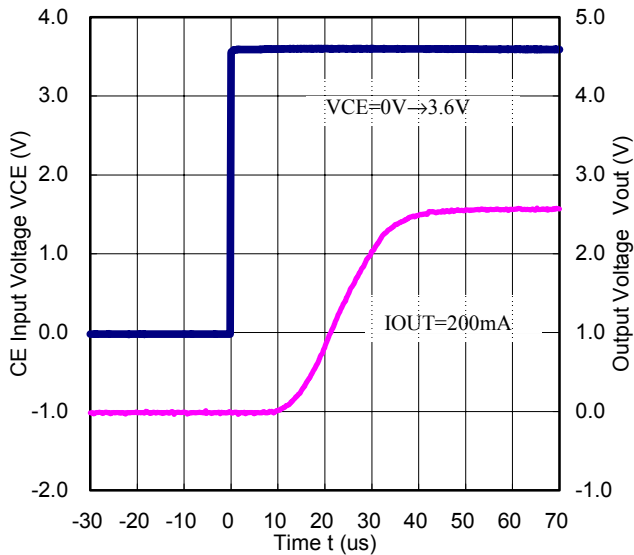


R1160N261B ECO=L

V<sub>IN</sub>=3.6V, C<sub>IN</sub>=tantal 1.0μF, C<sub>OUT</sub>= tantal 2.2μF

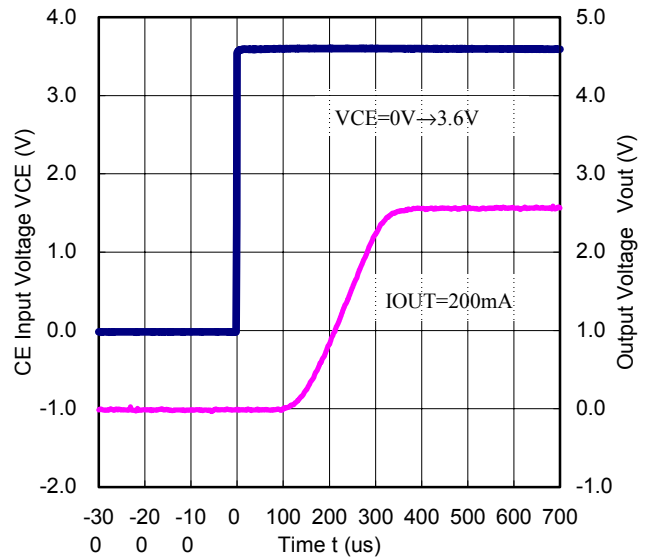


R1160N331B ECO=H

V<sub>IN</sub>=4.3V, C<sub>IN</sub>=tantal 1.0μF, C<sub>OUT</sub>= tantal 2.2μF

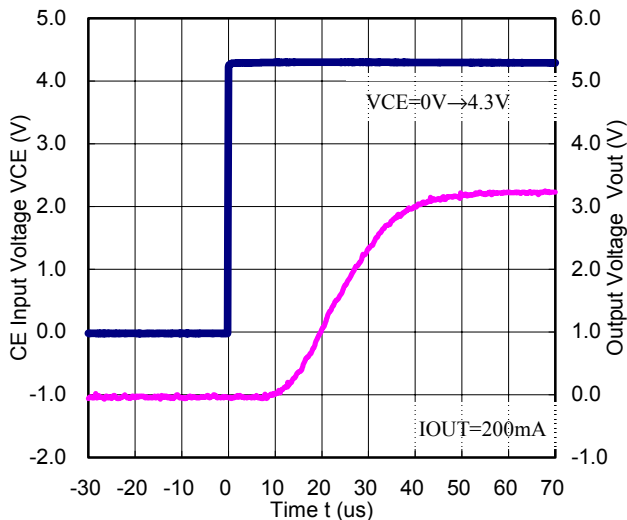

R1160N331B ECO=L

V<sub>IN</sub>=4.3V, C<sub>IN</sub>=tantal 1.0μF, C<sub>OUT</sub>= tantal 2.2μF

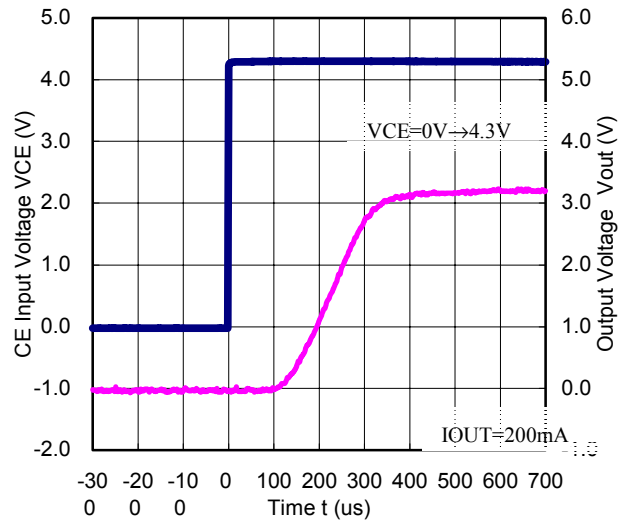



13) Output Voltage at Mode alternative point

R1160N101X

VIN=1.3V, CIN=tantal 1.0μF, COUT= tantal 2.2μF



R1160N101X

VIN=2.0V, CIN=tantal 1.0μF, COUT= tantal 2.2μF



R1160N261X

VIN=2.9V, CIN=tantal 1.0μF, COUT= tantal 2.2μF



R1160N261X

VIN=3.6V, CIN=tantal 1.0μF, COUT= tantal 2.2μF



## TECHNICAL NOTES




When using these ICs, consider the following points:

In these ICs, phase compensation is made for securing stable operation even if the load current is varied. For this purpose, be sure to use a capacitor  $C_{OUT}$  with good frequency characteristics and ESR (Equivalent Series Resistance) of which is in the range described as follows:

The relations between  $I_{OUT}$  (Output Current) and ESR of Output Capacitor are shown below. The conditions when the white noise level is under  $40\mu V(Avg.)$  are marked as the hatched area in the graph.

<Test conditions>

- (1) Frequency band: 10Hz to 2MHz
- (2) Temperature: 25°C

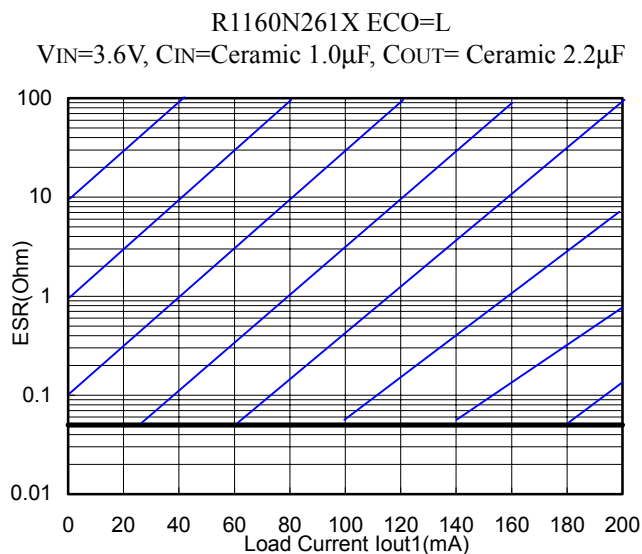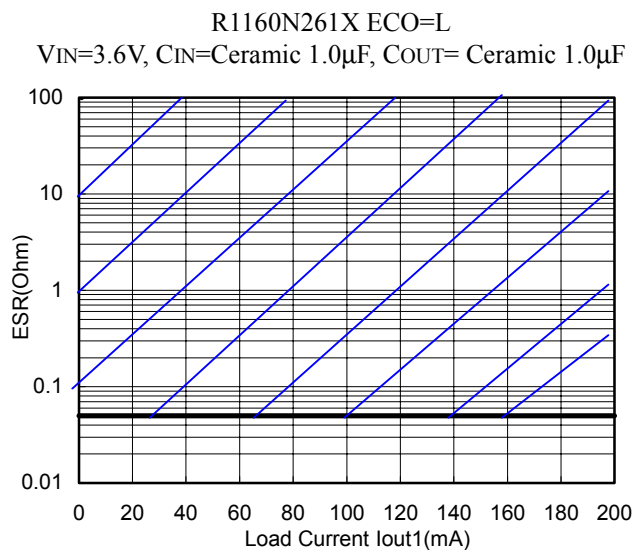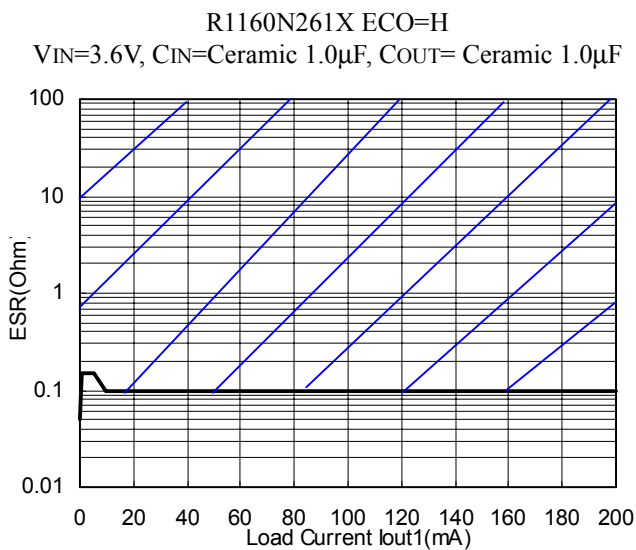



Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «**JONHON**», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «**FORSTAR**».



## JONHON

«**JONHON**» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«**FORSTAR**» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А