



MOP-TFT800480-70A-BLM-TPN

Hardware Manual

Revision 1.1

Revision History

| Revision | Date | Description | Author |
|----------|---------------|-------------------------|--------|
| 1.1 | June 13, 2017 | Updated TBD information | Divino |
| 1.0 | May 26, 2017 | Initial Release | Divino |



Contents

| | |
|--|----|
| Revision History | 1 |
| Contents | 2 |
| 1 General Information | 3 |
| 2 Absolute Maximum Ratings..... | 3 |
| 3 Electrical Characteristics..... | 3 |
| 4 Backlight Characteristics..... | 3 |
| 5 External Dimensions..... | 4 |
| 6 Electro-Optical Characteristics | 5 |
| 7 Interface Description | 6 |
| 7.1 TFT Module Interface Description | 6 |
| 8 AC Characteristics | 7 |
| 8.1 Pixel Timing..... | 7 |
| 8.2 Data Timing..... | 8 |
| 9 Power Sequence | 9 |
| 9.1 Power Up Sequence | 9 |
| 10 Inspection Criterion | 10 |
| 10.1 Description | 10 |
| 10.2 Sampling Plan and Reference Standards | 10 |
| 10.3 Inspection condition | 10 |
| 10.4 Definition of Inspection Zone in LCD | 10 |
| 10.5 Function Defect | 10 |
| 10.6 LCD Pixel Defect | 11 |
| 10.7 Dot and line defect | 11 |
| 11 Handling Precautions..... | 12 |
| 11.1 Mounting method | 12 |
| 11.2 LCD Handling and Cleaning Precaution | 12 |
| 11.3 Static Charge Precaution | 12 |
| 11.4 Packing..... | 12 |
| 11.5 Precautions during Operation..... | 12 |
| 11.6 Storage Recommendations | 13 |
| 11.7 Safety Precautions | 13 |
| 12 Ordering | 14 |
| 12.1 Part Numbering Scheme..... | 14 |
| 12.2 Options | 14 |
| 13 Contact | 14 |



1 General Information

| No. | Item | Contents | Unit |
|-----|--------------------------------|--|------|
| 1 | LCD size | 7.0 inch (Diagonal) | / |
| 2 | LCD type | TN/Normally white/Transmissive(Anti-glare) | / |
| 3 | Viewing direction(eye) | 12 O'clock | / |
| 4 | Gray scale inversion direction | 6 O'clock | / |
| 5 | Resolution(H*V) | 800*480 | / |
| 6 | Module size (L*W*H) | 164.9*100.0*3.5 | mm |
| 7 | Active area (L*W) | 153.84*85.63 | mm |
| 8 | Pixel pitch (L*W) | 0.1923*0.1784 | mm |
| 9 | Interface type | RGB Interface | / |
| 10 | Module power consumption | 0.462(without backlight) | W |
| 11 | Back light type | LED | / |
| 12 | Driver IC | HX8264+HX8664 or compatible | / |
| 13 | Weight | 122.2 | g |

2 Absolute Maximum Ratings

| Item | Symbol | Min. | Max. | Unit |
|----------------------------------|--------|------|--------------|------|
| Power supply input voltage (LCM) | VDD | -0.5 | 5.0 | V |
| Backlight current (normal temp.) | ILED | - | 75 | mA |
| Operation temperature | Top | -20 | 70 | °C |
| Storage temperature | Tst | -30 | 80 | °C |
| Humidity | RH | - | 90%(Max60°C) | RH |

3 Electrical Characteristics

DC Characteristics (at Ta=25 °C)

| Item | Symbol | Min. | Typ. | Max. | Unit |
|--|--------|--------|------|--------|------|
| Power supply input voltage (LCM) | VDD | 2.7 | 3.3 | 3.6 | V |
| I/O logic voltage | VDDIO | N/A | N/A | N/A | V |
| Input voltage 'H' level | VIH | 0.7VDD | - | VDD | V |
| Input voltage 'L' level | VIL | 0 | - | 0.3VDD | V |
| Power supply current | IVDD | - | 140 | - | mA |
| TFT gate on voltage | VGH | - | 18 | - | V |
| TFT gate off voltage | VGL | - | -8 | - | V |
| Analog power supply voltage | AVDD | - | 10.3 | - | V |
| Differential input common mode voltage | Vcom | - | 3.4 | - | V |

4 Backlight Characteristics

(at Ta=25 °C, RH=60%)

| Item | Symbol | Min. | Typ. | Max. | Unit | Note |
|-----------------------|--------|----------------------------|-------|------|------|---------|
| LED forward voltage | VF | - | 25.6 | - | V | IF=60mA |
| LED forward current | IF | - | 60 | - | mA | |
| LED power consumption | PLED | - | 1.536 | - | W | *Note |
| Number of LED | - | | 24 | | PCS | |
| Connection mode | - | 8 in series *3 in parallel | | | / | |
| LED life-time | - | 20000 | - | - | Hrs | **Note |

***Note:** Calculate Value for reference $IF \times VF = PLED$

****Note:** The LED Life-time is defined as the estimated time to 50% degradation of initial brightness at Ta=25°C and IF =60mA. The LED lifetime could be decreased if operating IF is larger than 60mA, and increased if IF is less than 60mA.



5 External Dimensions

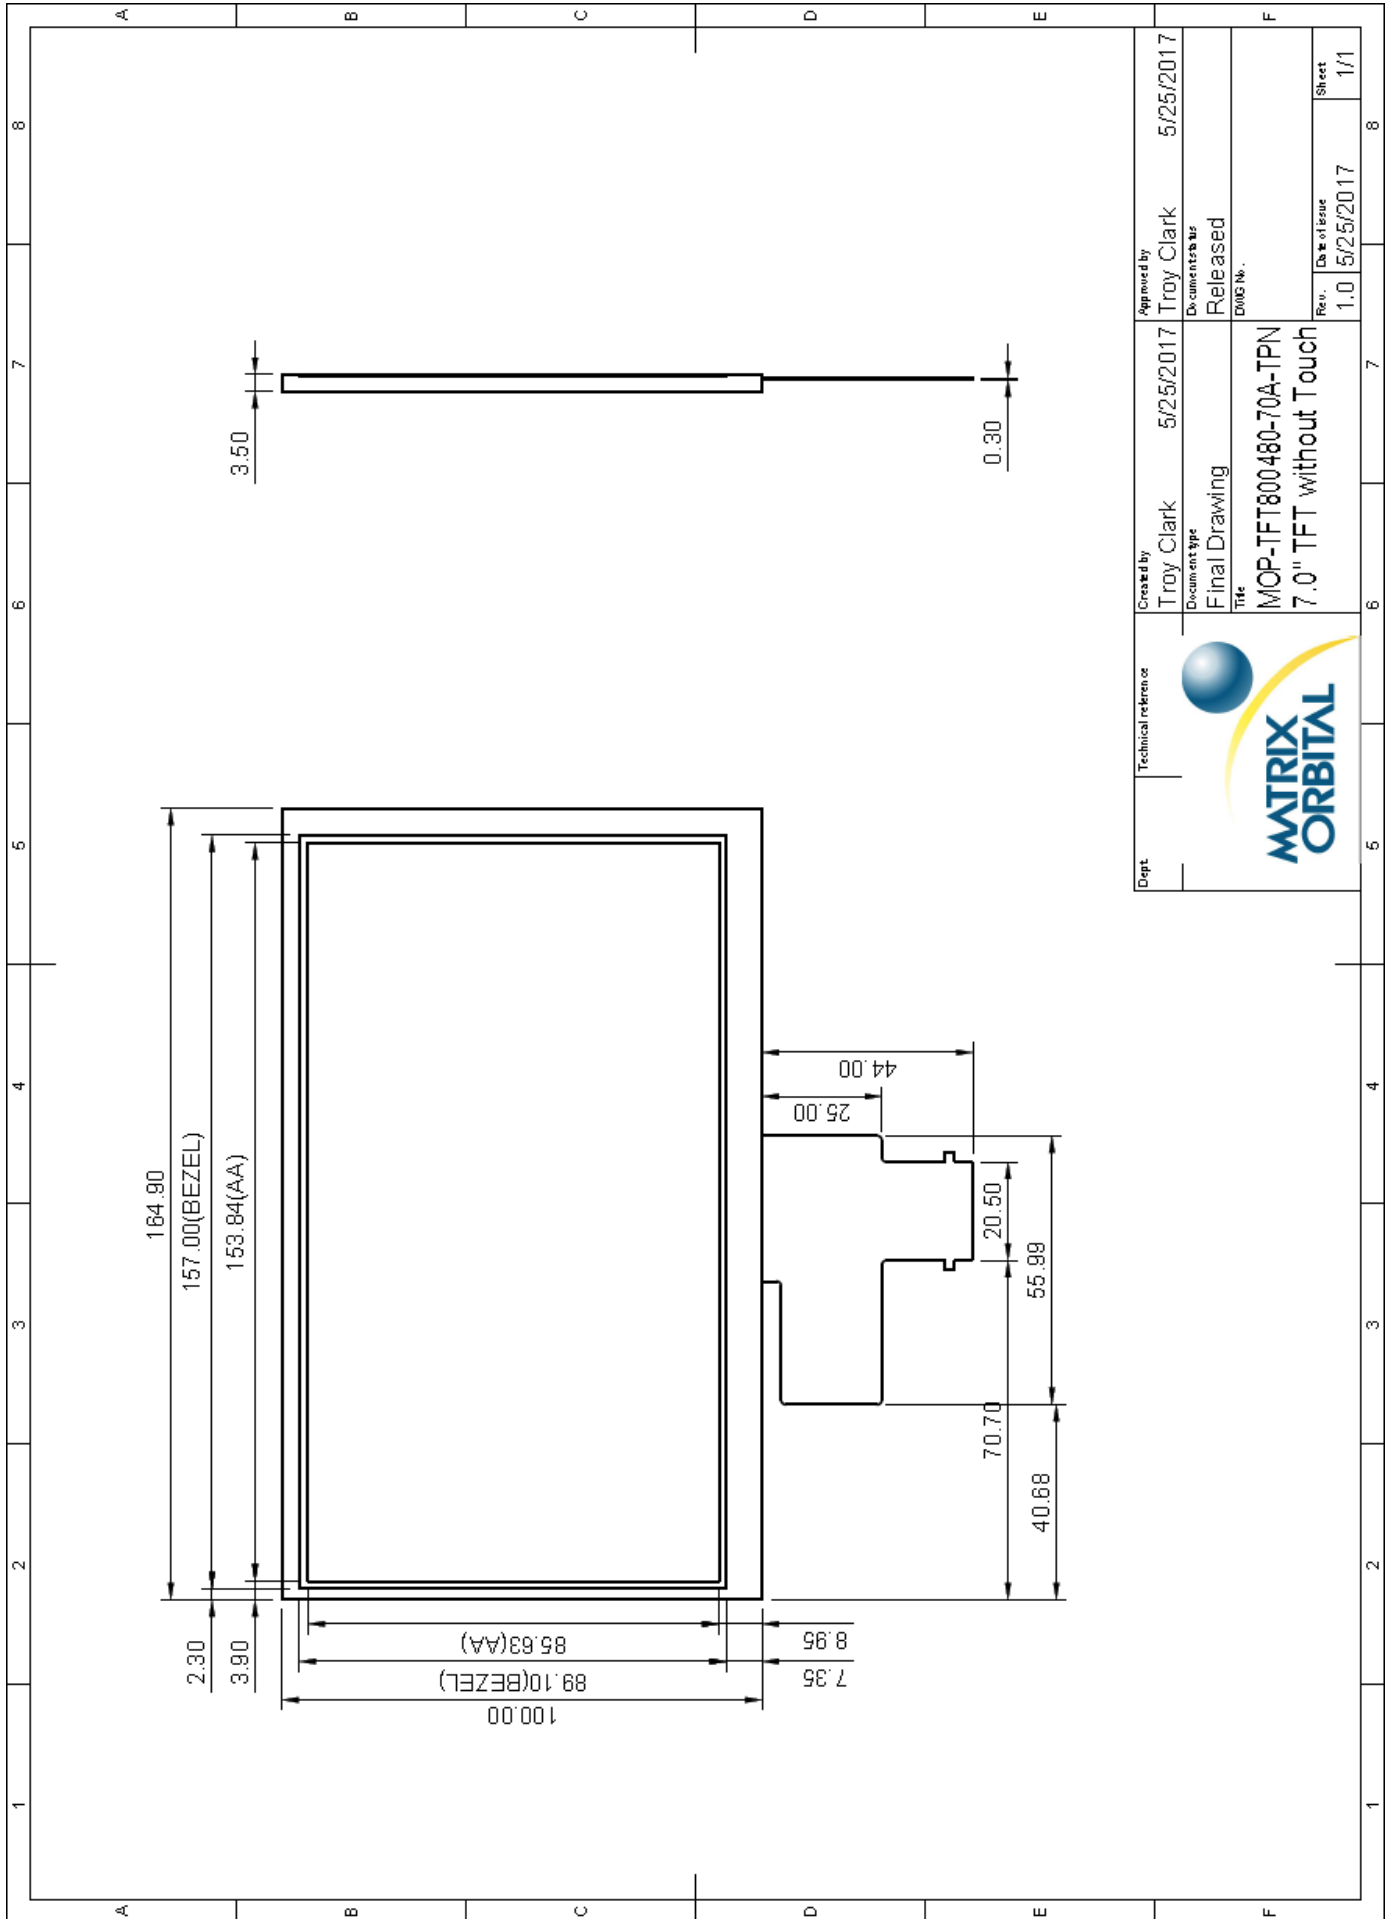


Figure 1: MOP-TFT800480-70A-BLM-TPN Drawing



6 Electro-Optical Characteristics

| Item | Symbol | Condition | Min. | Typ. | Max. | Unit | Remark | Note |
|-------------------------|----------------|--|--------|--------|--------|-------------------|------------------|--------|
| Response time | Tr + Tf | - | - | 25 | 50 | ms | FIG.1 | Note 4 |
| Contrast ratio | Cr | | 400 | 500 | - | --- | FIG.2 | Note 1 |
| Surface Luminance | Lv | $\theta=0^\circ$ | 420 | 520 | - | cd/m ² | FIG.2 | Note 2 |
| Luminance uniformity | δ WHITE | $\theta=0^\circ$ | 60 | 75 | - | % | FIG.2 | Note 3 |
| NTSC | - | $\theta=0^\circ$ | - | 50 | - | % | FIG.2 | Note 5 |
| Viewing angle | θ | $\varnothing = 90^\circ$ | 60 | 70 | - | deg | FIG.3 | Note 6 |
| | | $\varnothing = 270^\circ$ | 50 | 60 | - | deg | FIG.3 | |
| | | $\varnothing = 0^\circ$ | 60 | 70 | - | deg | FIG.3 | |
| | | $\varnothing = 180^\circ$ | 60 | 70 | - | deg | FIG.3 | |
| CIE (x, y) chromaticity | Red x | $\theta=0^\circ$ $\varnothing=0^\circ$ Ta=25°C | 0.5378 | 0.5778 | 0.6178 | - | FIG.2 CIE1931 | Note 5 |
| | Red y | | 0.2872 | 0.3272 | 0.3672 | - | | |
| | Green x | | 0.3128 | 0.3528 | 0.3928 | - | | |
| | Green y | | 0.5548 | 0.5948 | 0.6348 | - | | |
| | Blue x | | 0.1140 | 0.1540 | 0.1940 | - | | |
| | Blue y | | 0.0977 | 0.1377 | 0.1777 | - | | |
| | White x | | 0.2685 | 0.3085 | 0.3485 | - | | |
| | White y | | 0.3189 | 0.3589 | 0.3989 | - | | |

***Note 1:** Definition of contrast ratio

Contrast Ratio (CR) is defined mathematically by the following formula.

$$\text{CONTRAST RATIO} = \frac{\text{Luminance measured when LCD on the "White" State}}{\text{Luminance measured when LCD on the "Black" State}}$$

***Note 2:** Definition of surface luminance

Surface luminance is the LCD luminance from the surface with all pixels displaying white.

$$L_v = \text{Average Surface Luminance with all white pixels (P1, P2, P3 ... Pn)}$$

***Note 3:** Definition of luminance uniformity

The luminance uniformity in surface luminance (Yu) is determined by measuring luminance at each test position 1 through n, and then dividing the maximum luminance of n point's luminance by minimum luminance of n points luminance.

$$Y_u = \frac{\text{Minimum Surface Luminance with all white pixels (P1, P2, P3 ... Pn)}}{\text{Maximum Surface Luminance with all white pixels (P1, P2, P3 ... Pn)}}$$

***Note 4:** Definition of Response time

The response time is defined as the LCD optical switching time interval between "White" state and "Black" state. Rise time (TON) is the time between photo detector output intensity changed from 90% to 10%. And fall time (TOFF) is the time between photo detector output intensity changed from 10% to 90%.

***Note 5:** Definition of color chromaticity (CIE1931)

CIE (x, y) chromaticity, the x, y value is determined by screen active area center position P5.

***Note 6:** Definition of Viewing angle.

Viewing angle is the angle at which the contrast ratio is greater than 10. The angles are determined for the horizontal or x axis and the vertical or y axis with respect to the z axis which is normal to the LCD surface.

For Viewing angle and response time testing, the testing data is based on Autronic-Melchers's ConoScope or DMS series Instruments or compatible. For contrast ratio, Surface Luminance, Luminance uniformity and CIE, the testing data is based on TOPCON's BM-7 or BM-5 photo detector or compatible.

***Note 7:** For TFT module, Gray scale reverse occurs in the direction of panel viewing angle.



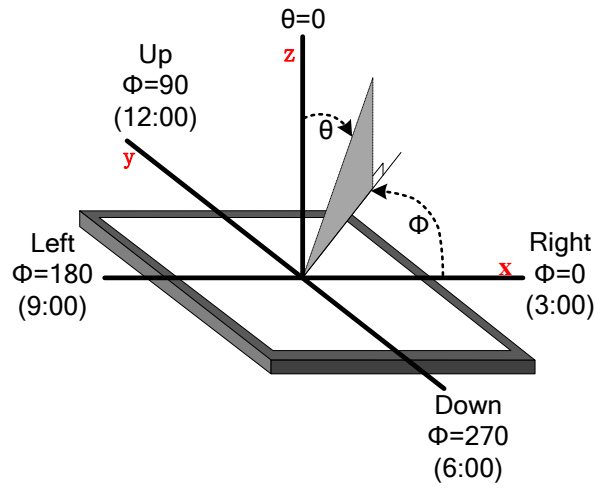


Figure 2: The definition of viewing angle

7 Interface Description

7.1 TFT Module Interface Description

| Interface No. | Name | I/O Pin Connections | Description |
|---------------|--------|---------------------|--|
| 1 | VLEDK | P | Power for LED backlight(Cathode) |
| 2 | VLEDA | P | Power for LED backlight(Anode) |
| 3 | CS | I | SPI function chip select signal |
| 4 | VDD | P | Digital Power |
| 5-12 | R0-R7 | I | Red data |
| 13-20 | G0-G7 | I | Green data |
| 21-28 | B0-B7 | I | Blue data |
| 29 | GND | P | Power Ground |
| 30 | DCLK | I | Clock input |
| 31 | DISP | I | Display on/off |
| 32 | HSYNC | I | Horizontal sync input. Negative polarity |
| 33 | VSYNC | I | Vertical sync input. Negative polarity |
| 34 | DE | I | Data Enable signal ;normally pull low |
| 35 | SCL | I | SPI SCL function |
| 36 | SDA | I | SPI SDA function |
| 37 | XR(NC) | / | / |
| 38 | YD(NC) | / | / |
| 39 | XL(NC) | / | / |
| 40 | YU(NC) | / | / |

8 AC Characteristics

8.1 Pixel Timing

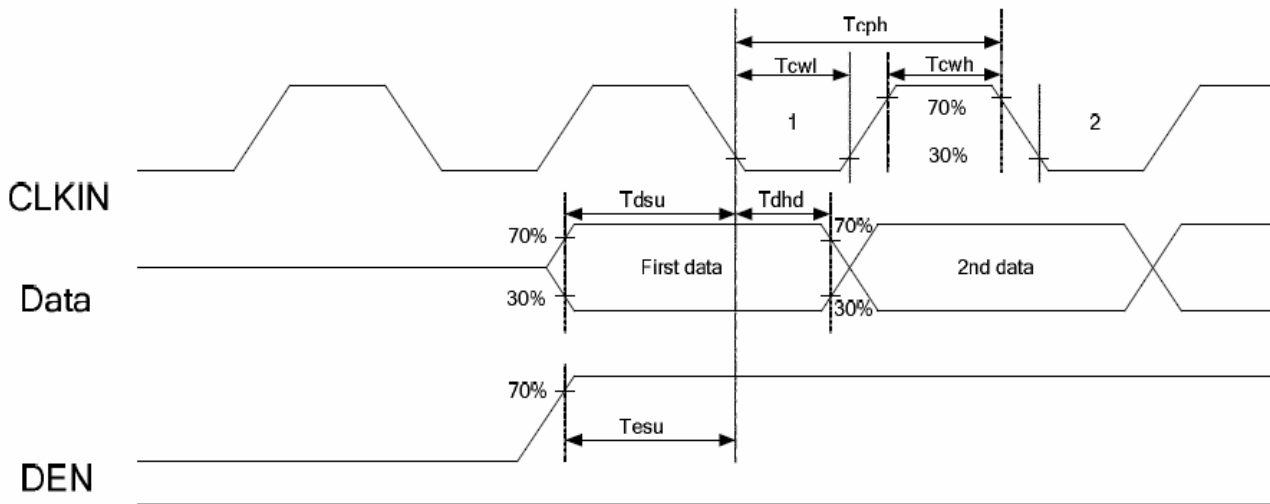


Figure 3: Clock input Data/Den timing diagram

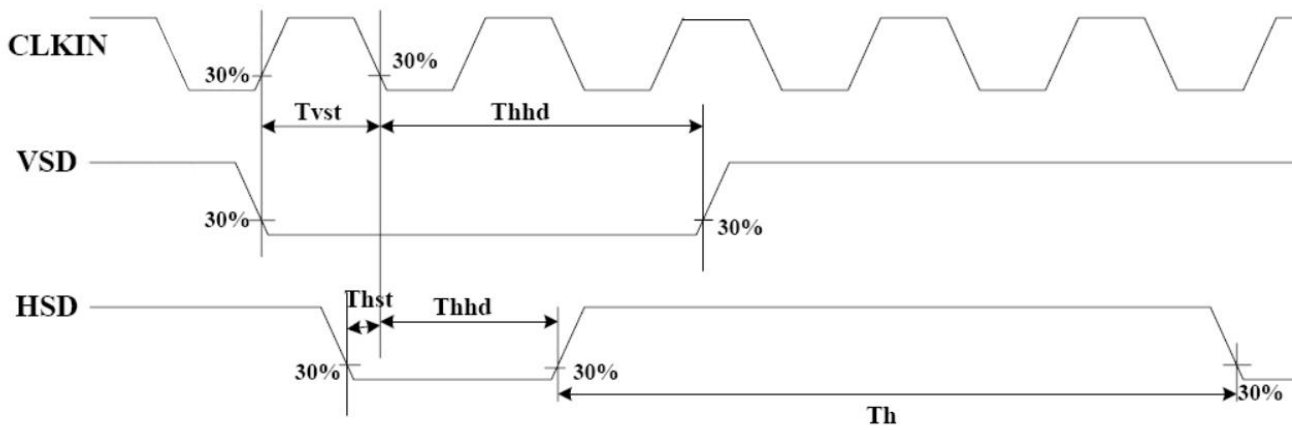


Figure 4: Clock input VSD/HSD timing diagram

| Parameter | Symbol | Spec. | | | Unit | Conditions |
|-------------------------|--------|-------|------|------|------|---------------|
| | | Min. | Typ. | Max. | | |
| HS setup time | Thst | 8 | - | - | ns | |
| HS hold time | Thhd | 8 | - | - | ns | |
| VS setup time | Tvst | 8 | - | - | ns | |
| VS hold time | Tvhd | 8 | - | - | ns | |
| Data setup time | Tdsu | 8 | - | - | ns | |
| Data hold time | Tdhd | 8 | - | - | ns | |
| DE setup time | Tesu | 8 | - | - | ns | |
| DE hold time | Tehd | 8 | - | - | ns | |
| DVDD power on slew rate | Tpor | - | - | 20 | ms | 0 to 90% DVDD |
| RESET pulse width | Trst | 1 | - | - | us | |
| DCLK cycle time | Tcoh | 20 | - | - | ns | |
| DCLK pulse duty | Tcwh | 40 | 50 | 60 | % | |



8.2 Data Timing

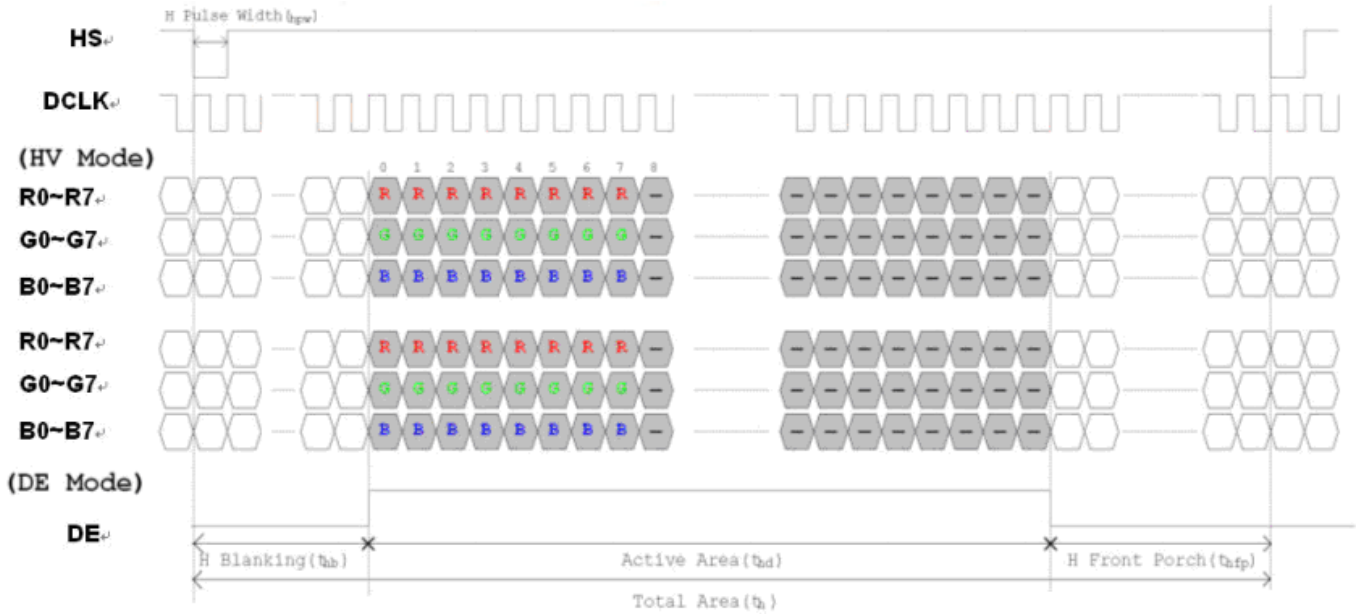


Figure 5: Horizontal Input Timing Diagram

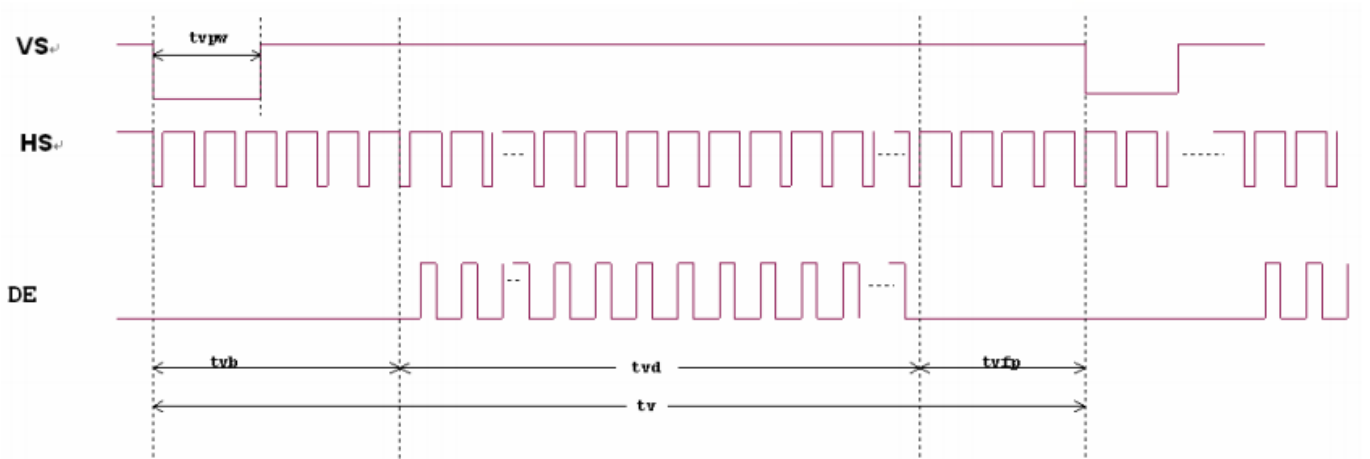


Figure 6: Vertical Input Timing Diagram

| Item | Symbol | Min | Typ | Max | Unit |
|-------------------------|--------|-----|-----|------|------|
| Horizontal Display Area | thd | | 800 | | DCLK |
| DCLK frequency | fclk | - | 30 | 50 | MHZ |
| One horizontal line | th | 889 | 928 | 1143 | DCLK |
| HS pulse width | thpw | 1 | 48 | 255 | DCLK |
| HS blanking | thb | | 88 | | DCLK |
| HS front porch | thfp | 1 | 40 | 255 | DCLK |
| Vertical Display Area | tvd | | 480 | | TH |
| VS period time | tv | 513 | 525 | 767 | TH |
| VS pulse width | tvpw | 3 | 3 | 255 | TH |
| VS blanking | tvb | | 32 | | TH |
| VS front porch | tvfp | 1 | 13 | 255 | TH |



9 Power Sequence

9.1 Power Up Sequence

To prevent the device damage from latch up, the power ON/OFF sequence shown below must be followed.

Power On: VDD, VSS → VDDA, VSSA

Power OFF: VDDA, VSSA → VDD, VSS

HX8264-D08 has a power on/off sequence control function. In order to prevent the IC from power on reset fail, the rising time (T_{POR}) of the digital power supply VDD should be maintained within the given specifications. Please refer to “AC Characteristics” for more detail on timing.

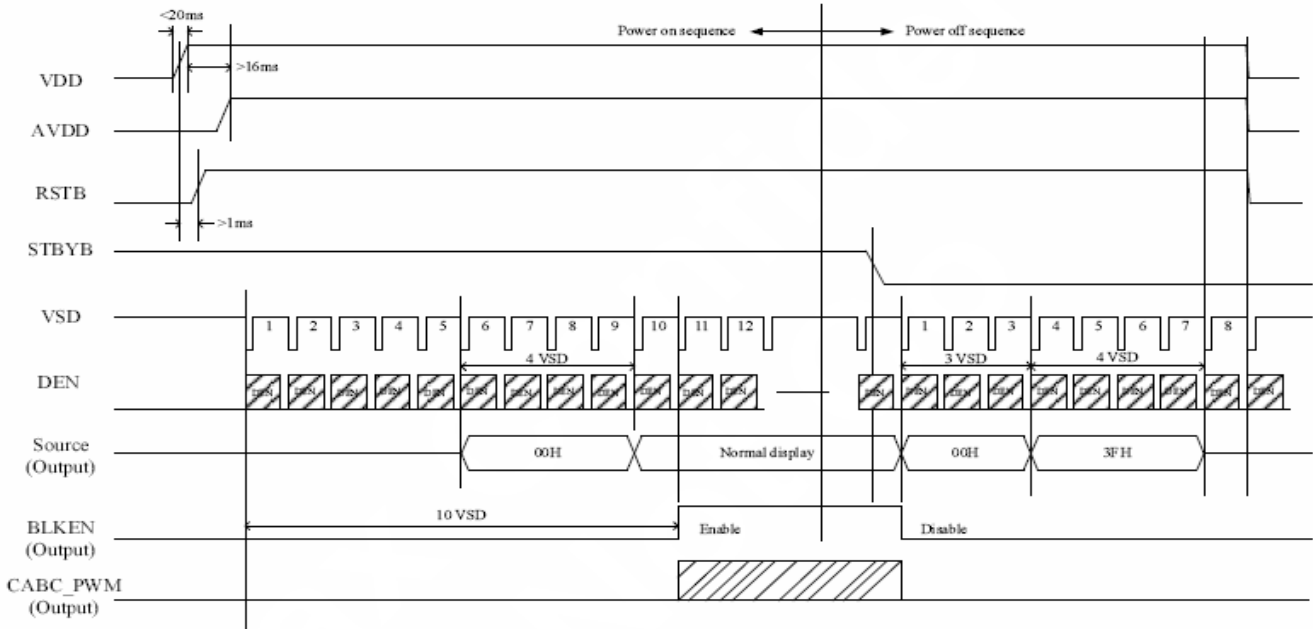


Figure 7: Power up sequence timing diagram

To prevent device latch up or power on/off sequence shown below must be followed. After VDD reaches 1.8V, VGH/VGL can start to power on. Before VDD drops to 1.8V, VGH/VGL must start to power down. After VGH/VGL start to power on, CPV and STV should not be floating, and /XAO should be at VDD level or floating. The other control signals have no timing limitation.

Power On: VDD → VGH/ VGL

Power OFF: VGH → VGL → VDD

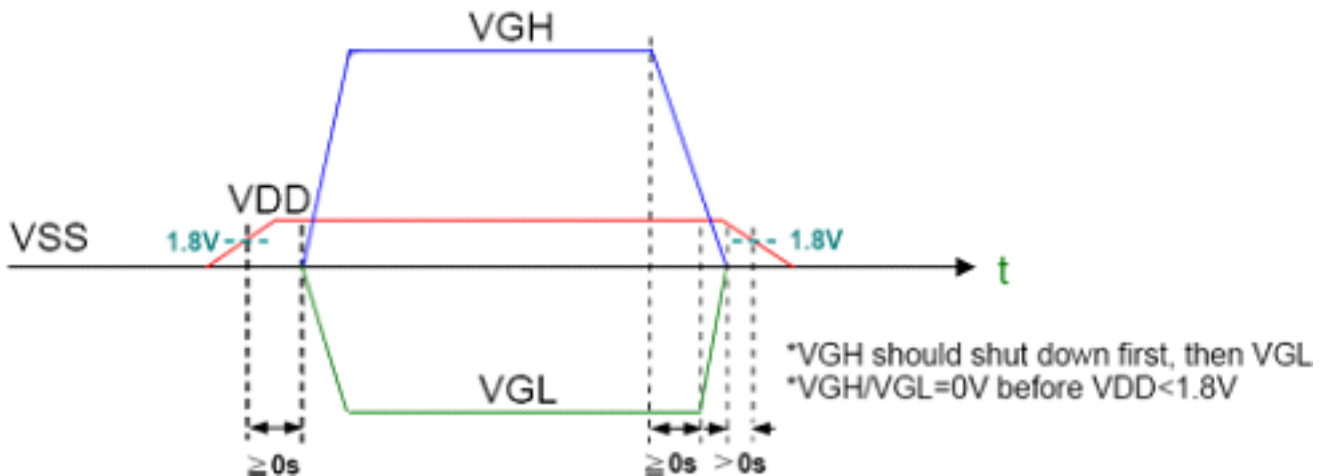


Figure 8: Device latch up timing sequence



10 Inspection Criterion

10.1 Description

This specification is made to be used as the standard acceptance/rejection criteria for the MOP-TFT800480-70A-BLM-TPN.

10.2 Sampling Plan and Reference Standards

Sampling plan according to GB/T2828.1-2003/ISO 2859-1 : 1999 and ANSI/ASQC Z1.4-1993, normal level 2 and based on:

Major defect: AQL 0.65

Minor defect: AQL 1.5

10.3 Inspection condition

- Viewing distance for cosmetic inspection is about 30±5cm with bare eyes, and under an environment 600~1000lux for visual inspection and 0~200lux for function test., all directions for inspecting the sample should be within 45° against perpendicular line. (Normal temperature 18~28°C and normal humidity 60±15%RH).
- Driving voltage
The Vop value from which the most optical contrast can be obtained near the specified Vop in the specification (Within ±0.5V of the typical value at 25°C.).

10.4 Definition of Inspection Zone in LCD

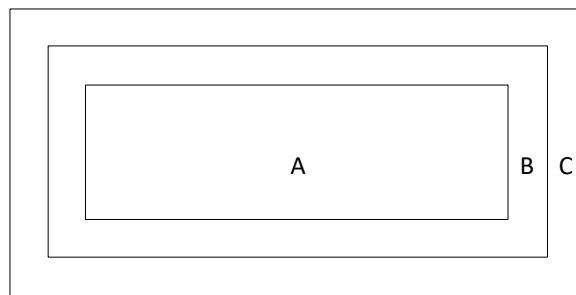


Figure 9: Inspection Zones in an LCD

Zone A: character/Digit area

Zone B: viewing area except Zone A (ZoneA + ZoneB=minimum Viewing area)

Zone C: Outside viewing area (invisible area after assembly in customer's product)

***Note:** As a general rule, visual defects in Zone C are permissible, if it does not affect display quality and assembly of customer's product.

10.5 Function Defect

| Items to be inspected | Inspection criterion | Classification of defects |
|------------------------|--|---------------------------|
| All functional defects | 1) No display 2) Display abnormally 3) Missing vertical, horizontal segment 4) Short circuit 5) Back-light no lighting, flickering and abnormal lighting. 6) obvious striation 7) Current beyond specification value | MA |
| Missing | Missing component | |
| Outline dimension | Overall outline dimension exceed the drawing is not allowed. | |







10.6 LCD Pixel Defect

(Bad Dot) (Defect type: MI)

| Item | Inspection criterion |
|-------------------------------------|-------------------------------|
| Color bad dot-bright dot(RGB) | 2 |
| two adjacent bright point | 1 |
| three or more adjacent point | 0 |
| total points for bad dot-bright dot | 2 |
| Bad dot-dark dot | 4 |
| two adjacent dark point | 2 |
| three or more adjacent point | 1 |
| total points for bad dot -dark dot | 6 |
| patch bright dot | Invisible with ND5% it is OK. |

10.7 Dot and line defect

(defect type: MI)

| Item | Inspection criterion | | | Picture |
|---|---|----------------------------|----------------------------|--|
| | Size | 5 Inch ≤ S < 7 Inch | | |
| Dot defect (black dot, white dot) | D ≤ 0.1 | allowed | |  D=(a+b)/2 |
| | 0.1 < D ≤ 0.2 | allowed | | |
| | 0.2 < D ≤ 0.3 | 5 | | |
| | 0.3 < D ≤ 0.5 | 0 | | |
| | D > 0.5 | 0 | | |
| | the distance between the two defect dot: DS ≥ 5mm | | | |
| Line defect (visible when power on) | Length (mm) | Width (mm) | Judgement Criterion |  |
| | Not count | W ≤ 0.05 | Accepted | |
| | L ≤ 5 | 0.05 ≤ W < 0.1 | 5 | |
| | L > 5 | W > 0.1 | 0 | |
| Polarizer convex-concave dot defect, polarizer bubble defect | Size(mm) | Judgement Criterion | |  D=(a+b)/2 |
| | D ≤ 0.30 | Not count | | |
| | 0.30 < D ≤ 1.0 | 4 | | |
| | 1.0 < D ≤ 1.5 | 2 | | |
| | D > 1.5mm | 0 | | |
| Fold mark, linear scar for polarizer | Length(mm) | Width(mm) | Judgment criterion |  |
| | disregard | W ≤ 0.05 | allowed | |
| | 1 < L ≤ 5 | 0.05 < W ≤ 0.2 | 4 | |
| | L > 5 | W > 0.2 | 0 | |
| Notes: 1. If the fold mark and linear scar for polarizer is visible with operating condition, the defect is judged with line judge. 2. If the fold mark and linear scar for polarizer is visible with non-operating condition, the defect is judged with the above judgment standard. | | | | |



11 Handling Precautions

11.1 Mounting method

Do not make extra holes in the display or modify its shape. When mounting the display, ensure that the display does not flex, bend or twist. Extreme care should be used when handling the LCD modules.

11.2 LCD Handling and Cleaning Precaution

To clean the display surface, it is recommended to wipe lightly using a soft cloth with either Isopropyl alcohol or Ethyl alcohol.

Do not wipe the display surface with dry or hard materials as it may damage the polarizer surface.

Do not use Water or Aromatics to clean the display.

Do not wipe ITO pad area with dry or hard materials that will damage the ITO patterns

Do not use Soldering flux, Chlorine(Cl), and Sulfur(S) on the pad or prevent it from being contaminated.

If the display is sent without applying a silicon coat on the pad, the ITO patterns could be damaged due to corrosion as time goes on.

If ITO corrosion occurs due to customer miss-handling, or if the customer applies materials such as Chlorine (Cl), Sulfur (S) to the display, the responsibility is placed the customer.

11.3 Static Charge Precaution

The LCD module uses CMOS LSI drivers, so we recommend that you:

- Connect any unused input terminal to VDD or VSS
- Do not input any signals before power is turned on
- Ground your body, work/assembly areas, and assembly equipment to protect against static electricity.

11.4 Packing

The module employs LCD elements and must be treated as such.

- Avoid intense shock and falls from a height.
- To prevent modules from degradation, do not operate or store them exposed direct to sunshine or high temperature/humidity

11.5 Precautions during Operation

- It is an indispensable condition to drive the LCD module within the specified voltage limits. Applying voltage higher than the limit will reduce the life span of the LCD.
- Using direct drive current should be avoided, as it will induce an electrochemical reaction causing undesirable deterioration.
- The LCD's response time will be delayed when operating at a temperature lower than the suggested operating range. When operating at a temperature higher than the suggested range, the LCD will be noticeably darker. The display will return to normal when it is brought back to the specified operation temperature.
- If the display area is pushed hard during operation, some font may be abnormally drawn but the LCD will return to normal after it is reset.
- Slight dew depositing on terminals can cause an electro-chemical reaction, damaging traces and resulting in an open circuit.

Usage under the maximum operating temperature, 50%Rh or less is required



11.6 Storage Recommendations

When storing the LCD for a prolonged period of time, the following recommendations will help prevent damage or deterioration

- Store the display in an ambient temperature range between 10°C to 30°C, and in a relative humidity of 45% to 75%.
- Do not leave the display exposed to sunlight or fluorescent light.
- Place the display in a polyethylene bag with the opening sealed.
- Ensure that nothing is making contact with the polarizer surface.
- It is recommended to store them in the same packaging that was provided upon purchase

11.7 Safety Precautions

In the case that the LCD glass has shattered, it is recommended to remove any glass pieces, wash off the liquid crystal using either acetone or ethanol, and proceed to burn any remaining display pieces.

If any liquid leaked out of a damaged glass cell, and comes in contact with your hands, please wash it off well with soap and water



12 Ordering

12.1 Part Numbering Scheme

Table 1: Parallel TFT Part Numbering Scheme

| MOP | TFT | 800 | 480 | 70 | A | BLM | TPN |
|-----|-----|-----|-----|----|---|-----|-----|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |

12.2 Options

Table 2: Parallel Part Options

| # | Designator | Options |
|---|---------------------|--|
| 1 | Product Line | MOP: Matrix Orbital Parallel Display |
| 2 | Screen Type | TFT: Graphic TFT |
| 3 | Display Columns | 800: Eight Hundred Pixel Columns |
| 4 | Display Rows | 480: Four Hundred Eighty Pixel Columns |
| 5 | Display Size | 70: 7.0" |
| 6 | Display Form Factor | A: A Form Factor |
| 7 | Brightness Level | -BLS: Brightness < 300 Nit -BLM: 300 Nit < Brightness < 600 Nit -BLH: 600 Nit < Brightness < 1000 Nit -BLD: Brightness > 1000 Nit |
| 8 | Touch Panel Type | TPN: None TPR: Resistive TPC: Capacitive |

13 Contact

Sales

Phone: 403.229.2737

Email: sales@matrixorbital.ca

Support

Phone: 403.204.3750

Email: support@matrixorbital.ca

Online

Purchasing: www.matrixorbital.com

Support: www.matrixorbital.ca



Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А