


## AM / FM RADIO TRANSMITTER KEYFOBS

- Highly Secure  Protocol
- 1 – 3 Switch Options
- Led Indication Of Transmission
- Directly Compatible With Keeloq Decoder
- Power Saving Auto Shut Off Feature
- Automatically Transmits Battery Low Condition.
- User Customisable Housing
- Board Level Programming Of Id
- Range:
  - ⇒ AM-315MHz upto 50m
  - ⇒ AM-433MHz upto 100m
  - ⇒ FM-433MHz upto 150m
- EMC & FCC Compliant

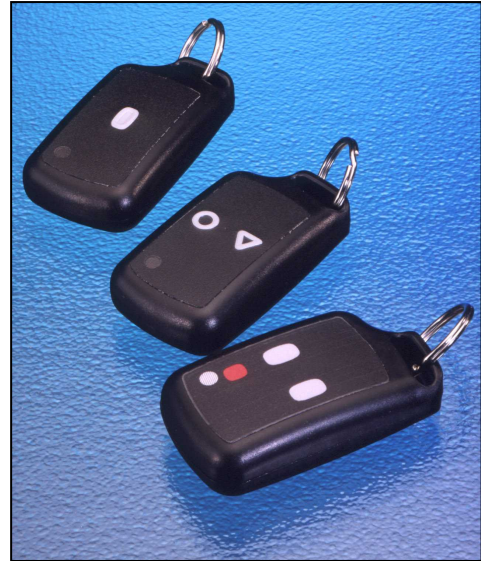

### DESCRIPTION


The RF Solutions KEELOQ range of miniature pocket Keyfob encoders are available as Radio of Infra Red transmitters.

When paired with one of the KEELOQ Rx decoder boards, a complete remote control system may be achieved, with comprehensive interfacing capabilities. This may also be high security “code hopping”

The keyfobs are housed in a tough ABS enclosure and supplied with Battery ready to operate.

An membrane overlay sticker is used to indicate the switch positions which may be customised to incorporate a specific logo or mark.

### BLOCK DIAGRAM

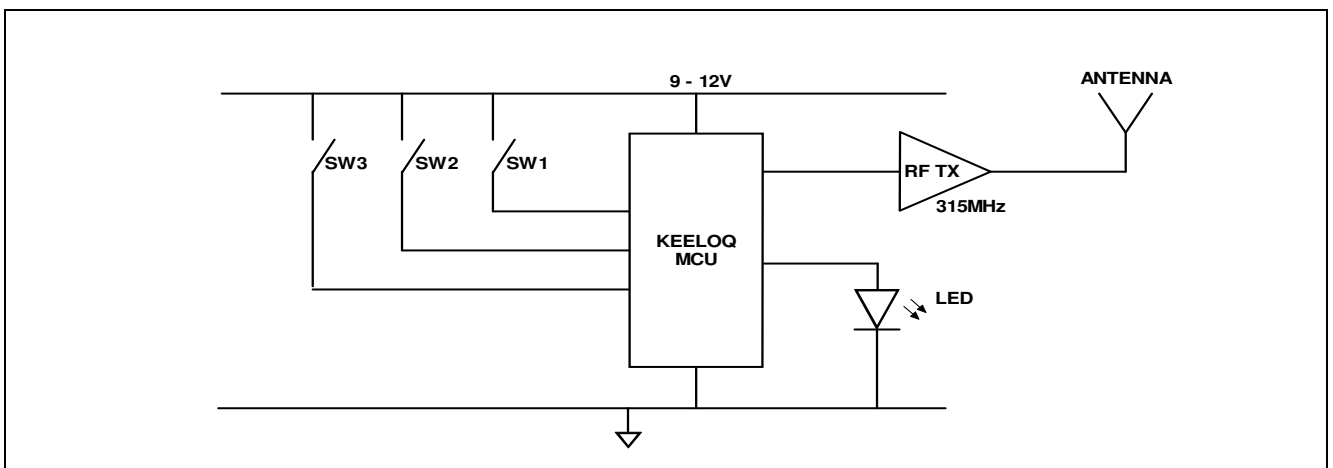



## AM / FM RADIO TRANSMITTER KEYFOBS

### '120' Series FM Keyfob Encoders

| Part Number | Description    | Freq (MHz) | Range** (Metres) | Compatible Decoders                                                 |
|-------------|----------------|------------|------------------|---------------------------------------------------------------------|
| 120T1-433F  | FM Keyfob 1 Sw | 433.92     | 150              | RF600D<br>HiRK-433F<br>008-433F<br>118-433F<br>119-433F<br>105-433F |
| 120T2-433F  | FM Keyfob 2 Sw | 433.92     | 150              |                                                                     |
| 120T3-433F  | FM Keyfob 3 Sw | 433.92     | 150              |                                                                     |


### '110' Series Keyfob Encoders

These products use the HCS360 Keeloq Encoder Device

| Part Number | Description    | Freq (MHz) | Range** (Metres) | Compatible Decoders                                                 |
|-------------|----------------|------------|------------------|---------------------------------------------------------------------|
| 110C1-315A  | AM Keyfob 1 Sw | 315        | 50               | RF600D<br>HiRK-315A<br>008-315A<br>118-315A<br>105-315A             |
| 110C2-315A  | AM Keyfob 2 Sw | 315        | 50               |                                                                     |
| 110C3-315A  | AM Keyfob 3 Sw | 315        | 50               |                                                                     |
| 110C1-433A  | AM Keyfob 1 Sw | 433.92     | 100              | RF600D<br>HiRK-433A<br>008-433A<br>118-433A<br>119-433A<br>105-433A |
| 110C2-433A  | AM Keyfob 2 Sw | 433.92     | 100              |                                                                     |
| 110C3-433A  | AM Keyfob 3 Sw | 433.92     | 100              |                                                                     |

\*\* Range stated is optimum, direct line of sight. In worst conditions this can be reduced by upto 50%

### Mechanical Details

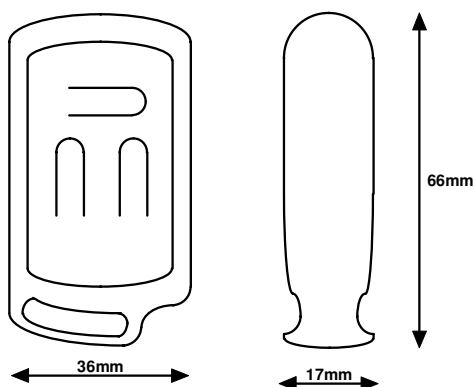

### Operation

The Tx encoder transmits the KEELOQ code for as long as any push-button switch is depressed. Operation of the Tx encoder buttons will cause either a momentary or a latching action at the Rx decoder, depending on the configuration of the Rx decoder.

### Battery Supply

The keyfob is supplied with a standard cigarette lighter 12V battery type GP23A or equivalent.

### Low Battery

When the unit measures a low battery voltage level, the data transmitted includes a 'Low battery' status flag to the receiver decoder.



## AM / FM RADIO TRANSMITTER KEYFOBS

### Auto Shutoff Feature

After ~26seconds of continuous transmission the Keyfobs are programmed shut down. This is to prevent the battery being drained through accidental operation (i.e. if it is in the users pocket!). This feature can be removed by re-flash programming of the unit.

### License Exemption

The transmitter encoders use EMC compliant radio transmitter modules and complies with ETSI330-220 and ETSI300-683.

USA : This device complies with part15 of the FCC rules.

Operation is subject to the following two conditions:

1. The device may not cause harmful interference, and
2. This device must accept any interference received including interference that may cause undesired operation.

### Bespoke Versions

Custom versions available with your own logo and or protocol.

Please contact Sales for further info





# AM / FM RADIO TRANSMITTER KEYFOBS

## Technical Specification

Max Storage Temperature -10°C to +85°C, Max Operating Temperature 0°C to +55°C

| Electrical Characteristics      | Min    | Typical | Max     | Dimension |
|---------------------------------|--------|---------|---------|-----------|
| Supply Current (Transmitting)   | 9      | 12      | 16      | mA        |
| Frequency                       |        | 315.00  |         | MHz       |
| Frequency                       | 432.90 | 433.920 | 434.100 | MHz       |
| Output Power (ERP) @ 433.92 MHz |        |         | 10      | mW        |


## Building a Receiver Decoder

Any of the keyfob Tx Encoders may be decoded with one of the complete RF Solutions receiver decoders or by using the appropriate receiver and RF600 decoder I/C. Schematic design is given in the datasheet for RF600 (DS600)

## Further Information: Developing a Keeloq Based Decoder System

The RFEVAL3 is an Evaluation Board consisting a receiver decoder board. The board can accept several RF Receivers and RF6000 decoding I/C providing a hardware development platform to enable the integration of remote Control.

- Range Testing
- Encoding / Decoding Testing
- AM / FM Selection
- Remote Switching
- Antenna Evaluation



This enables the engineer to select the optimum radio modules, antenna type and get a radio application working with the minimum time.

**R. F. Solutions Ltd.,**  
**William Way, Burgess Hill, RH15 9AG,**  
**England**  
**Tel +44 (0)1444 227900**

**Email [sales@rfsolutions.co.uk](mailto:sales@rfsolutions.co.uk) <http://www.rfsolutions.co.uk>**

All Trademarks acknowledged and remain the property of the respected owners.



## Disclaimer

Whilst the information in this document is believed to be correct at the time of issue, R.F.Solutions Ltd does not accept any liability whatsoever for its accuracy, adequacy or completeness. No express or implied warranty or representation is given relating to the information contained in this document. R.F.Solutions Ltd reserves the right to make changes and improvements to the product(s) described herein without notice. Buyers and other users should determine for themselves the suitability of any such information or products for their own particular requirements or specification(s). R.F.Solutions Ltd shall not be liable for any loss or damage caused as a result of user's own determination of how to deploy or use R.F.Solutions Ltd's products. Use of R.F.Solutions Ltd products or components in life support and/or safety applications is not authorised except with express written approval. No licences are created, implicitly or otherwise, under any of R.F.Solutions Ltd's intellectual property rights. Liability for loss or damage resulting or caused by reliance on the information contained herein or from the use of the product (including liability resulting from negligence or where R.F.Solutions Ltd was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict R.F.Solutions Ltd's liability for death or personal injury resulting from its negligence.

# AM / FM RADIO TRANSMITTER KEYFOBS

|                                                                                                                                                                                                                                                                                                                                                                   |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p><b>RF Solutions Ltd RECYCLING NOTICE</b><br/> rfsolutions.co.uk<br/> Meets the following EC Directives</p>                                                                                                                                                                    |
| <p><b>DO NOT Discard with normal waste, please recycle.</b></p>                                                                                                                                                                                                                                                                                                   |
| <p><b>ROHS Directive</b><br/> <b>2002/95/EC</b><br/> Specifies certain limits for hazardous substances.</p>                                                                                                                                                                                                                                                       |
| <p><b>WEEE Directive</b><br/> <b>2002/96/EC</b><br/> Waste Electrical &amp; Electronic Equipment.<br/> This product must be disposed of through a licensed WEEE collection point.<br/> RF Solutions Ltd fulfils its WEEE obligations by membership of an approved compliance scheme.<br/> <u>Environment Agency producer registration number WEE/JB0104WV</u></p> |
| <p><b>Waste Batteries and Accumulators Directive</b><br/> <b>2006/66/EC</b><br/> Where batteries are fitted, before recycling the product, the batteries must be removed and disposed of at a licensed collection point.</p>                                                                                                                                      |





Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А