

## ISL8002, ISL8002A, ISL80019, ISL80019A

Compact Synchronous Buck Regulators

FN7888 Rev 4.00 July 31, 2014

The ISL8002, ISL8002A, ISL80019 and ISL80019A are highly efficient, monolithic, synchronous step-down DC/DC converters that can deliver up to 2A of continuous output current from a 2.7V to 5.5V input supply. They use peak current mode control architecture to allow very low duty cycle operation. They operate at either 1MHz or 2MHz switching frequency, thereby providing superior transient response and allowing for the use of small inductors. They also have excellent stability and provide both internal and external compensation options.

The ISL8002, ISL8002A, ISL80019 and ISL80019A integrate very low  $r_{DS(ON)}$  MOSFETs in order to maximize efficiency. In addition, since the high-side MOSFET is a PMOS, the need for a Boot capacitor is eliminated, thereby reducing external component count. They can operate at 100% duty cycle (at 1MHz) with a dropout of 200mV at 2A output current.

These devices can be configured for either PFM (discontinuous conduction) or PWM (continuous conduction) operation at light load. PFM provides high efficiency by reducing switching losses at light loads and PWM reduces noise susceptibility and RF interference.

These devices are offered in a space saving 8 pin 2mmx2mm TDFN lead free package with exposed pad for improved thermal performance. The complete converter occupies less than 0.10in<sup>2</sup> area.

## **Features**

- V<sub>IN</sub> range 2.7V to 5.5V
- V<sub>OUT</sub> range is 0.6V to V<sub>IN</sub>
- IOUT maximum is 1.5A or 2A (see Table 1 on page 3)
- Switching frequency is 1MHz or 2MHz (see Table 1 on page 3)
- · Internal or external compensation option
- . Selectable PFM or PWM operation option
- · Overcurrent and short circuit protection
- · Over-temperature/thermal protection
- V<sub>IN</sub> Undervoltage Lockout and V<sub>OUT</sub> Overvoltage Protection
- · Up to 95% peak efficiency

## Applications

- General purpose point of load DC/DC
- · Set-top boxes and cable modems
- FPGA power
- · DVD, HDD drives, LCD panels, TV

## **Related Literature**

 See <u>AN1803</u>, "1.5A/2A Low Quiescent Current High Efficiency Synchronous Buck Regulator"

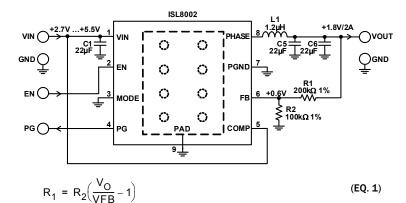


FIGURE 1. TYPICAL APPLICATION CIRCUIT CONFIGURATION (INTERNAL COMPENSATION OPTION)




FIGURE 2. EFFICIENCY vs LOAD  $F_{SW} = 1 \text{MHz}, V_{\text{IN}} = 3.3 \text{V}, \text{ MODE} = \text{PFM}, T_{\text{A}} = +25 \,^{\circ}\text{C}$ 

# **Table of Contents**

Pin Configuration	. 4
Pin Descriptions	. 4
Functional Block Diagram	. 5
Absolute Maximum Ratings	. 7
Thermal Information	. 7
Recommended Operating Conditions	. 7
Electrical Specifications	
Typical Performance Curves	
Theory of Operation.	
PWM Control Scheme PFM Mode Overcurrent Protection Short-Circuit Protection Negative Current Protection PG UVLO Enable, Disable, and Soft-Start Up. Discharge Mode (Soft-Stop) 100% Duty Cycle (1MHz Version). Thermal ShutDown Power Derating Characteristics	17 18 18 18 18 18 18 18 19
Applications Information	
Output Inductor and Capacitor Selection Output Voltage Selection Input Capacitor Selection Output Capacitor Selection Loop Compensation Design Layout Considerations.	19 19 19
Revision History	22
About Intersil	22
Package Outline Drawing	23

### **TABLE 1. SUMMARY OF KEY DIFFERENCES**

PART#	I <sub>OUT</sub> (MAX) (A)	F <sub>SW</sub> (MHz)	V <sub>IN</sub> RANGE (V)	V <sub>OUT</sub> RANGE (V)	PACKAGE SIZE
ISL80019	1.5	1			
ISL80019A	1.5	2	2.7 to 5.5	0.6 to 5.5	e nin Ommy Omm TDEN
ISL8002	2	1	2.7 (0 5.5		8 pin 2mmx2mm TDFI
ISL8002A	2	2			


NOTE: In this datasheet, the parts in the table above are collectively called "device".

#### **TABLE 2. COMPONENT VALUE SELECTION TABLE**

V <sub>OUT</sub> (V)	C1 (µF)	C5, C6 (μF)	C4 (pF)	L1 (μΗ)	R1 (kΩ)	R2 (kΩ)
0.8	22	22	22	1.0~2.2	33	100
1.2	22	22	22	1.0~2.2	100	100
1.5	22	22	22	1.0~2.2	150	100
1.8	22	22	22	1.0~3.3	200	100
2.5	22	22	22	1.5~3.3	316	100
3.3	22	22	22	1.5~4.7	450	100

# **Pin Configuration**


ISL8002, ISL8002A, ISL80019, ISL80019A (8 LD 2x2 TDFN) TOP VIEW



# **Pin Descriptions**

PIN#	PIN NAME	PIN DESCRIPTION
1	VIN	The input supply for the power stage of the PWM regulator and the source for the internal linear regulator that provides bias for the IC. Place a minimum of 10µF ceramic capacitance from VIN to GND and as close as possible to the IC for decoupling.
2	EN	Device enable input. When the voltage on this pin rises above 1.4V, the device is enabled. The device is disabled when the pin is pulled to ground. When the device is disabled, a 100Ω resistor discharges the output through the PHASE pin. See Figure 3, "FUNCTIONAL BLOCK DIAGRAM" on page 5 for details.
3	MODE	Mode selection pin. Connect to logic high or input voltage VIN for PWM mode. Connect to logic low or ground for PFM mode. There is an internal $1M\Omega$ pull-down resistor to prevent an undefined logic state in case the MODE pin is left floating, however, it is not recommended to leave this pin floating.
4	PG	Power-good output is pulled to ground during the soft-start interval and also when the output voltage is below regulation limits. There is an internal $5M\Omega$ internal pull-up resistor on this pin.
5	СОМР	COMP is the output of the error amplifier. When COMP is tied high to VIN, compensation is internal. When COMP is connected with a series resistor and capacitor to GND, compensation is external. See <u>"Loop Compensation Design" on page 20</u> for more detail.
6	FB	Feedback pin for the regulator. FB is the negative input to the voltage loop error amplifier. The output voltage is set by an external resistor divider connected to FB. In addition, the power-good PWM regulator's power-good and undervoltage protection circuits use FB to monitor the output voltage.
7	PGND	Power and analog ground connections. Connect directly to the board GROUND plane.
8	PHASE	Power stage switching node for output voltage regulation. Connect to the output inductor. This pin is discharged by an 100Ω resistor when the device is disabled. See Figure 3, "FUNCTIONAL BLOCK DIAGRAM" on page 5 for details.
9	THERMAL PAD (T-PAD)	Power ground. This thermal pad provides a return path for the power stage and switching currents, as-well-as a thermal path for removing heat from the IC to the board. Place thermal vias to the PGND plane in this pad.

# **Functional Block Diagram**

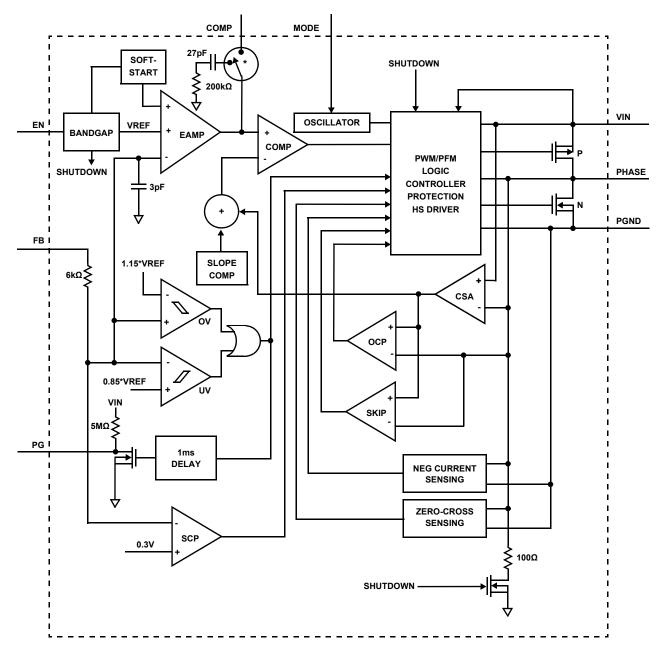

<sup>\*</sup> By default, when COMP is tied to VIN, the voltage loop is internally compensated with the 27pF and 200kΩ RC network. Please see "COMP" pin in the "Pin Descriptions" table on Page 4 for more details.

FIGURE 3. FUNCTIONAL BLOCK DIAGRAM

# **Ordering Information**

PART NUMBER (Notes 1, 2, 3)	TAPE AND REEL QUANTITY	PART MARKING	TECHNICAL SPECIFICATIONS	TEMP. RANGE (°C)	PACKAGE Tape and Reel (Pb-Free)	PKG. DWG.#		
ISL8002IRZ-T	1000	002	2A, 1MHz	-40 to +85	8 Ld TDFN	L8.2x2C		
ISL8002IRZ-T7A	250	002	2A, 1MHz	-40 to +85	8 Ld TDFN	L8.2x2C		
ISL8002AIRZ-T	1000	02A	2A, 2MHz	-40 to +85	8 Ld TDFN	L8.2x2C		
ISL8002AIRZ-T7A	250	02A	2A, 2MHz	-40 to +85	8 Ld TDFN	L8.2x2C		
ISL80019IRZ-T	1000	019	1.5A, 1MHz	-40 to +85	8 Ld TDFN	L8.2x2C		
ISL80019IRZ-T7A	250	019	1.5A, 1MHz	-40 to +85	8 Ld TDFN	L8.2x2C		
ISL80019AIRZ-T	1000	19A	1.5A, 2MHz	-40 to +85	8 Ld TDFN	L8.2x2C		
ISL80019AIRZ-T7A	250	19A	1.5A, 2MHz	-40 to +85	8 Ld TDFN	L8.2x2C		
ISL8002FRZ-T	1000	02F	2A, 1MHz	-40 to +125	8 Ld TDFN	L8.2x2C		
ISL8002FRZ-T7A	250	02F	2A, 1MHz	-40 to +125	8 Ld TDFN	L8.2x2C		
ISL8002AFRZ-T	1000	2AF	2A, 2MHz	-40 to +125	8 Ld TDFN	L8.2x2C		
ISL8002AFRZ-T7A	250	2AF	2A, 2MHz	-40 to +125	8 Ld TDFN	L8.2x2C		
ISL80019FRZ-T	1000	19F	1.5A, 1MHz	-40 to +125	8 Ld TDFN	L8.2x2C		
ISL80019FRZ-T7A	250	19F	1.5A, 1MHz	-40 to +125	8 Ld TDFN	L8.2x2C		
ISL80019AFRZ-T	1000	9AF	1.5A, 2MHz	-40 to +125	8 Ld TDFN	L8.2x2C		
ISL80019AFRZ-T7A	250	9AF	1.5A, 2MHz	-40 to +125	8 Ld TDFN	L8.2x2C		
ISL8002EVAL1Z	Evaluation Board		,		,	1		
ISL8002AEVAL1Z	Evaluation Board	Evaluation Board						
ISL80019AEVAL1Z	Evaluation Board	Evaluation Board						
ISL80019EVAL1Z	Evaluation Board	Evaluation Board						

#### NOTES:

- 1. Please refer to TB347 for details on reel specifications.
- 2. These Intersil Pb-free plastic packaged products employ special Pb-free material sets, molding compounds/die attach materials, and 100% matte tin plate plus anneal (e3 termination finish, which is RoHS compliant and compatible with both SnPb and Pb-free soldering operations). Intersil Pb-free products are MSL classified at Pb-free peak reflow temperatures that meet or exceed the Pb-free requirements of IPC/JEDEC J STD-020.
- 3. For Moisture Sensitivity Level (MSL), please see device information page for <u>ISL8002A</u>, <u>ISL80019</u>, <u>ISL80019A</u>. For more information on MSL please see techbrief <u>TB363</u>.

## **Absolute Maximum Ratings**

VIN	0.3V to	o 6V (DC) or 7V (20ms)
PHASE	1.5V (100ns)/-0.3V (DC) to	o 6V (DC) or 7V (20ms)
EN, COMP, PG, MODE.		0.3V to VIN + 0.3V
FB		0.3V to 2.7V
Junction Temperature I	Pange at AA	±150°C

## **Thermal Information**

Thermal Resistance (Typical, Notes 4, 5)	$\theta_{JA}(^{\circ}C/W)$	θ <sub>JC</sub> (°C/W)
2x2 TDFN Package	71	7
Junction Temperature Range	5!	5°C to +125°C
Storage Temperature Range	6!	5°C to +150°C
Pb-Free Reflow Profile		see TB493

## **Recommended Operating Conditions**

VIN Supply Voltage Range	2.7V to 5.5V
Load Current Range	0A to 2A
Junction Temperature Range	40°C to +125°C

CAUTION: Do not operate at or near the maximum ratings listed for extended periods of time. Exposure to such conditions may adversely impact product reliability and result in failures not covered by warranty.

#### NOTES:

- 4. θ<sub>JA</sub> is measured in free air with the component mounted on a high effective thermal conductivity test board with "direct attach" features. See Tech Brief TB379 for details.
- 5. For  $\theta_{\text{JC}}$ , the "case temp" location is the center of the exposed metal pad on the package underside.

**Electrical Specifications**  $T_J = -40 \,^{\circ}\text{C}$  to  $+125 \,^{\circ}\text{C}$ ,  $V_{IN} = 2.7 \text{V}$  to 5.5V, unless otherwise noted. Typical values are at  $T_A = +25 \,^{\circ}\text{C}$ . **Boldface limits** apply across the operating temperature range,  $-40 \,^{\circ}\text{C}$  to  $+85 \,^{\circ}\text{C}$ .

PARAMETER	SYMBOL	TEST CONDITIONS	MIN ( <u>Note 6</u> )	TYP	MAX ( <u>Note 6</u> )	UNITS
INPUT SUPPLY	•					l
V <sub>IN</sub> Undervoltage Lockout Threshold	V <sub>UVLO</sub>	Rising, no load		2.5	2.7	V
		Falling, no load	2.2	2.4		٧
Quiescent Supply Current	I <sub>VIN</sub>	MODE = PFM (GND), F <sub>SW</sub> = 2MHz, no load at the output		35	60	μΑ
		MODE = PWM (VIN), F <sub>SW</sub> = 1MHz, no load at the output		7	15	mA
		MODE = PWM (VIN), F <sub>SW</sub> = 2MHz, no load at the output		10	22	mA
Shut Down Supply Current	I <sub>SD</sub>	MODE = PFM (GND), V <sub>IN</sub> = 5.5V, EN = low		5	10	μΑ
OUTPUT REGULATION	·					•
Feedback Voltage	V <sub>FB</sub>		0.595	0.600	0.605	V
		T <sub>J</sub> = -40 °C to +125 °C	0.589		0.605	V
VFB Bias Current	I <sub>VFB</sub>	V <sub>FB</sub> = 2.7V. T <sub>J</sub> = -40 °C to +125 °C	-120	50	350	nA
Line Regulation		$V_{IN} = V_0 + 0.5V \text{ to } 5.5V \text{ (minimal } 2.7V)$ $T_J = -40 ^{\circ}\text{C} \text{ to } +125 ^{\circ}\text{C}$	-0.2	-0.05	0.1	%/V
Load Regulation		See Note 7		< -0.2		%/A
Soft-Start Ramp Time Cycle				1		ms
PROTECTIONS						
Positive Peak Current Limit	IPLIMIT	2A application	3	3.5	4	Α
		1.5A application	2.1	2.5	2.9	Α
Peak Skip Limit	I <sub>SKIP</sub>	V <sub>IN</sub> = 3.6, V <sub>OUT</sub> = 1.8V (See <u>"Applications Information" on page 19</u> for more detail)		450		mA
Zero Cross Threshold			-170	-70	30	mA
Negative Current Limit	INLIMIT		-2.3	-1.5	-1	Α
Thermal Shutdown		Temperature rising		150		°C



**Electrical Specifications**  $T_J = -40 \,^{\circ}\text{C}$  to  $+125 \,^{\circ}\text{C}$ ,  $V_{\text{IN}} = 2.7 \text{V}$  to 5.5 V, unless otherwise noted. Typical values are at  $T_A = +25 \,^{\circ}\text{C}$ . Boldface limits apply across the operating temperature range,  $-40 \,^{\circ}\text{C}$  to  $+85 \,^{\circ}\text{C}$ . (Continued)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN (Note 6)	TYP	MAX (Note 6)	UNITS
Thermal Shutdown Hysteresis		Temperature falling		25		°C
COMPENSATION		1				
Error Amplifier Trans-Conductance		COMP tied VIN		40		μ <b>A</b> /V
		COMP with RC		120		μ <b>A</b> /V
Trans-Resistance	RT		0.24	0.3	0.40	Ω
LX	<b>-</b>	-1	"			
P-Channel MOSFET ON-Resistance		V <sub>IN</sub> = 5V, I <sub>O</sub> = 200mA		117		mΩ
N-Channel MOSFET ON-Resistance		V <sub>IN</sub> = 5V, I <sub>O</sub> = 200mA		86		mΩ
LX Maximum Duty Cycle				100		%
LX Minimum On-Time		MODE = PWM (High) 1MHz		60	80	ns
OSCILLATOR		1			"	
Nominal Switching Frequency	F <sub>SW</sub>	ISL8002, ISL80019	850	1000	1150	kHz
		ISL8002A, ISL80019A	1700	2000	2300	kHz
PG		-1	<u> </u>			
Output Low Voltage		1mA sinking current			0.3	V
Delay Time (Rising Edge)			0.5	1	2	ms
PGOOD Delay Time (Falling Edge)				15		μs
PG Pin Leakage Current		PG = V <sub>IN</sub>		0.01	0.1	μΑ
OVP PG Rising Threshold			110	115	120	%
OVP PG Hysteresis				5		%
UVP PG Rising Threshold			80	85	90	%
UVP PG Hysteresis				5		%
EN AND MODE LOGIC	I	1	1		1	
Logic Input Low					0.4	V
Logic Input High			1.4			V
Logic Input Leakage Current	I <sub>MODE</sub>	Pulled up to 5.5V		5.5	8	μΑ

#### NOTES:

- 6. Parameters with MIN and/or MAX limits are 100% tested at +25°C, unless otherwise specified. Temperature limits established by characterization and are not production tested.
- 7. Not tested in production. Characterized using evaluation board. Refer to Figures 12 through 14 load regulation diagrams. +105 ° C T<sub>A</sub> represents near worst case operating point.

# **Typical Performance Curves**




FIGURE 4. EFFICIENCY vs LOAD  $F_{SW} = 2 \text{MHz}, \, V_{IN} = 3.3 \text{V}, \, \text{MODE} = \text{PFM}, \, T_A = +25\,^{\circ}\text{C}$ 




FIGURE 5. EFFICIENCY vs LOAD  $F_{SW} = 2MHz, V_{IN} = 3.3V, MODE = PWM, T_A = +25 ^{\circ}C$ 




FIGURE 6. EFFICIENCY vs LOAD  $F_{SW} = 1MHz$ ,  $V_{IN} = 3.3V$ , MODE = PFM,  $T_A = +25$  °C




FIGURE 7. EFFICIENCY vs LOAD  $F_{SW} = 1 \text{MHz}, \, V_{IN} = 3.3 \text{V}, \, \text{MODE} = \text{PWM}, \, T_{A} = +25\,^{\circ}\text{C}$ 




FIGURE 8. EFFICIENCY vs LOAD  $F_{SW} = 2 \text{MHz}, \, V_{IN} = 5 \text{V}, \, \text{MODE} = \text{PFM}, \, T_{A} = +25\,^{\circ}\text{C}$ 




FIGURE 9. EFFICIENCY vs LOAD  $F_{SW} = 2 \text{MHz}, V_{\text{IN}} = 5 \text{V}, \, \text{MODE} = \text{PWM}, \, \text{T}_{\text{A}} = +25\,^{\circ}\text{C}$ 




FIGURE 10. EFFICIENCY vs LOAD  $F_{SW} = 1 MHz, \, V_{IN} = 5 V, \, MODE = PFM, \, T_A = +25\,^{\circ}C$ 




FIGURE 11. EFFICIENCY vs LOAD  $F_{SW} = 1$ MHz,  $V_{IN} = 5$ V, MODE = PWM,  $T_A = +25$  °C




FIGURE 12. LOAD REGULATION,  $T_A = +105$  °C, 2.7 $V_{IN}$ , 0.6 $V_{OUT}$ , 1MHz




FIGURE 13. LOAD REGULATION,  $T_A = +105$  °C,  $3.3V_{IN}$ ,  $0.6V_{OUT}$ , 1MHz

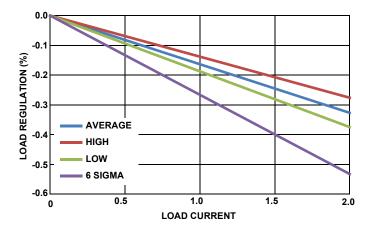


FIGURE 14. LOAD REGULATION,  $T_A = +105^{\circ}$ ,  $5.5V_{IN}$ ,  $0.6V_{OUT}$ , 1MHz

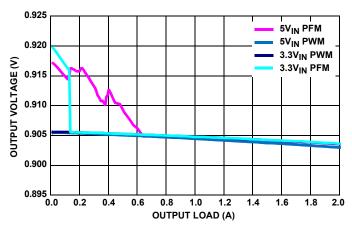


FIGURE 15.  $V_{OUT}$  REGULATION vs LOAD,  $F_{SW} = 2MHz, V_{OUT} = 0.9V, T_A = +25 ^{\circ}C$ 




FIGURE 16.  $V_{OUT}$  REGULATION vs LOAD,  $F_{SW} = 2MHz$ ,  $V_{OUT} = 1.2V$ ,  $T_A = +25$ °C




FIGURE 17.  $V_{OUT}$  REGULATION vs LOAD,  $F_{SW} = 2MHz$ ,  $V_{OUT} = 1.5V$ ,  $T_A = +25$  °C




FIGURE 18.  $V_{OUT}$  REGULATION vs LOAD,  $F_{SW} = 2MHz$ ,  $V_{OUT} = 1.8V$ ,  $T_A = +25$  °C




FIGURE 19.  $V_{OUT}$  REGULATION vs LOAD,  $F_{SW}$  = 2MHz,  $V_{OUT}$  = 2.5V,  $T_A$  = +25 °C

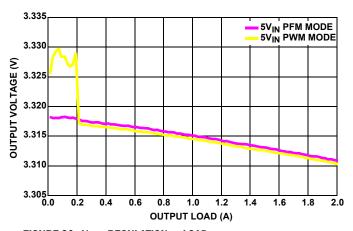


FIGURE 20.  $V_{OUT}$  REGULATION vs LOAD,  $F_{SW}$  = 2MHz,  $V_{OUT}$  = 3.3V,  $T_A$  = +25 °C

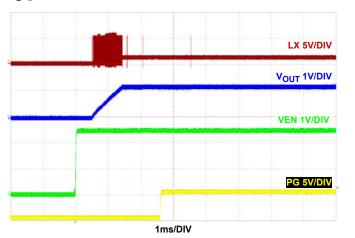


FIGURE 21. START-UP AT NO LOAD  $F_{SW} = 2MHz, V_{IN} = 5V, MODE = PFM, T_A = +25 ^{\circ}C$ 




FIGURE 22. START-UP AT NO LOAD  $F_{SW} = 2 \text{MHz}, \, V_{\text{IN}} = 5 \text{V}, \, \text{MODE} = \text{PWM}, \, T_{\text{A}} = +25\,^{\circ}\text{C}$ 

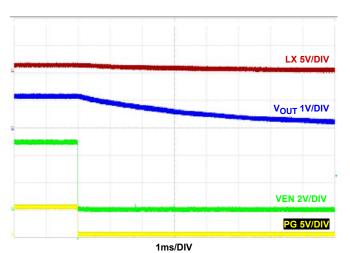


FIGURE 23. SHUTDOWN AT NO LOAD  $F_{SW} = 2 \text{MHz}, \, V_{IN} = 5 \text{V}, \, \text{MODE} = \text{PFM}, \, T_{A} = +25 \,^{\circ}\text{C}$ 

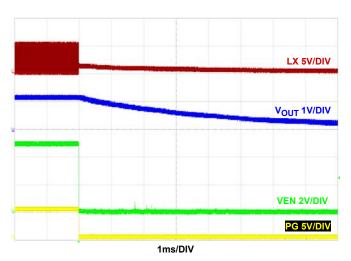


FIGURE 24. SHUTDOWN AT NO LOAD  $F_{SW} = 2 \text{MHz}, \, V_{IN} = 5 \text{V}, \, \text{MODE} = \text{PWM}, \, T_{A} = +25\,^{\circ}\text{C}$ 

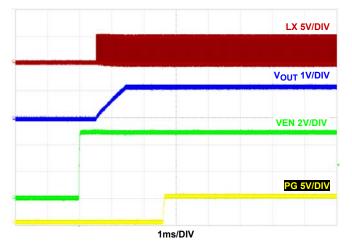


FIGURE 25. START-UP AT 2A LOAD  $F_{SW} = 2 \text{MHz}, \, V_{IN} = 5 \text{V}, \, \text{MODE} = \text{PWM}, \, T_A = +25\,^{\circ}\text{C}$ 

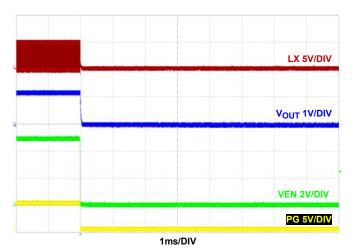


FIGURE 26. SHUTDOWN AT 2A LOAD  $F_{SW} = 2 MHz, V_{IN} = 5 V, MODE = PWM, T_A = +25 ^{\circ} C$ 




FIGURE 27. START-UP AT 2A LOAD  $F_{SW} = 2MHz, \, V_{IN} = 5V, \, MODE = PFM, \, T_A = +25\,^{\circ}C$ 

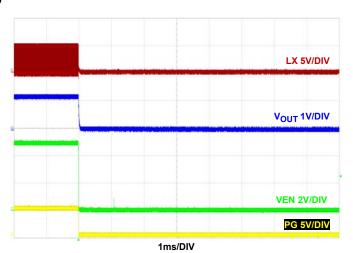


FIGURE 28. SHUTDOWN AT 2A LOAD  $F_{SW} = 2 \text{MHz}, \, V_{\text{IN}} = 5 \text{V}, \, \text{MODE} = \text{PFM}, \, T_{\text{A}} = +25\,^{\circ}\text{C}$ 

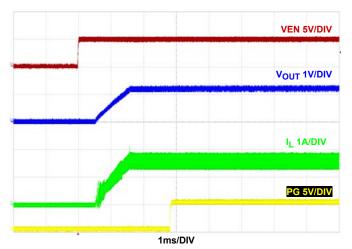


FIGURE 29. START-UP AT 1.5A LOAD  $F_{SW} = 2 \text{MHz}, V_{\text{IN}} = 5 \text{V}, \text{MODE} = \text{PWM}, T_{\text{A}} = +25\,^{\circ}\text{C}$ 




FIGURE 30. SHUTDOWN AT 1.5A LOAD  $F_{SW} = 2MHz, V_{IN} = 5V, MODE = PWM, T_A = +25 ^{\circ}C$ 




FIGURE 31. START-UP AT 1.5A LOAD  $F_{SW} = 2 \text{MHz}, \, V_{\text{IN}} = 5 \text{V}, \, \text{MODE} = \text{PFM}, \, T_{\text{A}} = +25\,^{\circ}\text{C}$ 




FIGURE 32. SHUTDOWN AT 1.5A LOAD

F<sub>SW</sub> = 2MHz, V<sub>IN</sub> = 5V, MODE = PFM, T<sub>A</sub> = +25°C

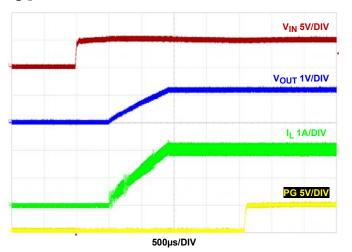


FIGURE 33. START-UP  $V_{IN}$  AT 2A LOAD  $F_{SW} = 2MHz, \, V_{IN} = 5V, \, MODE = PFM, \, T_A = +25\,^{\circ}C$ 




FIGURE 34. START-UP  $V_{IN}$  AT 2A LOAD  $F_{SW}$  = 2MHz,  $V_{IN}$  = 5V, MODE = PWM,  $T_A$  = +25 °C




FIGURE 35. SHUTDOWN V<sub>IN</sub> AT 2A LOAD  $F_{SW} = 2 \text{MHz}, V_{IN} = 5 \text{V}, \text{MODE} = \text{PFM}, T_{A} = +25 \,^{\circ}\text{C}$ 




FIGURE 36. SHUTDOWN  $V_{IN}$  AT 2A LOAD  $F_{SW} = 2MHz, V_{IN} = 5V, MODE = PWM, T_A = +25 ^{\circ}C$ 




FIGURE 37. START-UP  $V_{IN}$  AT NO LOAD  $F_{SW} = 2MHz, \, V_{IN} = 5V, \, MODE = PFM, \, T_A = +25\,^{\circ}C$ 




FIGURE 38. START-UP  $V_{IN}$  AT NO LOAD  $F_{SW} = 2MHz, \, V_{IN} = 5V, \, MODE = PFM, \, T_A = +25\,^{\circ}C$ 

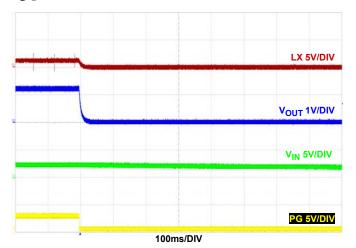


FIGURE 39. SHUTDOWN  $V_{IN}$  AT NO LOAD  $F_{SW}$  = 2MHz,  $V_{IN}$  = 5V, MODE = PFM,  $T_A$  = +25 °C




FIGURE 40. SHUTDOWN  $V_{IN}$  AT NO LOAD  $F_{SW} = 2 MHz, V_{IN} = 5 V, \, MODE = PWM, \, T_A = +25\,^{\circ}C$ 




FIGURE 41. JITTER AT NO LOAD  $F_{SW} = 2 \text{MHz}, \, V_{\text{IN}} = 5 \text{V}, \, \text{MODE} = PWM, \, T_{\text{A}} = +25\,^{\circ}\text{C}$ 




FIGURE 42. JITTER AT FULL LOAD  $F_{SW} = 2MHz, \, V_{IN} = 5V, \, MODE = PWM, \, T_A = +25\,^{\circ}C$ 

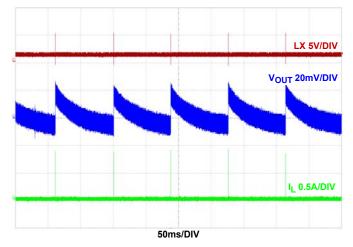


FIGURE 43. STEADY STATE AT NO LOAD  $F_{SW} = 2MHz, \, V_{IN} = 5V, \, MODE = PFM, \, T_A = +25\,^{\circ}C$ 




FIGURE 44. STEADY STATE AT NO LOAD  $F_{SW} = 2 \text{MHz}, \, V_{\text{IN}} = 5 \text{V}, \, \text{MODE} = \text{PWM}, \, T_{\text{A}} = +25\,^{\circ}\text{C}$ 

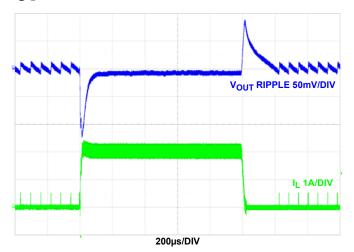


FIGURE 45. LOAD TRANSIENT  $F_{SW} = 2MHz, \, V_{IN} = 5V, \, MODE = PFM, \, T_A = +25\,^{\circ}C$ 




FIGURE 46. LOAD TRANSIENT  $F_{SW} = 2 \text{MHz}, V_{\text{IN}} = 5 \text{V}, \text{MODE} = \text{PWM}, T_{\text{A}} = +25 \,^{\circ}\text{C}$ 




FIGURE 47. OUTPUT SHORT-CIRCUIT  $F_{SW} = 2 \text{MHz}, \, V_{IN} = 5 \text{V}, \, \text{MODE} = \text{PFM}, \, T_{A} = +25 \,^{\circ}\text{C}$ 




FIGURE 48. OVERCURRENT PROTECTION  $F_{SW} = 2 \text{MHz}, \, V_{IN} = 5 \text{V}, \, \text{MODE} = \text{PWM}, \, T_A = +25\,^{\circ}\text{C}$ 

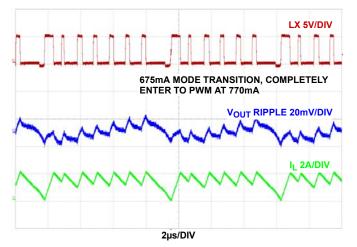


FIGURE 49. PFM TO PWM TRANSITION  $F_{SW} = 2 MHz, \, V_{IN} = 5 V, \, MODE = PFM, \, T_A = +25\,^{\circ}C$ 




FIGURE 50. PWM TO PFM TRANSITION  $F_{SW} = 2MHz, \ V_{IN} = 5V, \ MODE = PWM, \ T_A = +25 ^{\circ}C$ 




FIGURE 51. OVERVOLTAGE PROTECTION  $F_{SW} = 2 \text{MHz}, \, V_{\text{IN}} = 5 \text{V}, \, \text{MODE} = \text{PFM}, \, T_{\text{A}} = +25 \,^{\circ}\text{C}$ 



The device is a step-down switching regulator optimized for battery powered applications. It operates at high switching frequency (1MHz or 2MHz), which enables the use of smaller inductors resulting in small form factor, while also providing excellent efficiency. Further, at light loads while in PFM mode, the regulator reduces the switching frequency, thereby minimizing the switching loss and maximizing battery life. The quiescent current when the output is not loaded is typically only 35µA. The supply current is typically only 5µA when the regulator is shut down.

### **PWM Control Scheme**

Pulling the MODE pin HI (>2.5V) forces the converter into PWM mode, regardless of output current. The device employs the current-mode pulse-width modulation (PWM) control scheme for fast transient response and pulse-by-pulse current limiting. See "Functional Block Diagram" on page 5. The current loop consists of the oscillator, the PWM comparator, current sensing circuit and the slope compensation for the current loop stability. The slope compensation is 900mV/Ts, which changes with frequency. The gain for the current sensing circuit is typically 300mV/A. The control reference for the current loops comes from the error amplifier's (EAMP) output.

The PWM operation is initialized by the clock from the oscillator. The P-Channel MOSFET is turned on at the beginning of a PWM cycle and the current in the MOSFET starts to ramp up. When the sum of the current amplifier CSA and the slope compensation reaches the control reference of the current loop, the PWM comparator COMP sends a signal to the PWM logic to turn off the P-FET and turn on the N-Channel MOSFET. The N-FET stays on until the end of the PWM cycle. Figure 53 shows the typical operating waveforms during the PWM operation. The dotted lines illustrate the sum of the slope compensation ramp and the current-sense amplifier's CSA output.




FIGURE 52. OVER-TEMPERATURE PROTECTION  $F_{SW} = 2MHz, V_{IN} = 5V, MODE = PWM, T_A = +163 °C$ 




FIGURE 53. PWM OPERATION WAVEFORMS

The output voltage is regulated by controlling the  $V_{EAMP}$  voltage to the current loop. The bandgap circuit outputs a 0.6V reference voltage to the voltage loop. The feedback signal comes from the VFB pin. The soft-start block only affects the operation during the start-up and will be discussed separately. The error amplifier is a transconductance amplifier that converts the voltage error signal to a current output. The voltage loop is internally compensated with the 27 pF and  $200 k\Omega$  RC network. The maximum EAMP voltage output is precisely clamped to 1.6V.

### **PFM Mode**

Pulling the MODE pin LO (<0.4V) forces the converter into PFM mode. The device enters a pulse-skipping mode at light load to minimize the switching loss by reducing the switching frequency. Figure 54 illustrates the skip-mode operation. A zero-cross sensing circuit shown in Figure 54 monitors the N-FET current for zero crossing. When 16 consecutive cycles of the inductor current crossing zero are detected, the regulator enters the skip mode. During the eight detecting cycles, the current in the inductor is allowed to become negative. The counter is reset to zero when the current in any cycle does not cross zero.

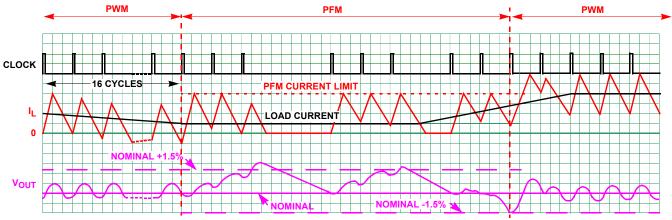


FIGURE 54. SKIP MODE OPERATION WAVEFORMS

Once the skip mode is entered, the pulse modulation starts being controlled by the SKIP comparator as shown in the "Functional Block Diagram" on page 5. Each pulse cycle is still synchronized by the PWM clock. The P-FET is turned on at the clock's rising edge and turned off when the output is higher than 1.5% of the nominal regulation or when its current reaches the peak Skip current limit value. Then the inductor current is discharges to 0A and stays at zero. The internal clock is disabled. The output voltage reduces gradually due to the load current discharging the output capacitor. When the output voltage drops to the nominal voltage, the P-FET will be turned on again at the rising edge of the internal clock as it repeats the previous operations.

The regulator resumes normal PWM mode operation when the output voltage drops 1.5% below the nominal voltage.

#### **Overcurrent Protection**

The overcurrent protection is realized by monitoring the CSA output with the OCP comparator, as shown in the <u>"Functional Block Diagram" on page 5</u>. The current sensing circuit has a gain of 300mV/A, from the P-FET current to the CSA output. When the CSA output reaches a threshold, the OCP comparator is tripped to turn off the P-FET immediately. The overcurrent function protects the switching converter from a shorted output by monitoring the current flowing through the upper MOSFET.

Upon detection of overcurrent condition, the upper MOSFET will be immediately turned off and will not be turned on again until the next switching cycle. If the overcurrent condition goes away, the output will resume back into regulation point.

#### **Short-Circuit Protection**

The short-circuit protection (SCP) comparator monitors the VFB pin voltage for output short-circuit protection. When the VFB is lower than 0.3V, the SCP comparator forces the PWM oscillator frequency to drop to 1/3 of the normal operation value. This comparator is effective during start-up or an output short-circuit event.

#### **Negative Current Protection**

Similar to the overcurrent, the negative current protection is realized by monitoring the current across the low-side N-FET, as shown in the <u>"Functional Block Diagram" on page 5</u>. When the valley point of the inductor current reaches -1.5A for 2 consecutive

cycles, both P-FET and N-FET shut off. The 100 $\Omega$  in parallel to the N-FET will activate discharging the output into regulation. The control will begin to switch when output is within regulation. The regulator will be in PFM for 20 $\mu$ s before switching to PWM if necessary.

#### PG

PG is an output of a window comparator that continuously monitors the buck regulator output voltage. PG is actively held low when EN is low and during the buck regulator soft-start period. After 1ms delay of the soft-start period, PG becomes high impedance as-long-as the output voltage is within nominal regulation voltage set by VFB. When VFB drops 15% below or raises 15% above the nominal regulation voltage, the device pulls PG low. Any fault condition forces PG low until the fault condition is cleared by attempts to soft-start. There is an internal  $5 \text{M}\Omega$  pull-up resistor to fit most applications. An external resistor can be added from PG to VIN for more pull-up strength.

#### **UVLO**

When the input voltage is below the undervoltage lock-out (UVLO) threshold, the regulator is disabled.

#### **Enable, Disable, and Soft-Start Up**

After the VIN pin exceeds its rising POR trip point (nominal 2.7V), the device begins operation. If the EN pin is held low externally, nothing happens until this pin is released. Once the EN is released and above the logic threshold, the internal default soft-start time is 1ms.

#### **Discharge Mode (Soft-Stop)**

When a transition to shutdown mode occurs or the VIN UVLO is set, the outputs discharge to GND through an internal  $100\Omega$  switch.

## 100% Duty Cycle (1MHz Version)

The device features 100% duty cycle operation to maximize the battery life. When the battery voltage drops to a level that the device can no longer maintain the regulation at the output, the regulator completely turns on the P-FET. The maximum dropout voltage under the 100% duty cycle operation is the product of the load current and the ON-resistance of the P-FET.



### **Thermal ShutDown**

The device has built-in thermal protection. When the internal temperature reaches +150°C, the regulator is completely shutdown. As the temperature drops to +125°C, the device resumes operation by stepping through the soft-start.

### **Power Derating Characteristics**

To prevent the ISL8002 from exceeding the maximum junction temperature, some thermal analysis is required. The temperature rise is given by <u>Equation 2</u>:

$$T_{RISE} = (PD)(\theta_{JA})$$
 (EQ. 2)

where PD is the power dissipated by the regulator and  $\theta_{JA}$  is the thermal resistance from the junction of the die to the ambient temperature. The junction temperature,  $T_J$ , is given by Equation 3:

$$T_{RISE} = (T_A + T_{RISE})$$
 (EQ. 3)

where  $T_A$  is the ambient temperature. For the DFN package, the  $\theta_{1\Delta}$  is +71° C/W.

The actual junction temperature should not exceed the absolute maximum junction temperature of +125°C when considering the thermal design.

The ISL8002 delivers full current at ambient temperatures up to +85 °C; if the thermal impedance from the thermal pad maintains the junction temperature below the thermal shutdown level, depending on the input voltage/output voltage combination and the switching frequency. The device power dissipation must be reduced to maintain the junction temperature at or below the thermal shutdown level. Figure 55 illustrates the approximate output current derating versus ambient temperature for the ISL8002 EVAL1Z kit.




FIGURE 55. DERATING CURVE vs TEMPERATURE

# **Applications Information**

### **Output Inductor and Capacitor Selection**

To consider steady state and transient operations, ISL8002A/ISL80019A typically requires a 1.2µH and ISL8002/ISL80019 typically requires a 2.2µH output inductor. Higher or lower inductor value can be used to optimize the total converter system performance. For example, for higher output

voltage 3.3V application, in order to decrease the inductor ripple current and output voltage ripple, the output inductor value can be increased. It is recommended to set the inductor ripple current to be approximately 30% of the maximum output current for optimized performance. The inductor ripple current can be expressed as shown in Equation 4:

$$\Delta I = \frac{V_O \cdot \left(1 - \frac{V_O}{V_{IN}}\right)}{L \cdot F_{SW}}$$
 (EQ. 4)

The inductor's saturation current rating needs to be at least larger than the peak current.

The device uses internal compensation network and the output capacitor value is dependent on the output voltage. The ceramic capacitor is recommended to be X5R or X7R.

### **Output Voltage Selection**

The output voltage of the regulator can be programmed via an external resistor divider that is used to scale the output voltage relative to the internal reference voltage and feed it back to the inverting input of the error amplifier (see <u>Figure 35</u>).

The output voltage programming resistor,  $R_2$ , will depend on the value chosen for the feedback resistor and the desired output voltage of the regulator. The value for the feedback resistor is typically between  $10k\Omega$  and  $100k\Omega$ , as shown in Equation 5.

$$R_1 = R_2 \left( \frac{V_O}{VFB} - 1 \right) \tag{EQ. 5}$$

If the output voltage desired is 0.6V, then  $R_2$  is left unpopulated and  $R_1$  is shorted. There is a leakage current from VIN to LX. It is recommended to preload the output with 10 $\mu$ A minimum. For better performance, add 22pF in parallel with  $R_1$ . Check loop analysis before use in application.

#### **Input Capacitor Selection**

The main functions for the input capacitor are to provide decoupling of the parasitic inductance and to provide filtering function to prevent the switching current flowing back to the battery rail. At least two  $22\mu F$  X5R or X7R ceramic capacitors are a good starting point for the input capacitor selection.

#### **Output Capacitor Selection**

An output capacitor is required to filter the inductor current. Output ripple voltage and transient response are 2 critical factors when considering output capacitance choice. The current mode control loop allows for the usage of low ESR ceramic capacitors and thus smaller board layout. Electrolytic and polymer capacitors may also be used.

Additional consideration applies to ceramic capacitors. While they offer excellent overall performance and reliability, the actual in-circuit capacitance must be considered. Ceramic capacitors are rated using large peak-to-peak voltage swings and with no DC bias. In the DC/DC converter application, these conditions do not reflect reality. As a result, the actual capacitance may be considerably lower than the advertised value. Consult the manufacturers data sheet to determine the actual in-application capacitance. Most manufacturers publish capacitance vs DC bias so this effect can be easily accommodated. The effects of AC



voltage are not frequently published, but an assumption of ~20% further reduction will generally suffice. The result of these considerations can easily result in an effective capacitance 50% lower than the rated value. Nonetheless, they are a very good choice in many applications due to their reliability and extremely low ESR.

The following equations allow calculation of the required capacitance to meet a desired ripple voltage level. Additional capacitance may be used.

For the ceramic capacitors (low ESR) =

$$V_{OUTripple} = \frac{\Delta I}{8*F_{SW}*C_{OUT}}$$
 (EQ. 6)

where  $\Delta I$  is the inductor's peak-to-peak ripple current,  $F_{SW}$  is the switching frequency and  $C_{OUT}$  is the output capacitor.

If using electrolytic capacitors then:

$$V_{OUTripple} = \Delta I^*ESR$$
 (EQ. 7)

Regarding transient response needs, a good starting point is to determine the allowable overshoot in  $V_{OUT}$  if the load is suddenly removed. In this case, energy stored in the inductor will be transferred to  $C_{OUT}$  causing its voltage to rise. After calculating capacitance required for both ripple and transient needs, choose the larger of the calculated values. The following equation determines the required output capacitor value in order to achieve a desired overshoot relative to the regulated voltage.

$$C_{OUT} = \frac{I_{OUT}^{2} L}{V_{OUT}^{2} (V_{OUTMAX}/V_{OUT})^{2} - 1)}$$
 (EQ. 8)

where  $V_{OUTMAX}/V_{OUT}$  is the relative maximum overshoot allowed during the removal of the load. For an overshoot of 5%, the equation becomes as follows:

$$C_{OUT} = \frac{I_{OUT}^{2} L}{V_{OUT}^{2} (1.05^{2} - 1)}$$
 (EQ. 9)

## **Loop Compensation Design**

When COMP is not connected to VDD, the COMP pin is active for external loop compensation. The ISL8002, ISL8002A, ISL80019, and ISL80019A use constant frequency peak current mode control architecture to achieve fast loop transient response. An accurate current sensing pilot device in parallel with the upper MOSFET is used for peak current control signal and overcurrent protection. The inductor is not considered as a state variable since its peak current is constant, and the system becomes a single order system. It is much easier to design a type II compensator to stabilize the loop than to implement voltage mode control. Peak current mode control has an inherent input voltage feed-forward function to achieve good line regulation. Figure 56 shows the small signal model of the synchronous buck regulator.




FIGURE 56. SMALL SIGNAL MODEL OF SYNCHRONOUS BUCK REGULATOR




FIGURE 57. TYPE II COMPENSATOR

Figure 57 shows the type II compensator and its transfer function is expressed as Equation 10:

$$A_{v}(S) = \frac{\hat{v}_{comp}}{\hat{v}_{FB}} = \frac{GM \cdot R_{2}}{(C_{7} + C_{8}) \cdot (R_{1} + R_{2})} \cdot \frac{\left(1 + \frac{S}{\omega_{cz1}}\right)\left(1 + \frac{S}{\omega_{cz2}}\right)}{S\left(1 + \frac{S}{\omega_{cp1}}\right)\left(1 + \frac{S}{\omega_{cp2}}\right)}$$
(EQ. 10)

where,

$$\omega_{\text{cz1}} = \frac{1}{R_{14}C_7}, \quad \omega_{\text{cz2}} = \frac{1}{R_1C_4}, \\ \omega_{\text{cp1}} = \frac{C_7 + C_8}{R_{14}C_7C_8}, \\ \omega_{\text{cp2}} = \frac{R_1 + R_2}{C_4R_1R_2}$$

#### **COMPENSATOR DESIGN GOAL**

- · High DC gain
- Choose Loop bandwidth f<sub>c</sub> less than 100kHz
- · Gain margin: >10dB
- Phase margin: >50°

The compensator design procedure is as follows:

The loop gain at crossover frequency of  $f_c$  has unity gain. Therefore, the compensator resistance  $R_{14}$  is determined by Equation 11.

$$R_{14} = \frac{2\pi f_c V_o C_o R_t}{GM \cdot V_{FB}} = 26 \times 10^3 \cdot f_c V_o C_o$$
 (EQ. 11)

Where GM is the trans-conductance of the voltage error amplifier.

Compensator capacitors  $C_7$  and  $C_8$  are then given by Equations 12 and 13.

$$C_7 = \frac{R_0 C_0}{R_{14}} = \frac{V_0 C_0}{I_0 R_{14}}$$
 (EQ. 12)

$$C_8 = max(\frac{R_c C_0}{R_{14}}, \frac{1}{\pi f_s R_{14}})$$
 (EQ. 13)

An optional zero can boost the phase margin.  $\omega_{\text{CZ2}}$  is a zero due to R1 and C4.

Put compensator zero 2 to 5 times fc:

$$C_4 = \frac{1}{\pi f_c R_1}$$
 (EQ. 14)

Example: V<sub>IN</sub> = 5V, V<sub>OUT</sub> = 1.8V, I<sub>O</sub> = 2A, F<sub>SW</sub> = 1MHz, R<sub>1</sub> = 200k $\Omega$ , R<sub>2</sub> = 100k $\Omega$ , C<sub>OUT</sub> = 2x22 $\mu$ F/3m $\Omega$ , L = 2.2 $\mu$ H, f<sub>C</sub> = 100kHz, then compensator resistance R<sub>14</sub>:

$$R_{14} = 26 \times 10^3 \cdot 100 \text{kHz} \cdot 1.8 \text{V} \cdot 44 \mu \text{F} = 205 \text{k}\Omega$$
 (EQ. 15)

Using the closest standard value for R<sub>14</sub> value is fine (200k $\Omega$ ).


$$C_7 = \frac{1.8 \text{V} \cdot 44 \mu \text{F}}{2 \text{A} \cdot 200 \text{k}\Omega} = 198 \text{pF}$$
 (EQ. 16)

$$C_8 = max(\frac{3m\Omega \cdot 44\mu F}{200k\Omega}, \frac{1}{\pi \cdot 1MHz(200k\Omega)}) = (1pF, 2.3pF)$$
 (EQ. 17)

The closest standard values for  $C_7$  and  $C_8$  are also fine. There is approximately 3pF parasitic capacitance from  $V_{COMP}$  to GND; Therefore,  $C_8$  is optional. Use  $C_7$  = 220pF and  $C_8$  = 0PEN.

$$C_4 = \frac{1}{\pi 100 \, \text{kHz} \cdot 200 \, \text{k}\Omega} = 16 \, \text{pF}$$
 (EQ. 18)

Use  $C_4$  = 15pF. Note that  $C_4$  may increase the loop bandwidth from previously estimated value. Figure 58 shows the simulated voltage loop gain. It is shown that it has 114kHz loop bandwidth with 52° phase margin and 10dB gain margin. It may be more desirable to achieve more phase margin. This can be accomplished by lowering  $R_{14}$  by 20% to 50%.

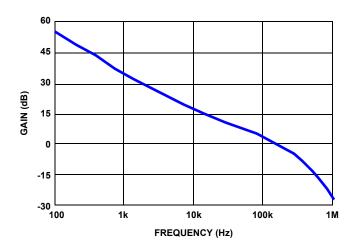




FIGURE 58. SIMULATED LOOP GAIN

#### **Layout Considerations**

The PCB layout is a very important converter design step to make sure the designed converter works well. The power loop is composed of the output inductor L's, the output capacitor COUT, the PHASE's pins, and the PGND pin. It is necessary to make the power loop as small as possible and the connecting traces among them should be direct, short and wide. The switching node of the converter, the PHASE pins, and the traces connected to the node are very noisy, so keep the voltage feedback trace away from these noisy traces. The input capacitor should be placed as closely as possible to the VIN pin and the ground of the input and output capacitors should be connected as closely as possible. The heat of the IC is mainly dissipated through the thermal pad. Maximizing the copper area connected to the thermal pad is preferable. In addition, a solid ground plane is helpful for better EMI performance. It is recommended to add at least 4 vias ground connection within the pad for the best thermal relief.

# **Revision History**

The revision history provided is for informational purposes only and is believed to be accurate, but not warranted. Please go to web to make sure you have the latest revision.

DATE	REVISION	CHANGE
July 31, 2014	FN7888.4	Page 18 under overcurrent protection: removed a text, which read "after the hiccup mode expires".  Added ISL80019AEVAL1Z and ISL80019EVAL1Z to ordering information table on Page 6.
November 26, 2013	FN7888.3	Added Eval boards to "Ordering Information" on Page 6. Added Curve and "Power Derating Characteristics" on page 19.
July 30, 2013	FN7888.2	Updated ordering information table on Page 6.  Added Figures 12, 13 and 14 to "Typical Performance Curves" on page 9.  Electrical Specifications on Page 7 under output regulation section removed duplicate of "T <sub>J</sub> = -40°C to +125°C" from VFB Bias Current to in place Line Regulation.
June 13, 2013		Functional Block Diagram on page 5 - changed VFB to VREF  Changed part number in ordering information on page 6 from ISL80019FRZ-T TO ISL80019FZ-T  Changed on page 7 Recommend Operating Conditions the word "Ambient" to "Junction"
		Changed in Electrical Spec on page 7 conditions from TA -40 to +85 to TJ -40 to +125 VFB Bias Current under Output Regulation Test condition from 0.75V and TYP from 0.1 to 2.7V MIN -120 TYP 50 MAX 350  Type II Compensator graphic on page 20 - changed VFB to VREF
May 10, 2013		Pin Descriptions on Page 4: EN section, changed pin rises from 0.6V to 1.4V.
January 7, 2013	FN7888.1	Initial release.

## **About Intersil**

Intersil Corporation is a leading provider of innovative power management and precision analog solutions. The company's products address some of the largest markets within the industrial and infrastructure, mobile computing and high-end consumer markets.

For the most updated datasheet, application notes, related documentation and related parts, please see the respective product information page found at <a href="https://www.intersil.com">www.intersil.com</a>.

You may report errors or suggestions for improving this datasheet by visiting www.intersil.com/ask.

Reliability reports are also available from our website at www.intersil.com/support

© Copyright Intersil Americas LLC 2013-2014. All Rights Reserved. All trademarks and registered trademarks are the property of their respective owners.

For additional products, see <a href="https://www.intersil.com/en/products.html">www.intersil.com/en/products.html</a>

Intersil products are manufactured, assembled and tested utilizing ISO9001 quality systems as noted in the quality certifications found at <a href="https://www.intersil.com/en/support/qualandreliability.html">www.intersil.com/en/support/qualandreliability.html</a>

Intersil products are sold by description only. Intersil may modify the circuit design and/or specifications of products at any time without notice, provided that such modification does not, in Intersil's sole judgment, affect the form, fit or function of the product. Accordingly, the reader is cautioned to verify that datasheets are current before placing orders. Information furnished by Intersil is believed to be accurate and reliable. However, no responsibility is assumed by Intersil or its subsidiaries for its use; nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Intersil or its subsidiaries.


For information regarding Intersil Corporation and its products, see <a href="https://www.intersil.com">www.intersil.com</a>




# **Package Outline Drawing**


### L8.2x2C


# 8 LEAD THIN DUAL FLAT NO-LEAD PLASTIC PACKAGE (TDFN) WITH E-PAD Rev 0, 07/08






TYPICAL RECOMMENDED LAND PATTERN

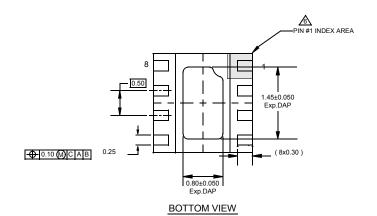

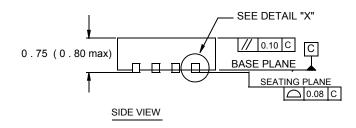



DETAIL "X"

#### NOTES:

- Dimensions are in millimeters.
   Dimensions in ( ) for Reference Only.
- $2. \ \ \, \text{Dimensioning and tolerancing conform to AMSE Y14.5m-1994}.$
- 3. Unless otherwise specified, tolerance : Decimal  $\pm 0.05$
- Dimension b applies to the metallized terminal and is measured between 0.15mm and 0.30mm from the terminal tip.
- 5. Tiebar shown (if present) is a non-functional feature.
- The configuration of the pin #1 identifier is optional, but must be located within the zone indicated. The pin #1 identifier may be either a mold or mark feature.



Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

### Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



**«JONHON»** (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«**FORSTAR**» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: http://oceanchips.ru/

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А