NHD-0216SZ-FL-GBW

Character Liquid Crystal Display Module

NHD-	Newhaven Display
0216-	2 lines x 16 characters
SZ-	Model
F-	Transflective
L-	Yellow/Green LED Backlight
G-	STN- Gray
B-	6:00 view
W-	Wide Temperature (-20°C~+70°C)
	RoHS Compliant

Newhaven Display International, Inc.
2511 Technology Drive, Suite 101
Elgin IL, 60124
Ph: 847-844-8795 Fax: 847-844-8796

www.newhavendisplay.com
nhtech@newhavendisplay.com nhsales@newhavendisplay.com

Document Revision History

Revision	Date	Description	Changed by
0	**2/20/2009**	**Initial Release**	**-**
1	**12/18/2009**	**User Guide Reformat**	**BE**
2	**1/7/2010**	**Optical/Backlight revised**	**BE**
3	**1/6/2011**	**Alternate controller information updated**	**AK**

Functions and Features

- **2 lines x 16 characters**
- **Built-in controller (SPLC780D or ST7066U)**
- **+5.0V Power Supply**
- **1/16 duty, 1/5 bias**
- **RoHS compliant**

Mechanical Drawing

REV	DESCRIPTION:	DATE

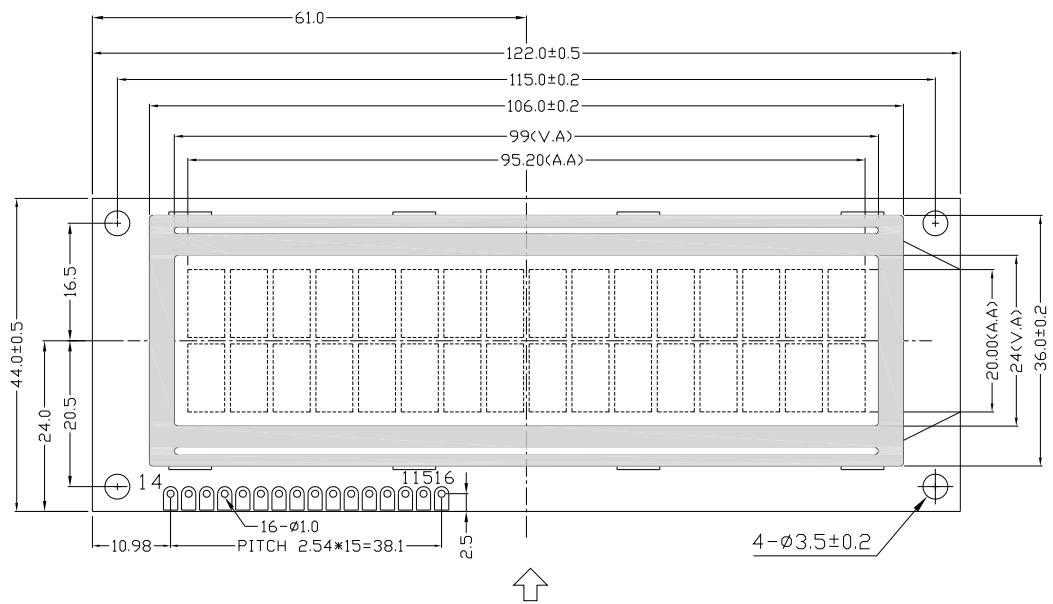

VIEWING DIRECTION

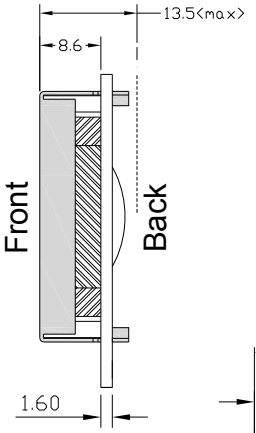

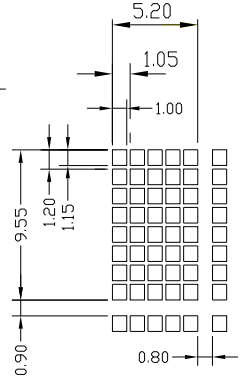

PIN ASSIGNMENT

1	VSS
2	VDD
3	V0
4	RS
5	RW
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	LED+
16	LED-

Specification:

1). Driving: Duty:1/16, Bias:1/5, VLCD:**4.6V**, VDD:5.0V
2). Viewing Direction: 6 O'clock
3). Display mode:STN-**Gray / Transflective**
4). Operating temp.:−20°c~ +70°C
Storage temp.:−30°c~ +80°C
5). Driver : SPLC780D **or ST7066U**
6). Backlight:5.0V/ **Yellow-Green**

Model Name: NHD-0216SZ-FL-GBW		**Newhaven Display**
GENERAL TOL: ± 0.2		
APPROVALS	DATE	DRAWN NO. / SCALE: 1:1
DWN: Qiqei Qiu		
CHK:		SIZE: A4 / UNIT: mm / Page: 1-1
APP: Guoxiang Ye		

Pin Description and Wiring Diagram

Pin No.	Symbol	External Connection	Function Description
1	VSS	Power Supply	Ground
2	VDD	Power Supply	Supply Voltage for logic (+5.0V)
3	V0	Adj Power Supply	Power supply for contrast (approx. 0.4V)
4	RS	MPU	Register select signal. RS=0: Command, RS=1: Data
5	R/W	MPU	Read/Write select signal, R/W=1: Read R/W: =0: Write
6	E	MPU	Operation enable signal. Falling edge triggered.
7-10	DB0 – DB3	MPU	Four low order bi-directional three-state data bus lines. These four are not used during 4-bit operation.
11-14	DB4 – DB7	MPU	Four high order bi-directional three-state data bus lines.
15	LED+	Power Supply	Power supply for LED Backlight (+5.0V via on-board resistor)
16	LED-	Power Supply	Ground for Backlight

Recommended LCD connector: 2.54mm pitch pins
Backlight connector: --- **Mates with:** ---

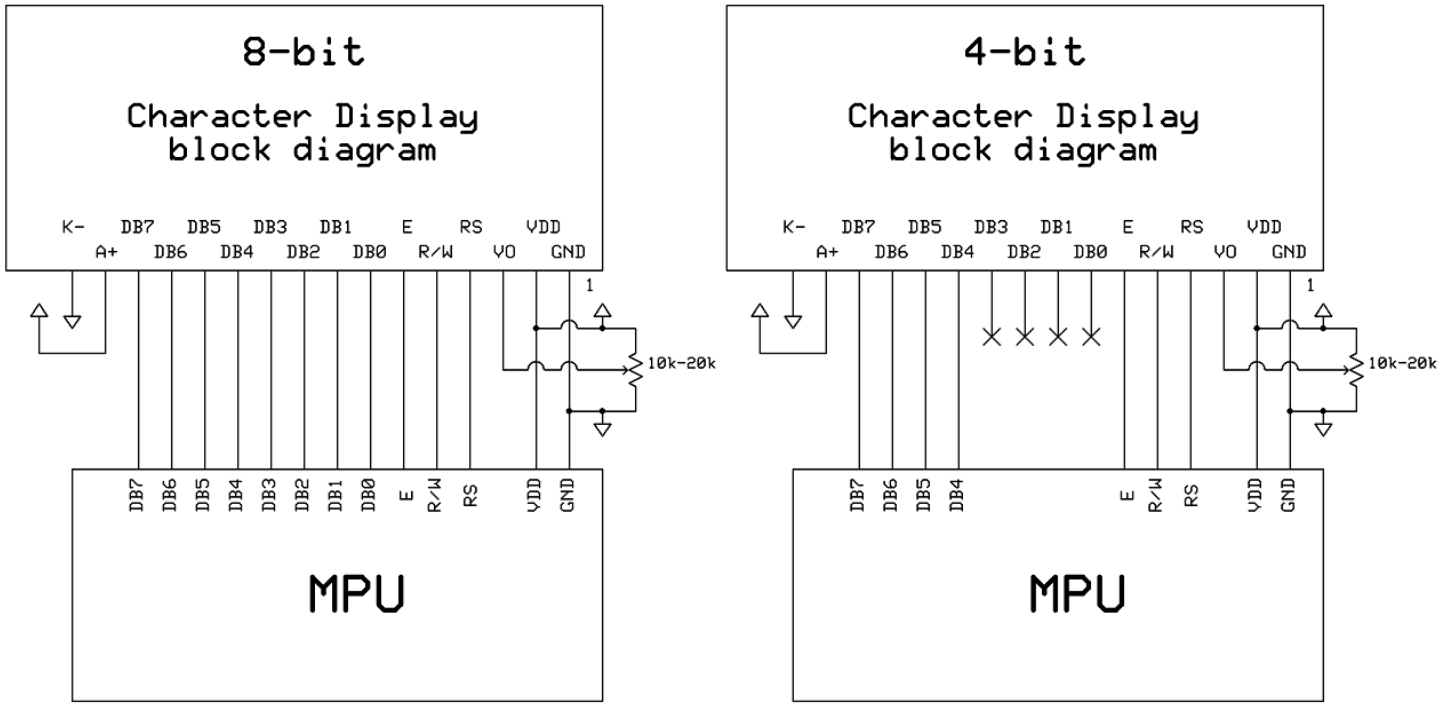

Electrical Characteristics

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
Operating Temperature Range	Top	Absolute Max	-20	-	+70	°C
Storage Temperature Range	Tst	Absolute Max	-30	-	+80	°C
Supply Voltage	VDD		4.7	5.0	5.5	V
Supply Current	IDD	Ta=25°C, VDD=5.0V	-	1.5	2.5	mA
Supply for LCD (contrast)	VDD-V0	Ta=25°C	-	4.6	-	V
"H" Level input	Vih		2.2	-	VDD	V
"L" Level input	Vil		0	-	0.6	V
"H" Level output	Voh		2.4	-	-	V
"L" Level output	Vol		-	-	0.4	V
Backlight Supply Voltage	Vled	-	-	5.0	-	V
Backlight Supply Current	Iled	Vled=5.0V	-	120	-	mA

Optical Characteristics

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
Viewing Angle – Vertical (top)	AV	Cr ≥ 2	-	25	-	º
Viewing Angle – Vertical (bottom)	AV	Cr ≥ 2	-	70	-	º
Viewing Angle – Horizontal (left)	AH	Cr ≥ 2	-	30	-	º
Viewing Angle – Horizontal (right)	AH	Cr ≥ 2	-	30	-	º
Contrast Ratio	Cr		-	2	-	-
Response Time (rise)	Tr	-	-	120	150	ms
Response Time (fall)	Tf	-	-	120	150	ms

Controller Information

Built-in SPLC780D. Download specification at http://www.newhavendisplay.com/app_notes/SPLC780D.pdf

Built-in ST7066U. Download specification at http://www.newhavendisplay.com/app_notes/ST7066U.pdf

Display character address code:

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
00	01	02	03	04	05	06	07	08	09	0A	0B	0C	0D	0E	0F
40	41	42	43	44	45	46	47	48	49	4A	4B	4C	4D	4E	4F

Built-in Font Table

Example Initialization Program

8-bit Initialization:

```
/*********************************************************/
void command(char i)
{
      P1 = i;                       //put data on output Port
      D_I =0;                       //D/I=LOW : send instruction
      R_W =0;                       //R/W=LOW : Write
      E  = 1;
      Delay(1);                     //enable pulse width  >= 300ns
        E  = 0;                     //Clock enable: falling edge
}
/*********************************************************/
void write(char i)
{
      P1 = i;                       //put data on output Port
      D_I =1;                       //D/I=LOW : send data
      R_W =0;                       //R/W=LOW : Write
      E  = 1;
      Delay(1);                     //enable pulse width  >= 300ns
      E  = 0;                       //Clock enable: falling edge
}
/*********************************************************/
void init()
{
      E = 0;
      Delay(100);                   //Wait >15 msec after power is applied
      command(0x30);                //command 0x30 = Wake up
      Delay(30);                    //must wait 5ms, busy flag not available
      command(0x30);                //command 0x30 = Wake up #2
      Delay(10);                    //must wait 160us, busy flag not available
      command(0x30);                //command 0x30 = Wake up #3
      Delay(10);                    //must wait 160us, busy flag not available
      command(0x38);                //Function set: 8-bit/2-line
      command(0x10);                //Set cursor
      command(0x0c);                //Display ON; Cursor ON
      command(0x06);                //Entry mode set
}
/*********************************************************/
```

4-bit Initialization:

```
/*********************************************************/
void command(char i)
{
      P1 = i;                       //put data on output Port
      D_I =0;                       //D/I=LOW : send instruction
      R_W =0;                       //R/W=LOW : Write
      Nybble();                     //Send lower 4 bits
      i = i<<4;                     //Shift over by 4 bits
      P1 = i;                       //put data on output Port
      Nybble();                     //Send upper 4 bits
}
/*********************************************************/
void write(char i)
{
      P1 = i;                       //put data on output Port
      D_I =1;                       //D/I=HIGH : send data
      R_W =0;                       //R/W=LOW : Write
      Nybble();                     //Clock lower 4 bits
      i = i<<4;                     //Shift over by 4 bits
      P1 = i;                       //put data on output Port
      Nybble();                     //Clock upper 4 bits
}
/*********************************************************/
void Nybble()
{
      E = 1;
      Delay(1);                     //enable pulse width  >= 300ns
      E = 0;                        //Clock enable: falling edge
}
/*********************************************************/
void init()
{
      P1 = 0;
      P3 = 0;
      Delay(100);                   //Wait >15 msec after power is applied
      P1 = 0x30;                    //put 0x30 on the output port
      Delay(30);                    //must wait 5ms, busy flag not available
      Nybble();                     //command 0x30 = Wake up
      Delay(10);                    //must wait 160us, busy flag not available
      Nybble();                     //command 0x30 = Wake up #2
      Delay(10);                    //must wait 160us, busy flag not available
      Nybble();                     //command 0x30 = Wake up #3
      Delay(10);                    //can check busy flag now instead of delay
      P1= 0x20;                     //put 0x20 on the output port
      Nybble();                     //Function set: 4-bit interface
      command(0x28);                //Function set: 4-bit/2-line
      command(0x10);                //Set cursor
      command(0x0F);                //Display ON; Blinking cursor
      command(0x06);                //Entry Mode set
}
/*********************************************************/
```

Quality Information

Test Item	Content of Test	Test Condition	Note
High Temperature storage	Endurance test applying the high storage temperature for a long time.	+80°C , 48hrs	2
Low Temperature storage	Endurance test applying the low storage temperature for a long time.	-30°C , 48hrs	1,2
High Temperature Operation	Endurance test applying the electric stress (voltage & current) and the high thermal stress for a long time.	+70°C 48hrs	2
Low Temperature Operation	Endurance test applying the electric stress (voltage & current) and the low thermal stress for a long time.	-20°C , 48hrs	1,2
High Temperature / Humidity Operation	Endurance test applying the electric stress (voltage & current) and the high thermal with high humidity stress for a long time.	+40°C , 90% RH , 48hrs	1,2
Thermal Shock resistance	Endurance test applying the electric stress (voltage & current) during a cycle of low and high thermal stress.	0°C,30min -> 25°C,5min -> 50°C,30min = 1 cycle 10 cycles	
Vibration test	Endurance test applying vibration to simulate transportation and use.	10-55Hz , 15mm amplitude. 60 sec in each of 3 directions X,Y,Z For 15 minutes	3
Static electricity test	Endurance test applying electric static discharge.	VS=800V, RS=1.5kΩ, CS=100pF One time	

Note 1: No condensation to be observed.
Note 2: Conducted after 4 hours of storage at 25°C, 0%RH.
Note 3: Test performed on product itself, not inside a container.

Precautions for using LCDs/LCMs

See Precautions at www.newhavendisplay.com/specs/precautions.pdf

Warranty Information and Terms & Conditions

http://www.newhavendisplay.com/index.php?main_page=terms

OCEAN CHIPS
Океан Электроники
Поставка электронных компонентов

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «**JONHON**», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «**FORSTAR**».

AVIC JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).

FORSTAR®

Телефон: 8 (812) 309-75-97 (многоканальный)
Факс: 8 (812) 320-03-32
Электронная почта: ocean@oceanchips.ru
Web: http://oceanchips.ru/
Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А