

LDT481 Series

480W DIN Rail Switching Power Supply

LDT481 Series is a high power switching mode power supplies with three phase input voltage 400 – 500 VAC, delivering 480 W of output power, covering output voltages from 24 to 72 V (model dependent).

Their compact size, high efficiency and excellent reliability together with easy installation make them fit demanding applications where compactness and high power are needed.

LDT481 Series are suitable for SELV and PELV circuitry (up to 48 VDC models) and are designed to be mounted on DIN rail and installed inside a protective enclosure.



Key Features & Benefits

- 3 phase AC input 400 – 500 VAC
- Overload 150%
- High Efficiency and compact size
- Constant current or hiccup mode limitation, user settable
- User settable current limitation (Hiccup or Constant mode)
- Easy parallelable for power increase
- Natural convection cooling
- 72 V output model as standard

Applications

- Automation
- Process Control
- Communication
- Instrumentation Equipment



bel POWER SOLUTIONS & PROTECTION

a bel group

belfuse.com/power-solutions

1. MODEL SELECTION

MODEL	INPUT VOLTAGE	# of PHASES	OUTPUT VOLTAGE	OUTPUT CURRENT
LDT481-12	400 - 500 VAC / 520 - 725 VDC	3	12 VDC	40 A
LDT481-24	400 - 500 VAC / 520 - 725 VDC	3	24 VDC	20 A
LDT481-48	400 - 500 VAC / 520 - 725 VDC	3	48 VDC	10 A
LDT481-72	400 - 500 VAC / 520 - 725 VDC	3	72 VDC	6.7 A

2. INPUT SPECIFICATIONS

Technical parameters are typical, measured in laboratory environment at 25°C and 400 VAC / 50 Hz, at nominal values, after minimum 5 minutes of operation.

PARAMETER	DESCRIPTION / CONDITION	SPECIFICATION
Input AC Voltage Range ¹	Rated, three phase (UL certified) Operating	400 – 500 VAC 340 – 550 VAC
Input DC Voltage Range		520 – 725 VDC
Input Frequency		47 - 63 Hz
Input AC Current	Vin = 400 VAC	1.3 A
	Vin = 500 VAC	1.1 A
Input DC Current	Vin = 520 VAC	1.2 A
	Vin = 725 VAC	0.9 A
Inrush Peak Current		≤ 50 A
Touch (Leakage) Current		≤ 0.15 mA
Internal Protection Fuse	None, external fuse must be provided	
Recommended External Protection	It is strongly recommended to provide external surge arresters (SPD) according to local regulations	Fuse 3x 10 AT or 3x MCB 10 A C curve

¹ In case of 2-phase operation, reduce the output load to 50% of the nominal value.

3. OUTPUT SPECIFICATIONS

PARAMETER	DESCRIPTION / CONDITION	SPECIFICATION
Output Power		480 W
Rated Voltage (Adjustable Voltage Range)	LDT481-12	12 VDC (12 – 15 VDC)
	LDT481-24	24 VDC (23 – 28 VDC)
	LDT481-48	48 VDC (45 – 55 VDC)
	LDT481-72	72 VDC (72 – 85 VDC)
Continuous Current	LDT481-12	40 A
	LDT481-24	20 A
	LDT481-48	10 A
	LDT481-72	6.7 A
Overload Limit (Constant Current Mode)	LDT481-12	44 A
	LDT481-24	22 A
	LDT481-48	11 A
	LDT481-72	7.5 A
Overload Limit (Hiccup Mode) (max. 5s)	LDT481-12	60 A
	LDT481-24	30 A
	LDT481-48	15 A
	LDT481-72	10 A
Load Regulation	LDT481-12	≤ 2.5%
	LDT481-24	≤ 1.0%
	LDT481-48 / LDT481-72	≤ 0.5%
Ripple & Noise ²	LDT481-12	≤ 150 mVpp
	LDT481-24 / LDT481-48 / LDT481-72	≤ 100 mVpp
Hold up Time		≥ 20 ms

Protections	Overload, short circuit: Constant current or Hiccup mode (user settable) Thermal protection Output overvoltage	
Output Over Voltage Protection	LDT481-12	≥ 18 VDC
	LDT481-24	≥ 33 VDC
	LDT481-48	≥ 68 VDC
	LDT481-72	≥ 100 VDC
Status Signals	DC OK - green LED OVERLOAD - red LED DC OK - dry contact (NO, 24 VDC / 1 A)	
Parallel Connection ³	Possible for power or redundancy (with external ORing module)	
Efficiency	LDT481-12	> 89%
	LDT481-24 / LDT481-48	> 93.5%
	LDT481-72	> 94%
Dissipated Power	LDT481-12	< 59 W
	LDT481-24 / LDT481-48	< 34 W
	LDT481-72	< 31 W

² Ripple and Noise are measured with 20 MHz bandwidth, probe terminated with a 0.1µF MKP parallel capacitor.

³ Pay attention, set the current limitation mode jumper on C.C. mode when connecting more units in parallel.

NOTE: Power rating, losses, efficiency, ripple, thermal behavior and start-up may change outside of the nominal rated input range. Contact factory for details.

4. ENVIRONMENTAL, EMC & SAFETY SPECIFICATIONS

PARAMETER	DESCRIPTION / CONDITION	SPECIFICATION
Operating Temperature ⁴	UL certified up to 50°C (Start-up type tested: - 40°C)	- 40 to + 70°C
Storage Temperature		- 40 to + 80°C
Derating		- 4.5 W/°C over 50°C
Humidity	Non-condensing	5 - 95% RH
Life Time Expectancy	At 25°C ambient 75% load	63 200 h (7.2 years)
MTBF	MIL-HDBK-217F, at 25°C ambient full load	> 500 000 h
Overvoltage Category	EN50178	III
Pollution Degree	IEC60664-1	2
Protection Class		Class I
Isolation Voltage	Input to Output	4.2 kVDC
	Input to Ground	2.2 kVDC
	Output to Ground	0.75 kVDC
Standards & Approvals	UL508 (certified E356563)	
	EN60950 (reference)	
	EN50178 (reference)	
EMC Emission	EN55011 (CISPR11)	Class A
	EN55022 (CISPR22)	Class A
EMC Standards	EN61000-4-2	Level 3
	EN61000-4-3	Level 3
	EN61000-4-4	Level 3
	EN61000-4-5	Level 4
	EN61000-4-11	Level 2
Protection Degree	EN60529	IP20
Vibration Sinusoidal	IEC 60068-2-6	5-17.8 Hz: ±1.6 mm; 17.8-500 Hz: 2g 2 hours / axis (X,Y,Z)
Shock	IEC 60068-2-27	30 g 6 ms, 20 g 11 ms; 3 bumps / direction, 18 bumps total)

⁴ Start-up type tested: - 40°C, possible at nominal voltage with load derating.




Asia-Pacific
+86 755 298 85888

Europe, Middle East
+353 61 225 977

North America
+1 408 785 5200

5. PIN LAYOUT & DESCRIPTION



INPUT CONNECTION	OUTPUT CONNECTION	PIN	DESCRIPTION
3 phase: L1 = Phase 1 L2 = Phase 2 L3 = Phase 3 ⊕ = Earth ground	+ = Positive DC - = Negative DC	1	AC/DC input
DC: L1 = + Positive DC L2 = - Negative DC L3 = do not connect ⊕ = Earth ground	Signaling: DC OK: dry contact NO COM	2	DC output (load)
		3	Diagnostic Output (dry contact, NC output OK)
		4	Green LED: Output OK
		5	Red LED: Overload
		6	Output voltage adjustment
		7	Selectable limitation mode

6. MECHANICAL SPECIFICATIONS

PARAMETER	DESCRIPTION / CONDITION	SPECIFICATION
Weight		1.3 kg
Dimensions		80 x 127 x 137.5 mm
Mounting Rail		IEC 60715/H15/TH35-7.5(-15)
Connection Terminals	Screw type header (16 – 10 AWG) Screw type header (10 – 6 AWG) for output on 12 V model	1.5 – 6 mm ² 6 - 16 mm ²
Case Material	Aluminum	

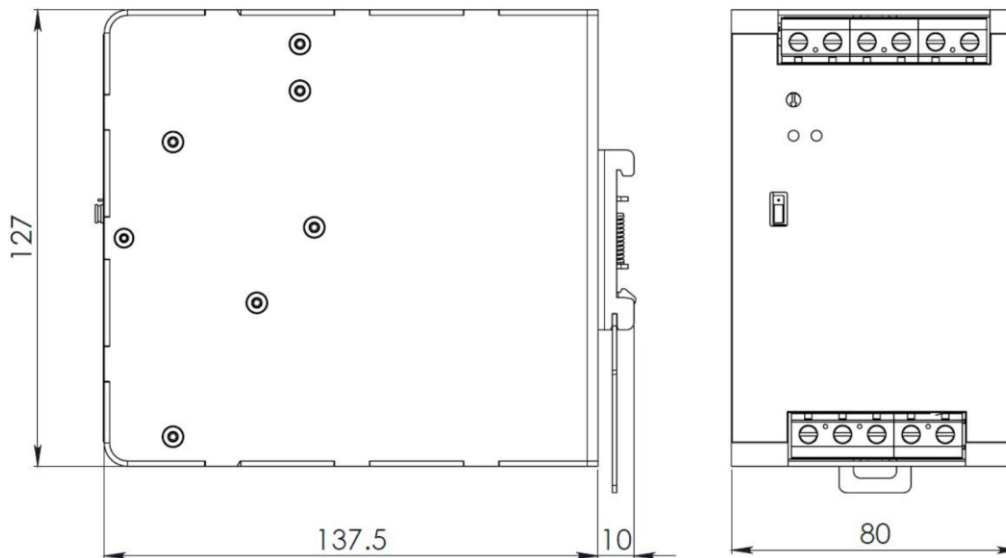


Figure 1. Mechanical Drawing

For more information on these products consult: tech.support@psbel.com

NUCLEAR AND MEDICAL APPLICATIONS - Products are not designed or intended for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems.

TECHNICAL REVISIONS - The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «**JONHON**», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «**FORSTAR**».



JONHON

«**JONHON**» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«**FORSTAR**» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А