

## GENERAL DESCRIPTION

The XRP431L is a three-terminal adjustable shunt voltage regulator providing a highly accurate bandgap reference.

The XRP431L acts as an open-loop error amplifier with a 1.24V temperature compensation reference. The XRP431L has thermal stability, wide operating current of 100mA and broad temperature range of -40°C to 125°C, making it suitable for a variety of applications which require a low-cost, high performance solution. The XRP431L tolerance of 0.5% is proven to be sufficient to overcome all other errors in the system to virtually eliminate the need for trimming in the power supply manufacturer's assembly line and contribute a significant cost savings. The output voltage may be adjusted to any value between  $V_{REF}$  and 18 volts with two external resistors.

The XRP431L is available in RoHS compliant, "green"/halogen free 5-pin SOT23 package.

## APPLICATIONS

- **Charger**
- **Switching Power Supplies**
- **Graphic Cards**
- **Monitors, VCRs, TVs**

## FEATURES

- **0.5% Precise Output Voltage**
  - Adjustable 1.24V to 18V
- **Wide Operating Current**
  - 0.1mA to 100mA
- **Low Temperature Coefficient at 20ppm/°C**
- **Extended Temperature Range**
  - -40°C to +125°C
- **RoHS Compliant "Green"/Halogen Free 5-pin SOT23 Package**

## TYPICAL APPLICATION DIAGRAM

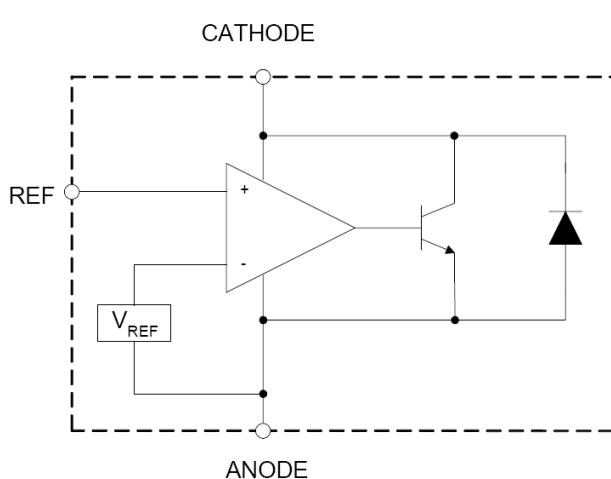


Fig. 1: XRP431L Application Diagram

## ABSOLUTE MAXIMUM RATINGS

These are stress ratings only and functional operation of the device at these ratings or any other above those indicated in the operation sections of the specifications below is not implied. Exposure to absolute maximum rating conditions for extended periods of time may affect reliability.

Cathode-Anode Voltage $V_{KA}$ .....	20V
Operating Cathode Current (cont.) $I_{KA}$ .....	100mA
Reference Input Current Range $I_{REF}$ .....	10mA
Power Dissipation (Cont. 25°C) $P_D$ .....	770mW
Junction Temperature .....	150°C
Storage Temperature $T_{STG}$ .....	-65°C to 150°C
ESD Rating (HBM - Human Body Model) .....	2kV

## ELECTRICAL SPECIFICATIONS

Specifications with standard type are for an Operating Ambient Temperature of  $T_A = 25^\circ\text{C}$  only; limits applying over the full Operating Ambient Temperature range are denoted by a “•”. Minimum and Maximum limits are guaranteed through test, design, or statistical correlation. Typical values represent the most likely parametric norm at  $T_A = 25^\circ\text{C}$ , and are provided for reference purposes only.

Parameter	Min.	Typ.	Max.	Units		Conditions
Reference Voltage	1.234	1.240	1.246	V		Test circuit 1 $V_{KA}=V_{REF}$ , $I_{KA}=10\text{mA}$
$\Delta V_{REF}$ with temperature $T_C$		2	10	mV		Test circuit 1 $V_{KA}=V_{REF}$ , $I_{KA}=10\text{mA}$ , $0^\circ\text{C} \leq T_A \leq 70^\circ\text{C}$
		3	10	mV		Test circuit 1 $V_{KA}=V_{REF}$ , $I_{KA}=10\text{mA}$ , $-40^\circ\text{C} \leq T_A \leq 85^\circ\text{C}$
		4	15	mV	•	Test circuit 1 $V_{KA}=V_{REF}$ , $I_{KA}=10\text{mA}$ , $-40^\circ\text{C} \leq T_A \leq 125^\circ\text{C}$
Ratio of change in $V_{REF}$ to Cathode Voltage $\Delta V_{REF} / \Delta V_{KA}$	-1.5	-0.5		mV/V		Test circuit 2 $V_{REF} \leq \Delta V_{KA} \leq 16\text{V}$ , $I_{KA}=10\text{mA}$
Reference Input Current $I_{REF}$		0.15	0.4	$\mu\text{A}$		Test circuit 2 $I_{KA}=10\text{mA}$ , $R_1=10\text{k}\Omega$ , $R_2=\infty$
$I_{REF}$ Temperature Deviation $\Delta I_{REF}$		0.1	0.4	$\mu\text{A}$	•	Test circuit 2 $I_{KA}=10\text{mA}$ , $R_1=10\text{k}\Omega$ , $R_2=\infty$
Minimum $I_{KA}$ for Regulation $I_{KA(MIN)}$		55	80	$\mu\text{A}$		Test circuit 1 $V_{KA}=V_{REF}$
Off State Leakage $I_{KA(OFF)}$		40	100	nA		Test circuit 3 $V_{KA}=18\text{V}$ , $V_{REF}=0\text{V}$
		10	50	nA		Test circuit 3 $V_{KA}=6\text{V}$ , $V_{REF}=0\text{V}$
Dynamic Output Impedance $Z_{KA}$		0.05	0.15	$\Omega$		Test circuit 1 $V_{KA}=V_{REF}$ , $f_Z \leq 1\text{KHz}$ , $I_{KA}=1$ to $100\text{mA}$

## OPERATING RATINGS

Cathode-Anode Voltage $V_{KA}$ .....	<18V
Operating Cathode Current (cont.) $I_{KA}$ .....	<100mA
Ambient Temperature Range .....	-40°C to 125°C
Thermal Resistance $\theta_{JC}$ (SOT23-5) .....	84.8 °C/W

## BLOCK DIAGRAM

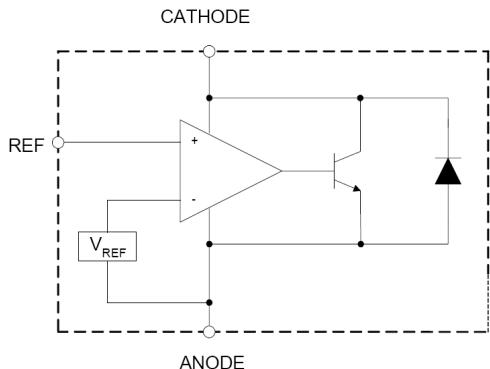


Fig. 2: XRP431L Block Diagram

## PIN ASSIGNMENT





Fig. 3: XRP431L Pin Assignment

## ORDERING INFORMATION

Part Number	Temperature Range	Marking	Package	Packing Quantity	Note 1	Note 2
XRP431LES5TRR3-F	$-40^{\circ}\text{C} \leq T_A \leq +125^{\circ}\text{C}$	GCWW	5-pin SOT23	3K/Tape & Reel	RoHS Compliant Halogen free	

"WW" = Work Week

Note that the XRP431L series is packaged in Tape and Reel with a reverse part orientation as per the following diagram



## TYPICAL PERFORMANCE CHARACTERISTICS

All data taken at  $T_A = 25^\circ\text{C}$ , unless otherwise specified - Schematic and BOM from Application Information section of this datasheet.

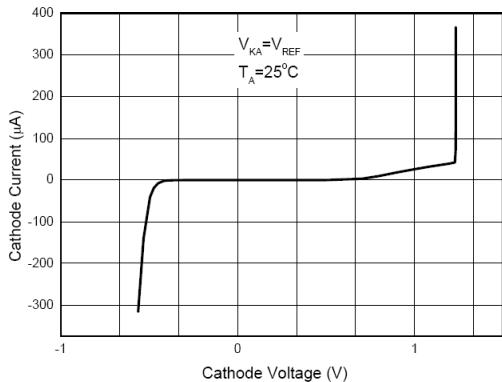


Fig. 4: Cathode Current vs Cathode Voltage

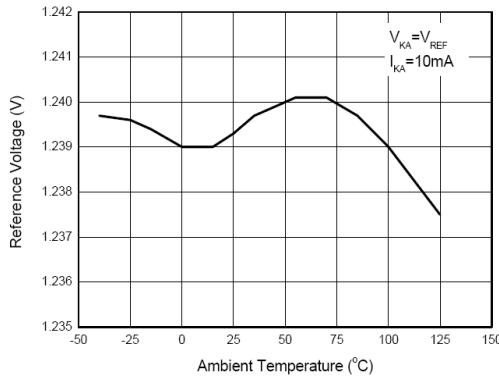


Fig. 5: Reference Voltage vs Ambient Temperature

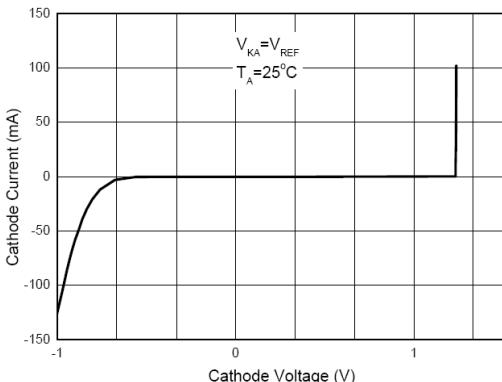


Fig. 6: Low Current Operating Characteristics

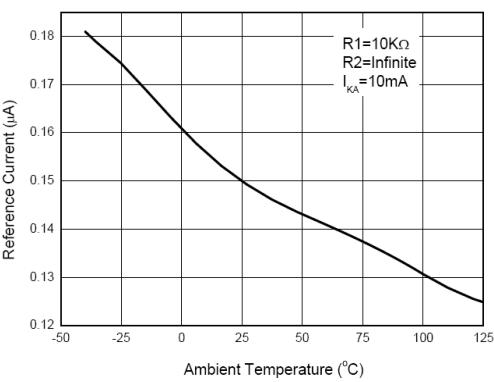


Fig. 7: Reference Input Current vs Ambient Temperature

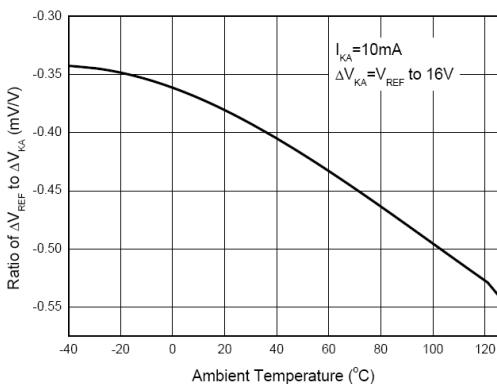


Fig. 8:  $\Delta V_{\text{REF}}$  to  $\Delta V_{\text{KA}}$  Ratio

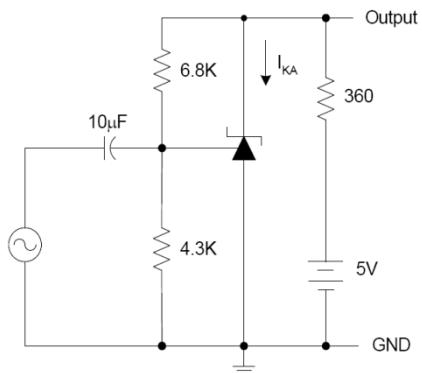


Fig. 9: Test Circuit for Gain vs Frequency Response

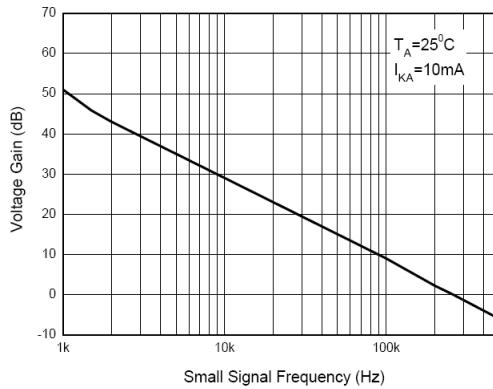


Fig. 10: Small Signal Gain vs Frequency

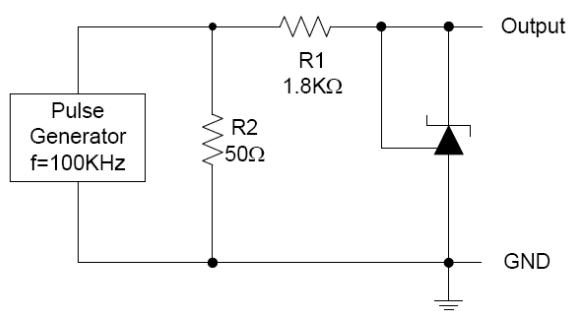


Fig. 11: Test Circuit for Pulse Response

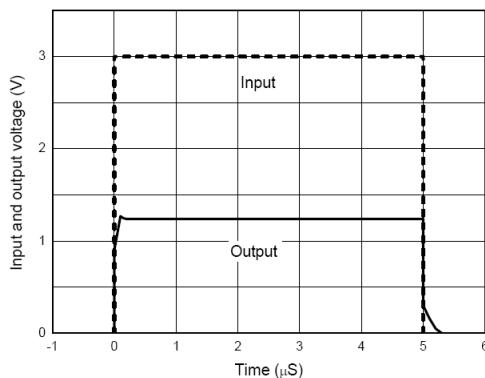


Fig. 12: Pulse Response

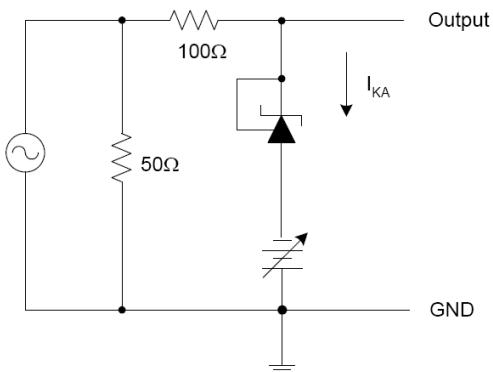


Fig. 13: Test Circuit for Dynamic Output Impedance


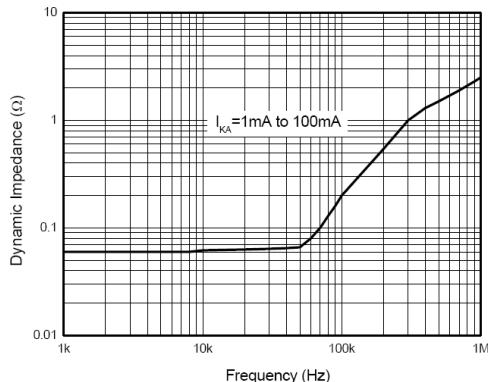


Fig. 14: Dynamic Output Impedance

## TEST CIRCUITS


### TEST CIRCUIT 1

Test circuit for  $V_{KA}=V_{REF}$

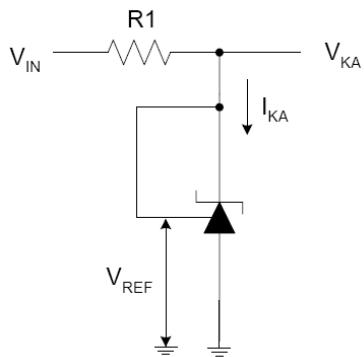


### TEST CIRCUIT 2

Test circuit for  $V_{KA} > V_{REF}$

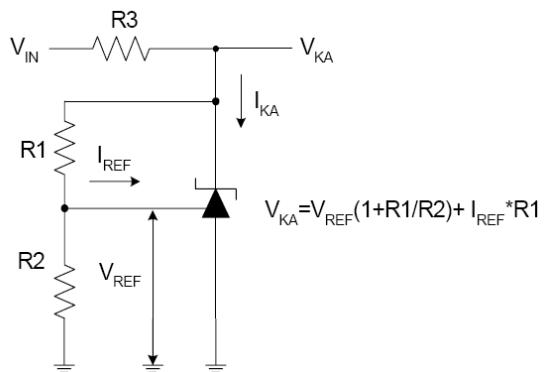

### TEST CIRCUIT 3


Test circuit for  $I_{KOFF}$

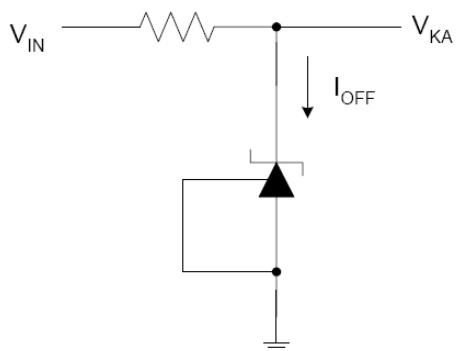

## PACKAGE SPECIFICATION

### 5-PIN SOT23

Unit: mm (inch)

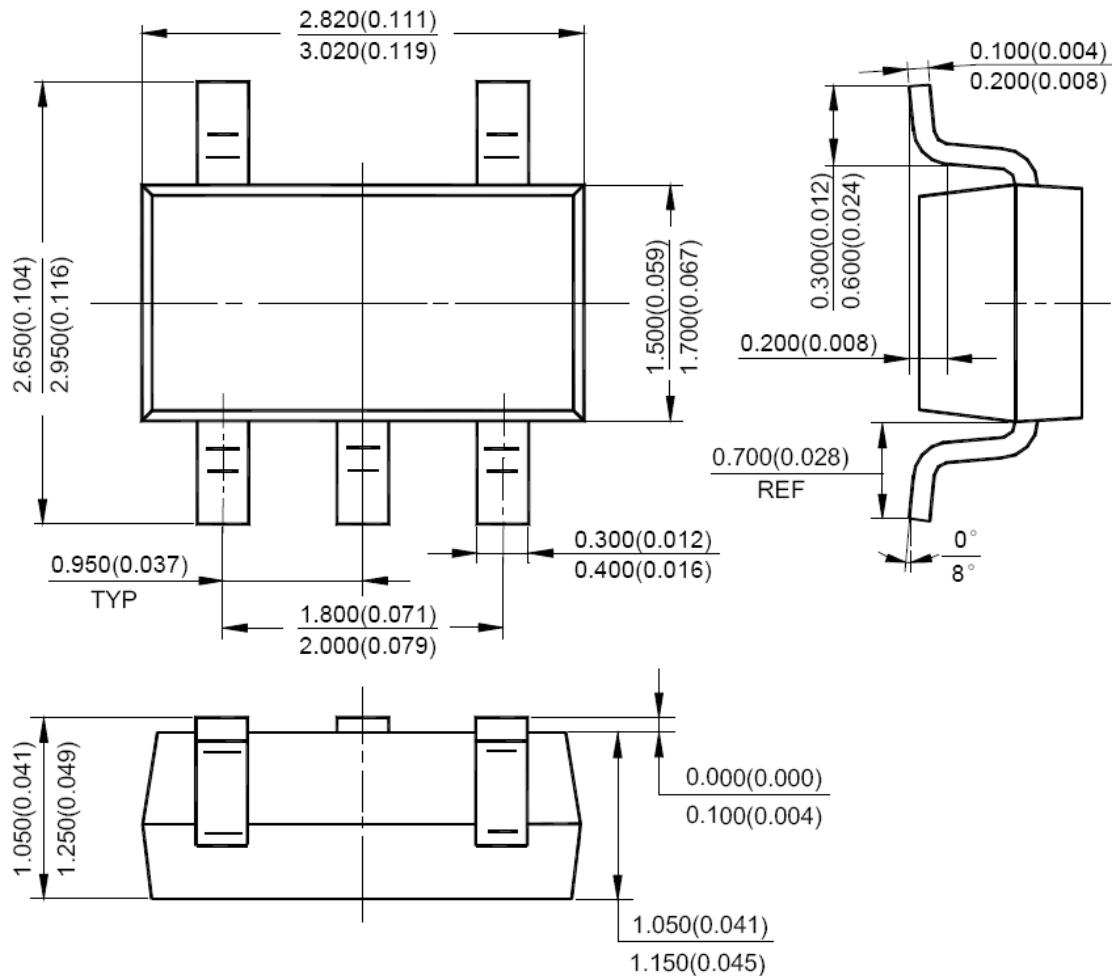



XRP431L

## Precision Adjustable Shunt Regulator

### REVISION HISTORY

Revision	Date	Description
1.0.0	10/02/2009	Initial release of datasheet
1.1.0	03/24/2010	Modified part number to reflect RoHS compliant, "green'/halogen free compliance.
1.2.0	09/16/2010	Modified part number to reflect reverse part orientation in tape & reel and 3K/reel.

### FOR FURTHER ASSISTANCE

Email:

[customersupport@exar.com](mailto:customersupport@exar.com)

Exar Technical Documentation:

<http://www.exar.com/TechDoc/default.aspx?>



### EXAR CORPORATION

#### HEADQUARTERS AND SALES OFFICES

48720 Kato Road

Fremont, CA 94538 – USA

Tel.: +1 (510) 668-7000

Fax: +1 (510) 668-7030

[www.exar.com](http://www.exar.com)

### NOTICE

EXAR Corporation reserves the right to make changes to the products contained in this publication in order to improve design, performance or reliability. EXAR Corporation assumes no responsibility for the use of any circuits described herein, conveys no license under any patent or other right, and makes no representation that the circuits are free of patent infringement. Charts and schedules contained here in are only for illustration purposes and may vary depending upon a user's specific application. While the information in this publication has been carefully checked; no responsibility, however, is assumed for inaccuracies.

EXAR Corporation does not recommend the use of any of its products in life support applications where the failure or malfunction of the product can reasonably be expected to cause failure of the life support system or to significantly affect its safety or effectiveness. Products are not authorized for use in such applications unless EXAR Corporation receives, in writing, assurances to its satisfaction that: (a) the risk of injury or damage has been minimized; (b) the user assumes all such risks; (c) potential liability of EXAR Corporation is adequately protected under the circumstances.

Reproduction, in part or whole, without the prior written consent of EXAR Corporation is prohibited.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Exar:

[XRP431LES5TRR3-F](#)



# OCEAN CHIPS

## Океан Электроники

### Поставка электронных компонентов

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

#### Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибутором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибутором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А