

# General Specifications

## Electrical Capacity (Resistive Load)

**Low/Logic Level:** 50mA @ 24V DC

## Other Ratings

|                                 |                                                                                                     |
|---------------------------------|-----------------------------------------------------------------------------------------------------|
| <b>Contact Resistance:</b>      | 50 milliohms maximum                                                                                |
| <b>Insulation Resistance:</b>   | 500 megohms minimum @ 250V DC                                                                       |
| <b>Dielectric Strength:</b>     | 250V AC minimum for 1 minute minimum                                                                |
| <b>Mechanical Life:</b>         | 500,000 operations minimum                                                                          |
| <b>Electrical Life:</b>         | 500,000 operations minimum                                                                          |
| <b>Nominal Operating Force:</b> | 1.96N for sculptured actuator<br>2.0N for piano actuator<br>3.0N for square & round flush actuators |
| <b>Total Travel:</b>            | Flush Actuators .016" (0.4mm)<br>Sculptured & Piano Actuators .031" (0.8mm)                         |

## Materials & Finishes

|                             |                                     |
|-----------------------------|-------------------------------------|
| <b>Actuator:</b>            | Polyamide                           |
| <b>Case:</b>                | Glass fiber reinforced polyamide    |
| <b>Seal:</b>                | Nitrile butadiene rubber            |
| <b>Base:</b>                | Glass fiber reinforced polyester    |
| <b>Movable Contact:</b>     | Phosphor bronze with silver plating |
| <b>Stationary Contacts:</b> | Brass with silver plating           |
| <b>Terminals:</b>           | Brass with silver plating           |

## Environmental Data

|                                     |                                                                                                                                              |
|-------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Operating Temperature Range:</b> | -25°C through +85°C (-13°F through +185°F)                                                                                                   |
| <b>Humidity:</b>                    | 90 ~ 95% humidity for 96 hours @ 40°C (104°F)                                                                                                |
| <b>Vibration:</b>                   | 10 ~ 55Hz with peak-to-peak amplitude of 1.5mm traversing the frequency range & returning in 1 minute; 3 right angled directions for 2 hours |
| <b>Shock:</b>                       | 50G (490m/s <sup>2</sup> ) acceleration (tested in 6 right angled directions, with 5 shocks in each direction)                               |

## PCB Processing

|                   |                                                                                                                            |
|-------------------|----------------------------------------------------------------------------------------------------------------------------|
| <b>Soldering:</b> | Wave Soldering Recommended. See Profile A in Supplement section.<br>Manual Soldering: See Profile A in Supplement section. |
| <b>Cleaning:</b>  | Automated cleaning. See Cleaning specifications in Supplement section.                                                     |

## Standards & Certifications

The JF Series tactiles have not been tested for UL recognition or CSA certification. These switches are designed for use in a low-voltage, low-current, logic-level circuit. When used as intended in a logic-level circuit, the results do not produce hazardous energy.

# Distinctive Characteristics

Extremely low profile of 5mm from PCB to top of switch.

Rubber seal construction prevents contact contamination and allows automated soldering and cleaning.

Minimal operating force and short stroke permit light touch operation.


Dome contact gives crisp tactile and audible feedback to positively indicate circuit transfer and assures high reliability and long life.

Wide choice of body shapes and colors.

Crimped terminals provide a spring type action to ensure secure mounting and prevent dislodging during wave soldering.

Space saving body dimensions provide for compact, side-by-side mounting on a standard grid.

Terminal spacing conforms to standard .100" (2.54mm) PCB grid.

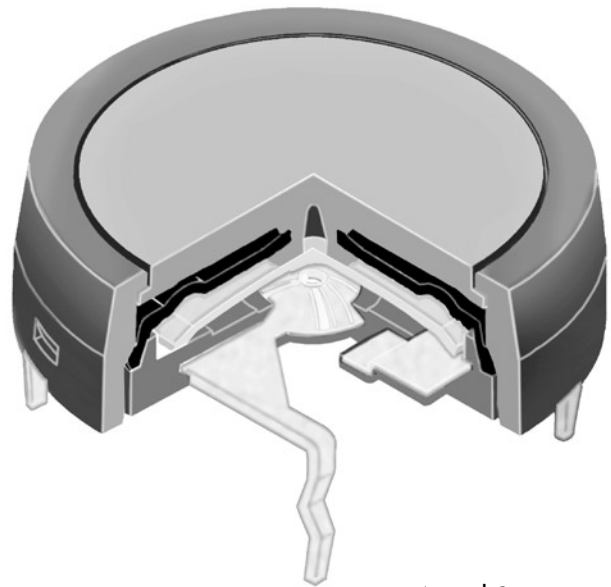


Actual Size



## Common Bus Matrix

These single pole, single throw switches can be used in a keyboard matrix and, using strapped terminals, achieve a common bus electrical configuration on a single-sided PC board.

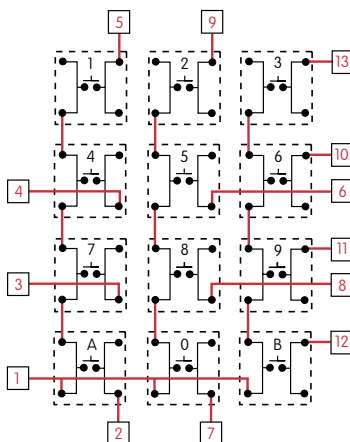


| PC Terminations |   |   |   |   |   |   |   |   |   |    |    |    |    |
|-----------------|---|---|---|---|---|---|---|---|---|----|----|----|----|
|                 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 |
| Keys (Switches) |   |   |   |   |   |   |   |   |   |    |    |    |    |
| 1               |   |   |   |   |   |   |   |   |   |    |    |    |    |
| 2               |   |   |   |   |   |   |   |   |   |    |    |    |    |
| 3               |   |   |   |   |   |   |   |   |   |    |    |    |    |
| 4               |   |   |   |   |   |   |   |   |   |    |    |    |    |
| 5               |   |   |   |   |   |   |   |   |   |    |    |    |    |
| 6               |   |   |   |   |   |   |   |   |   |    |    |    |    |
| 7               |   |   |   |   |   |   |   |   |   |    |    |    |    |
| 8               |   |   |   |   |   |   |   |   |   |    |    |    |    |
| 9               |   |   |   |   |   |   |   |   |   |    |    |    |    |
| 0               |   |   |   |   |   |   |   |   |   |    |    |    |    |
| A               |   |   |   |   |   |   |   |   |   |    |    |    |    |
| B               |   |   |   |   |   |   |   |   |   |    |    |    |    |

● = ON

## X-Y Matrix

These single pole, single throw switches can be arranged on a single-sided PC board matrix with strapped terminals to achieve an X-Y type electrical interconnection.

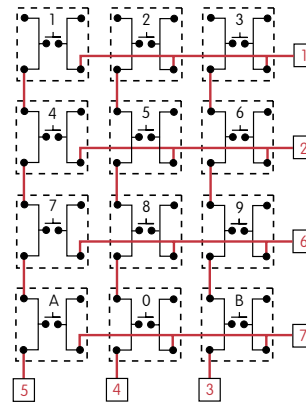


| PC Terminations |   |   |   |   |   |   |   |
|-----------------|---|---|---|---|---|---|---|
|                 | 1 | 2 | 3 | 4 | 5 | 6 | 7 |
| Keys (Switches) |   |   |   |   |   |   |   |
| 1               |   |   |   |   |   |   |   |
| 2               |   |   |   |   |   |   |   |
| 3               |   |   |   |   |   |   |   |
| 4               |   |   |   |   |   |   |   |
| 5               |   |   |   |   |   |   |   |
| 6               |   |   |   |   |   |   |   |
| 7               |   |   |   |   |   |   |   |
| 8               |   |   |   |   |   |   |   |
| 9               |   |   |   |   |   |   |   |
| 0               |   |   |   |   |   |   |   |
| A               |   |   |   |   |   |   |   |
| B               |   |   |   |   |   |   |   |

● = ON


Red = PCB Trace    Black = Switch Circuit

TYPICAL SWITCH ORDERING EXAMPLE

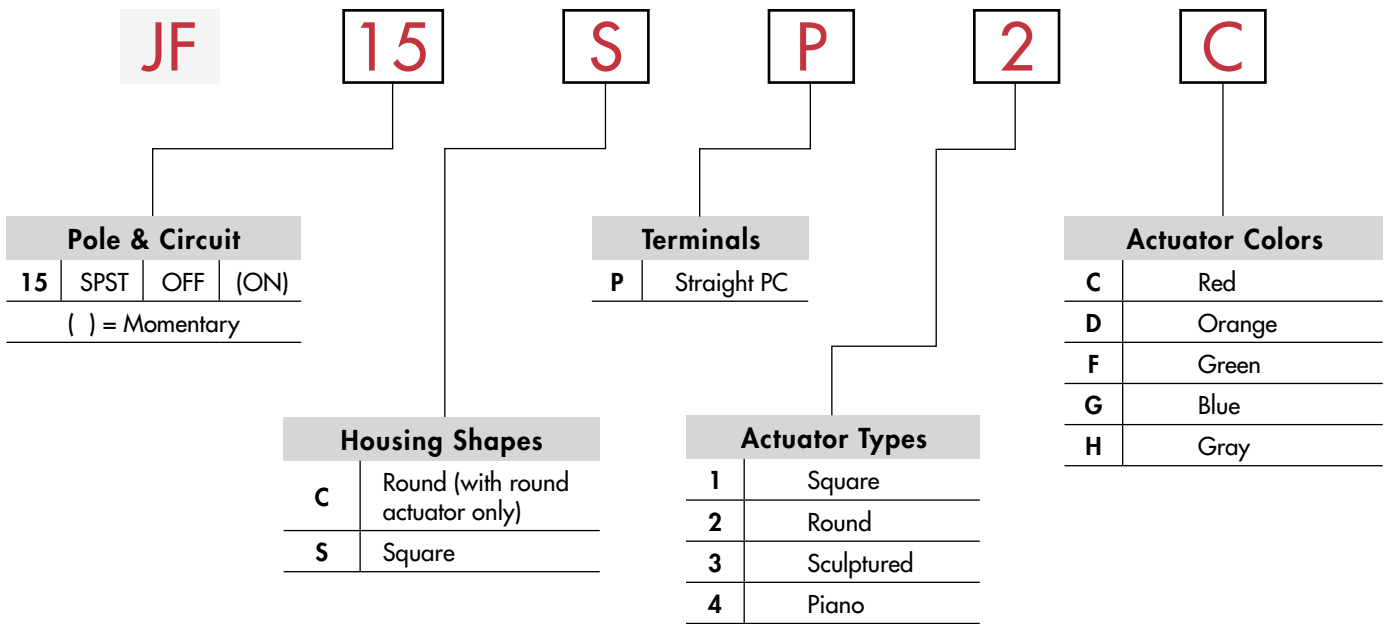

DESCRIPTION FOR TYPICAL ORDERING EXAMPLE

JF15SP2C

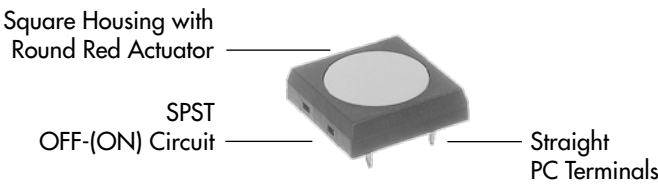

POLE & CIRCUIT

|      |       | Actuator Position<br>( ) = Momentary                                                          |                                                                                             | Switch Throw & Schematic                                                                             | Note: Terminal numbers are shown on the switch. |
|------|-------|-----------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|-------------------------------------------------|
| Pole | Model | Normal<br> | Down<br> | <div>SPST</div>  |                                                 |
| SP   | JF15  | OFF                                                                                           | (ON)                                                                                        |                                                                                                      |                                                 |

HOUSING SHAPES & ACTUATOR TYPES

C


Round Housing

S

Square Housing


2

Round Actuator




1

Square Actuator




2

Round Actuator




3

Sculptured Actuator



4

Piano Actuator



Actuator Colors Available:

C

Red

D

Orange

F

Green

G

Blue

H

Gray


Housing is Black

TERMINALS & PANEL DESIGN

P

Straight PC

Additional details in Typical Switch Dimensions



3

1

4

2


(12.7) .500

(10.16) .400

(1.0) Dia Typ


.039

Versatile panel arrangements can be made to fit individual design needs.



(5.08) .200


(3.6) .142

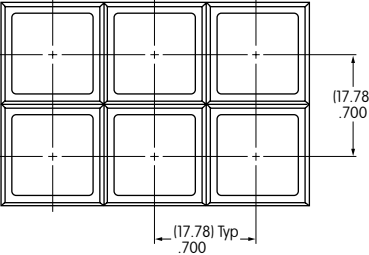

(17.78) .700


(17.78) Typ .700

TYPICAL SWITCH DIMENSIONS



(14.0) Dia .551

(17.7) Dia .697



(3.0) .118

(16.4) Dia .646


(12.7) .500

(0.3) .012

(0.3) Typ .012

(3.6) .142

(8.68) .342



(10.16) .400

(0.8) Typ .031

Round Actuator



JF15CP2C

nkK SWITCHES





www.nkk.com

J37

Toggles  
Rocker  
Pushbuttons  
Illuminated PB  
Programmable  
Keylocks  
Rotaries  
Slides  
Tactiles  
Tilt  
Touch  
Indicators  
Accessories  
Supplement





### TYPICAL SWITCH DIMENSIONS

#### Square Actuator







JF15SP1C

#### Round Actuator







JF15SP2C

#### Sculptured Actuator



JF15SP3C

#### Piano Actuator




JF15SP4C

LEGENDS

NKK Switches can provide custom legends for caps. Contact factory for more information.

Shaded Areas are Printable Areas

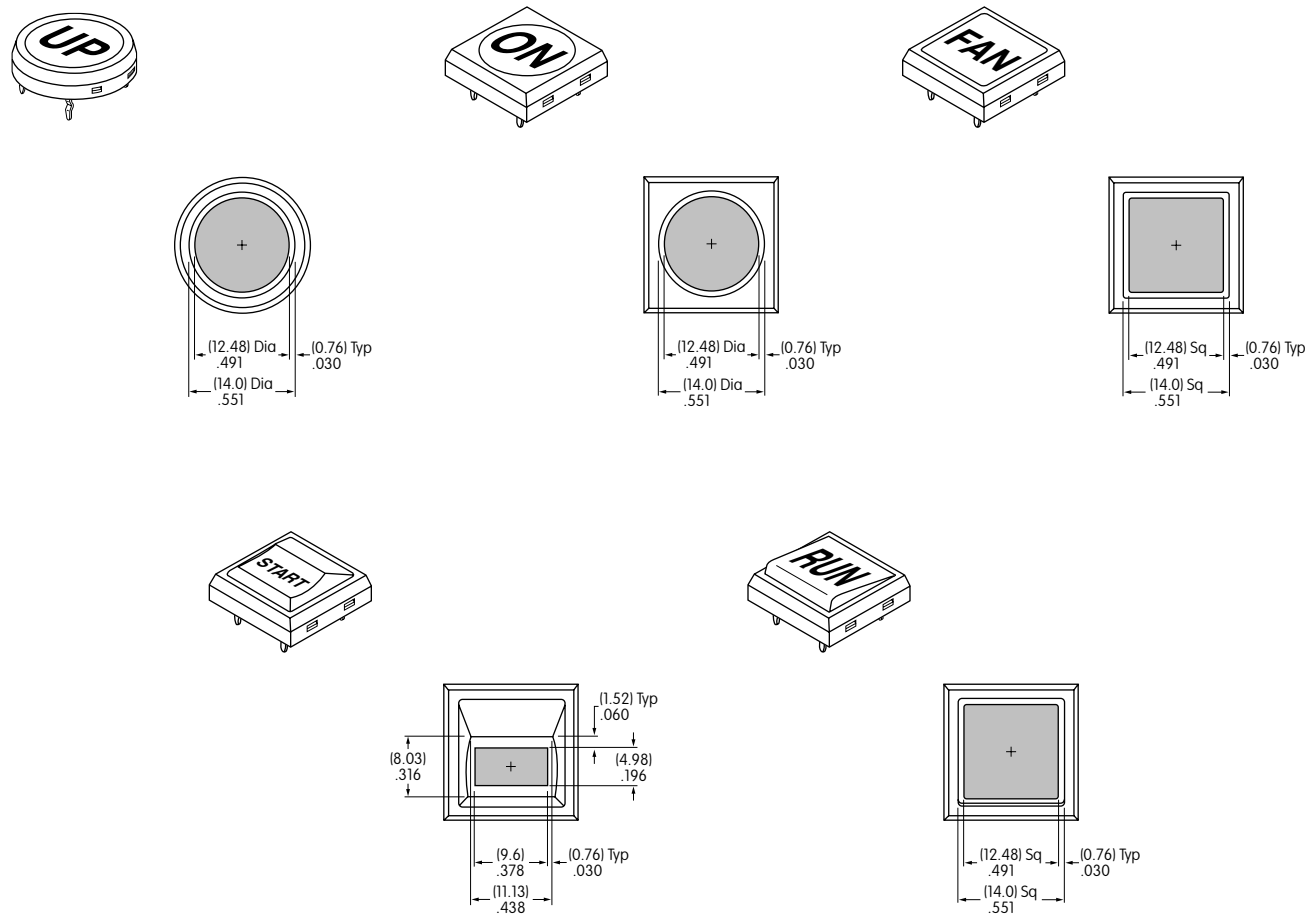

Recommended Print Methods: Screen Print or Pad Print. Epoxy based ink is recommended.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А