


## IEC Appliance Inlet C14 with modular extended Components



IEC C14 device plug with modular expandable components  
Snap-in version  
from front side



IEC C14 device plug with modular expandable components  
Snap-in version  
from front side



IEC C14 device plug with modular expandable components  
Snap-in version  
from front side

See below:  
[Approvals and Compliances](#)

### Description

- Panel mount :  
Snap-in version , from front side
- 2 - 5 Functions :  
Appliance Inlet , Protection class I , Outlet , Line Switch 2-pole , Fuseholder for fuse-links 5 x 20 mm 1- or 2-pole , Solder terminals 3.5 x 0.8 mm or quick connect terminals 6.3 x 0.8 mm

### Characteristics

- Modular component selection
- Individual components soldered on a printed circuit board
- Plug removal necessary for fuse-link replacement
- Fully insulated from the rear
- Suitable for use in equipment according to IEC/UL 62368-1

### Other versions on request

- Line switch with other rocker marking

### References

Alternative: version with line filter [Felcom 54](#)

### Weblinks

[pdf data sheet](#), [html datasheet](#), [General Product Information](#), [Approvals](#), [Distributor-Stock-Check](#), [Accessories](#), [Detailed request for product](#)

### Technical Data

|                                   |                                                                                    |
|-----------------------------------|------------------------------------------------------------------------------------|
| Ratings IEC                       | 10 A / 250 VAC; 50 Hz                                                              |
| Ratings UL/CSA                    | 10 A / 250 VAC; 60 Hz                                                              |
|                                   | 15 A / 250 VAC 60 Hz without fuse holder                                           |
| Allowable Operation Temperature   | -25 °C to 70 °C                                                                    |
| Protection against electric shock | Suitable for appliances with protection class I acc. to IEC 61140                  |
| Terminal                          | Solder terminals 3.5 x 0.8 mm or quick connect terminals 6.3 x 0.8 mm , tin-plated |
| Panel Thickness S                 | Snap-in: 1/1.2/1.5/2/2.5/3 mm                                                      |
| Material: Housing                 | Thermoplastic, black, UL 94V-0                                                     |

|                                   |                                                                                                                                               |
|-----------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|
| Appliance inlet/-outlet           | C14 acc. to IEC 60320-1 and F acc. to UL 60320-1, CSA C22.2 no. 60320-1 (for cold conditions) pin-temperature 70 °C, 10 A, Protection Class I |
| Fuseholder                        | 1 or 2 pole, Shocksafe category PC2 acc. to IEC 60127-6, for fuse-links 5 x 20 mm                                                             |
| Rated Power Acceptance @ Ta 23 °C | 5 x 20: 2 W (1 pole)/ 1.6 W (2-pole) per pole                                                                                                 |
| Power Acceptance @ Ta > 23 °C     | Admissible power acceptance at higher ambient temperature see derating curves                                                                 |
| Line Switch                       | Rocker switch 2-pole, non-illuminated, IEC 61058-1<br><a href="#">Technical Details</a>                                                       |

### Approvals and Compliances

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [Details about Approvals](#)

SCHURTER products are designed for use in industrial environments. They have approvals from independent testing bodies according to national and international standards. Products with specific characteristics and requirements such as required in the automotive sector according to IATF 16949, medical technology according to ISO 13485 or in the aerospace industry can be offered exclusively with customer-specific, individual agreements by SCHURTER.

## Approvals

The approval mark is used by the testing authorities to certify compliance with the safety requirements placed on electronic products.

Approval Reference Type: Felcom 64

| Approval Logo                                                                    | Certificates                  | Certification Body | Description                  |
|----------------------------------------------------------------------------------|-------------------------------|--------------------|------------------------------|
|  | <a href="#">VDE Approvals</a> | VDE                | Certificate Number: 40028094 |
|  | <a href="#">UL Approvals</a>  | UL                 | UL File Number: E93617       |

## Product standards

Product standards that are referenced

| Organization                                                                     | Design                | Standard              | Description                                                           |
|----------------------------------------------------------------------------------|-----------------------|-----------------------|-----------------------------------------------------------------------|
|  | Designed according to | IEC 60320-1           | Appliance couplers for household and similar general purposes         |
|  | Designed according to | IEC 60127-6           | Miniature fuses. Part 6. Fuse-holders for miniature fuse-links        |
|  | Designed according to | IEC 61058-1           | Switches for appliances. Part 1. General requirements                 |
|  | Designed according to | UL 60320-1            | Standard for Attachment Plugs and Receptacles                         |
|  | Designed according to | CSA C22.2 no. 60320-1 | General Use Receptacles, Attachment Plugs, and Similar Wiring Devices |

## Application standards

Application standards where the product can be used


| Organization                                                                       | Design                         | Standard       | Description                                                                                                                                                                                                                  |
|------------------------------------------------------------------------------------|--------------------------------|----------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|   | Designed for applications acc. | IEC/UL 62368-1 | IEC 62368-1 includes the basic requirements for safety of audio, video, information technology and office equipment.                                                                                                         |
|  | Designed for applications acc. | IEC 60601-1    | Medical electrical equipment - Part 1: General requirements for basic safety and essential performance                                                                                                                       |
|  | Designed for applications acc. | IEC 60335-1    | Safety of electrical appliances for household and similar purposes. Meets the requirements for appliances in unattended use. This includes the enhanced requirements of glow wire tests acc. to IEC 60695-2-11 or -12 & -13. |

## Compliances


The product complies with following Guide Lines

| Identification                                                                     | Details                                      | Initiator   | Description                                                                                                                                                                                           |
|------------------------------------------------------------------------------------|----------------------------------------------|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | <a href="#">CE declaration of conformity</a> | SCHURTER AG | The CE marking declares that the product complies with the applicable requirements laid down in the harmonisation of Community legislation on its affixing in accordance with EU Regulation 765/2008. |
|  | <a href="#">RoHS</a>                         | SCHURTER AG | Directive RoHS 2011/65/EU, Amendment (EU) 2015/863                                                                                                                                                    |
|  | <a href="#">China RoHS</a>                   | SCHURTER AG | The law SJ / T 11363-2006 (China RoHS) has been in force since 1 March 2007. It is similar to the EU directive RoHS.                                                                                  |
|  | <a href="#">REACH</a>                        | SCHURTER AG | On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force.                               |
|  | <a href="#">White Paper Glow wire test</a>   | SCHURTER AG | Meets the requirements of IEC 60335-1 for appliances in unattended use. This includes the enhanced requirements of glow wire tests acc. to IEC 60695-2-11 or -12 & -13.                               |
|  | <a href="#">Medical Technology</a>           | SCHURTER AG | Suitable for use in medical equipment according to IEC/UL 60601-1                                                                                                                                     |


## Dimensions [mm]

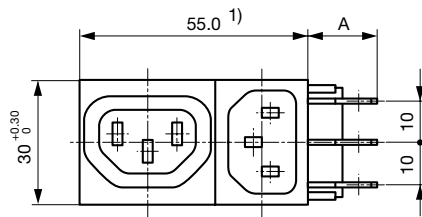


Variants 6421.005X.XX  
 Mounting hole:  $53.6+0,2 \times 27.6+0,2$   
 A: Quick-connect terminal  $6.3 \times 0.8$  mm: 17.1 mm  
 A: Solder terminal  $3.5 \times 0.8$  mm: 12.3 mm

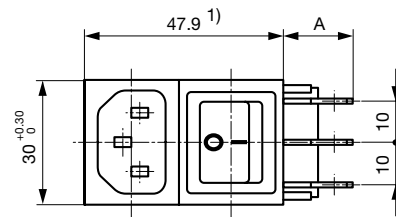


Variants 6422.005X.XX  
 Mounting hole:  $46.7+0,2 \times 27.6+0,2$   
 A: Quick-connect terminal  $6.3 \times 0.8$  mm: 18.1 mm  
 A: Solder terminal  $3.5 \times 0.8$  mm: 13.3 mm  
 S: Panel thickness

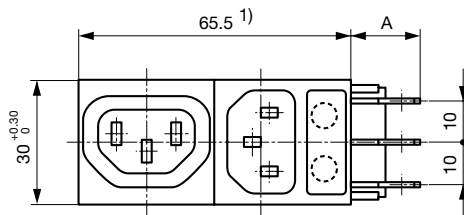

Variants 6423.0X5X.XX  
 Mounting hole:  $65.5+0,2 \times 27.6+0,2$   
 A: Quick-connect terminal  $6.3 \times 0.8$  mm: 18.15 mm  
 A: Solder terminal  $3.5 \times 0.8$  mm: 13.35 mm


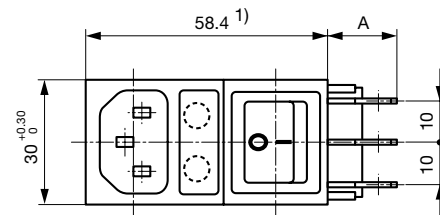


Variants 6424.0X5X.XX  
 Mounting hole:  $57+0,2 \times 27.6+0,2$   
 A: Quick-connect terminal  $6.3 \times 0.8$  mm: 18.1 mm  
 A: Solder terminal  $3.5 \times 0.8$  mm: 13.3 mm  
 S: Panel thickness

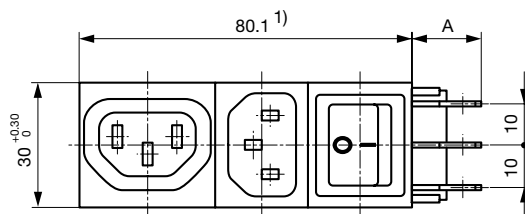

Variants 6431.005X.XX  
 Mounting hole:  $80.1 \text{ } 0/+0,2 \times 27.6 \text{ } 0/+0,2$   
 A: Quick-connect terminal  $6.3 \times 0.8$  mm: 18.1 mm  
 A: Solder terminal  $3.5 \times 0.8$  mm: 13.3 mm  
 S: Panel thickness


1) In an uninstalled state the total length of the combinations may be slightly bigger than the nominal dimension. However, they can always be installed in the specified mounting cutouts.

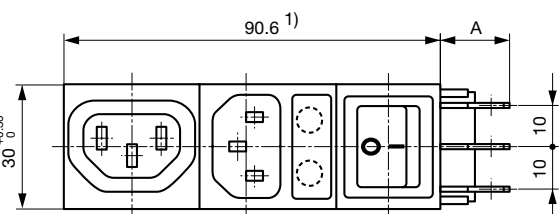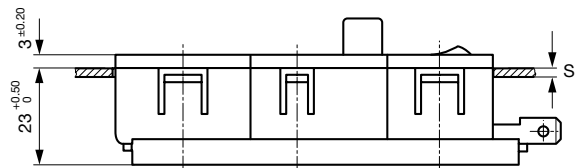


Variants 6432.0X5X.XX  
 Mounting hole:  $90.6+0,2 \times 27.6+0,2$   
 A: Quick-connect terminal  $6.3 \times 0.8$  mm: 18.1 mm  
 A: Solder terminal  $3.5 \times 0.8$  mm: 13.3 mm  
 S: Panel thickness

## Diagrams


6421




6422




6423




6424



6431




6432




## Derating Curves

1-pole

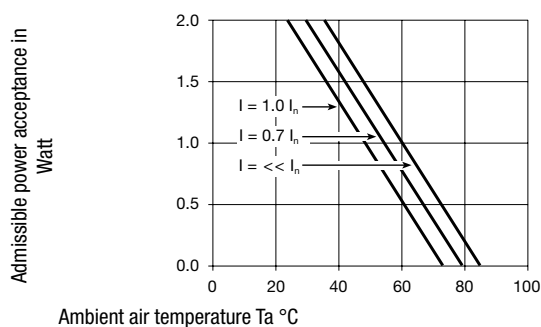

2-pole

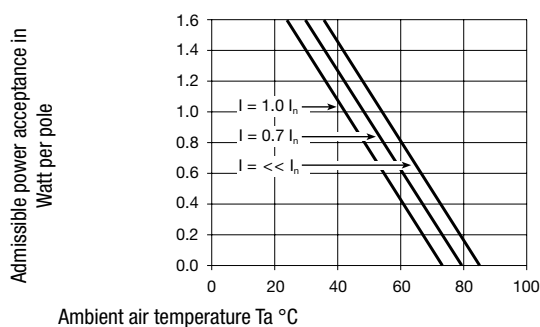

## All Variants

| Type      | Connectors | Connector | Line Switch | Fuseholder | connection type                      | Panel Thickness s [mm] | Order Number |
|-----------|------------|-----------|-------------|------------|--------------------------------------|------------------------|--------------|
| Felcom 64 | C14        | -         | -           | -          | Solder terminals 3.5 x 0.8 mm        | 1.5                    | 6455.0051.15 |
| Felcom 64 | C14        | -         | 2-pole      | -          | Quick connect terminals 6.3 x 0.8 mm | 1.0                    | 6422.0053.10 |
| Felcom 64 | C14        | -         | 2-pole      | -          | Quick connect terminals 6.3 x 0.8 mm | 1.2                    | 6422.0053.12 |
| Felcom 64 | C14        | -         | 2-pole      | -          | Quick connect terminals 6.3 x 0.8 mm | 1.5                    | 6422.0053.15 |
| Felcom 64 | C14        | -         | 2-pole      | -          | Quick connect terminals 6.3 x 0.8 mm | 2.0                    | 6422.0053.20 |
| Felcom 64 | C14        | -         | 2-pole      | -          | Quick connect terminals 6.3 x 0.8 mm | 2.5                    | 6422.0053.25 |
| Felcom 64 | C14        | -         | 2-pole      | -          | Quick connect terminals 6.3 x 0.8 mm | 3.0                    | 6422.0053.30 |
| Felcom 64 | C14        | -         | 2-pole      | -          | Solder terminals 3.5 x 0.8 mm        | 1.2                    | 6422.0051.12 |
| Felcom 64 | C14        | -         | 2-pole      | -          | Solder terminals 3.5 x 0.8 mm        | 1.5                    | 6422.0051.15 |
| Felcom 64 | C14        | -         | 2-pole      | 1-pole     | Quick connect terminals 6.3 x 0.8 mm | 1.0                    | 6424.0153.10 |
| Felcom 64 | C14        | -         | 2-pole      | 1-pole     | Quick connect terminals 6.3 x 0.8 mm | 1.2                    | 6424.0153.12 |
| Felcom 64 | C14        | -         | 2-pole      | 1-pole     | Quick connect terminals 6.3 x 0.8 mm | 1.5                    | 6424.0153.15 |
| Felcom 64 | C14        | -         | 2-pole      | 1-pole     | Quick connect terminals 6.3 x 0.8 mm | 2.0                    | 6424.0153.20 |
| Felcom 64 | C14        | -         | 2-pole      | 1-pole     | Quick connect terminals 6.3 x 0.8 mm | 2.5                    | 6424.0153.25 |
| Felcom 64 | C14        | -         | 2-pole      | 1-pole     | Quick connect terminals 6.3 x 0.8 mm | 3.0                    | 6424.0153.30 |
| Felcom 64 | C14        | -         | 2-pole      | 1-pole     | Solder terminals 3.5 x 0.8 mm        | 1.0                    | 6424.0151.10 |
| Felcom 64 | C14        | -         | 2-pole      | 1-pole     | Solder terminals 3.5 x 0.8 mm        | 1.2                    | 6424.0151.12 |

| Type      | Connectors | Connector | Line Switch | Fuseholder | connection type                                                       | Panel Thickness s [mm] | Order Number |
|-----------|------------|-----------|-------------|------------|-----------------------------------------------------------------------|------------------------|--------------|
| Felcom 64 | C14        | -         | 2-pole      | 1-pole     | Solder terminals 3.5 x 0.8 mm                                         | 1.5                    | 6424.0151.15 |
| Felcom 64 | C14        | -         | 2-pole      | 1-pole     | Solder terminals 3.5 x 0.8 mm                                         | 2.0                    | 6424.0151.20 |
| Felcom 64 | C14        | -         | 2-pole      | 1-pole     | Solder terminals 3.5 x 0.8 mm                                         | 3.0                    | 6424.0151.30 |
| Felcom 64 | C14        | -         | 2-pole      | 2-pole     | Quick connect terminals 6.3 x 0.8 mm                                  | 1.0                    | 6424.0253.10 |
| Felcom 64 | C14        | -         | 2-pole      | 2-pole     | Quick connect terminals 6.3 x 0.8 mm                                  | 1.2                    | 6424.0253.12 |
| Felcom 64 | C14        | -         | 2-pole      | 2-pole     | Quick connect terminals 6.3 x 0.8 mm                                  | 1.5                    | 6424.0253.15 |
| Felcom 64 | C14        | -         | 2-pole      | 2-pole     | Quick connect terminals 6.3 x 0.8 mm                                  | 2.0                    | 6424.0253.20 |
| Felcom 64 | C14        | -         | 2-pole      | 2-pole     | Quick connect terminals 6.3 x 0.8 mm                                  | 2.5                    | 6424.0253.25 |
| Felcom 64 | C14        | -         | 2-pole      | 2-pole     | Quick connect terminals 6.3 x 0.8 mm                                  | 3.0                    | 6424.0253.30 |
| Felcom 64 | C14        | -         | 2-pole      | 2-pole     | Solder terminals 3.5 x 0.8 mm                                         | 1.0                    | 6424.0251.10 |
| Felcom 64 | C14        | -         | 2-pole      | 2-pole     | Solder terminals 3.5 x 0.8 mm                                         | 1.2                    | 6424.0251.12 |
| Felcom 64 | C14        | -         | 2-pole      | 2-pole     | Solder terminals 3.5 x 0.8 mm                                         | 1.5                    | 6424.0251.15 |
| Felcom 64 | C14        | -         | 2-pole      | 2-pole     | Solder terminals 3.5 x 0.8 mm                                         | 2.0                    | 6424.0251.20 |
| Felcom 64 | C14        | -         | 2-pole      | 2-pole     | Solder terminals 3.5 x 0.8 mm                                         | 2.5                    | 6424.0251.25 |
| Felcom 64 | C14        | -         | 2-pole      | 2-pole     | Solder terminals 3.5 x 0.8 mm                                         | 3.0                    | 6424.0251.30 |
| Felcom 64 | C14        | -         | 2-pole      | 2-pole     | Solder terminals 3.5 x 0.8 mm or quick connect terminals 6.3 x 0.8 mm | 3.0                    | 6424.0250.30 |
| Felcom 64 | C14        | F         | -           | -          | Quick connect terminals 6.3 x 0.8 mm                                  | 1.2                    | 6421.0053.12 |
| Felcom 64 | C14        | F         | -           | -          | Quick connect terminals 6.3 x 0.8 mm                                  | 1.5                    | 6421.0053.15 |
| Felcom 64 | C14        | F         | -           | -          | Quick connect terminals 6.3 x 0.8 mm                                  | 2.0                    | 6421.0053.20 |
| Felcom 64 | C14        | F         | -           | -          | Quick connect terminals 6.3 x 0.8 mm                                  | 2.5                    | 6421.0053.25 |
| Felcom 64 | C14        | F         | -           | -          | Quick connect terminals 6.3 x 0.8 mm                                  | 3.0                    | 6421.0053.30 |
| Felcom 64 | C14        | F         | -           | -          | Solder terminals 3.5 x 0.8 mm                                         | 1.0                    | 6421.0051.10 |
| Felcom 64 | C14        | F         | -           | 1-pole     | Quick connect terminals 6.3 x 0.8 mm                                  | 1.2                    | 6423.0153.12 |
| Felcom 64 | C14        | F         | -           | 1-pole     | Quick connect terminals 6.3 x 0.8 mm                                  | 1.5                    | 6423.0153.15 |
| Felcom 64 | C14        | F         | -           | 1-pole     | Quick connect terminals 6.3 x 0.8 mm                                  | 2.0                    | 6423.0153.20 |
| Felcom 64 | C14        | F         | -           | 1-pole     | Solder terminals 3.5 x 0.8 mm                                         | 1.5                    | 6423.0151.15 |
| Felcom 64 | C14        | F         | -           | 1-pole     | Solder terminals 3.5 x 0.8 mm                                         | 2.5                    | 6423.0151.25 |
| Felcom 64 | C14        | F         | -           | 1-pole     | Solder terminals 3.5 x 0.8 mm                                         | 3.0                    | 6423.0151.30 |
| Felcom 64 | C14        | F         | -           | 2-pole     | Quick connect terminals 6.3 x 0.8 mm                                  | 1.0                    | 6423.0253.10 |
| Felcom 64 | C14        | F         | -           | 2-pole     | Quick connect terminals 6.3 x 0.8 mm                                  | 1.5                    | 6423.0253.15 |
| Felcom 64 | C14        | F         | -           | 2-pole     | Quick connect terminals 6.3 x 0.8 mm                                  | 2.0                    | 6423.0253.20 |
| Felcom 64 | C14        | F         | -           | 2-pole     | Quick connect terminals 6.3 x 0.8 mm                                  | 3.0                    | 6423.0253.30 |
| Felcom 64 | C14        | F         | -           | 2-pole     | Solder terminals 3.5 x 0.8 mm                                         | 1.5                    | 6423.0251.15 |
| Felcom 64 | C14        | F         | -           | 2-pole     | Solder terminals 3.5 x 0.8 mm                                         | 2.5                    | 6423.0251.25 |
| Felcom 64 | C14        | F         | -           | 2-pole     | Solder terminals 3.5 x 0.8 mm                                         | 3.0                    | 6423.0251.30 |
| Felcom 64 | C14        | F         | 2-pole      | -          | Quick connect terminals 6.3 x 0.8 mm                                  | 1.5                    | 6431.0053.15 |
| Felcom 64 | C14        | F         | 2-pole      | -          | Quick connect terminals 6.3 x 0.8 mm                                  | 2.0                    | 6431.0053.20 |
| Felcom 64 | C14        | F         | 2-pole      | -          | Quick connect terminals 6.3 x 0.8 mm                                  | 3.0                    | 6431.0053.30 |
| Felcom 64 | C14        | F         | 2-pole      | -          | Solder terminals 3.5 x 0.8 mm                                         | 1.0                    | 6431.0051.10 |
| Felcom 64 | C14        | F         | 2-pole      | -          | Solder terminals 3.5 x 0.8 mm                                         | 1.5                    | 6431.0051.15 |
| Felcom 64 | C14        | F         | 2-pole      | -          | Solder terminals 3.5 x 0.8 mm                                         | 2.0                    | 6431.0051.20 |
| Felcom 64 | C14        | F         | 2-pole      | -          | Solder terminals 3.5 x 0.8 mm                                         | 2.5                    | 6431.0051.25 |
| Felcom 64 | C14        | F         | 2-pole      | 1-pole     | Quick connect terminals 6.3 x 0.8 mm                                  | 1.0                    | 6432.0153.10 |
| Felcom 64 | C14        | F         | 2-pole      | 1-pole     | Quick connect terminals 6.3 x 0.8 mm                                  | 1.5                    | 6432.0153.15 |
| Felcom 64 | C14        | F         | 2-pole      | 1-pole     | Quick connect terminals 6.3 x 0.8 mm                                  | 2.0                    | 6432.0153.20 |
| Felcom 64 | C14        | F         | 2-pole      | 1-pole     | Quick connect terminals 6.3 x 0.8 mm                                  | 2.5                    | 6432.0153.25 |
| Felcom 64 | C14        | F         | 2-pole      | 1-pole     | Quick connect terminals 6.3 x 0.8 mm                                  | 3.0                    | 6432.0153.30 |

| Type      | Connectors | Connector | Line Switch | Fuseholder | connection type                                                       | Panel Thickness s [mm] | Order Number |
|-----------|------------|-----------|-------------|------------|-----------------------------------------------------------------------|------------------------|--------------|
| Felcom 64 | C14        | F         | 2-pole      | 1-pole     | Solder terminals 3.5 x 0.8 mm                                         | 1.5                    | 6432.0151.15 |
| Felcom 64 | C14        | F         | 2-pole      | 2-pole     | Quick connect terminals 6.3 x 0.8 mm                                  | 1.0                    | 6432.0253.10 |
| Felcom 64 | C14        | F         | 2-pole      | 2-pole     | Quick connect terminals 6.3 x 0.8 mm                                  | 1.2                    | 6432.0253.12 |
| Felcom 64 | C14        | F         | 2-pole      | 2-pole     | Quick connect terminals 6.3 x 0.8 mm                                  | 1.5                    | 6432.0253.15 |
| Felcom 64 | C14        | F         | 2-pole      | 2-pole     | Quick connect terminals 6.3 x 0.8 mm                                  | 2.0                    | 6432.0253.20 |
| Felcom 64 | C14        | F         | 2-pole      | 2-pole     | Quick connect terminals 6.3 x 0.8 mm                                  | 3.0                    | 6432.0253.30 |
| Felcom 64 | C14        | F         | 2-pole      | 2-pole     | Solder terminals 3.5 x 0.8 mm                                         | 1.0                    | 6432.0251.10 |
| Felcom 64 | C14        | F         | 2-pole      | 2-pole     | Solder terminals 3.5 x 0.8 mm                                         | 1.5                    | 6432.0251.15 |
| Felcom 64 | C14        | F         | 2-pole      | 2-pole     | Solder terminals 3.5 x 0.8 mm                                         | 2.0                    | 6432.0251.20 |
| Felcom 64 | C14        | F         | 2-pole      | 2-pole     | Solder terminals 3.5 x 0.8 mm                                         | 3.0                    | 6432.0251.30 |
| Felcom 64 | C14        | F         | 2-pole      | 2-pole     | Solder terminals 3.5 x 0.8 mm or quick connect terminals 6.3 x 0.8 mm | 2.5                    | 6432.0250.25 |

Most Popular.

Availability for all products can be searched real-time: <https://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

**Packaging unit** 10 Pcs

## Accessories

### Description



[Cord retaining kits](#)  
Cord retaining strain relief

|              |           |
|--------------|-----------|
| Flat head, A | 4700.0001 |
| Flat head, E | 4700.0005 |
| Flat head, G | 4700.0007 |

## Mating Inlets/Plugs

### Category / Description

[Plug Overview complete](#)



|                                                 |      |
|-------------------------------------------------|------|
| 4732, Mounting: Power Cord, Plug: IEC E, Cable  | 4732 |
| 4735, Mounting: Power Cord, Plug: IEC E, Cable  | 4735 |
| 9009, Mounting: Plug: IEC E, Screw clamps       | 9009 |
| 4733, Mounting: Power Cord, Plug: IEC E, Cable  | 4733 |
| 4736, Mounting: Power Cord, Plug: IEC E, Cable  | 4736 |
| <a href="#">Plug further types to Felcom 64</a> | ...  |

## Mating Outlets/Connectors

[Appliance Outlet Overview complete](#)



|                                                                                                                                                           |      |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------|------|
| 4787, Mounting: Screw-on mounting, Appliance Outlet: IEC Solder terminals, 10 A, Suitable for appliances with protection class I                          | 4787 |
| 4788, Mounting: Snap-in version, Appliance Outlet: IEC Solder terminals or quick connect terminals, 10 A, Suitable for appliances with protection class I | 4788 |
| IEC Appliance Outlet F or H, Screw-on Mounting, Front Side, Solder, PCB or Quick-connect Terminal                                                         | 5091 |
| <a href="#">Appliance Outlet further types to Felcom 64</a>                                                                                               |      |



[Connector Overview complete](#)

|                                                                                             |                         |
|---------------------------------------------------------------------------------------------|-------------------------|
| 4782 Mounting: Power Cord, 3 x 1 mm <sup>2</sup> / 3 x 18 AWG, Cable, Connector: IEC C13    | <a href="#">4782</a>    |
| 4785 Mounting: Power Cord, 3 x 1 mm <sup>2</sup> / 3 x 18 AWG, Cable, Connector: IEC C13    | <a href="#">4785</a>    |
| 4012 Mounting: Power Supply Cord, 3 x 1 mm <sup>2</sup> , Screw clamps, Connector: IEC C13  | <a href="#">4012</a>    |
| 4300-06 Mounting: Power Cord, 3 x 1 mm <sup>2</sup> / 3 x 18 AWG, Cable, Connector: IEC C13 | <a href="#">4300-06</a> |
| 4781 Mounting: Power Cord, 3 x 1 mm <sup>2</sup> / 3 x 18 AWG, Cable, Connector: IEC C15    | <a href="#">4781</a>    |
| <a href="#">Connector further types to Felcom 64</a>                                        | ...                     |

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А