

## FLORENCE-Z90

~90° wide beam. Ideal for retail and industrial lighting. Can be used for general office lighting with shade.

### TECHNICAL SPECIFICATIONS:

Dimensions	61.0 x 286.0 mm
Height	8.5 mm
Fastening	screw
ROHS compliant	yes ⓘ

### MATERIAL SPECIFICATIONS:

Component	Type
FLORENCE-Z90	Linear lens



Material	Colour	Finish
PMMA	clear	









### ORDERING INFORMATION:

Component
F13853_FLORENCE-Z90
» Box size: 398 x 298 x 140 mm

Qty in box	MOQ	MPQ	Box weight (kg)
72	18	6	7.8




#### PHOTOMETRIC DATA (MEASURED):
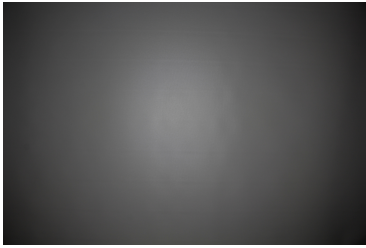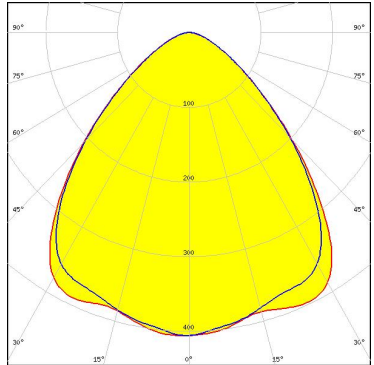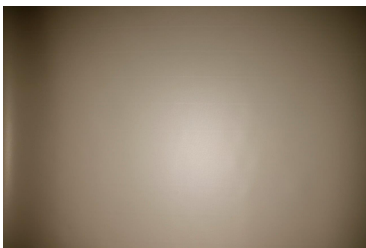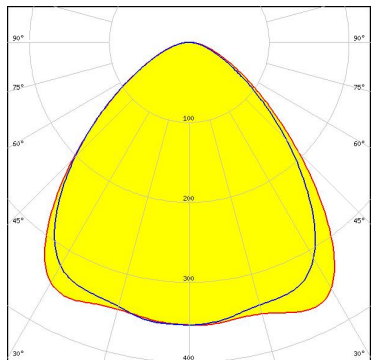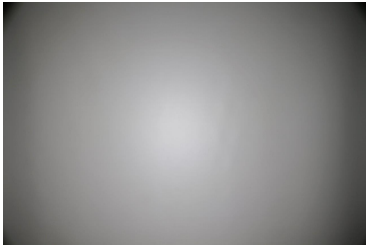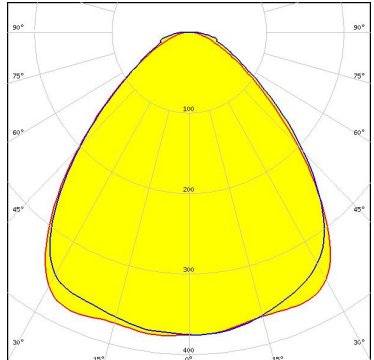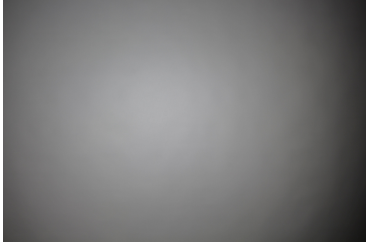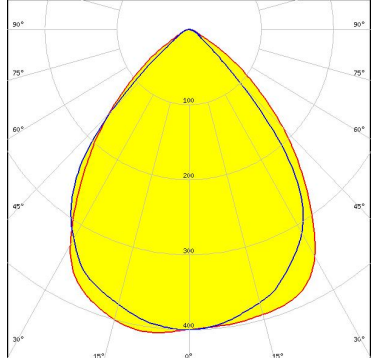
<p><b>COMET ELECTRONICS</b></p> <p>LED TRIDINO R3 8x0 1100 1ft HV            FWHM 92.0°            Efficiency 87 %            Peak intensity 0.410 cd/lm            LEDs/each optic 1            Light colour White            Required components:</p>		
<p><b>CREE</b></p> <p>LED XH-B/G            FWHM 95.0°            Efficiency 82 %            Peak intensity 0.370 cd/lm            LEDs/each optic 1            Light colour White            Required components:</p>		
<p><b>LG Innotek</b></p> <p>LED LG 5630            FWHM 93.0°            Efficiency 87 %            Peak intensity 0.390 cd/lm            LEDs/each optic 1            Light colour White            Required components:</p>		
<p><b>LG Innotek</b></p> <p>LED LG 6030            FWHM 83.0°            Efficiency 70 %            Peak intensity 0.400 cd/lm            LEDs/each optic 1            Light colour White            Required components:            C14592_FLORENCE-3R-SHD-BLK</p>		

#### PHOTOMETRIC DATA (MEASURED):



##### LG Innotek

LED LG 6030  
 FWHM 92.0°  
 Efficiency 88 %  
 Peak intensity 0.410 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

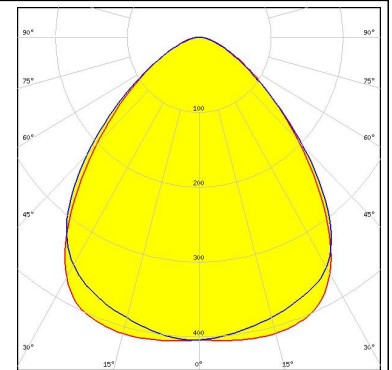



##### LG Innotek

LED LG 6030  
 FWHM 85.0°  
 Efficiency 84 %  
 Peak intensity 0.440 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:  
 C14646\_FLORENCE-3R-SHD-WHT

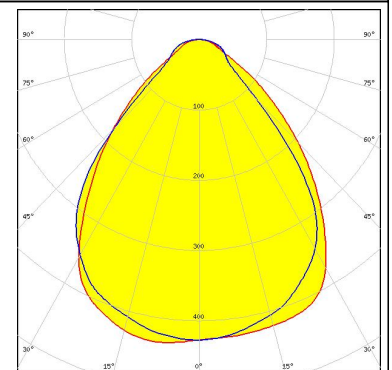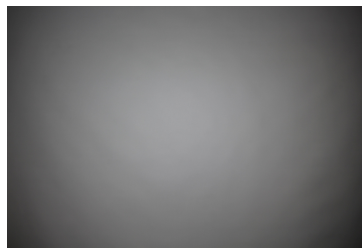



##### LG Innotek

LED LG 6030  
 FWHM 83.0°  
 Efficiency 72 %  
 Peak intensity 0.400 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:  
 C14453\_FLORENCE-3R-SHD-GR

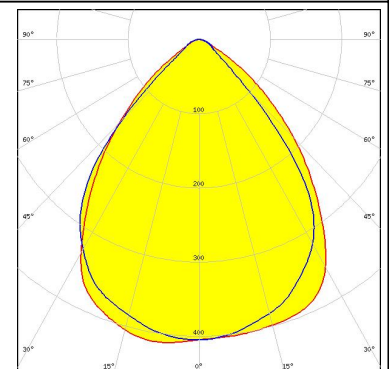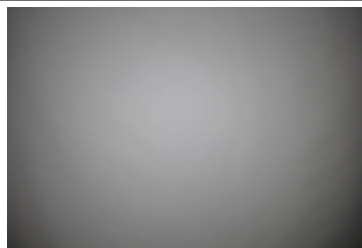

##### LUMILEDS

LED LUXEON 3030 2D (Round LES)  
 FWHM 91.0°  
 Efficiency 87 %  
 Peak intensity 0.420 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

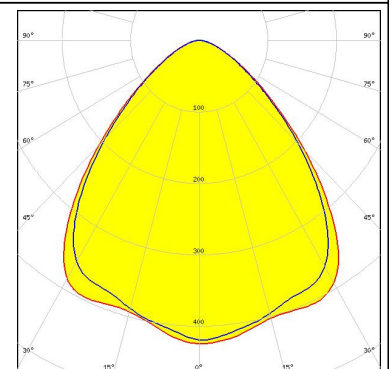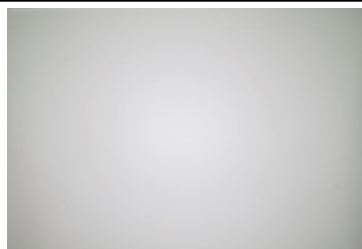




#### PHOTOMETRIC DATA (MEASURED):



##### LUMILEDS

LED LUXEON 3535 2D  
 FWHM 92.0°  
 Efficiency 87 %  
 Peak intensity 0.410 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

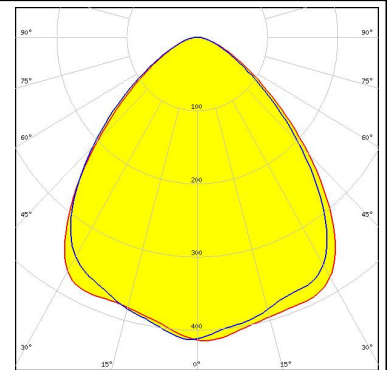


##### LUMILEDS

LED LUXEON 3535L HE  
 FWHM 92.0°  
 Efficiency 93 %  
 Peak intensity 0.420 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

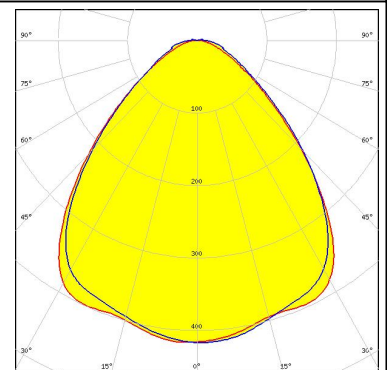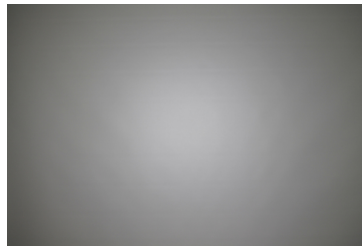


##### LUMILEDS

LED LUXEON XR-3535L (L202 - xxxx033C30001)  
 FWHM 91.0°  
 Efficiency 93 %  
 Peak intensity 0.430 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

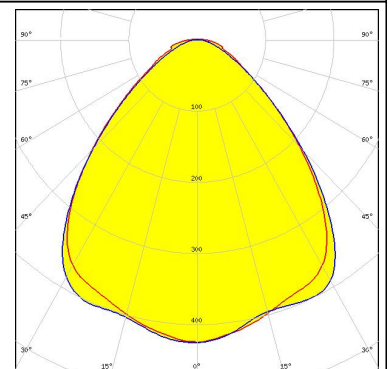

##### LUMINUS


LED MP-2016  
 FWHM 90.0°  
 Efficiency 91 %  
 Peak intensity 0.420 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

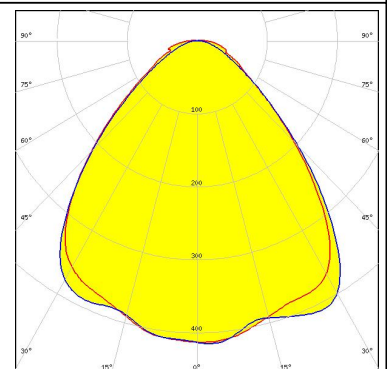


#### PHOTOMETRIC DATA (MEASURED):




**LED** NF2x757D  
**FWHM** 92.0°  
**Efficiency** 90 %  
**Peak intensity** 0.430 cd/lm  
**LEDs/each optic** 1  
**Light colour** White  
**Required components:**

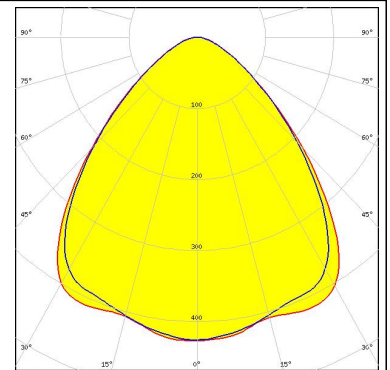



**LED** NFSW757H  
**FWHM** 90.0 + 83.0°  
**Efficiency** 87 %  
**Peak intensity** 0.439 cd/lm  
**LEDs/each optic** 1  
**Light colour** White  
**Required components:**  
 C14646\_FLORENCE-3R-SHD-WHT

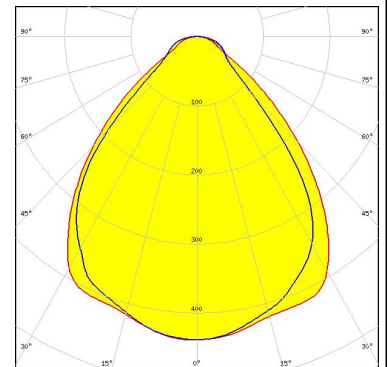

**LED** NFSW757H  
**FWHM** 91.0 + 90.0°  
**Efficiency** 92 %  
**Peak intensity** 0.415 cd/lm  
**LEDs/each optic** 1  
**Light colour** White  
**Required components:**

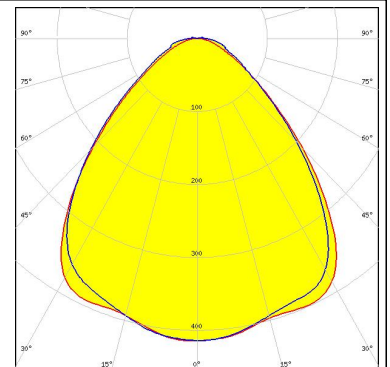



**LED** PL-BAR-G3 1100 280x55  
**FWHM** 90.0°  
**Efficiency** 92 %  
**Peak intensity** 0.410 cd/lm  
**LEDs/each optic** 1  
**Light colour** White  
**Required components:**

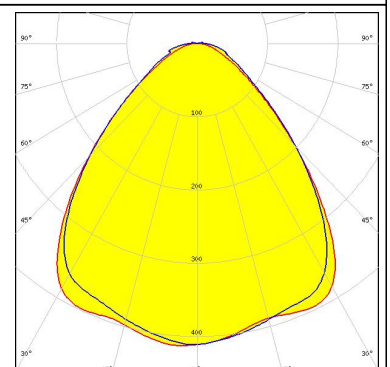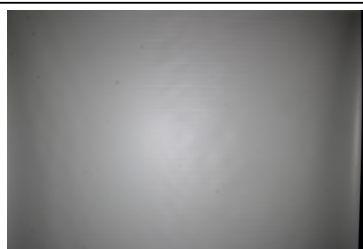

**PHOTOMETRIC DATA (MEASURED):**



**OSRAM**

LED PLG2-BAR-1100-xxx-280x55-DC  
 FWHM 92.0°  
 Efficiency 92 %  
 Peak intensity 0.420 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

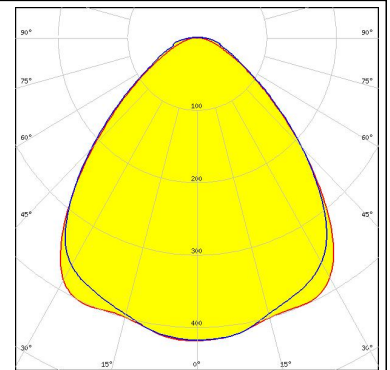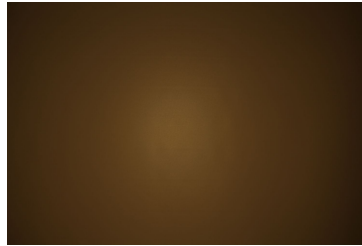


**OSRAM**  
Opto Semiconductors

LED Duris E5  
 FWHM 92.0°  
 Efficiency 88 %  
 Peak intensity 0.400 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

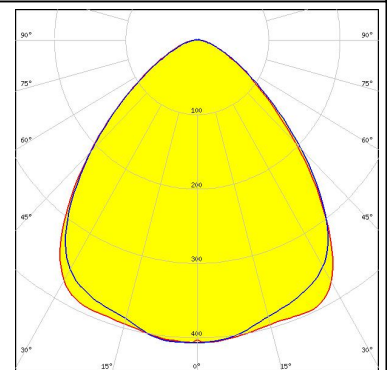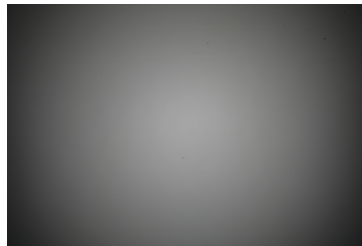



**OSRAM**  
Opto Semiconductors

LED Duris S2  
 FWHM 95.0°  
 Efficiency 90 %  
 Peak intensity 0.350 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

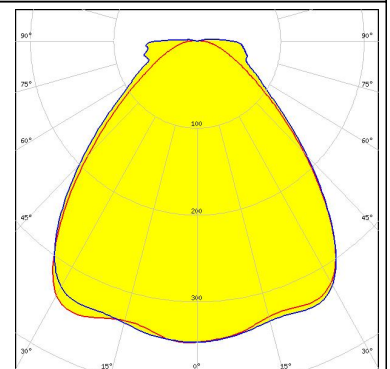

**OSRAM**  
Opto Semiconductors

LED Duris S5 (Single chip)  
 FWHM 91.0°  
 Efficiency 88 %  
 Peak intensity 0.410 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

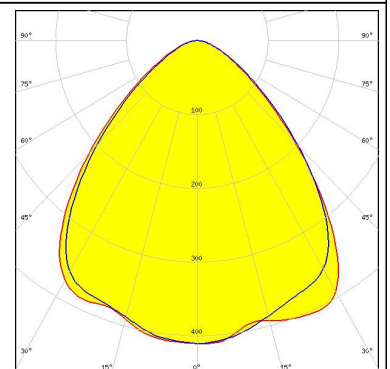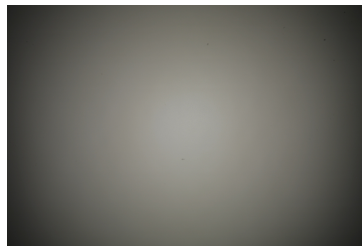


#### PHOTOMETRIC DATA (MEASURED):

#### OSRAM

Opto Semiconductors


LED OSCONIQ P 2226  
 FWHM 94.0°  
 Efficiency 83 %  
 Peak intensity 0.370 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

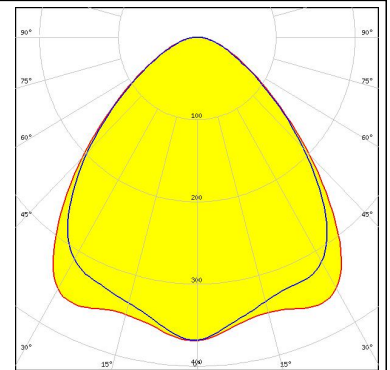

#### OSRAM


Opto Semiconductors

LED OSLON Square CSSRM2/CSSRM3  
 FWHM 91.0°  
 Efficiency 93 %  
 Peak intensity 0.420 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

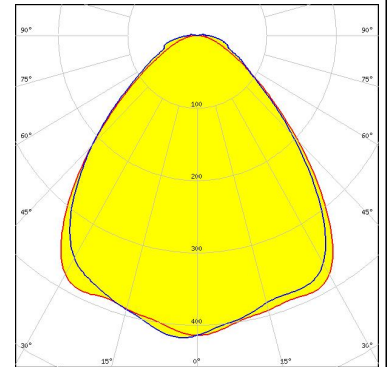



#### PHILIPS

LED Fortimo LED Line 1ft 650lm 3R HV4 & LV4  
 FWHM 90.0°  
 Efficiency 93 %  
 Peak intensity 0.410 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

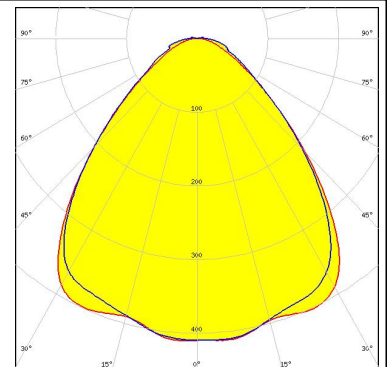

#### SAMSUNG

LED LM231 A/B  
 FWHM 91.0°  
 Efficiency 88 %  
 Peak intensity 0.414 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

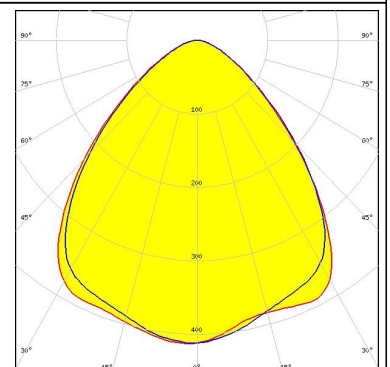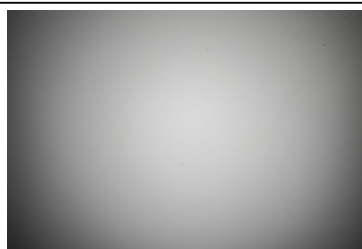




**PHOTOMETRIC DATA (MEASURED):**



**SAMSUNG**

LED LM561B  
FWHM 86.0°  
Efficiency 85 %  
Peak intensity 0.420 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

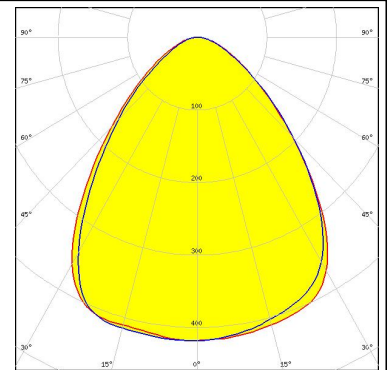



**SAMSUNG**

LED LM561B Plus  
FWHM 92.0°  
Efficiency 93 %  
Peak intensity 0.410 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

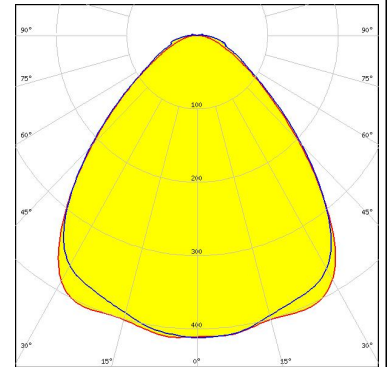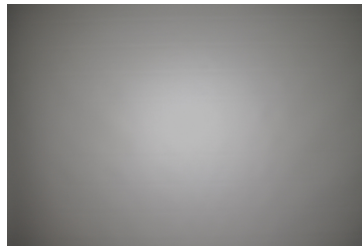



**SAMSUNG**

LED LM561C  
FWHM 92.0°  
Efficiency 93 %  
Peak intensity 0.420 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

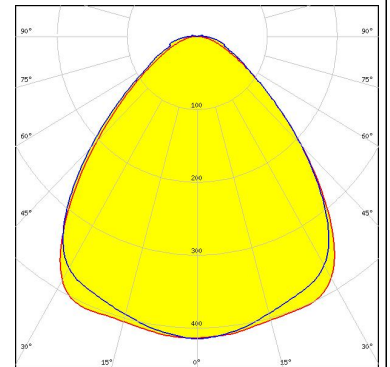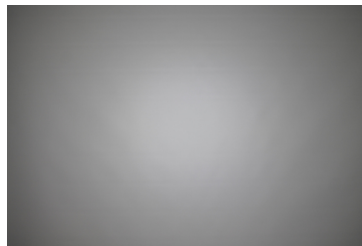







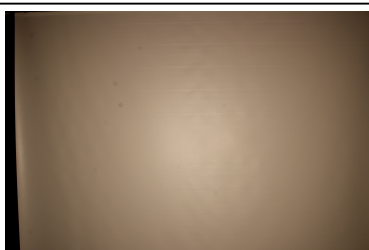
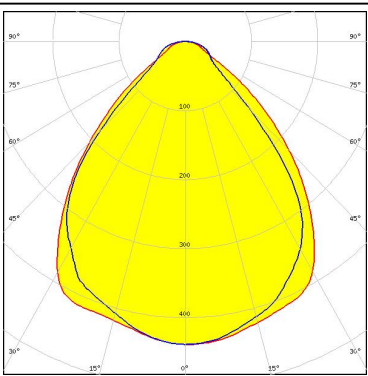

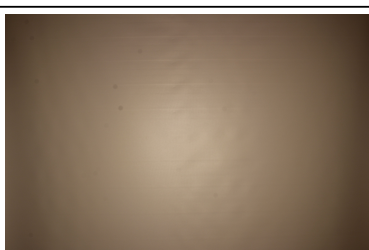
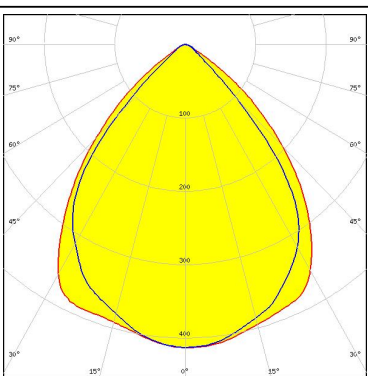
**SAMSUNG**

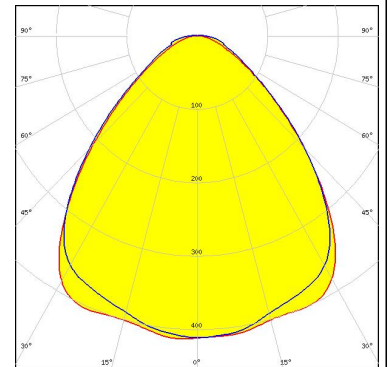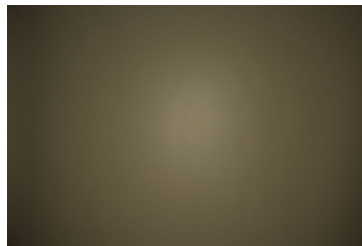LED LT-R286A  
FWHM 93.0°  
Efficiency 93 %  
Peak intensity 0.410 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:








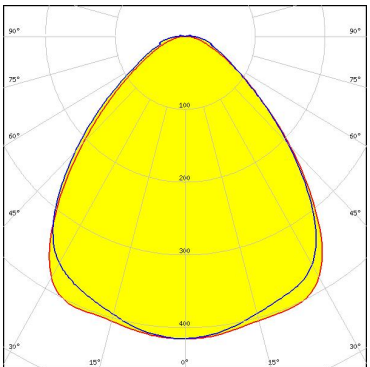


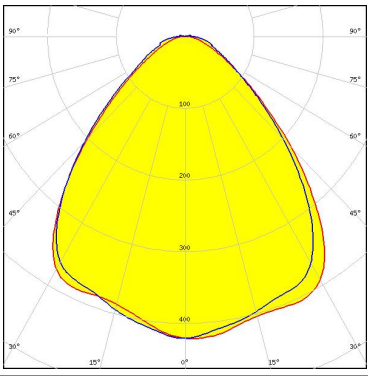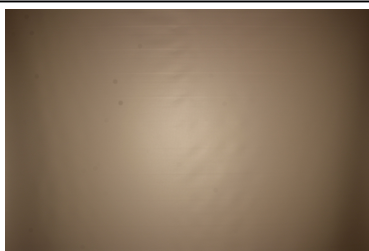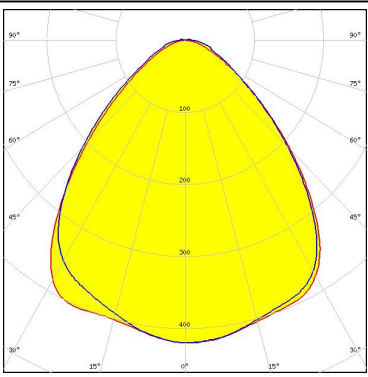

#### PHOTOMETRIC DATA (MEASURED):

<p> SEOL SEMICONDUCTOR</p> <p>LED: SEOUL 3030            FWHM: 91.0°            Efficiency: 91 %            Peak intensity: 0.420 cd/lm            LEDs/each optic: 1            Light colour: White            Required components:</p>		
<p> SEOL SEMICONDUCTOR</p> <p>LED: SEOUL 5630C            FWHM: 90.0°            Efficiency: 91 %            Peak intensity: 0.420 cd/lm            LEDs/each optic: 1            Light colour: White            Required components:</p>		
<p> SEOL SEMICONDUCTOR</p> <p>LED: SEOUL 5630C            FWHM: 89.0 + 83.0°            Efficiency: 86 %            Peak intensity: 0.440 cd/lm            LEDs/each optic: 1            Light colour: White            Required components:            C14646_FLORENCE-3R-SHD-WHT</p>		
<p> SEOL SEMICONDUCTOR</p> <p>LED: SEOUL 5630C            FWHM: 87.0 + 81.0°            Efficiency: 71 %            Peak intensity: 0.410 cd/lm            LEDs/each optic: 1            Light colour: White            Required components:            C14592_FLORENCE-3R-SHD-BLK</p>		

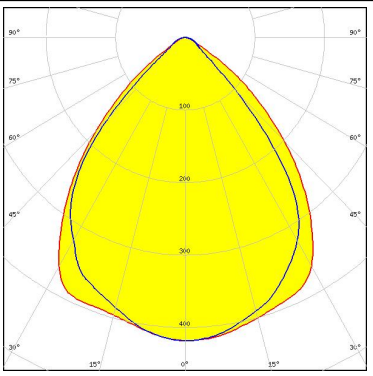
**PHOTOMETRIC DATA (MEASURED):**
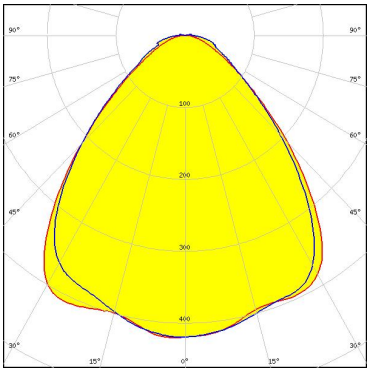
<p> SEOUL SEMICONDUCTOR</p> <p>LED                    SEOUL 5630C FWHM                87.0 + 81.0° Efficiency            74 % Peak intensity       0.420 cd/lm LEDs/each optic    1 Light colour         White Required components:           C14453_FLORENCE-3R-SHD-GR</p>		
<p> SEOUL SEMICONDUCTOR</p> <p>LED                    SEOUL DC 3030 FWHM                90.0° Efficiency            93 % Peak intensity       0.420 cd/lm LEDs/each optic    1 Light colour         White Required components:</p>		
<p><b>TRIDONIC</b></p> <p>LED                    LLE G2 55x280mm 2000lm FWHM                91.0° Efficiency            93 % Peak intensity       0.420 cd/lm LEDs/each optic    1 Light colour         White Required components:</p>		

#### PHOTOMETRIC DATA (SIMULATED):


##### **LG Innotek**

LED LG 7030  
FWHM 91.0°  
Efficiency %  
Peak intensity 0.320 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

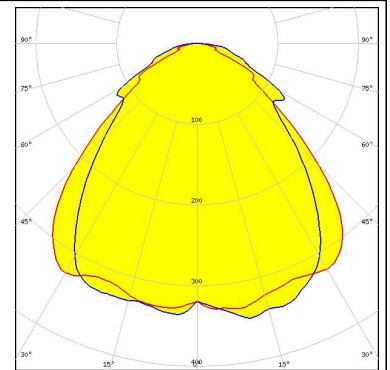


##### **LUMILEDS**

LED LUXEON 5050 Round LES  
FWHM 90.0°  
Efficiency 91 %  
Peak intensity 0.460 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

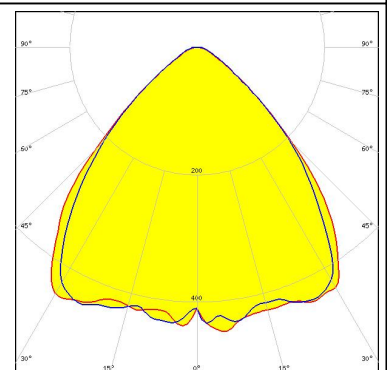


##### **NICHIA**

LED NF2x757G  
FWHM 90.0°  
Efficiency 80 %  
Peak intensity 0.370 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:




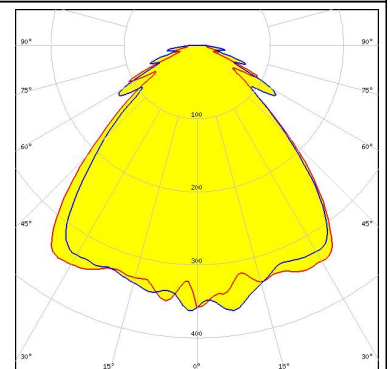


##### **NICHIA**

LED NFMW48xA  
FWHM 89.0°  
Efficiency 92 %  
Peak intensity 0.440 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:

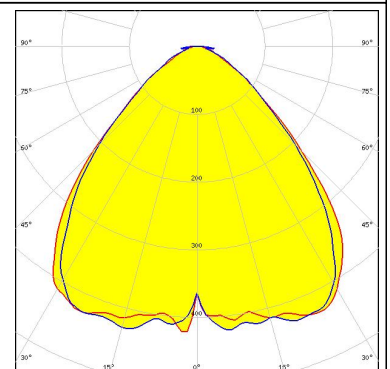

#### PHOTOMETRIC DATA (SIMULATED):

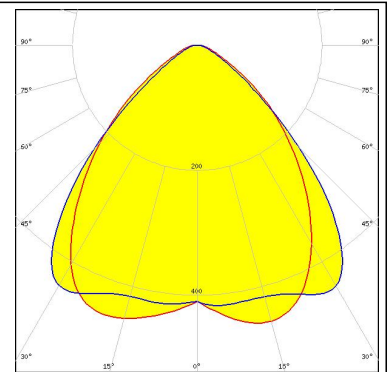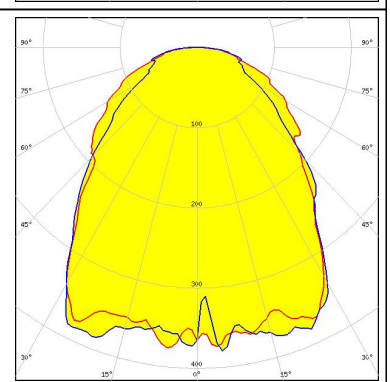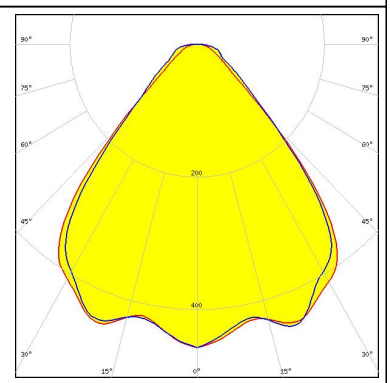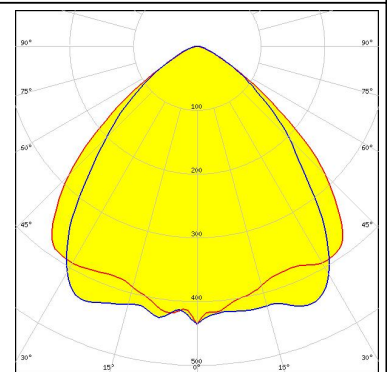
<p><b>NICHIA</b></p> <p>LED NFSx757G            FWHM 86.0 + 90.0°            Efficiency 92 %            Peak intensity 0.458 cd/lm            LEDs/each optic 2            Light colour White            Required components:</p>	
<p><b>NICHIA</b></p> <p>LED NVSxE21A            FWHM 90.0°            Efficiency 94 %            Peak intensity 0.390 cd/lm            LEDs/each optic 1            Light colour White            Required components:</p>	
<p><b>OSRAM</b>  <small>Opto Semiconductors</small></p> <p>LED Duris E 2835            FWHM 85.0°            Efficiency 87 %            Peak intensity 0.460 cd/lm            LEDs/each optic 1            Light colour White            Required components:</p>	
<p><b>OSRAM</b>  <small>Opto Semiconductors</small></p> <p>LED Duris E 2835            FWHM 86.0 + 87.0°            Efficiency 92 %            Peak intensity 0.400 cd/lm            LEDs/each optic 2            Light colour White            Required components:</p>	

#### PHOTOMETRIC DATA (SIMULATED):

#### OSRAM


Opto Semiconductors

LED Duris S8  
 FWHM 83.0°  
 Efficiency 91 %  
 Peak intensity 0.470 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

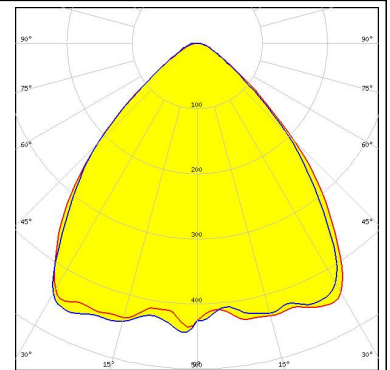


#### SAMSUNG

LED LM28xB Series  
 FWHM 90.0°  
 Efficiency 93 %  
 Peak intensity 0.450 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

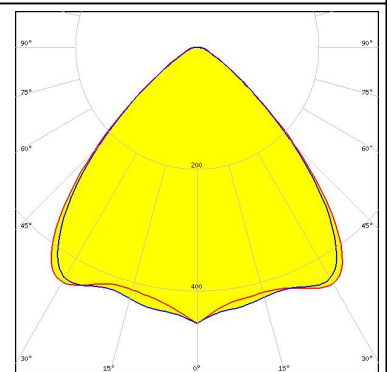


SEOUL SEMICONDUCTOR

LED SEOUL 5630D  
 FWHM 83.0°  
 Efficiency 84 %  
 Peak intensity 0.450 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

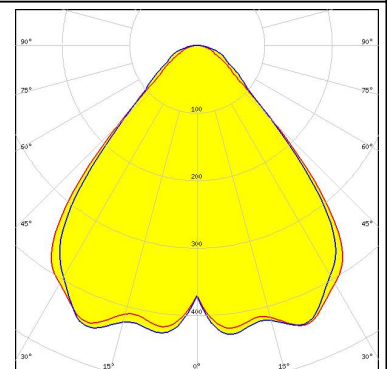

SEOUL SEMICONDUCTOR

LED SEOUL DC 3030C  
 FWHM 89.0°  
 Efficiency 94 %  
 Peak intensity 0.457 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:

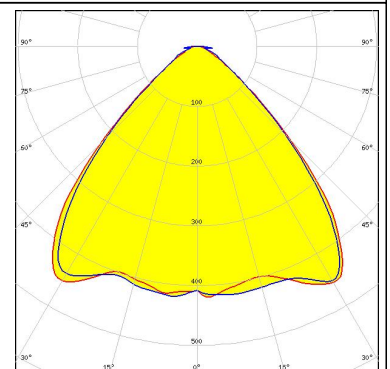




## PHOTOMETRIC DATA (SIMULATED):

### TRIDONIC

LED LLE G2 55x280mm 2000lm  
FWHM 85.0 + 81.0°  
Efficiency 77 %  
Peak intensity 0.456 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:  
C14592\_FLORENCE-3R-SHD-BLK

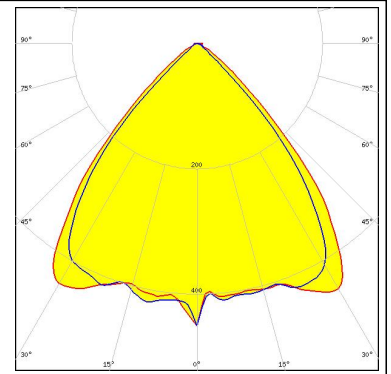

#### GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

#### MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

#### PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

#### LEDiL Oy

Joensuunkatu 13  
FI-24240 SALO  
Finland

#### LEDiL Inc.

228 West Page Street  
Suite D  
Sycamore IL 60178  
USA

#### Local sales and technical support

[www.ledil.com/  
where\\_to\\_buy](http://www.ledil.com/where_to_buy)

#### Shipping locations

Salo, Finland  
Hong Kong, China

#### Distribution Partners

[www.ledil.com/  
where\\_to\\_buy](http://www.ledil.com/where_to_buy)

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А