



AC and Pulse Metallized Polypropylene Film Capacitors KP/MKP Radial Lacquered Type

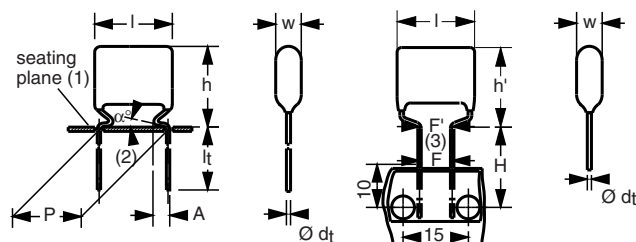

Dimensions in mm

- (1) Hole $\varnothing$ 1.3 for $d_t = 0.8$ mm
- (2) $0 \leq \alpha < 50^\circ$
- (3) $|F - F'| < 0.3$ mm
 $F = 7.5 + 0.6/-0.1$ mm
- (4) $A = 2.0 + 1.0/-0.5$ mm for 10 mm pitch
 $A = 2.5 + 1.5/-0.5$ mm for 15 mm pitch
 $A = 2.5 + 1.4/-0.5$ mm for pitch > 22.5 mm

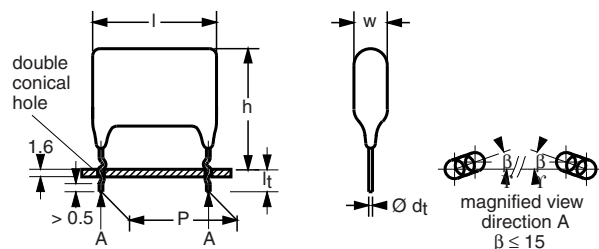

Dimensions in mm

APPLICATIONS

Where high currents and steep pulses occur. For deflection circuits in television sets.

REFERENCE SPECIFICATIONS

IEC 60384-17

MARKING

C-value; tolerance; rated voltage; manufacturer's type; manufacturer's location

DIELECTRIC

Polypropylene film

ELECTRODES

Metallized and aluminum

CONSTRUCTION

Internal serial construction

RATED (DC) VOLTAGE

630 V, 1000 V, 1600 V, 2000 V

RATED (AC) VOLTAGE

300 V, 400 V, 500 V, 600 V

RATED PEAK-TO-PEAK VOLTAGE

850 V, 1100 V, 1400 V, 1700 V

FEATURES

- 10 mm to 27.5 mm pitch
- Supplied loose in box (including lock lead versions) and taped
- Bent back version for automatic insertion available
- Compliant to RoHS directive 2002/95/EC



RoHS
COMPLIANT

ENCAPSULATION

Flame retardant epoxy material
(Class UL 94 V-0)

CLIMATIC TESTING CLASS ACC. TO IEC 60068-1

55/105/56

CAPACITANCE RANGE (E24 SERIES)

0.1 nF to 270 nF

CAPACITANCE TOLERANCE

$\pm 5\%$; $\pm 3.5\%$

LEADS

Tinned wire

RATED TEMPERATURE

85 °C

MAXIMUM APPLICATION TEMPERATURE

105 °C

PERFORMANCE GRADE

for $C > 5.6$ nF: grade 1 (long life)
for $C \leq 5.6$ nF: grade 2

STABILITY GRADE

Grade 2

DETAIL SPECIFICATION

For more detailed data and test requirements contact:

dc-film@vishay.com

COMPOSITION OF CATALOG NUMBER

TYPE AND PITCHES		CAPACITANCE (numerically; but not for lock lead)	MULTIPLIER (nF)	
375	10.0 mm/7.5 mm		0.01	1
	15.0 mm/7.5 mm		0.1	2
	10.0 mm		1	3
	15.0 mm		10	4
	22.5 mm			
	27.5 mm			

BFC2	375	XX	YY	Y
2222 ⁽¹⁾	375	XX	YY	Y

⁽¹⁾ old ordering number

Example:
104 = 10 x 10 = 100 nF

TYPE	PACKAGING	LEAD CONFIGURATION	PREFERRED TYPES				
			C-TOL.	630 V	1000 V	1600 V	2000 V
375	Loose in box	Lead length 5.0 mm ± 1.0 mm	± 5 %	14	24	34	44
		Lock lead 4.0 mm + 1.0/- 0.5 mm	± 5 %	90	90	90	90
	Taped on reel ⁽²⁾ (bent back)	H = 16.0 mm; P ₀ = 15.0 mm; Reel diameter 500 mm	± 5 %	16	26	36	46
		Dimensions of this code numbers stays between brackets					
				ON REQUEST			
375	Loose in box	Lead length 5.0 ± 1.0 mm	± 3.5 %	15	25	35	45
		Lead length 3.5 ± 0.5 mm	± 5 %	10	20	30	40
			± 3.5 %	11	21	31	41
	Taped on reel ⁽²⁾	H = 16.0 mm; P ₀ = 12.7 mm; Reel diameter = 500 mm	± 5 %	12	22	32	42
			± 3.5 %	13	23	33	43
	Taped on reel ⁽²⁾ (bent back)	H = 16.0 mm; P ₀ = 15.0 mm; Reel diameter = 500 mm	± 3.5 %	17	27	37	47
		Dimensions of this code numbers stays between brackets					
		H = 16.0 mm; P ₀ = 15.0 mm; Reel diameter = 356 mm	± 5 %	18	28	38	48

Note

⁽¹⁾ For detailed tape specifications refer to "Packaging Information" www.vishay.com/doc?28139 or end of catalog

SPECIFIC REFERENCE DATA (630 V_{DC})

DESCRIPTION	VALUE	
Tangent of loss angle at (x 10 ⁻⁴)	10 kHz	100 kHz
Pitch = 10 mm, 15 mm and 7.5 mm (bent back)	≤ 6	≤ 10
Pitch = 22.5 mm	≤ 8	≤ 15
Pitch = 27.5 mm	≤ 8	≤ 20
Rated voltage pulse slope (dU/dt) _R :		
Pitch = 10 mm	15 000 V/μs	
Pitch = 15 mm and 7.5 mm (bent back)	8000 V/μs	
Pitch = 22.5 mm	2800 V/μs	
Pitch = 27.5 mm	1900 V/μs	
R between leads at 500 V, 1 min	> 100 000 MΩ	
R between interconnected leads and case, 500 V, 1 min	> 100 000 MΩ	
Ionisation (AC) voltage (typical value) at 50 pC peak discharge		
at 50 pC peak discharge	> 400 V	
at 20 pC peak discharge		
Withstanding (DC) voltage (cut off current 10 mA), rise time 1000 V/s		
For C ≤ 47 nF	1008 V, 1 min	
For C > 47 nF		
Withstanding (DC) voltage between leads and case	2840 V, 1 min	
Maximum application temperature	105 °C	



AC and Pulse Metallized Polypropylene Film Capacitors Vishay BCcomponents KP/MKP Radial Lacquered Type

$U_{RDC} = 630 \text{ V}$; $U_{RAC} = 300 \text{ V}$; $U_{pp} = 850 \text{ V}$ (kinked); $C\text{-tol.} = \pm 5 \%$

C	DIMENSIONS w x h (h') x l (mm)	MASS (g) ⁽¹⁾	CATALOG NUMBER BFC2 375 XXYYY AND PACKAGING					
			LOOSE IN BOX	REEL			C VALUE	
				Leads 5 mm ± 1.0 mm	Original pitch	Pitch = 7.5 mm (bent back)		..YYY
					Ø 500 mm	Ø 500 mm	Ø 356 mm	
			XX (SPQ)	XX (SPQ)	XX (SPQ)	XX (SPQ)		
C (pF)	Pitch = 10.0 mm ± 0.4 mm; d _t = 0.60 mm ± 0.06 mm		Pitch = 10.0 mm	Pitch = 7.5 mm (bent back)				
680	5.0 x 13.0 x 14.5	0.65	14... (2000)	12... (1200)				
750								681 751
820	5.5 x 13.5 x 14.5	0.70	14... (2000)	12... (1100)				
910								821 911
1000								102
1100		112						
1200		122						
1300		132						
1500		152						
1600		162						
1800	6.0 x 14.0 x 14.5	0.80	14... (1750)	12... (1000)				
2000		0.85						182 202
2200		0.90						222
2400		1.0						242
2700	6.5 x 14.5 x 14.5	1.1	14... (1500)	12... (900)	272			

Note

⁽¹⁾ Net weight for short lead product only

- SPQ = Standard Packing Quantity

Vishay BCcomponents AC and Pulse Metallized Polypropylene Film Capacitors KP/MKP Radial Lacquered Type

$U_{RDC} = 630 \text{ V}$; $U_{RAC} = 300 \text{ V}$; $U_{pp} = 850 \text{ (kinked)}$; $C\text{-tol.} = \pm 5 \%$

C	DIMENSIONS w x h (h') x l (mm)	MASS (g) ⁽¹⁾	CATALOG NUMBER BFC2 375 XYYYY AND PACKAGING				
			LOOSE IN BOX	REEL			C VALUE
			Leads 5 mm $\pm$ 1.0 mm	Original pitch	Pitch = 7.5 mm (bent back)		..YYY
			XX (SPQ)	XX (SPQ)	XX (SPQ)	XX (SPQ)	
C (pF)	Pitch = 15.0 mm $\pm$ 0.4 mm; $d_t = 0.80 \text{ mm} \pm 0.08 \text{ mm}$				Pitch = 7.5 mm (bent back)		
3000	5.0 x 14.0 (16.0) x 18.5	1.0	14...	12...	16 ...	18 ...	302
3300			(2000)	(1200)	(1000)	(550)	332
3600							362
3900							392
4300			14...	12...	16 ...	18 ...	432
4700	5.5 x 14.5 (16.0) x 18.5	1.1	(2000)	(1100)	(900)	(500)	472
5100							512
5600							562
6200							622
6800							682
7500	6.0 x 15.0 (16.0) x 18.5	1.2					752
8200							822
9100			14...	12...	16 ...	18 ...	912
10 000			(2000)	(1000)	(800)	(450)	103
11 000							113
12 000							123
13 000							133
15 000							153
16 000							163
18 000	6.5 x 15.5 (17.0) x 18.5	1.3	14...	12...	16...	18...	183
20 000			(1500)	(900)	(750)	(400)	203
22 000	7.0 x 16.0 (17.5) x 18.5	1.5	14...	12...	16...	18...	223
			(1500)	(800)	(700)	(400)	
24 000	7.5 x 16.5 (18.0) x 18.5	1.6	14...	12...	16...	18...	243
			(1250)	(800)	(650)	(350)	
27 000	8.0 x 17.0 (18.5) x 18.5	1.9	14...	12...	16...	18...	273
30 000			(1250)	(750)	(600)	(350)	303
33 000	8.5 x 17.5 (19.0) x 18.5	2	14...	12...	16...	18...	333
			(1000)	(700)	(550)	(300)	
36 000	9.0 x 18.5 (20.0) x 18.5	2.3	14...	12...	16...	18...	ON
39 000			(900)	(600)	(500)	(300)	REQUEST
C (μF)	Pitch = 22.5 mm $\pm$ 0.4 mm; $d_t = 0.80 \text{ mm} \pm 0.08 \text{ mm}$			Pitch = 22.5 mm	Pitch = 7.5 mm (bent back)		
0.036	7.0 x 20.0 x 26.0	2.7	14...	-	-		363
0.039							393
0.043							433
0.047							473
0.051							513
0.056							563
0.062							623
0.068	7.5 x 20.5 x 26.0	3	14...	-	-		683
			(600)				
0.075	8.0 x 21.0 x 26.0	3.3	14...	-	-		753
0.082			(550)				823
0.091	8.5 x 21.5 x 26.0	3.8	14...	-	-		913
			(500)				
0.1	9.0 x 22.0 x 26.0	4	14...	-	-		104
			(450)				

Note

⁽¹⁾ Net weight for short lead product only

• SPQ = Standard Packing Quantity



AC and Pulse Metallized Polypropylene Film Capacitors Vishay BCcomponents
KP/MKP Radial Lacquered Type

U_{RDC} = 630 V; U_{RAC} = 300 V; U_{pp} = 850 (kinked); C-tol. = ± 5 %

C	DIMENSIONS w x h (h') x l (mm)	MASS (g) ⁽¹⁾	CATALOG NUMBER BFC2 375 XYYYY AND PACKAGING				
			LOOSE IN BOX	REEL			C VALUE
			Leads 5 mm ± 1.0 mm	Original pitch	Pitch = 7.5 mm (bent back)		..YYY
				Ø 500 mm	Ø 500 mm	Ø 356 mm	
			XX (SPQ)	XX (SPQ)	XX (SPQ)	XX (SPQ)	
C (µF)	Pitch = 22.5 mm ± 0.4 mm; d _t = 0.80 mm ± 0.08 mm		Pitch = 22.5 mm	Pitch = 7.5 mm (bent back)			
0.11	9.5 x 22.5 x 26.0	4.3	14... (400)	-	-	114	
0.12	10.0 x 23.0 x 26.0	4.7	14... (400)			124	
C (µF)	Pitch = 27.5 mm ± 0.5 mm; d _t = 0.80 mm ± 0.08 mm		Pitch = 27.5mm	Pitch = 7.5 mm (bent back)			
0.13	9.5 x 22.5 x 30.0	4.7	14... (500)	-	-	134	
0.15	10.0 x 23.0 x 30.0	5.2	14... (500)			154	
0.16	10.5 x 23.5 x 30.0	5.5	14... (450)			164	
0.18	11.0 x 24.0 x 30.0	6	14... (400)			184	
0.2	11.5 x 24.5 x 30.0	6.6	14... (400)			204	
0.22	12.5 x 25.5 x 30.0	7.1	14... (350)			224	
0.24	13.0 x 26.0 x 30.0	7.7	14... (300)			244	
0.27	13.5 x 26.5 x 30.0	8.5	14... (300)			274	

Notes

- ⁽¹⁾ Net weight for short lead product only
- Loose in box, all lengths have same SPQ
 - SPQ = Standard Packing Quantity

U_{RDC} = 630 V; U_{RAC} = 300 V; U_{pp} = 850 V (lock lead); C-tol. = ± 5 %

C	DIMENSIONS w x h (h') x l (mm)	MASS (g) ⁽¹⁾	CATALOG NUMBER BFC2 375 XYYYY AND PACKAGING	
			LOOSE IN BOX	
			l _t = 4.0 mm + 1.0 mm/- 0.5 mm	
				(SPQ)
C (pF)	Pitch = 10.0 mm ± 1.0 mm; d _t = 0.60 mm ± 0.06 mm			
680	5.0 x 16.0 x 14.5	0.65	90308	(2000)
750			90309	
820		0.7	90311	
910		0.7	90312	
1000		0.7	90313	
1100		0.75	90314	
1300		0.75	90316	
1500	6.0 x 17.0 x 14.5	0.80	90317	(1750)
1600		0.85	90318	
1800		0.80	90319	
2000		0.85	90321	
2200	6.5 x 17.5 x 14.5	0.90	90322	(1500)
2400		1.0	90323	
2700		1.1	90324	

Notes

- ⁽¹⁾ Net weight for short lead product only
- SPQ = Standard Packing Quantity

KP/MKP 375



Vishay BCcomponents AC and Pulse Metallized Polypropylene Film Capacitors KP/MKP Radial Lacquered Type

$U_{RDC} = 630 \text{ V}$; $U_{RAC} = 300 \text{ V}$; $U_{pp} = 850 \text{ V}$ (lock lead); C-tol. = $\pm 5 \%$

C	DIMENSIONS w x h (h') x l (mm)	MASS (g) ⁽¹⁾	CATALOG NUMBER BFC2 375 XXYYY AND PACKAGING	
			LOOSE IN BOX	
			l _t = 4.0 mm + 1.0 mm/- 0.5 mm	
				(SPQ)
C (pF)	Pitch = 15.0 mm ± 1.0 mm; d _t = 0.80 mm ± 0.08 mm			
3000	5.0 x 17.0 x 18.5	1	90325	(2000)
3300			90326	
3600	5.5 x 17.5 x 18.5	1.1	90327	(2000)
3900			90328	
4300			90329	
4700			90331	
5100			90332	
5600			90333	
6200	6.0 x 18.0 x 18.5	1.3	90334	(2000)
6800			90335	
7500			90336	
8200			90337	
9100			90338	
10 000			90339	
11 000			90236	
12 000			90341	
13 000			90342	
15 000			90343	
16 000			90344	
18 000	6.5 x 18.5 x 18.5	1.4	90218	(1750)
20 000			90345	
22 000	7.0 x 19.0 x 18.5	1.5	90219	(1500)
24 000	7.5 x 19.5 x 18.5	1.6	90221	(1400)
27 000	8.0 x 20.0 x 18.5	1.9	90223	(1250)
30 000			90346	
33 000	8.5 x 20.5 x 18.5	2	90347	(1200)
36 000	9.0 x 21.5 x 18.5	2.3	ON REQUEST	(1000)
39 000				
C (μF)	Pitch = 22.5 mm ± 1.0 mm; d _t = 0.80 mm ± 0.08 mm			
0.036	7.0 x 23.0 x 26.0	2.7	90348	(600)
0.039			90349	
0.043			90351	
0.047			90352	
0.051			90353	
0.056			90354	
0.062			90355	
0.068	7.5 x 23.5 x 26.0	3	90356	(550)
0.075	8.0 x 24.0 x 26.0	3.3	90357	(500)
0.082			90358	
0.091	8.5 x 24.5 x 26.0	3.8	90359	(450)

Notes

- ⁽¹⁾ Net weight for short lead product only
• SPQ = Standard Packing Quantity

**AC and Pulse Metallized Polypropylene Film Capacitors Vishay BCcomponents**
KP/MKP Radial Lacquered Type

C	DIMENSIONS w x h (h') x l (mm)	MASS (g) ⁽¹⁾	CATALOG NUMBER BFC2 375 XYYYY AND PACKAGING	
			LOOSE IN BOX	
			l _t = 4.0 mm + 1.0 mm/- 0.5 mm	
				(SPQ)
C (μF)	Pitch = 22.5 mm ± 1.0 mm; d _t = 0.80 mm ± 0.08 mm			
0.1	9.0 x 25.0 x 26.0	4.0	90361	(450)
0.11	9.5 x 25.5 x 26.0	4.3	90362	(400)
0.12	10.0 x 26.0 x 26.0	4.7	90363	(350)
C (μF)	Pitch = 27.5 mm ± 1.0 mm; d _t = 0.80 mm ± 0.08 mm			
0.13	9.5 x 25.5 x 30.0	4.7	90364	(450)
0.15	10.0 x 26.0 x 30.0	5.2	90365	(400)
0.16	10.5 x 26.5 x 30.0	5.5	90366	(350)
0.18	11.0 x 27.0 x 30.0	6.0	90367	(350)
0.2	11.5 x 27.5 x 30.0	6.6	90368	(350)
0.22	12.5 x 28.5 x 30.0	7.1	90369	(300)
0.24	13.0 x 29.0 x 30.0	7.7	90371	(250)
0.27	13.5 x 29.5 x 30.0	8.5	90372	(250)

Notes⁽¹⁾ Net weight for short lead product only

- SPQ = Standard Packing Quantity

SPECIFIC REFERENCE DATA (1000 V_{DC})

DESCRIPTION	VALUE	
	10 kHz	100 kHz
Tangent of loss angle at (x 10 ⁻⁴)		
Pitch = 10 mm, 15 mm and 7.5 mm (bent back)	≤ 6	≤ 10
Pitch = 22.5 mm	≤ 8	≤ 15
Pitch = 27.5 mm	≤ 8	≤ 20
Rated voltage pulse slope (dU/d _t):		
Pitch = 10 mm	27 000 V/μs	
Pitch = 15 mm and 7.5 mm (bent back)	15 000 V/μs	
Pitch = 22.5 mm	5000 V/μs	
Pitch = 27.5 mm	3300 V/μs	
R between leads at 500 V, 1 min	> 100 000 MΩ	
R between interconnected leads and case, 500 V, 1 min	> 100 000 MΩ	
Ionisation (AC) voltage (typical value)		
at 50 pC peak discharge	> 500 V	
at 20 pC peak discharge		
Withstanding (DC) voltage (cut off current 10 mA), rise time 1000 V/s		
For C ≤ 47 nF	1600 V, 1 min	
For C > 47 nF	[1.6 - (0.0364 x (C - 47))] x 1000 V, 1 min	
Withstanding (DC) voltage between leads and case	2840 V, 1 min	
Maximum application temperature	105 °C	

Vishay BCcomponents AC and Pulse Metallized Polypropylene Film Capacitors KP/MKP Radial Lacquered Type

$U_{RDC} = 1000 \text{ V}$; $U_{RAC} = 400 \text{ V}$; $U_{pp} = 1100 \text{ V}$ (kinked); C-tol. = $\pm 5 \%$

C	DIMENSIONS w x h (h') x l (mm)	MASS (g) ⁽¹⁾	CATALOG NUMBER BFC2 375 XXYYY AND PACKAGING				C VALUE	
			LOOSE IN BOX	REEL				
				Leads 5 mm ± 1.0 mm	Original pitch	Pitch = 7.5 mm (bent back)		..YYY
					Ø 500 mm	Ø 500 mm	Ø 356 mm	
			XX (SPQ)	XX (SPQ)	XX (SPQ)	XX (SPQ)		
C (pF)	Pitch = 10.0 mm ± 0.4 mm; d _t = 0.60 mm ± 0.06 mm		Pitch = 10.0 mm	Pitch = 7.5 mm (bent back)				
100	5.0 x 13.0 x 14.5	0.5	24... (2000)	22... (1200)		-	101	
110							111	
120							121	
130							131	
150	5.5 x 13.5 x 14.5	0.55	24... (2000)	22... (1100)		-	151	
160		0.55					161	
180		0.55					181	
200		0.55					201	
220		0.60					221	
240		0.60					241	
270		0.60					271	
300		0.60					301	
330		0.60					331	
360		0.60					361	
390		0.65					391	
430		0.70					431	
470		0.75					471	
510		0.75					511	
560		0.80					561	
620		0.80					621	
680		0.80					681	
750	0.70	751						
820	0.70	821						
910	0.70	911						
1000	6.0 x 14.0 x 14.5	0.75	24... (1750)	22... (1000)		-	102	
1100		0.85					112	
1200		0.90					122	
1300		0.85					132	
1500		0.90					152	
C (pF)	Pitch = 15.0 mm ± 0.4 mm; d _t = 0.80 mm ± 0.08 mm		Pitch = 15.0 mm	Pitch = 7.5 mm (bent back)				
1600	5.5 x 14.5 (16.0) x 18.5	1.1	24... 2000)	22... (1100)	26... (900)	28... (500)	162	
1800							182	
2000							202	
2200							222	
2400							242	
2700	6.0 x 15.0 (16.5) x 18.5	1.2	24... (2000)	22... (1000)	26... (800)	28... (450)	272	
3000							302	
3300							332	
3600							362	
3900							392	
4300							432	
4700							472	
5100							512	
5600		562						

Notes

- ⁽¹⁾ Net weight for short lead product only
- Loose in box, all lengths have same SPQ
- SPQ = Standard Packing Quantity



AC and Pulse Metallized Polypropylene Film Capacitors Vishay BCcomponents

KP/MKP Radial Lacquered Type

$U_{RDC} = 1000 \text{ V}$; $U_{RAC} = 400 \text{ V}$; $U_{pp} = 1100 \text{ V}$ (kinked); C-tol. = $\pm 5 \%$

C	DIMENSIONS w x h (h') x l (mm)	MASS (g) ⁽¹⁾	CATALOG NUMBER BFC2 375 XYYYY AND PACKAGING				C VALUE ..YYY
			LOOSE IN BOX Leads 5 mm ± 1.0 mm XX (SPQ)	REEL			
				Original pitch Ø 500 mm	Pitch = 7.5 mm (bent back)		
					Ø 500 mm	Ø 356 mm	
C (pF)	Pitch = 15.0 mm ± 0.4 mm; d _t = 0.80 mm ± 0.08 mm	Pitch = 15.0 mm	Pitch = 7.5 mm (bent back)				
6200 6800	6.0 x 15.0 (16.5) x 18.5	1.2	24... (2000)	22... (1000)	26... (800)	28... (450)	622 682
7500 8200 9100	7.0 x 16.0 (17.5) x 18.5	1.4	24... (1500)	22... (800)	26... (700)	28... (400)	752 822 912
10 000	7.5 x 16.5 (18.0) x 18.5	1.6	24... (1250)	22... (800)	26... (650)	28... (350)	103
11 000 12 000	8.0 x 17.0 (18.5) x 18.5	1.8	24... (1250)	22... (750)	26... (600)	28... (350)	113 123
13 000	8.5 x 17.5 (19.0) x 18.5	1.9	24... (1000)	22... (700)	26... (550)	28... (300)	133
15 000	9.0 x 18.5 (19.5) x 18.5	2.1	24... (1000)	22... (650)	26... (550)	28... (300)	153
C (µF)	Pitch = 22.5 mm ± 0.4 mm; d _t = 0.80 mm ± 0.08 mm	Pitch = 22.5 mm	Pitch = 7.5 mm (bent back)				
0.016 0.018	6.0 x 19.0 x 26.0	2.2	24... (800)				163 183
0.02 0.022	6.5 x 19.5 x 26.0	2.5	24... (750)				203 223
0.024	7.0 x 20.0 x 26.0	2.7	24...				243
0.027 0.03	7.5 x 20.5 x 26.0	3.1	24... (600)				273 303
0.033	8.0 x 21.0 x 26.0	3.4	24... (550)				333
0.036 0.039	8.5 x 21.5 x 26.0	3.7	24... (500)				363 393
0.043	9.0 x 22.0 x 26.0	4.1	24... (450)				433
C (µF)	Pitch = 27.5 mm ± 0.5 mm; d _t = 0.80 mm ± 0.08 mm	Pitch = 27.5 mm	Pitch = 7.5 mm (bent back)				
0.047	7.0 x 20.0 x 30.0	3.1	24... (1000)				473
0.051 0.056	7.5 x 20.5 x 30.0	3.4	24... (750)				513 563
0.062	8.0 x 21.0 x 30.0	3.8	24... (650)				623
0.068	8.5 x 21.5 x 30.0	4.0	24... (550)				683
0.075	9.0 x 22.0 x 30.0	4.4	24... (550)				753
0.082	9.5 x 22.5 x 30.0	4.7	24... (500)				823
0.091	10.0 x 23.0 x 30.0	5.1	24... (500)				913
0.10	10.5 x 23.5 x 30.0	5.5	24... (450)				104
0.11	11.0 x 24.0 x 30.0	5.9	24... (400)				114
0.12	11.5 x 24.5 x 30.0	6.3	24... (400)				124
0.13	12.0 x 25.0 x 30.0	6.8	24 ... (350)				134
0.15	12.5 x 25.5 x 30.0	7.6	24 ... (350)				154

Notes

- ⁽¹⁾ Net weight for short lead product only
- Loose in box, all lengths have same SPQ
 - SPQ = Standard Packing Quantity

KP/MKP 375



Vishay BCcomponents AC and Pulse Metallized Polypropylene Film Capacitors KP/MKP Radial Lacquered Type

$U_{RDC} = 1000 \text{ V}$; $U_{RAC} = 400 \text{ V}$; $U_{pp} = 1100 \text{ V}$ (lock lead); C-tol = $\pm 5 \%$

C	DIMENSIONS w x h (h') x l (mm)	MASS (g) ⁽¹⁾	CATALOG NUMBER BFC2 375 XYYYY AND PACKAGING												
			LOOSE IN BOX												
			l _t = 4.0 mm + 1.0 mm/- 0.5 mm												
				(SPQ)											
C (pF)	Pitch = 10.0 mm ± 1.0 mm; d _t = 0.60 mm ± 0.06 mm														
100 110 120 130	5.0 x 16.0 x 14.5	0.5	90373 90374 90375 90376	(2000)											
150 160 180 200 220 240 270 300 330 360 390 430 470 510 560 620 680 750 820 910			5.5 x 16.5 x 14.5		0.55 0.55 0.55 0.55 0.60 0.60 0.60 0.60 0.60 0.60 0.65 0.70 0.75 0.75 0.80 0.80 0.80 0.70 0.70 0.70	90377 90378 90379 90281 90382 90383 90384 90385 90386 90387 90388 90389 90391 90392 90393 90394 90395 90396 90397 90398	(2000)								
1000 1100 1200 1300 1500								6.0 x 17.0 x 14.5	0.75 0.85 0.90 0.85 0.90	90399 90401 90402 90403 90404	(1750)				
C (pF)												Pitch = 15.0 mm ± 1.0 mm; d _t = 0.80 mm ± 0.08 mm			
1600 1800 2000 2200 2400	5.5 x 17.5 x 18.5	1.1		90405 90406 90407 90408 90409								(2000)			
2700 3000 3300 3600 3900 4300 4700 5100 5600 6200 6800				6.0 x 18.0 x 18.5									1.2	90411 90412 90413 90414 90415 90416 90417 90418 90419 90421 90422	(2000)

Notes

⁽¹⁾ Net weight for short lead product only

- SPQ = Standard Packing Quantity



AC and Pulse Metallized Polypropylene Film Capacitors Vishay BCcomponents
KP/MKP Radial Lacquered Type

C	DIMENSIONS w x h (h') x l (mm)	MASS (g) ⁽¹⁾	CATALOG NUMBER BFC2 375 XYYYY AND PACKAGING	
			LOOSE IN BOX	
			l _t = 4.0 mm + 1.0 mm/- 0.5 mm	
				(SPQ)
C (pF)	Pitch = 15.0 mm ± 1.0 mm; d _t = 0.80 mm ± 0.08 mm			
7500 8200 9100	7.0 x 19.0 x 18.5	1.5	90232 90423 90424	(1500)
10 000	7.5 x 19.5 x 18.5	1.6	90425	(1400)
11 000 12 000	8.0 x 20.0 x 18.5	1.8	90426 90427	(1250)
13000	8.5 x 20.5 x 18.5	1.9	90428	(1200)
15000	9.0 x 21.0 x 18.5	2.1	90429	(1100)
C (μF)	Pitch = 22.5 mm ± 1.0 mm; d _t = 0.80 mm ± 0.08 mm			
0.016 0.018	6.0 x 22.0 x 26.0	2.2	90431 90432	(750)
0.02 0.022	6.5 x 22.5 x 26.0	2.5	90433 90434	(700)
0.024	7.0 x 23.0 x 26.0	2.7	90435	(600)
0.027 0.03	7.5 x 23.5 x 26.0	3.1	90436 90437	(550)
0.033	8.0 x 24.0 x 26.0	3.4	90438	(500)
0.036 0.039	8.5 x 24.5 x 26.0	3.8	90439 90224	(450)
0.043	9.0 x 25.0 x 26.0	4.1	90441	(450)
C (μF)	Pitch = 27.5 mm ± 1.0 mm; d _t = 0.80 mm ± 0.08 mm			
0.047	7.0 x 23.0 x 30.0	3.1	90442	(800)
0.051 0.056	7.5 x 23.5 x 30.0	3.4	90443 90444	(600)
0.062	8.0 x 24.0 x 30.0	3.8	90445	(550)
0.068	8.5 x 24.5 x 30.0	4.0	90446	(550)
0.075	9.0 x 25.0 x 30.0	4.4	90447	(450)
0.082	9.5 x 25.5 x 30.0	4.7	90448	(450)
0.091	10.0 x 26.0 x 30.0	5.1	90449	(400)
0.1	10.5 x 26.5 x 30.0	5.5	90451	(350)
0.11	11.0 x 27.0 x 30.0	5.9	90452	(350)
0.12	11.5 x 27.5 x 30.0	6.3	90453	(350)
0.13	12.0 x 28.0x 30.0	6.8	90454	(350)
0.15	12.0 x 28.5x 30.0	7.6	90455	(300)

Notes

⁽¹⁾ Net weight for short lead product only

• SPQ = Standard Packing Quantity

SPECIFIC REFERENCE DATA (1600 V_{DC})

DESCRIPTION	VALUE	
Tangent of loss angle at ($\times 10^{-4}$): Pitch = 10 mm, 15 mm and 7.5 mm (bent back) Pitch = 22.5 mm Pitch = 27.5 mm	10 kHz	100 kHz
	≤ 6	≤ 10
	≤ 6	≤ 15
	≤ 6	≤ 20
Rated voltage pulse slope (dU/dt): Pitch = 10 mm Pitch = 15 mm and 7.5 mm (bent back) Pitch = 22.5 mm Pitch = 27.5 mm	21 000 V/ μ s 7000 V/ μ s 4700 V/ μ s	
R between leads at 500 V, 1 min	> 100 000 M Ω	
R between interconnected leads and case, 500 V, 1 min	> 100 000 M Ω	
Ionisation (AC) voltage (typical value) at 50 pC peak discharge at 10 pC peak discharge	> 550 V	
Withstanding (DC) voltage (cut off current 10 mA), rise time 1000 V/s For C $\leq$ 47 nF For C > 47 nF	2560 V, 1 min	
Withstanding (DC) voltage between leads and case	2840 V, 1 min	
Maximum application temperature	105 °C	

U_{RDC} = 1600 V; U_{RAC} = 500 V; U_{pp} = 1400 V (kinked); C-tol. = $\pm$ 5 %

C	DIMENSIONS w x h (h') x l (mm)	MASS (g) ⁽¹⁾	CATALOG NUMBER BFC2 375 XXYYY AND PACKAGING					
			LOOSE IN BOX	REEL			C VALUE	
				Leads 5 mm ± 1.0 mm	Original pitch	Pitch = 7.5 mm (bent back)		..YYY
					Ø 500 mm	Ø 500 mm	Ø 356 mm	
			XX (SPQ)	XX (SPQ)	XX (SPQ)	XX (SPQ)		
C (pF)	Pitch = 15.0 mm ± 0.4 mm; d _t = 0.80 mm ± 0.08 mm		Pitch = 15.0 mm	Pitch = 7.5 mm (bent back)				
680	5.5 x 14.5 (15.0) x 18.5	0.75	34... (2000)	32... (1100)	36... (900)	38... (500)	681	
750							751	
820							821	
910	6.0 x 15.0 (15.5) x 18.5	0.8	34...(2000)	32... (1000)	36... (800)	38... (450)	911	
1000		0.85					102	
1100		0.85					112	
1200		0.90					122	
1300		0.95					132	
1500	5.5 x 14.5 (16.0) x 18.5	1.1	34... (2000)	32... (1100)	36... (900)	38... (500)	152	
1600							162	
1800	6.0 x 15.0 (16.5) x 18.5	1.2	34... (2000)	32... (1000)	36... (800)	38... (450)	182	
2000	6.5 x 15.5 (17.0) x 18.5	1.3	34... (1500)	32... (900)	36... (750)	38... (400)	202	
2200							222	
2400	7.0 x 16.0 (17.5) x 18.5	1.4	34... (1500)	32... (800)	36... (700)	38... (400)	242	
2700	7.5 x 16.5 (18.0) x 18.5	1.6	34... (1250)	32... (800)	36... (650)	38... (350)	272	
3000							302	
3300	8.0 x 17.0 (18.5) x 18.5	1.7	34... (1250)	32... (750)	36... (600)	38... (350)	332	
3600	8.5 x 17.5 (19.0) x 18.5	1.8	34... (1000)	32... (700)	36... (550)	38... (300)	362	
3900	9.0 x 18.5 (19.5) x 18.5	2.0	34... (1000)	32... (650)	36... (550)	38... (300)	392	
4300							432	

Notes

- ⁽¹⁾ Net weight for short lead product only
- Loose in box, all lengths have same SPQ
 - SPQ = Standard Packing Quantity



AC and Pulse Metallized Polypropylene Film Capacitors Vishay BCcomponents
KP/MKP Radial Lacquered Type

C	DIMENSIONS w x h (h') x l (mm)	MASS (g) ⁽¹⁾	CATALOG NUMBER BFC2 375 XXYYY AND PACKAGING							
			LOOSE IN BOX	REEL			C VALUE			
				Leads 5 mm ± 1.0 mm	Original pitch	Pitch = 7.5 mm (bent back)		..YYY		
					Ø 500 mm	Ø 500 mm	Ø 356 mm			
			XX (SPQ)	XX (SPQ)	XX (SPQ)	XX (SPQ)				
C (µF)	Pitch = 22.5 mm ± 0.4 mm; d _t = 0.80 mm ± 0.08 mm		Pitch = 22.5 mm	Pitch = 7.5 mm (bent back)						
0.0047	6.0 x 19.0 x 26.0	2.0	34... (800)	-	-	-	472			
0.0051							512			
0.0056							562			
0.0062	6.5 x 19.5 x 26.0	2.1	34... (750)				622			
0.0068							682			
0.0075	7.0 x 20.0 x 26.0	2.3	34... (650)				752			
0.0082							822			
0.0091	7.5 x 20.5 x 26.0	2.5	34... (600)				912			
0.01	8.0 x 21.0 x 26.0	2.6	34... (550)				103			
0.011	8.5 x 21.5 x 26.0	2.9	34... (500)				113			
0.012							123			
0.013	9.0 x 22.0 x 26.0	3.1	34... (450)				133			
0.015	9.5 x 22.5 x 26.0	3.5	34... (400)				153			
0.016	10.0 x 23.0 x 26.0	3.6	34... (400)				163			
0.018	10.5 x 23.5 x 26.0	4.0	34... (350)				183			
C (µF)	Pitch = 27.5 mm ± 0.5 mm; d _t = 0.80 mm ± 0.08 mm		Pitch = 27.5 mm	Pitch = 7.5 mm (bent back)						
0.02	9.0 x 22.0 x 30.0	4.2	34... (550)	-	-	-	203			
0.022	9.5 x 22.5 x 30.0	4.4	34... (500)				223			
0.024	10.0 x 23.0 x 30.0	4.7	34... (500)				243			
0.027	10.5 x 23.5 x 30.0	5.2	34... (450)				273			
0.03	11.0 x 24.0 x 30.0	5.6	34... (400)				303			
0.033	11.5 x 24.5 x 30.0	6.0	34... (400)				333			
0.036	12.0 x 25.0 x 30.0	6.5	34... (350)				363			
0.039	12.5 x 25.5 x 30.0	6.9	34... (350)				393			

Notes

- (1) Net weight for short lead product only
- Loose in box, all lengths have same SPQ
 - SPQ = Standard Packing Quantity

KP/MKP 375



Vishay BCcomponents AC and Pulse Metallized Polypropylene Film Capacitors KP/MKP Radial Lacquered Type

$U_{RDC} = 1600 \text{ V}$; $U_{RAC} = 500 \text{ V}$; $U_{pp} = 1400 \text{ V}$ (lock lead); C-tol. = $\pm 5 \%$

C	DIMENSIONS w x h (h') x l (mm)	MASS (g) ⁽¹⁾	CATALOG NUMBER BFC2 375 XXYYY AND PACKAGING	
			LOOSE IN BOX	
			l _t = 4.0 mm + 1.0 mm/- 0.5 mm	
				(SPQ)
C (pF)	Pitch = 15.0 mm ± 1.0 mm; d _t = 0.80 mm ± 0.08 mm			
680 750 820	5.5 x 17.5 x 18.5	0.75	90456 90457 90458	(2000)
910 1000 1100 1200 1300	6.0 x 18.0 x 18.5	0.80 0.85 0.85 0.90 0.95	90459 90461 90462 90463 90464	(2000)
1500 1600	5.5 x 17.5 x 18.5	1.1	90465 90466	(2000)
1800	6.0 x 18.0 x 18.5	1.2	90467	(2000)
2000 2200	6.5 x 18.5 x 18.5	1.3	90468 90469	(1750)
2400	7.0 x 19.0 x 18.5	1.4	90471	(1500)
2700 3000	7.5 x 19.5 x 18.5	1.6	90472 90473	(1400)
3300	8.0 x 20.0 x 18.5	1.9	90141	(1250)
3600	8.5 x 20.5 x 18.5	2.3	90142	(1200)
3900 4300	9.0 x 21.5 x 18.5	2.5	90143 90144	(1100)
C (μF)	Pitch = 22.5 mm ± 1.0 mm; d _t = 0.80 mm ± 0.08 mm			
0.0047 0.0051 0.0056	6.0 x 22.0 x 26.0	2.4	90145 90146 90147	(750)
0.0062 0.0068	6.5 x 22.5 x 26.0	2.6	90148 90149	(700)
0.0075 0.0082 0.0083	7.0 x 23.0 x 26.0	2.8	90151 90152 90202	(600)
0.0091	7.5 x 23.5 x 26.0	2.9	90153	(550)
0.01	8.0 x 24.0 x 26.0	3.2	90154	(500)
0.011 0.012	8.5 x 24.5 x 26.0	3.4	90155 90156	(450)
0.013	9.0 x 25.0 x 26.0	3.6	90157	(450)
0.015	9.5 x 25.5 x 26.0	4.0	90158	(400)
0.016	10.0 x 26.0 x 26.0	4.3	90159	(350)
0.018	10.5 x 26.5 x 26.0	4.7	90161	(350)
C (μF)	Pitch = 27.5 mm ± 1.0 mm; d _t = 0.80 mm ± 0.08 mm			
0.02	9.0 x 25.0 x 30.0	4.2	90474	(450)
0.022	9.5 x 25.5 x 30.0	4.4	90475	(450)
0.024	10.0 x 26.0 x 30.0	4.7	90476	(400)
0.027	10.5 x 26.5 x 30.0	5.2	90477	(350)
0.03	11.0 x 27.0 x 30.0	5.6	90478	(350)
0.033	11.5 x 27.5 x 30.0	6.0	90479	(350)
0.036	12.0 x 28.0 x 30.0	6.5	90481	(300)
0.039	12.5 x 28.5 x 30.0	6.9	90482	(300)

Notes

- ⁽¹⁾ Net weight for short lead product only
- SPQ = Standard Packing Quantity



AC and Pulse Metallized Polypropylene Film Capacitors Vishay BCcomponents

KP/MKP Radial Lacquered Type

SPECIFIC REFERENCE DATA (2000 V_{DC})

DESCRIPTION	VALUE	
Tangent of loss angle at ($\times 10^{-4}$): Pitch = 10 mm, 15 mm and 7.5 mm (bent back) Pitch = 22.5 mm Pitch = 27.5 mm	10 kHz	100 kHz
	≤ 6	≤ 10
	≤ 6	≤ 10
	≤ 6	≤ 15
Rated voltage pulse slope (dU/dt): Pitch = 10 mm Pitch = 15 mm and 7.5 mm (bent back) Pitch = 22.5 mm Pitch = 27.5 mm	30 000 V/ μ s	
	10 000 V/ μ s	
	6700 V/ μ s	
R between leads at 500 V, 1 min	> 100 000 M Ω	
R between interconnected leads and case, 500 V, 1 min	> 100 000 M Ω	
Ionisation (AC) voltage (typical value) at 50 pC peak discharge at 20 pC peak discharge	> 600 V	
Withstanding (DC) voltage (cut off current 10 mA), rise time 1000 V/s For C $\leq$ 47 nF For C > 47 nF	3200 V, 1 min	
Withstanding (DC) voltage between leads and case	2840 V, 1 min	
Maximum application temperature	105 °C	

U_{RDC} = 2000 V; U_{RAC} = 600 V; U_{pp} = 1700 (kinked); C-tol. = $\pm 5\%$

C	DIMENSIONS w x h (h') x l (mm)	MASS (g) ⁽¹⁾	CATALOG NUMBER BFC2 375 XXYYY AND PACKAGING					
			LOOSE IN BOX	REEL			C VALUE	
				Leads 5 mm ± 1.0 mm	Original pitch	Pitch = 7.5 mm (bent back)		
					Ø 500 mm	Ø 500 mm		Ø 356 mm
			XX (SPQ)	XX (SPQ)	XX (SPQ)	XX (SPQ)	..YYY	
C (pF)	Pitch = 15.0 mm ± 0.4 mm; d _t = 0.80 mm ± 0.08 mm		Pitch = 15.0 mm	Pitch = 7.5 mm (bent back)				
100	5.5 x 14.5 (15.0) x 18.5	0.75	44... (2000)	42... (1100)	46... (900)	48... (500)	101	
110		0.75					111	
120		0.75					121	
130		0.75					131	
150		0.75					151	
160		0.75					161	
180		0.75					181	
200		0.75					201	
220		0.75					221	
240		0.75					241	
270		0.75					271	
300		0.75					301	
330		0.75					331	
360		0.75					361	
390		0.75					391	
430		0.75					431	
470		0.80					471	
510	0.80	511						
560	0.80	561						

Notes

- ⁽¹⁾ Net weight for short lead product only
• SPQ = Standard Packing Quantity

Vishay BCcomponents AC and Pulse Metallized Polypropylene Film Capacitors
KP/MKP Radial Lacquered Type

C	DIMENSIONS w x h (h') x l (mm)	MASS (g) ⁽¹⁾	CATALOG NUMBER BFC2 375 XXYYY AND PACKAGING					
			LOOSE IN BOX	REEL			C VALUE	
				Leads 5 mm ± 1.0 mm	Original pitch	Pitch = 7.5 mm (bent back)		
					Ø 500 mm	Ø 500 mm		Ø 356 mm
			XX (SPQ)	XX (SPQ)	XX (SPQ)	XX (SPQ)	..YYY	
C (pF)	Pitch = 15.0 mm ± 0.4 mm; d _t = 0.80 mm ± 0.08 mm		Pitch = 15.0 mm	Pitch = 7.5 mm (bent back)				
620	6.0 x 15.0 (15.5) x 18.5	0.85	44... (2000)	42... (1000)	46... (800)	48... (450)	621	
680		0.85					681	
750		0.90					751	
820	6.5 x 15.5 (16.0) x 18.5	0.95	44... (1500)	42... (900)	46... (750)	48... (400)	821	
910	5.5 x 14.5 (16.0) x 18.5	1.1	44... (2000)	42... (420)	46... (900)	48... (500)	911	
1000	6.0 x 15.0 (16.5) x 18.5	1.2	44... (2000)	42... (1000)	46... (800)	48... (450)	102	
1100							112	
1200							122	
1300	6.5 x 15.5 (17.0) x 18.5	1.3	44... (1500)	42... (900)	46... (750)	48... (400)	132	
1500	7.0 x 16.0 (17.5) x 18.5	1.4	44... (1500)	42... (800)	46... (700)	48... (400)	152	
1600	7.5 x 16.5 (18.0) x 18.5	1.5	44... (1250)	42... (800)	46... (650)	48... (350)	162	
1800							182	
2000	8.0 x 17.0 (18.5) x 18.5	1.6	44... (1250)	42... (750)	46... (600)	48... (350)	202	
2200	8.5 x 17.5 (19.0) x 18.5	1.7	44... (1000)	42... (700)	46... (550)	48... (300)	222	
2400	9.0 x 18.0 (19.5) x 18.5	1.8	44... (1000)	42... (650)	46... (550)	48... (300)	242	
2700	9.5 x 18.5 (20.0) x 18.5	2.0	44... (900)	42... (600)	46... (500)	48... (300)	272	
C (µF)	Pitch = 22.5 mm ± 0.4 mm; d _t = 0.80 mm ± 0.08 mm		Pitch = 22.5 mm	Pitch = 7.5 mm (bent back)				
0.003	6.0 x 19.0 x 26.0	2.1	44... (800)	-	-	-	302	
0.0033							332	
0.0036							362	
0.0039							392	
0.0043	6.5 x 19.5 x 26.0	2.3	44... (750)				432	
0.0047							472	
0.0051	7.0 x 20.0 x 26.0	2.6	44... (650)				512	
0.0056							562	
0.0062	7.5 x 20.5 x 26.0	2.8	44... (600)				622	
0.0068	8.0 x 21.0 x 26.0	3.0	44... (550)				682	
0.0075							752	
0.0082	8.5 x 21.5 x 26.0	3.3	44... (500)				822	
0.0091	9.0 x 22.0 x 26.0	3.6	44... (450)	912				
0.01	9.5 x 22.5 x 26.0	3.8	44... (400)	103				

Notes

- ⁽¹⁾ Net weight for short lead product only
• SPQ = Standard Packing Quantity



AC and Pulse Metallized Polypropylene Film Capacitors Vishay BCcomponents
KP/MKP Radial Lacquered Type

C	DIMENSIONS w x h (h') x l (mm)	MASS (g) ⁽¹⁾	CATALOG NUMBER BFC2 375 XYYYY AND PACKAGING						
			LOOSE IN BOX	REEL			C VALUE		
				Leads 5 mm ± 1.0 mm	Original pitch	Pitch = 7.5 mm (bent back)		..YYY	
					Ø 500 mm	Ø 500 mm			Ø 356 mm
					XX (SPQ)	XX (SPQ)			XX (SPQ)
C (µF)	Pitch = 27.5 mm ± 0.5 mm; d _t = 0.80 mm ± 0.08 mm	Pitch = 27.5 mm	Pitch = 7.5 mm (bent back)						
0.011	9.0 x 22.0 x 30.0	3.8	44... (550)	-	-	-	113		
0.012	9.5 x 22.5 x 30.0	4.1	44... (500)				123		
0.013	10.0 x 23.0 x 30.0	4.4	44... (500)				133		
0.015	10.5 x 23.5 x 30.0	4.9	44... (450)				153		
0.016	11.0 x 24.0 x 30.0	5.1	44... (400)				163		
0.018	11.5 x 24.5 x 30.0	5.6	44... (400)				183		
0.02	12.5 x 25.5 x 30.0	6.1	44... (350)				203		
0.022	13.0 x 26.0 x 30.0	6.5	44... (300)				223		

Notes

- ⁽¹⁾ Net weight for short lead product only
 • Loose in box, all lengths have same SPQ
 • SPQ = Standard Packing Quantity

U_{RDC} = 2000 V; U_{RAC} = 600 V; U_{pp} = 1700 V (lock lead)

C	DIMENSIONS w x h (h') x l (mm)	MASS (g) ⁽¹⁾	CATALOG NUMBER BFC2 375 XYYYY AND PACKAGING	
			LOOSE IN BOX	
			l _t = 4.0 mm + 1.0 mm/- 0.5 mm	
			(SPQ)	
C (pF)	Pitch = 15.0 mm ± 1.0 mm; d _t = 0.80 mm ± 0.08 mm			
100	5.5 x 17.5 x 18.5	0.75	90483	(2000)
110		0.75	90484	
120		0.75	90485	
130		0.75	90486	
150		0.75	90487	
160		0.75	90488	
180		0.75	90489	
200		0.75	90491	
220		0.75	90276	
240		0.75	90492	
270		0.75	90493	
300		0.75	90494	
330		0.75	90495	
360		0.75	90496	
390		0.75	90188	
430		0.75	90497	
470		0.80	90498	
510		0.80	90499	
560		0.80	90501	

Note

- SPQ = Standard Packing Quantity

Vishay BCcomponents AC and Pulse Metallized Polypropylene Film Capacitors KP/MKP Radial Lacquered Type

C	DIMENSIONS w x h (h') x l (mm)	MASS (g) ⁽¹⁾	CATALOG NUMBER BFC2 375 XYYYY AND PACKAGING	
			LOOSE IN BOX	
			l _t = 4.0 mm + 1.0 mm/- 0.5 mm	
				(SPQ)
C (pF)	Pitch = 15.0 mm ± 1.0 mm; d _t = 0.80 mm ± 0.08 mm			
620	6.0 x 18.0 x 18.5	0.85	90502	(2000)
680		0.85	90229	
750		0.90	90503	
820	6.5 x 18.5 x 18.5	0.95	90504	(1750)
910	5.5 x 17.5 x 18.5	1.1	90505	(2000)
1000	6.0 x 18.0 x 18.5	1.3	90225	(2000)
1100			90506	
1200			90226	
1300	6.5 x 18.5 x 18.5	1.3	90507	(1750)
1500	7.0 x 19.0 x 18.5	1.5	90266	(1500)
1600	7.5 x 19.5 x 18.5	1.7	90508	(1400)
1800			90237	
2000	8.0 x 20.0 x 18.5	1.7	90509	(1250)
2200	8.5 x 20.5 x 18.5	2.3	90227	(1200)
2400	9.0 x 21.0 x 18.5	1.8	90511	(1100)
2700	9.5 x 21.5 x 18.5	2.7	90228	(1000)
C (μF)	Pitch = 22.5 mm ± 1.0 mm; d _t = 0.80 mm ± 0.08 mm			
0.003	6.0 x 22.0 x 26.0	2.2	90512	(750)
0.0033			90162	
0.0036			90163	
0.0039			90164	
0.0043	6.5 x 22.5 x 26.0	2.4	90165	(700)
0.0047			90166	
0.0051	7.0 x 23.0 x 26.0	2.6	90167	(600)
0.0056			90168	
0.0062	7.5 x 23.5 x 26.0	2.8	90169	(550)
0.0068	8.0 x 24.0 x 26.0	3.0	90171	(500)
0.0075			90172	
0.0082	8.5 x 24.5 x 26.0	3.2	90173	(450)
0.0091	9.0 x 25.0 x 26.0	3.5	90174	(450)
0.01	9.5 x 25.5 x 26.0	3.8	90175	(400)
C (μF)	Pitch = 27.5 mm ± 1.0 mm; d _t = 0.80 mm ± 0.08 mm			
0.011	9.0 x 25.0 x 30.0	4.4	90176	(450)
0.012	9.5 x 25.5 x 30.0	4.6	90177	(450)
0.013	10.0 x 26.0 x 30.0	5.0	90178	(400)
0.015	10.5 x 26.5 x 30.0	5.4	90179	(350)
0.016	11.0 x 27.0 x 30.0	5.8	90181	(350)
0.018	11.5 x 27.5 x 30.0	6.2	90182	(350)
0.02	12.5 x 28.5 x 30.0	6.1	90513	(300)
0.022	13.0 x 29.0 x 30.0	6.5	90514	(250)

Notes

- ⁽¹⁾ Net weight for short lead product only
• SPQ = Standard Packing Quantity



MOUNTING

Normal Use

The capacitors are designed for mounting on printed-circuit boards. The capacitors packed in bandoliers are designed for mounting in printed-circuit boards by means of automatic insertion machines.

For detailed tape specifications refer to "Packaging information" www.vishay.com/doc?28139 or end of catalog

Specific Method of Mounting to Withstand Vibration and Shock

- For pitches ≤ 15 mm capacitors shall be mechanically fixed by the leads
- For larger pitches the capacitors shall be mounted in the same way and the body clamped

Storage Temperature

- Storage temperature: $T_{stg} = -25\text{ }^{\circ}\text{C}$ to $+40\text{ }^{\circ}\text{C}$ with RH maximum 80 % without condensation


Ratings and Characteristics Reference Conditions

Unless otherwise specified, all electrical values apply to an ambient temperature of $23\text{ }^{\circ}\text{C} \pm 1\text{ }^{\circ}\text{C}$, an atmospheric pressure of 86 kPa to 106 kPa and a relative humidity of $50\text{ \%} \pm 2\text{ \%}$.


For reference testing, a conditioning period shall be applied over $96\text{ h} \pm 4\text{ h}$ by heating the products in a circulating air oven at the rated temperature and a relative humidity not exceeding 20 %.

CHARACTERISTICS


Capacitance as a function of ambient temperature
(typical curve)

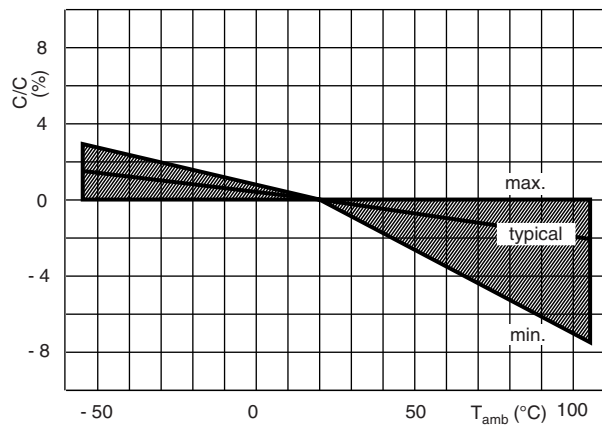


Impedance as a function of frequency
(typical curve)

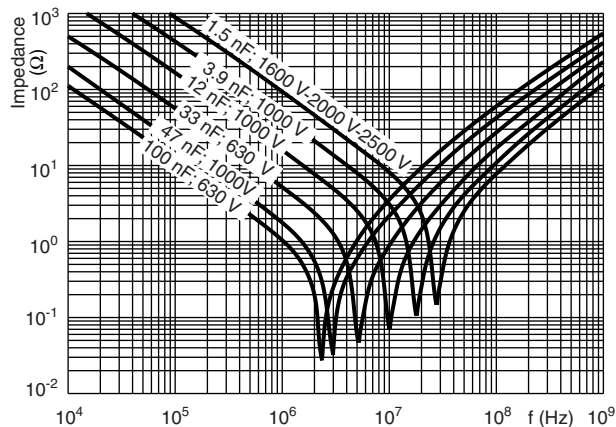

Max. DC voltage as a function of temperature

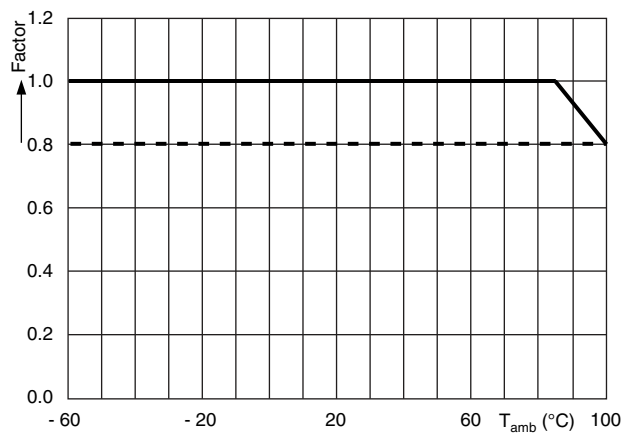


Max. allowed component temperature rise
as a function of ambient temperature

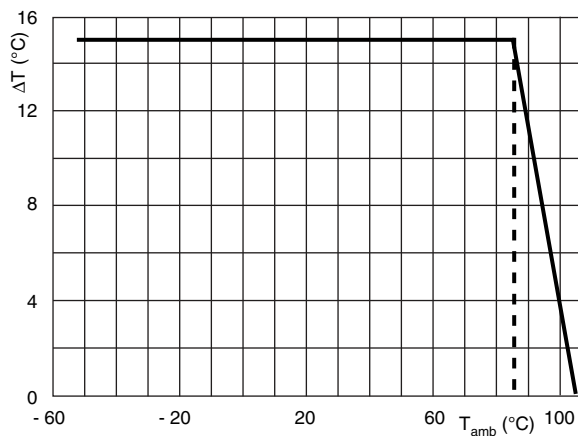


AC and Pulse Metallized Polypropylene Film Capacitors Vishay BCcomponents
KP/MKP Radial Lacquered Type


Max. RMS voltage (sinewave) as a function of frequency

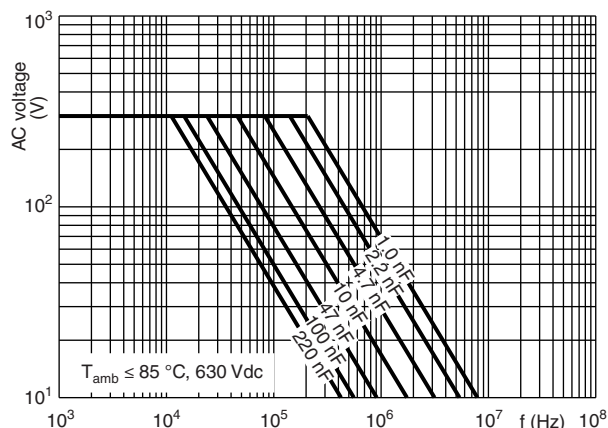


Max. RMS voltage (sinewave) as a function of frequency

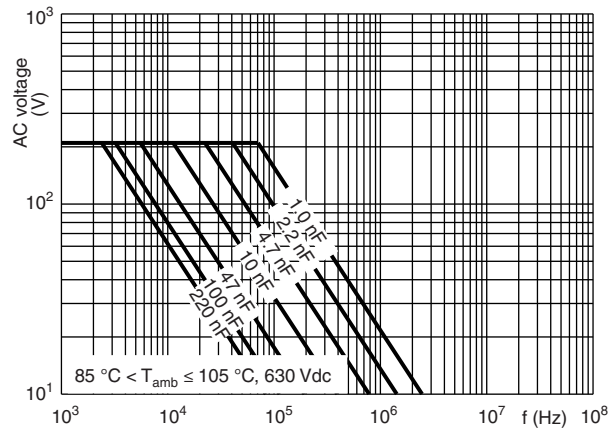


Max. RMS voltage (sinewave) as a function of frequency

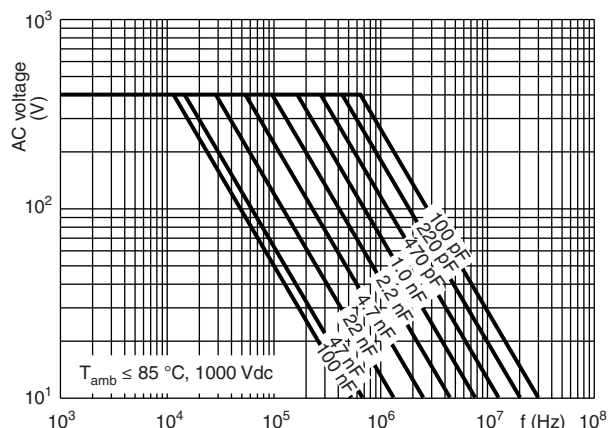


Max. RMS voltage (sinewave) as a function of frequency

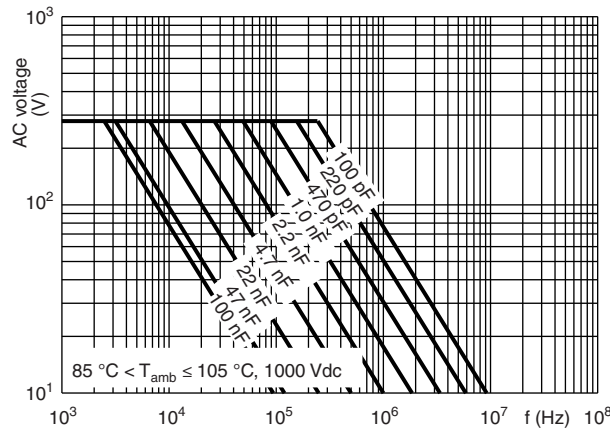


Max. RMS voltage (sinewave) as a function of frequency

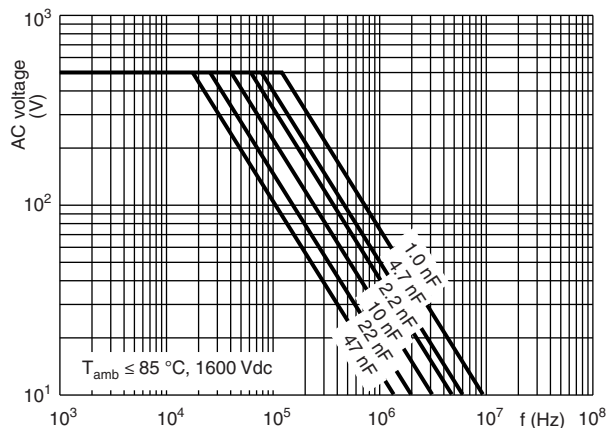


Max. RMS voltage (sinewave) as a function of frequency

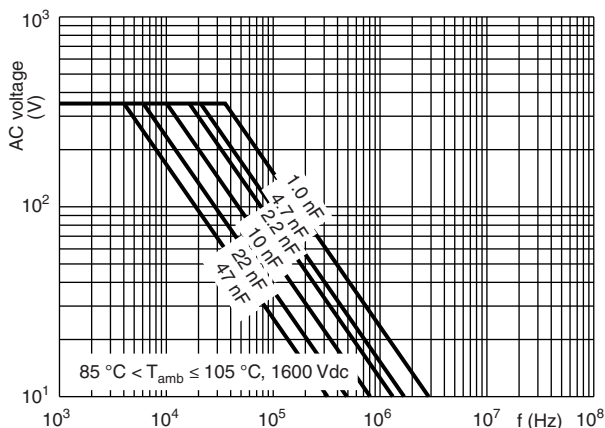


Max. RMS voltage (sinewave) as a function of frequency

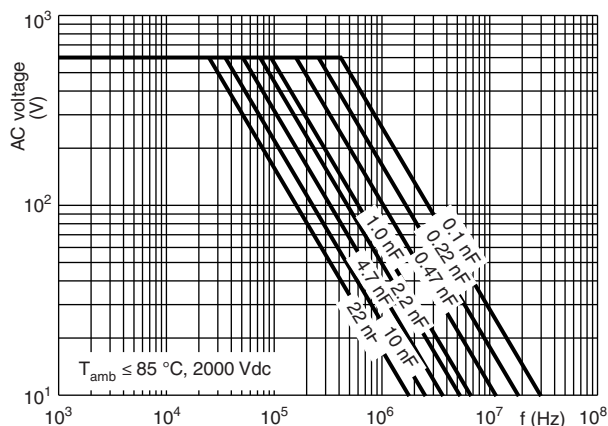

Max. RMS voltage (sinewave) as a function of frequency

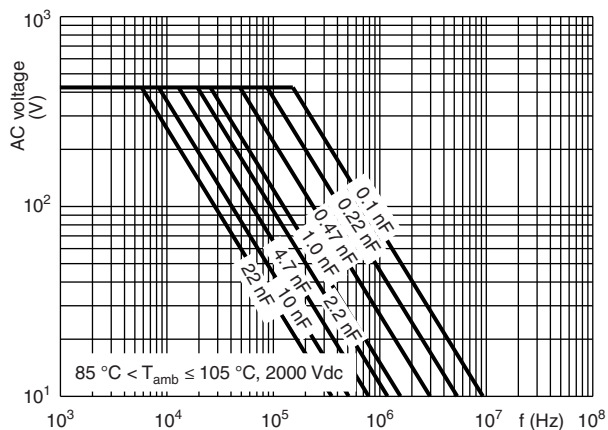


Tangent of loss angle (typical curve)

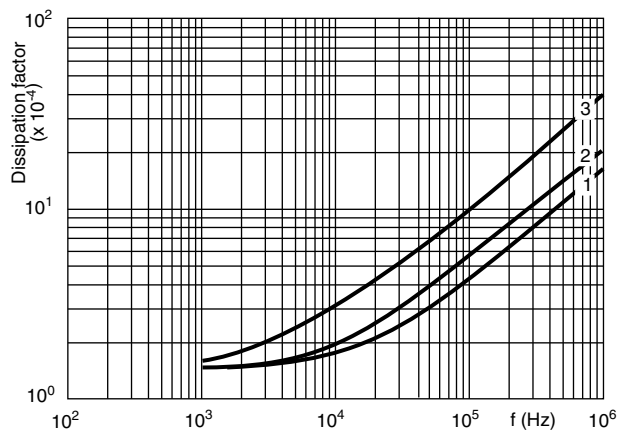


1. KP/MPK 10.0 mm and 15 mm pitch all versions
22.5 mm pitch, 1000 V, 1600 V, 2000 V and 2500 V versions
2. KP/MPK 22.5 mm pitch, 630 V versions
27.5 mm pitch, 1000 V, 1600 V and 2000 V versions
3. KP/MPK 27.5 mm pitch, 630 V versions

Maximum curves

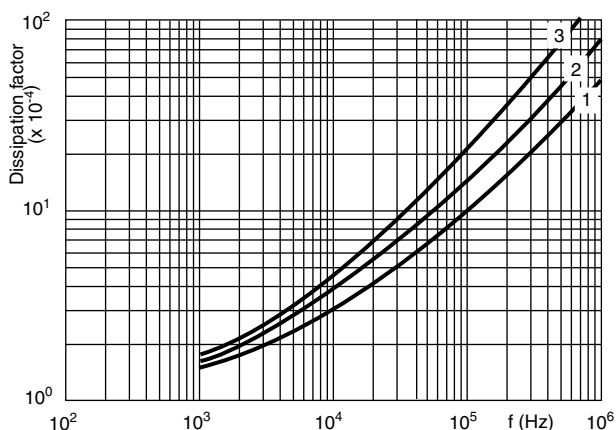

1. KP/MPK 10.0 mm and 15 mm pitch all versions
22.5 mm pitch, 1000 V, 1600 V, 2000 V and 2500 V versions
2. KP/MPK 22.5 mm pitch, 630 V versions
27.5 mm pitch, 1000 V, 1600 V and 2000 V versions
3. KP/MPK 27.5 mm pitch, 630 V versions

Insulation resistance as a function of ambient temperature

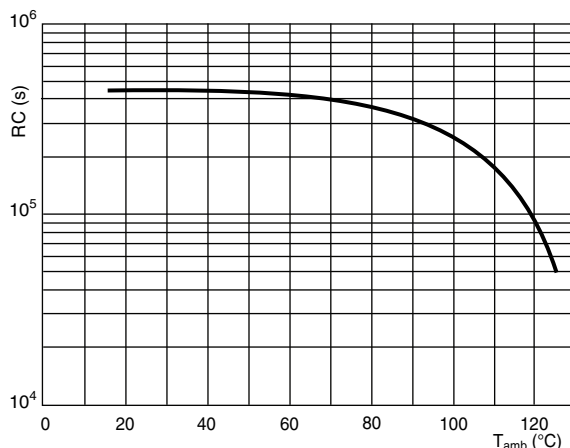

**HEAT CONDUCTIVITY (G) AS A FUNCTION OF (ORIGINAL) PITCH AND CAPACITOR BODY THICKNESS IN mW/°C**

W _{max.} (mm)	HEAT CONDUCTIVITY (mW/°C)			
	PITCH 10 mm	PITCH 15 mm	PITCH 22.5 mm	PITCH 27.5 mm
4.0	4.0	5.0	-	-
4.5	4.5	6.0	-	-
5.0	5.0	6.0	12.0	13.0
5.5	6.0	6.5	13.0	15.0
6.0	6.0	6.5	13.0	15.0
6.5	6.5	8.0	15.0	17.0
7.0	-	8.0	15.0	17.0
7.5	-	9.0	17.0	18.0
8.0	-	9.0	17.0	20.0
8.5	-	11.0	18.0	20.0
9.0	-	11.0	18.0	22.0
9.5	-	12.0	20.0	22.0
10.0	-	12.0	20.0	23.0
10.5	-	-	22.0	25.0
11.0	-	-	22.0	25.0
11.5	-	-	23.0	27.0
12.0	-	-	-	27.0
12.5	-	-	-	30.0
13.0	-	-	-	30.0
13.5	-	-	-	30.0
14.0	-	-	-	30.0
14.5	-	-	-	33.0
15.0	-	-	-	33.0
15.5	-	-	-	37.0
16.0	-	-	-	37.0

POWER DISSIPATION AND MAXIMUM COMPONENT TEMPERATURE RISE

The power dissipation must be limited in order not to exceed the maximum allowed component temperature rise as a function of the free ambient temperature.

The power dissipation can be calculated according Type detail specification "HQN-384-01/101: Technical Information Film Capacitors


The component temperature rise (ΔT) can be measured (see section "Measuring the component temperature" for more details) or calculated by

$$\Delta T = P/G:$$

- ΔT = Component temperature rise (°C)
- P = Power dissipation of the component (mW)
- G = Heat conductivity of the component (mW/°C)

MEASURING THE COMPONENT TEMPERATURE

A thermocouple must be attached to the capacitor body as in:

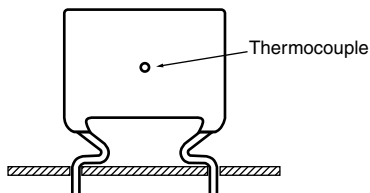

The temperature is measured in unloaded (T_{amb}) and maximum loaded condition (T_C).

The temperature rise is given by $\Delta T = T_C - T_{amb}$.

To avoid radiation or convection, the capacitor should be tested in a wind-free box.

APPLICATION NOTE AND LIMITING CONDITIONS

To select the capacitor for a certain application, the following conditions must be checked:

1. The peak voltage (U_P) shall not be greater than the rated DC voltage (U_{RDC})
2. The peak-to-peak voltage (U_{PP}) shall not be greater than the maximum (U_{P-P}) to avoid the ionisation inception level
3. The voltage pulse slope (dU/dt) shall not exceed the rated voltage pulse slope in an RC-circuit at rated voltage and without ringing. If the pulse voltage is lower than the rated DC voltage, the rated voltage pulse slope may be multiplied by U_{Rdc} and divided by the applied voltage.

For all other pulses following equation must be fulfilled:

$$2 \times \int_0^T \left(\frac{dU}{dt} \right)^2 \times dt < U_{Rdc} \times \left(\frac{dU}{dt} \right)_{rated}$$

T is the pulse duration.

4. The maximum component surface temperature rise must be lower than the limits

EXAMPLE

$C = 10 \text{ nF}$ 1600 V, KP/MPK

This is a signal as in the drawing below


$U_{P-P} = 1200 \text{ V}$; $U_P = 1100 \text{ V}$; $T_1 = 12 \text{ } \mu\text{s}$; $T_2 = 64 \text{ } \mu\text{s}$

The ambient temperature is $50 \text{ } ^\circ\text{C}$

Checking conditions:

1. The peak voltage $U_P = 1100 \text{ V}$ is lower than 1600 V_{DC}
2. The peak-to-peak voltage 1200 V is lower than $2\sqrt{2} \times 550 \text{ Vac} = 1414 \text{ V}$
3. The voltage pulse slope (dU/dt) = 320 V is much lower than $7000 \text{ V}/\mu\text{s}$
4. The dissipated power is 170 mW as calculated with fourier terms

This gives a temperature rise of $170 \text{ mW} / (17 \text{ mW}/^\circ\text{C}) = 10 \text{ } ^\circ\text{C}$ which is allowed acc. fig. "max. allowed temperature rise as a function of ambient temperature" for an ambient temperature of $50 \text{ } ^\circ\text{C}$

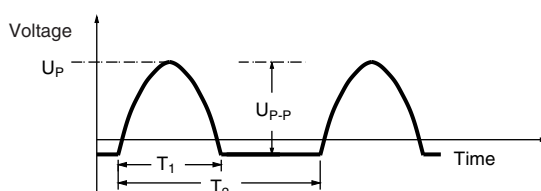

**AC and Pulse Metallized Polypropylene Film Capacitors Vishay BCcomponents
KP/MKP Radial Lacquered Type****INSPECTION REQUIREMENTS****General Notes:**

Sub-clause numbers of tests and performance requirements refer to the “Sectional Specification, Publication IEC 60384-17 and Specific Reference Data”.

Group C Inspection Requirements

SUB-CLAUSE NUMBER AND TEST	CONDITIONS	PERFORMANCE REQUIREMENTS
SUB-GROUP C1A PART OF SAMPLE OF SUB-GROUP C1		
4.1 Dimensions (detail)		As specified in chapters “General Data” of this specification
4.3.1 Initial measurements	Capacitance Tangent of loss angle at 100 kHz	
4.3 Robustness of terminations	Tensile: Load 10 N; 10 s Bending: Load 5 N; 4 x 90°	No visible damage
4.4 Resistance to soldering heat	Method: 1A Solder bath: 280 °C ± 5 °C Duration: 10 s	
4.14 Component solvent resistance	Isopropylalcohol at room temperature Method: 2 Immersion time: 5 min ± 0.5 min Recovery time: Min. 1 h, max. 2 h	
4.4.2 Final measurements	Visual examination Capacitance Tangent of loss angle	No visible damage Legible marking $ \Delta C/C \leq 1 \% + 5 \text{ pF}$ of the value measured initially Increase of $\tan \delta$: ≤ 0.0005 Compared to values measured in 4.3.1
SUB-GROUP C1B PART OF SAMPLE OF SUB-GROUP C1		
4.6.1 Initial measurements	Capacitance Tangent of loss angle at 100 kHz	
4.15 Solvent resistance of the marking	Isopropylalcohol at room temperature Method: 1 Rubbing material: cotton wool Immersion time: 5 min ± 0.5 min	No visible damage Legible marking
4.6 Rapid change of temperature	$\theta A = - 55 \text{ }^{\circ}\text{C}$ $\theta B = + 105 \text{ }^{\circ}\text{C}$ 5 cycles Duration $t = 30 \text{ min}$	
4.7 Vibration	Visual examination Mounting: See section “Mounting” of this specification Procedure B4 Frequency range: 10 Hz to 55 Hz Amplitude: 0.75 mm or Acceleration 98 m/s ² (whichever is less severe) Total duration 6 h	No visible damage

SUB-CLAUSE NUMBER AND TEST	CONDITIONS	PERFORMANCE REQUIREMENTS
4.7.2 Final inspection	Visual examination	No visible damage
4.9 Shock	Mounting: See section "Mounting" of this specification Pulse shape: Half sine Acceleration: 490 m/s ² Duration of pulse: 11 ms	
4.9.3 Final measurements	Visual examination Capacitance Tangent of loss angle Insulation resistance	No visible damage For $C > 0.027\mu\text{F}$: $ \Delta C/C \leq 2\%$ or for $C \leq 0.027\mu\text{F}$: $ \Delta C/C \leq 3\% + 5\text{ pF}$ of the value measured in 4.6.1. Increase of $\tan \delta$: ≤ 0.0005 Compared to values measured in 4.6.1 As specified in chapter "General data" of this specification
SUB-GROUP C1 COMBINED SAMPLE OF SPECIMENS OF SUB-GROUPS C1A AND C1B		
4.10 Climatic sequence		
4.10.2 Dry heat	Temperature: + 105 °C Duration: 16 h	
4.10.3 Damp heat cyclic Test Db, first cycle		
4.10.4 Cold	Temperature: - 55 °C Duration: 2 h	
4.10.6 Damp heat cyclic Test Db, remaining cycles		
4.10.6.2 Final measurements	Voltage proof = U_{RDC} for 1 min within 15 min after removal from testchamber Visual examination Capacitance Tangent of loss angle Insulation resistance	No breakdown of flash-over No visible damage Legible marking $ \Delta C/C \leq 3\%$ of the value measured in 4.4.2 or 4.9.3 Increase of $\tan \delta$: ≤ 0.001 Compared to values measured in 4.3.1 or 4.6.1 $\geq 50\%$ of values specified in chapters "General data" of this specification
SUB-GROUP C2		
4.11 Damp heat steady state	56 days, 40 °C, 90 % to 95 % RH	
4.11.1 Initial measurements	Capacitance Tangent of loss angle at 1 kHz	
4.11.3 Final measurements	Voltage proof = U_{RDC} for 1 min within 15 min after removal from testchamber Visual examination Capacitance Tangent of loss angle Insulation resistance	No breakdown of flash-over No visible damage Legible marking $ \Delta C/C \leq 1\% + 5\text{ pF}$ of the value measured in 4.11.1. Increase of $\tan \delta \leq 0.0005$ Compared to values measured in 4.11.1 $\geq 50\%$ of values specified in section "Insulation Resistance" of this specification



AC and Pulse Metallized Polypropylene Film Capacitors Vishay BCcomponents
KP/MKP Radial Lacquered Type

SUB-CLAUSE NUMBER AND TEST	CONDITIONS	PERFORMANCE REQUIREMENTS
SUB GROUP C3		
4.12.1 Endurance	Duration: 2000 h Temperature: 85 °C Voltage: 1.25 x max. U_{RDC} V_{rms} , 50 Hz Duration: 2000 h Temperature: 105 °C	
4.12.1.1 Initial measurements 4.12.1.3 Final measurements	Voltage: 0.875 x max. U_{RDC} V_{rms} , 50 Hz Capacitance Tangent of loss angle at 100 kHz Visual examination Capacitance Tangent of loss angle Insulation resistance	No visible damage Legible marking Temperature: 85 °C For $C > 0.056 \mu F$: $ \Delta C/C \leq 2 \% + 5 \text{ pF}$ or for $C > 0.056 \mu F$: $ \Delta C/C \leq 3 \% + 5 \text{ pF}$ of the value measured in 4.12.1.1 Temperature: 105 °C $ \Delta C/C \leq 5 \% + 5 \text{ pF}$ Increase of $\tan \delta$: ≤ 0.001 Compared to values measured in 4.12.1 $\geq 50 \%$ of values specified in chapters "General data" of this specification
SUB-GROUP C4		
4.2.6 Temperature characteristics	Capacitance Insulation resistance	As specified in section "Capacitance" of this specification As specified in chapters "General data" of this specification



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

Material Category Policy

Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as RoHS-Compliant fulfill the definitions and restrictions defined under Directive 2011/65/EU of The European Parliament and of the Council of June 8, 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (EEE) - recast, unless otherwise specified as non-compliant.

Please note that some Vishay documentation may still make reference to RoHS Directive 2002/95/EC. We confirm that all the products identified as being compliant to Directive 2002/95/EC conform to Directive 2011/65/EU.

Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as Halogen-Free follow Halogen-Free requirements as per JEDEC JS709A standards. Please note that some Vishay documentation may still make reference to the IEC 61249-2-21 definition. We confirm that all the products identified as being compliant to IEC 61249-2-21 conform to JEDEC JS709A standards.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А