

TCN Series



Conductive Polymer Solid Electrolytic Chip Capacitors Undertab Series



FEATURES

- Conductive polymer electrode
- Benign failure mode under recommended use conditions
- Lower ESR
- Undertab terminations layout:
 - High Volumetric Efficiency
 - High PCB assembly density
 - High capacitance in smaller dimensions
- 3x reflow 260°C compatible
- 8 case sizes available



APPLICATIONS

- Consumer applications (e.g. mobiles, MP3 etc.)


CASE DIMENSIONS: millimeters (inches)

| Code | EIA Code | EIA Metric | L±0.20 (0.008) | W+0.20 (0.008) -0.10 (0.004) | H max. | W _P ±0.10 (0.004) | W _N ±0.10 (0.004) | A _P ±0.10 (0.004) | A _N ±0.10 (0.004) | S Min. |
|------|----------|------------|----------------|------------------------------|--------------|------------------------------|------------------------------|------------------------------|------------------------------|--------------|
| N | 0805 | 2012-10 | 2.05 (0.081) | 1.30 (0.051) | 1.00 (0.039) | 1.00 (0.039) | 1.00 (0.039) | 0.85 (0.033) | 0.85 (0.033) | 0.40 (0.016) |
| K | 1206 | 3216-10 | 3.20 (0.126) | 1.60 (0.063) | 1.00 (0.039) | 1.30 (0.051) | 1.30 (0.051) | 1.15 (0.045) | 1.15 (0.045) | 0.90 (0.035) |
| S | 1206 | 3216-12 | 3.20 (0.126) | 1.60 (0.063) | 1.20 (0.047) | 1.30 (0.051) | 1.30 (0.051) | 1.15 (0.045) | 1.15 (0.045) | 0.90 (0.035) |
| L | 1210 | 3528-10 | 3.50 (0.138) | 2.80 (0.110) | 1.00 (0.039) | 2.50 (0.098) | 2.10 (0.083) | 1.15 (0.045) | 1.35 (0.053) | 1.00 (0.039) |
| T | 1210 | 3528-12 | 3.50 (0.138) | 2.80 (0.110) | 1.20 (0.047) | 2.50 (0.098) | 2.10 (0.083) | 1.15 (0.045) | 1.35 (0.053) | 1.00 (0.039) |
| X | 2917 | 7343-15 | 7.30 (0.287) | 4.30 (0.169) | 1.50 (0.059) | 3.25 (0.128) | 3.25 (0.128) | 2.00 (0.079) | 3.20 (0.126) | 2.10 (0.083) |
| 3 | 2924 | 7361-15 | 7.30 (0.287) | 6.10 (0.240) | 1.50 (0.059) | 4.75 (0.187) | 4.75 (0.187) | 2.00 (0.079) | 3.20 (0.126) | 2.10 (0.083) |
| 4 | 2924 | 7361-20 | 7.30 (0.287) | 6.10 (0.240) | 2.00 (0.079) | 4.75 (0.187) | 4.75 (0.187) | 2.00 (0.079) | 3.20 (0.126) | 2.10 (0.083) |

W₁ dimension applies to the termination width for A dimensional area only.

MARKING


K, L, S, T, X CASE



N CASE



3, 4 CASE



HOW TO ORDER

TCN

Type

L

Case Size
See table above

157

Capacitance Code
pF code: 1st two digits represent significant figures, 3rd digit represents multiplier (number of zeros to follow)

M

Tolerance
M = ±20%

006

Rated DC Voltage
006 = 6.3Vdc
016 = 16Vdc
025 = 25Vdc
035 = 35Vdc

R

Packaging
R = Pure Tin 7" Reel
S = Pure Tin 13" Reel

0200

ESR in mΩ

TECHNICAL SPECIFICATIONS

| | | | | | | | | |
|------------------------------------|---|-----|-----|----|----|----|----|--|
| Technical Data: | All technical data relate to an ambient temperature of +25°C | | | | | | | |
| Capacitance Range: | 1.0 µF to 1500 µF | | | | | | | |
| Capacitance Tolerance: | ±20% | | | | | | | |
| Leakage Current DCL: | 0.1CV | | | | | | | |
| Rated Voltage (V _R) | ≤ +85°C: | 4 | 6.3 | 10 | 16 | 25 | 35 | |
| Category Voltage (V _C) | ≤ +105°C: | 3.2 | 5 | 8 | 13 | 20 | 28 | |
| Surge Voltage (V _S) | ≤ +85°C: | 5.2 | 8 | 13 | 21 | 33 | 46 | |
| Surge Voltage (V _S) | ≤ +105°C: | 4 | 6 | 10 | 16 | 25 | 35 | |
| Temperature Range: | -55°C to +105°C | | | | | | | |
| Reliability: | 1% per 1000 hours at 85°C, V _R with 0.1Ω/V series impedance 60% confidence level | | | | | | | |

NOTE: Conductive Polymer Capacitors are designed to operate within the limits of the environmental conditions specified for each series. If operated continuously at their maximum temperature and / or humidity limit, or beyond these limits, capacitors may exhibit a parametric shift in capacitance and increases in ESR. These changes may occur earlier if the specified environmental conditions are exceeded. Similarly, their normal operational time period will be significantly extended if their general duty cycle includes operation below maximum temperature within humidity controlled environments. Careful attention should be paid to maximum temperature with associated high humidity environments as well as voltage derating, ripple current and current surges. Please reference the AVX Conductive Polymer Capacitor Guidelines for more information or contact factory for application assistance.



CAPACITANCE AND RATED VOLTAGE RANGE (LETTER DENOTES CASE SIZE)

| Capacitance | | Rated Voltage DC to 85°C / 0.66DC to 105°C | | | | | |
|-------------|------|--|--|----------------------------------|-------------------|--------------|---------------|
| µF | Code | 4V (G) | 6.3V (J) | 10V (A) | 16V (C) | 25V (E) | 35V (V) |
| 1.0 | 105 | | | | | | O* |
| 4.7 | 475 | | | | | N(500) | L(300)/T(200) |
| 10 | 106 | | | | | | T(200) |
| 15 | 156 | | | N(500)* | | | |
| 22 | 226 | | | N(500)* | | T(200)/X* | X(100)* |
| 33 | 336 | N(500)* | K(500)*N(500)* | K(500)*N(500)* | L(200)/T(200) | | |
| 47 | 476 | N(500)* | K(500)*M(250)* N(500)* | K(500)*S(500)* | L(250)/T(150,200) | X(100) | X(100) |
| 68 | 686 | K(500)*N(500)* | K(500)*S(500)* | G(150)*L(150)* S(500)* | | | |
| 100 | 107 | K(500)*S(500)* | G(200)* K(200,250) L(200)/S(250) | G(150)*L(150)* S(150)*T(150)* | | 3(70)/4(100) | 4(100) |
| 150 | 157 | G(200)*L(200)* S(500)* | K(200)*L(200) S(250)/T(200) | G(150)*H(150)* T(150)* | X(100) | 4(70) | |
| 220 | 227 | G(200)*L(150)* S(200)*T(150)* | H(100,200)* T(200) | H(150)* | 4(70) | | |
| 330 | 337 | H(150)*T(150)* | H(200)* | | 4(70) | | |
| 470 | 477 | H(150)* | X(50) | | 4(100) | | |
| 1000 | 108 | | X(200)/3(100) 4(55) | | | | |
| 1500 | 158 | | 4(55) | | | | |

Available Ratings, (ESR ratings in mOhms in brackets)

Engineering samples - please contact manufacturer

*Codes under development - subject to change

Note: Voltage ratings are minimum values. AVX reserves the right to supply higher ratings in the same case size, to the same reliability standards.

TCN Series



Conductive Polymer Solid Electrolytic Chip Capacitors Undertab Series

RATINGS & PART NUMBER REFERENCE

| AVX Part No. | Case Size | Cap (µF) | Rated Voltage (V) | Maximum Operating Temperature (°C) | DCL Max. (µA) | DF Max. (%) | ESR Max. @ 100kHz (mΩ) | MSL | 100kHz RMS Current (mA) | | | Product Category |
|------------------------|-----------|----------|-------------------|------------------------------------|---------------|-------------|------------------------|-----|-------------------------|------|-------|------------------|
| | | | | | | | | | 45°C | 85°C | 105°C | |
| 6.3 Volt @ 85°C | | | | | | | | | | | | |
| TCNK107M006#0200 | K | 100 | 6.3 | 105 | 60 | 10 | 200 | 3 | 700 | 500 | 300 | 3 |
| TCNK107M006#0250 | K | 100 | 6.3 | 105 | 60 | 10 | 250 | 3 | 600 | 400 | 300 | 3 |
| TCNL107M006#0200 | L | 100 | 6.3 | 105 | 60 | 10 | 200 | 3 | 700 | 500 | 300 | 3 |
| TCNS107M006#0250 | S | 100 | 6.3 | 85 | 60 | 10 | 250 | 3 | 600 | 400 | – | 5 |
| TCNL157M006#0200 | L | 150 | 6.3 | 105 | 90 | 10 | 200 | 3 | 700 | 500 | 300 | 3 |
| TCNS157M006#0250 | S | 150 | 6.3 | 85 | 90 | 10 | 250 | 3 | 600 | 400 | – | 5 |
| TCNT157M006#0200 | T | 150 | 6.3 | 105 | 90 | 10 | 200 | 3 | 700 | 500 | 300 | 3 |
| TCNT227M006#0200 | T | 220 | 6.3 | 85 | 132 | 10 | 200 | 3 | 700 | 500 | – | 5 |
| TCNX477M006#0050 | X | 470 | 6.3 | 85 | 282 | 10 | 50 | 3 | 1900 | 1300 | – | 5 |
| TCNX108M006#0200 | X | 1000 | 6.3 | 85 | 600 | 30 | 200 | 3 | 900 | 600 | – | 5 |
| TCN3108M006#0100 | 3 | 1000 | 6.3 | 105 | 600 | 20 | 100 | 4 | 1200 | 840 | 480 | 3 |
| TCN4108M006#0055 | 4 | 1000 | 6.3 | 85 | 600 | 20 | 55 | 4 | 1860 | 1302 | – | 5 |
| TCN4158M006#0055 | 4 | 1500 | 6.3 | 85 | 900 | 20 | 55 | 4 | 1860 | 1302 | – | 5 |
| 16 Volt @ 85°C | | | | | | | | | | | | |
| TCNL336M016#0200 | L | 33 | 16 | 85 | 52.8 | 6 | 200 | 3 | 700 | 500 | – | 5 |
| TCNT336M016#0200 | T | 33 | 16 | 85 | 52.8 | 6 | 200 | 3 | 700 | 500 | – | 5 |
| TCNL476M016#0250 | L | 47 | 16 | 85 | 75.2 | 6 | 250 | 3 | 600 | 400 | – | 5 |
| TCNX476M016#0150 | T | 47 | 16 | 85 | 75.2 | 6 | 150 | 3 | 800 | 600 | – | 5 |
| TCNT476M016#0200 | T | 47 | 16 | 85 | 75.2 | 6 | 200 | 3 | 700 | 500 | – | 5 |
| TCNX157M016#0100 | X | 150 | 16 | 85 | 240 | 6 | 100 | 3 | 1300 | 900 | – | 5 |
| TCN4227M016#0070 | 4 | 220 | 16 | 105 | 352 | 20 | 70 | 4 | 1650 | 1155 | 660 | 2 |
| TCN4337M016#0070 | 4 | 330 | 16 | 105 | 528 | 20 | 70 | 4 | 1650 | 1155 | 660 | 3 |
| TCN4477M016#0100 | 4 | 470 | 16 | 85 | 752 | 20 | 100 | 4 | 1380 | 966 | – | 5 |
| 25 Volt @ 85°C | | | | | | | | | | | | |
| TCNN475M025#0500 | N | 4.7 | 25 | 105 | 11.8 | 10 | 500 | 3 | 400 | 300 | 200 | 3 |
| TCNT226M025#0200 | T | 22 | 25 | 105 | 55 | 6 | 200 | 3 | 700 | 500 | 300 | 3 |
| TCNX476M025#0100 | X | 47 | 25 | 105 | 117.5 | 6 | 100 | 3 | 1300 | 900 | 600 | 2 |
| TCN3107M025#0070 | 3 | 100 | 25 | 105 | 250 | 6 | 70 | 4 | 1440 | 1008 | 576 | 2 |
| TCN4107M025#0100 | 4 | 100 | 25 | 105 | 250 | 6 | 100 | 4 | 1380 | 966 | 552 | 2 |
| TCN4157M025#0070 | 4 | 150 | 25 | 105 | 375 | 6 | 70 | 4 | 1650 | 1155 | 660 | 2 |
| 35 Volt @ 85°C | | | | | | | | | | | | |
| TCNL475M035#0300 | L | 4.7 | 35 | 105 | 16.5 | 6 | 300 | 3 | 600 | 400 | 300 | 2 |
| TCNT475M035#0200 | T | 4.7 | 35 | 85 | 16.5 | 10 | 200 | 3 | 700 | 500 | – | 5 |
| TCNT106M035#0200 | T | 10 | 35 | 85 | 35 | 10 | 200 | 3 | 700 | 500 | – | 5 |
| TCNX476M035#0100 | X | 47 | 35 | 105 | 164.5 | 10 | 100 | 3 | 1300 | 900 | 600 | 2 |
| TCN4107M035#0100 | 4 | 100 | 35 | 105 | 350 | 10 | 100 | 4 | 1380 | 966 | 552 | 3 |

Moisture Sensitivity Level (MSL) is defined according to J-STD-020.

All technical data relates to an ambient temperature of +25°C. Capacitance and DF are measured at 120Hz, 0.5RMS with DC bias of 2.2 volts. DCL is measured at rated voltage after 5 minutes.

ESR allowed to move up to 1.25 times catalog limit post mounting.

For typical weight and composition see page 223.

NOTE: AVX reserves the right to supply a higher voltage rating or tighter tolerance part in the same case size, to the same reliability standards.


RECOMMENDED DERATING FACTOR

Voltage and temperature derating as percentage of Vr


Product Category 2



Product Category 3

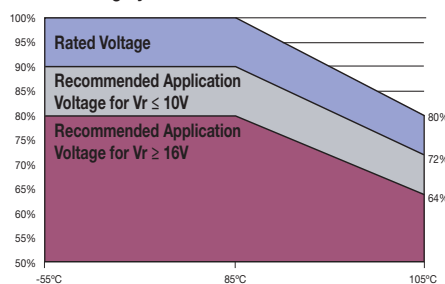

Product Category 5

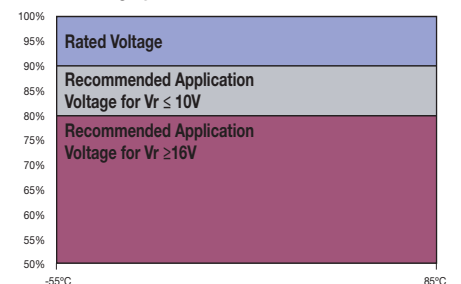

PRODUCT CATEGORY 2, 3 (TEMPERATURE RANGE -55°C TO +105°C)

| TEST | Condition | Characteristics | | | | | | | | |
|------------------------------|---|--|----------------------------------|-------|-------|-----------|-------|-----------|------------|-----|
| Endurance | Determine after application of rated voltage for 2000 +48/-0 hours at 85±2°C and then leaving 1-2 hours at room temperature. Also determine after application of 105°C temperature. For CATEGORY 2: Rated voltage for 2000 +48/-0 hours For CATEGORY 3: 0.8x rated voltage for 2000 +48/-0 hours And then leaving 1-2 hours at room temperature. Power supply impedance to be ≤ 0.1Ω/V. | Visual examination | no visible damage | | | | | | | |
| | | DCL | 1.25 x initial limit | | | | | | | |
| | | ΔC/C | within ±20% of initial value | | | | | | | |
| | | DF | 1.5 x initial limit | | | | | | | |
| | | ESR | 2 x initial limit | | | | | | | |
| Storage Life | 105°C, 0V, 2000h | Visual examination | no visible damage | | | | | | | |
| | | DCL (V _R ≤ 75V) | 1.25 x initial limit | | | | | | | |
| | | DCL (V _R > 75V) | 2 x initial limit | | | | | | | |
| | | ΔC/C | within ±20% of initial value | | | | | | | |
| | | DF | 1.5 x initial limit | | | | | | | |
| | | ESR | 2 x initial limit | | | | | | | |
| Humidity | Determine after storage without applied voltage at 65±2°C and 95±2% relative humidity for 500hrs and then recovery 1-2 hours at room temperature. | Visual examination | no visible damage | | | | | | | |
| | | DCL | 3 x initial limit | | | | | | | |
| | | ΔC/C | within +30/-20% of initial value | | | | | | | |
| | | DF | 1.5 x initial limit | | | | | | | |
| | | ESR | 2 x initial limit | | | | | | | |
| Temperature Stability | Step | Temperature°C | Duration(min) | | | | | | | |
| | 1 | +20±2 | 15 | +20°C | -55°C | +20°C | +85°C | +105°C | +20°C | |
| | 2 | -55+0/-3 | 15 | DCL | IL* | n/a | IL* | 10 x IL* | 12.5 x IL* | IL* |
| | 3 | +20±2 | 15 | ΔC/C | n/a | +0/-20% | ±5% | +20/-0% | +30/-0% | ±5% |
| | 4 | +85+3/-0 | 15 | DF | IL* | 1.5 x IL* | IL* | 1.5 x IL* | 2 x IL* | IL* |
| | 5 | +105+3/-0 | 15 | | | | | | | |
| | 6 | +20±2 | 15 | | | | | | | |
| Surge Voltage | Test temperature: 105°C+3/0°C For CATEGORY 2: Surge voltage: 1.3x rated voltage at 105°C For CATEGORY 3: Surge voltage: 1.3x 0.8x rated voltage at 105°C Charge/Discharge resistance: 1000±100Ω Number of cycles: 1000x Cycle duration: 6 min; 30 sec charge, 5 min 30 sec discharge | Visual examination | no visible damage | | | | | | | |
| | DCL | initial limit | | | | | | | | |
| | ΔC/C | within +10/-20% of initial value for V _r ≤ 10V within +20/-30% of initial value for V _r ≥ 16V | | | | | | | | |
| | DF | 1.25 x initial limit | | | | | | | | |

*Initial Limit

Initial measurement max. 1hr after the removal from dry pack or after pretreatment at 85°C for 24 hours.

PRODUCT CATEGORY 5 (TEMPERATURE RANGE -55°C TO +85°C)

| TEST | Condition | Characteristics | | | | | | | |
|------------------------------|---|--|----------------------------------|-------|-------|-----------|-------|-----------|-----|
| Endurance | Determine after application of rated voltage for 2000 +48/-0 hours at 85±2°C and then leaving 1-2 hours at room temperature. Power supply impedance to be ≤ 0.1Ω/V. | Visual examination | no visible damage | | | | | | |
| | | DCL | 1.25 x initial limit | | | | | | |
| | | ΔC/C | within ±20% of initial value | | | | | | |
| | | DF | 1.5 x initial limit | | | | | | |
| | | ESR | 2 x initial limit | | | | | | |
| Storage Life | 85°C, 0V, 2000h | Visual examination | no visible damage | | | | | | |
| | | DCL | 1.25 x initial limit | | | | | | |
| | | ΔC/C | within ±20% of initial value | | | | | | |
| | | DF | 1.5 x initial limit | | | | | | |
| | | ESR | 2 x initial limit | | | | | | |
| Humidity | Determine after storage without applied voltage at 65±2°C and 95±2% relative humidity for 500hrs and then recovery 1-2 hours at room temperature. | Visual examination | no visible damage | | | | | | |
| | | DCL | 5 x initial limit | | | | | | |
| | | ΔC/C | within +40/-20% of initial value | | | | | | |
| | | DF | 1.5 x initial limit | | | | | | |
| | | ESR | 2 x initial limit | | | | | | |
| Temperature Stability | Step | Temperature°C | Duration(min) | | | | | | |
| | 1 | +20±2 | 15 | +20°C | -55°C | +20°C | +85°C | +20°C | |
| | 2 | -55+0/-3 | 15 | DCL | IL* | n/a | IL* | 10 x IL* | IL* |
| | 3 | +20±2 | 15 | ΔC/C | n/a | +0/-20% | ±5% | +20/-0% | ±5% |
| | 4 | +85+3/-0 | 15 | DF | IL* | 1.5 x IL* | IL* | 1.5 x IL* | IL* |
| | 5 | +20±2 | 15 | | | | | | |
| Surge Voltage | Test temperature: 85+3/0°C Surge voltage: 1.3x rated voltage Charge/Discharge resistance: 1000±100Ω Number of cycles: 1000x Cycle duration: 6 min; 30 sec charge, 5 min 30 sec discharge | Visual examination | no visible damage | | | | | | |
| | DCL | initial limit | | | | | | | |
| | ΔC/C | within +10/-20% of initial value for V _r ≤ 10V within +20/-30% of initial value for V _r ≥ 16V | | | | | | | |
| | DF | 1.25 x initial limit | | | | | | | |

*Initial Limit

Initial measurement max. 1hr after the removal from dry pack or after pretreatment at 85°C for 24 hours.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А