Plug - QP 1,5/ 8 - 3051179

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://phoenixcontact.com/download)

Illustration shows the product version QP 1,5/ 6

Plug, Connection method: Quick connection, Number of positions: 8, Cross section: 0.25 mm² - 1.5 mm², AWG: 24 - 16, Width: 41.6 mm, Height: 40 mm, Color: gray

Product Features

- Just like the basic terminal blocks, the plugs also offer the right connection technology for every application
- The conductor is connected using the familiar IDC connection with no stripping, therefore saving time
- Tested for railway applications
- The QP 1,5/... fast connector plug is designed for the connection of solid and stranded conductors

Key Commercial Data

Packing unit	1 pc
Weight per Piece (excluding packing)	31.01 g
Custom tariff number	85366990
Country of origin	Turkey

Technical data

General

Number of levels	1
Number of connections	8
Nominal cross section	1.5 mm²
Color	gray
Insulating material	PA
Flammability rating according to UL 94	V0
Area of application	Railway industry
	Machine building
	Plant engineering

Plug - QP 1,5/ 8 - 3051179

Technical data

General

Maximum load current	17.5 A (with 1.5 mm² conductor cross section)
Rated surge voltage	6 kV
Degree of pollution	3
Overvoltage category	III
Insulating material group	I
Connection in acc. with standard	IEC 61984
Maximum load current	17.5 A (with 1.5 mm² conductor cross section)
Nominal current I_N	17.5 A
Nominal voltage U_N	500 V

Dimensions

Width	41.6 mm
Length	20 mm
Height	40 mm
	24.00 mm
Pitch	5.20 mm

Connection data

Connection method	Quick connection
Connection in acc. with standard	IEC 61984
Conductor cross section solid min.	0.25 mm²
Conductor cross section solid max.	1.5 mm²
Conductor cross section AWG min.	24
Conductor cross section AWG max.	16
Conductor cross section flexible min.	0.25 mm²
Conductor cross section flexible max.	1.5 mm²
Min. AWG conductor cross section, flexible	24
Max. AWG conductor cross section, flexible	16
Material wire insulation	PVC / PE
Structure of individual litz in acc. with VDE 0295 / smallest wire diameter	VDE 0295 Cl.1-5
Max. wire diameter incl. insulation	3 mm

Standards and Regulations

Connection in acc. with standard	CSA
	IEC 61984
Flammability rating according to UL 94	V0

Plug - QP 1,5/ 8 - 3051179

Classifications

eCl@ss

eCl@ss 4.0	272607xx
eCl@ss 4.1	27260701
eCl@ss 5.0	27260701
eCl@ss 5.1	27260701
eCl@ss 6.0	27141120
eCl@ss 7.0	27141120
eCl@ss 8.0	27141151

ETIM

ETIM 2.0	EC000897
ETIM 3.0	EC000897
ETIM 4.0	EC002021
ETIM 5.0	EC002021

UNSPSC

UNSPSC 6.01	30211802
UNSPSC 7.0901	39121402
UNSPSC 11	39121402
UNSPSC 12.01	39121402
UNSPSC 13.2	39121402

Approvals

Approvals

Approvals

CSA / UL Recognized / cUL Recognized / GL / EAC / cULus Recognized

Ex Approvals

Approvals submitted

Approval details

Plug - QP 1,5/ 8 - 3051179

Approvals

CSA

	B	C	D
mm²/AWG/kcmil	24-16	24-16	24-16
Nominal current IN	10 A	10 A	5 A
Nominal voltage UN	300 V	300 V	600 V

UL Recognized

		B	C	D
mm²/AWG/kcmil	24-16	24-16	24-16	24-16
Nominal current IN	10 A	10 A	10 A	5 A
Nominal voltage UN	600 V	300 V	300 V	600 V

cUL Recognized

		B	C	D
mm²/AWG/kcmil	24-12	24-12	24-12	24-12
Nominal current IN	10 A	10 A	10 A	5 A
Nominal voltage UN	600 V	300 V	300 V	600 V

GL

EAC

cULus Recognized

Accessories

Accessories

Insulating sleeve

Plug - QP 1,5/ 8 - 3051179

Accessories

Insulating sleeve - MPS-IH WH - 0201663

Insulating sleeve, Color: white

Insulating sleeve - MPS-IH RD - 0201676

Insulating sleeve, Color: red

Insulating sleeve - MPS-IH BU - 0201689

Insulating sleeve, Color: blue

Insulating sleeve - MPS-IH YE - 0201692

Insulating sleeve, Color: yellow

Insulating sleeve - MPS-IH GN - 0201702

Insulating sleeve, Color: green

Plug - QP 1,5/ 8 - 3051179

Accessories

Insulating sleeve - MPS-IH GY - 0201728

Insulating sleeve, Color: gray

Insulating sleeve - MPS-IH BK - 0201731

Insulating sleeve, Color: black

Partition plate

Spacer plate - DP PS-5 - 3036725

Spacer plate, Length: 22.4 mm, Width: 5.2 mm, Height: 29 mm, Number of positions: 1, Color: red

Screwdriver tools

Screwdriver - SZF 1-0,6X3,5 - 1204517

Actuation tool, for ST terminal blocks, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip

Test plug terminal block

Plug - QP 1,5/ 8 - 3051179

Accessories

Reducing plug - RPS - 0201647

Reducing plug, Color: gray

Test plugs - MPS-MT - 0201744

Test plugs, Color: silver

Test plugs - PS-5 - 3030983

Test plugs, Color: red

Test plugs - PS-5/2,3MM RD - 3038723

Test plugs, Color: red

Drawings

Plug - QP 1,5/ 8 - 3051179

Circuit diagram

Diagram

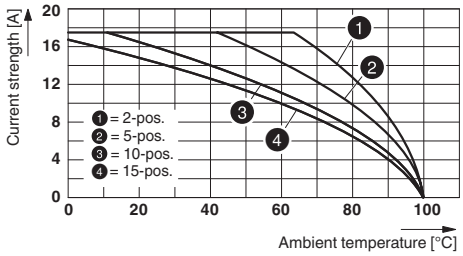

Phoenix Contact 2016 © - all rights reserved
http://www.phoenixcontact.com

OCEAN CHIPS
Океан Электроники
Поставка электронных компонентов

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «**JONHON**», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «**FORSTAR**».

AVIC JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).

FORSTAR®

Телефон: 8 (812) 309-75-97 (многоканальный)
Факс: 8 (812) 320-03-32
Электронная почта: ocean@oceanchips.ru
Web: http://oceanchips.ru/
Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А