MOTOR DISCONNECT SWITCHES

FEATURES AND BENEFITS:

- *One of the smallest 60A switches in the industry with compact design*
- *Advanced switch technology (use of silver contacts ensures safe and durable operation)*
- Across the line, motor starting - up to 75hp/600V
- General Use Rating - 25A to 150A/600V
- Available as rotary switches for extended or direct handle
- Toggle switches
- Non-fused switch
- Interrupting capacity 10kA with back-up fuse
- DIN Rail and panel mount available
- Comprehensive range of accessories includes Door Mounting Kits & Fuse Holder
- Snap on auxiliary contacts
- Enclosed switches with NEMA Type 4x rating

UL508 Listed Manual Motor Controllers

with Disconnecting Means

c UL US LISTED

AC Motor Across-The-Line
AC General Use

EXTENDED / DIRECT HANDLE MOTOR DISCONNECT SWITCH

KU/VKA switches 4-5
Extended Handle Accessories 6
Direct Handle Accessories 7

TOGGLE HANDLE MOTOR DISCONNECT SWITCH

KUE/EVA Switches and Accessories 10-11

ENCLOSED MOTOR DISCONNECT SWITCHES & FUSED ENCLOSED MOTOR DISCONNECT SWITCH (30A)

KEM Switches and Accessories 12-13
KKVM Fused Switch and Accessories 13

APPLICATION EXAMPLES

. 8-9

Extended/Direct Handle Motor Disconnect Switch

The KU/VKA...N series can be used with extended and direct handles (see page 8-9 for details).

Catalog Number	KU325N		KU340N		KU363N	
No. of Poles	3 (4 pole - KU425N)		3 (4 pole - KU440N)		3 (4 pole - KU463N)	
General Purpose Current	25A		40A		60A	
Maximum Voltage	600V AC		600V AC		600V AC	
Motor FLA @ 480V AC	17.5A		28A		34A	
Motor FLA @ 600V AC	11A		18A		27A	
Horsepower Rating /HP	1 Phase	3 Phase	1 Phase	3 Phase	1 Phase	3 Phase
110-120V AC	1	2	2	3	3	5
200V AC	2	5	3	7.5	5	10
208V AC	2	5	3	7.5	5	10
220-240V AC	3	7.5	5	10	5	10
265V AC	3	7.5	5	10	5	10
277V AC	3	7.5	5	10	7.5	10
380-415V AC	5	10	7.5	15	10	20
440-480V AC	7.5	15	10	20	15	25
550-600V AC	5	10	7.5	15	15	25
Short Circuit Withstand Rating at 600 V with Max. Fuse Size/Class:	10kA		10kA		10kA	
K5	50A		50A		60A	
RK5	50A		50A		60A (80A@480V AC)	
RK1	80A		80A		100A	
J	80A		80A		100A	
Terminal Size Acceptability (Cu Conductors only, 75°C)	14-8AWG		14-8AWG		12-4AWG	
Terminal Torque	16 lb. in.		16 lb. in.		16 lb. in.	

Dimensions

(to convert to inches multiply by 0.03937)

3 Pole

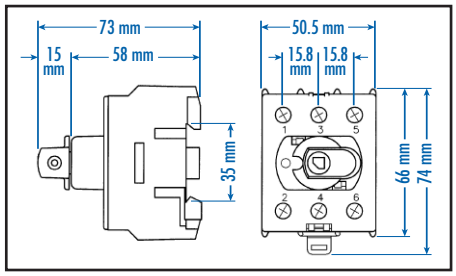

4 Pole

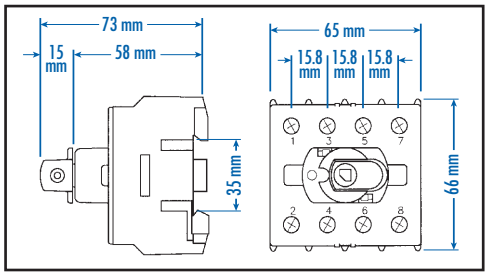

Weight	0.172Kg (0.379lb.) (3 pole) 0.215Kg (0.474lb.) (4 pole)	0.172Kg (0.379lb.) (3 pole) 0.215Kg (0.474lb.) (4 pole)	0.172Kg (0.379lb.) (3 pole) 0.215Kg (0.474lb.) (4 pole)

Suitable Accessories

Extended Handle Version/ Door Interlock Mechanism			
Shaft	L1(2,3)00AD11-ST	L1(2,3)00AD11-ST	L1(2,3)00AD11-ST
Handles	LK10 (Y/R) UL, LK11 (Y/R) U	LK10 (Y/R) UL, LK11 (Y/R) U	LK10 (Y/R) UL, LK11 (Y/R) U
Auxiliary Switch	KU1.V, KU2.V	KU1.V, KU2.V	KU1.V, KU2.V
Fuse Holder	—	KV 10x38, KV 10x38 CC	—
Direct Handle Version			
Handle for 3 Pole	K/KU3P (Y/R)	K/KU3P (Y/R)	K/KU3P (Y/R)
Handle for 4 Pole	K/KU4P (Y/R)	K/KU4P (Y/R)	K/KU4P (Y/R)
Door Mounting Kits	OKA0.V (Y/R), OKA/KU LK10 (Y/R)	OKA0.V (Y/R), OKA/KU LK10 (Y/R)	OKA0.V (Y/R), OKA/KU LK10 (Y/R)

Altech Corp.® • 35 Royal Road • Flemington, NJ 08822-6000 • Phone (908)806-9400 • FAX (908)806-9490 • www.altechcorp.com

Extended/Direct Handle Motor Disconnect Switch

Catalog Number	VKA380N		VKA3100N		VKA3125N		VKA3160N	
No. of Poles	3 (4 pole - VKA480N)		3 (4 pole - VKA4100N)		3 (4 pole - VKA4125N)		3 (4 pole - VKA4160N)	
General Purpose Current	80A		100A		125A		150A	
Maximum Voltage	600V AC		600V AC		600V AC		600V AC	
Motor FLA @ 480V AC	–		–		–		–	
Motor FLA @ 600V AC	47A		54A		68A		83A	
Horsepower Rating /HP	1 Phase	3 Phase	1 Phase	3 Phase	1 Phase	3 Phase	1 Phase	3 Phase
110-120V AC	3	7.5	3	7.5	5	10	7.5	10
200V AC	7.5	10	7.5	15	10	20	10	25
208V AC	7.5	15	7.5	15	10	20	10	25
220-240V AC	7.5	15	10	20	15	25	15	30
265V AC	10	20	10	20	15	25	20	30
277V AC	10	20	10	20	15	30	20	30
380-415V AC	15	25	15	30	20	40	25	50
440-480V AC	20	30	20	40	25	50	30	60
550-600V AC	25	40	30	50	30	60	40	75
Short Circuit Withstand Rating at 600 V with Max. Fuse Size/Class:	10kA		10kA		10kA		10kA	
K5	150A		150A		150A		150A	
RK5	150A		150A		150A		150A	
RK1	–		–		–		–	
J	200A		200A		200A		200A	
Terminal Size Acceptability (Cu Conductors only, 75°C)	4-1/0AWG		4-1/0AWG		4-1/0AWG		4-1/0AWG	
Terminal Torque	50 lb. in.		50 lb. in.		50 lb. in.		50 lb. in.	

Dimensions

(to convert to inches multiply by 0.03937)

3 Pole

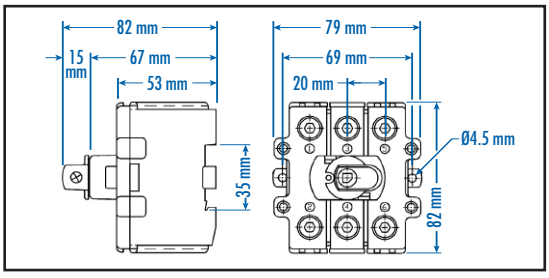

4 Pole

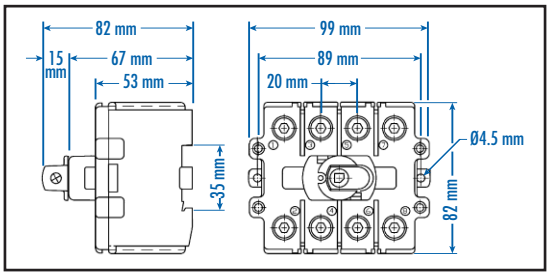

Weight	0.480Kg (1.058lb.) (3 pole) 0.620Kg (1.367lb.) (4 pole)	0.480Kg (1.058lb.) (3 pole) 0.620Kg (1.367lb.) (4 pole)	0.480Kg (1.058lb.) (3 pole) 0.620Kg (1.367lb.) (4 pole)	0.480Kg (1.058lb.) (3 pole) 0.620Kg (1.367lb.) (4 pole)

Suitable Accessories

Extended Handle Version/ Door Interlock Mechanism				
Shaft	L1(2.3)00AD11-ST	L1(2.3)00AD11-ST	L1(2.3)00AD11-ST	L1(2.3)00AD11-ST
Handles	LK10 (Y/R) UL, LK11 (Y/R) U	LK10 (Y/R) UL, LK11 (Y/R) U	LK10 (Y/R) UL, LK11 (Y/R) U	LK10 (Y/R) UL, LK11 (Y/R) U
Auxiliary Switch	VKA1V, VKA2.V	VKA1V, VKA2.V	VKA1V, VKA2.V	VKA1V, VKA2.V
Fuse Holder	–	–	–	–
Direct Handle Version				
Handle for 3 & 4 Pole	K/VKA3-4P (Y/R)	K/VKA3-4P (Y/R)	K/VKA3-4P (Y/R)	K/VKA3-4P (Y/R)
Door Mounting Kit	OKA/V LK11 (Y/R)	OKA/V LK11 (Y/R)	OKA/V LK11 (Y/R)	OKA/V LK11 (Y/R)

Extended Handle Accessories

DOOR INTERLOCK HANDLES

LK10 (Y/R) UL:
- *Single hole mounting (22.5mm)*
- *Defeatable (built-in mechanism)*

LK11 (Y/R) U:
- *Retention mechanism (only rotates 90° from off to on, keeps handle in off position while cabinet door is open)*
- *Defeatable (looses NEMA rating)*

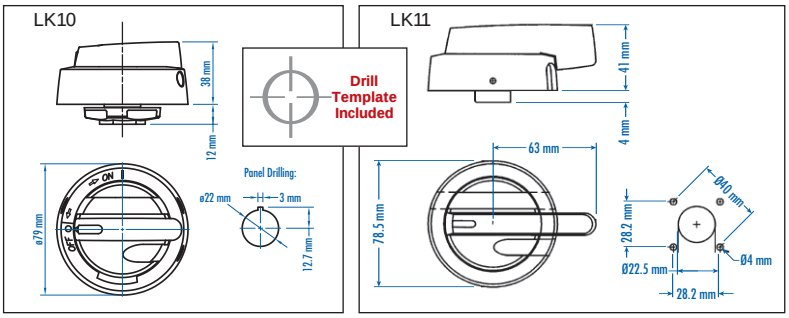

Cat. No.	LK10 UL	LK10 Y/R UL	LK11 U	LK11 Y/R U
Environmental Rating	NEMA Type 4X, IP66	NEMA Type 4X, IP66	NEMA Type 4X, IP67	NEMA Type 4X, IP67
Color	Black	Yellow/Red	Black	Yellow/Red

DOOR INTERLOCK SHAFT

The steel shaft ensures reliable operation even in the toughest conditions.

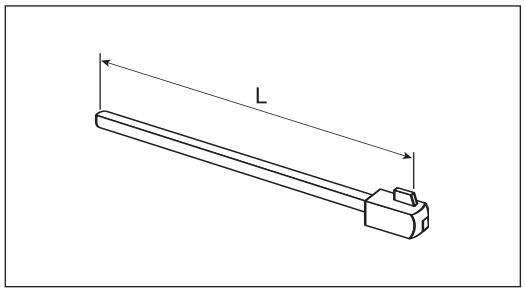

Cat. No.	L100AD11-ST	L200AD11-ST	L300AD11-ST
Length (L)	100mm	200mm	300mm
Material	Steel	Steel	Steel

AUXILIARY SWITCHES

The auxiliary switches are the snap-on type and can be retrofitted.

Cat. No.	KU1.V	KU2.V	VKA1.V	VKA2.V
Electrical Rating	10A/1/2HP/125-250V AC	10A/1/2HP/125-250V AC	10A/1/2HP/125-250V AC	10A/1/2HP/125-250V AC
No. of contacts	1n.o./1n.c.	2n.o./2n.c.	1n.o./1n.c.	2n.o./2n.c.
For Use With	KU models	KU models	VKA models	VKA models

FUSE HOLDER

This fuseholder can be retrofitted with the KU340N. Therefore design changes can be incorporated with ease to allow a fusible disconnect.

Shown with extended handle switch.

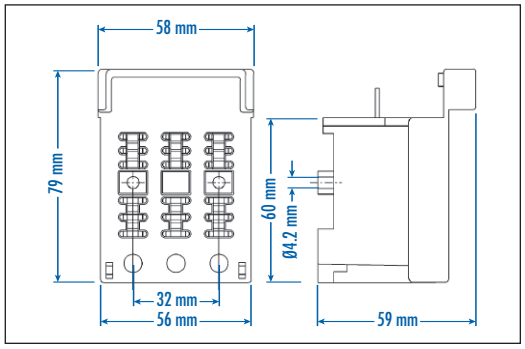

Cat. No.	KV 10x38	KV 10x38 CC
Electrical Rating	30A/600V AC	30A/600V AC
Fuse Type	10x38, Midget	Class CC
For Use With	KU340N	KU340N

Dimensions *(to convert to inches multiply by 0.03937)*

Altech Corp.® • 35 Royal Road • Flemington, NJ 08822-6000 • Phone (908)806-9400 • FAX (908)806-9490 • www.altechcorp.com

DIRECT HANDLES

Improved design with metal shaft. Use for all your "inside the panel" applications.

Cat. No.	K/KU3P	K/KU3P Y/R	K/KU4P	K/KU4P Y/R	K/VKA3-4P	K/VKA3-4P Y/R
Color	Black	Yellow/Red	Black	Yellow/Red	Black	Yellow/Red
For use with	KU models (3P)	KU models (3P)	KU models (4P)	KU models (4P)	VKA models (3/4P)	VKA models (3/4P)

Dimensions

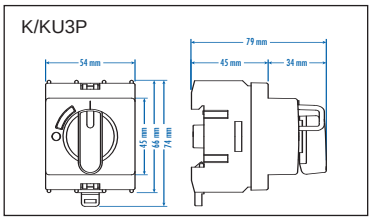

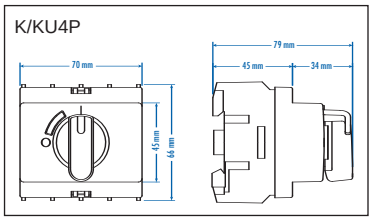

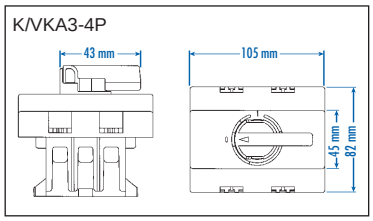

DOOR MOUNTING KITS

Designed for fast and easy assembly.

Drill Template Included

Shown with switch and display plate. (sold separately)

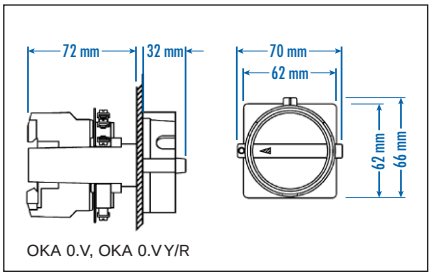

OKA 0.V, OKA 0.V Y/R

Cat. No.	OKA 0.V	OKA 0.V Y/R
Environmental Rating	IP65	IP65
Color	Black	Yellow/Red
For use with	KU models (3P)	KU models (3P)

Shown with switch and display plate. (sold separately)

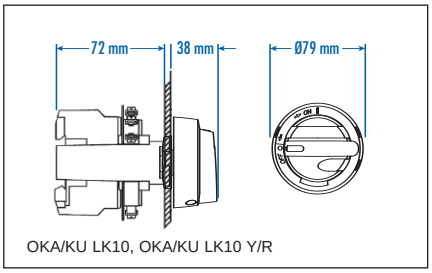

OKA/KU LK10, OKA/KU LK10 Y/R

Cat. No.	OKA/KU LK10	OKA/KU LK10 Y/R
Environmental Rating	NEMA Type 4X, IP66	NEMA Type 4X, IP66
Color	Black	Yellow/Red
For use with	KU models (3P)	KU models (3P)



Shown with switch. (sold separately)

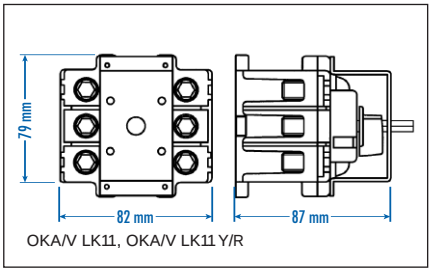

OKA/V LK11, OKA/V LK11 Y/R

Cat. No.	OKA/V LK11	OKA/V LK11 Y/R
Environmental Rating	NEMA Type 4X, IP67	NEMA Type 4X, IP67
Color	Black	Yellow/Red
For use with	VKA models (3P)	VKA models (3P)

MOUNTING ALTERNATIVES - ALUMINUM DIN RAIL

Panel mount option for small Disconnect Switches.

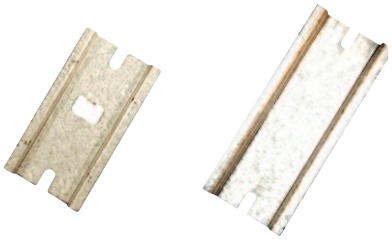

Cat. No.	RKA 3P	RKA 4P
For Use With	KU325/40/63N	KU425/40/63N

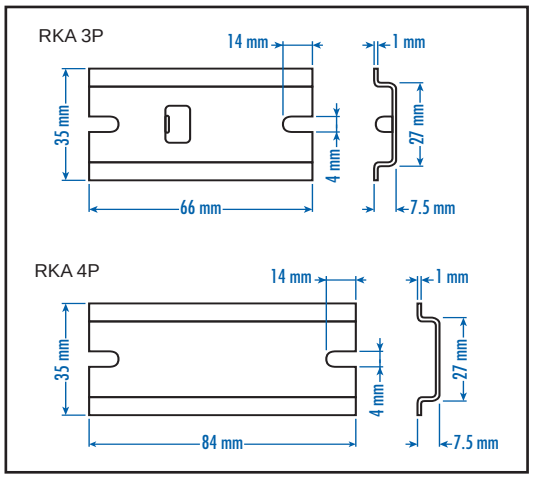

NOTE:

In the rare case that your mounting hardware (screws) for DIN Rail interfere with the enforcement studs in the back of the Motor Disconnect Switch please use smaller (≤M3 or equivalent) flathead screws or change your DIN Rail to the 15mm high version.

Dimensions *(to convert to inches multiply by 0.03937)*

Direct Handle
Motor Disconnect Switch

Used when a switch is required within a panel.

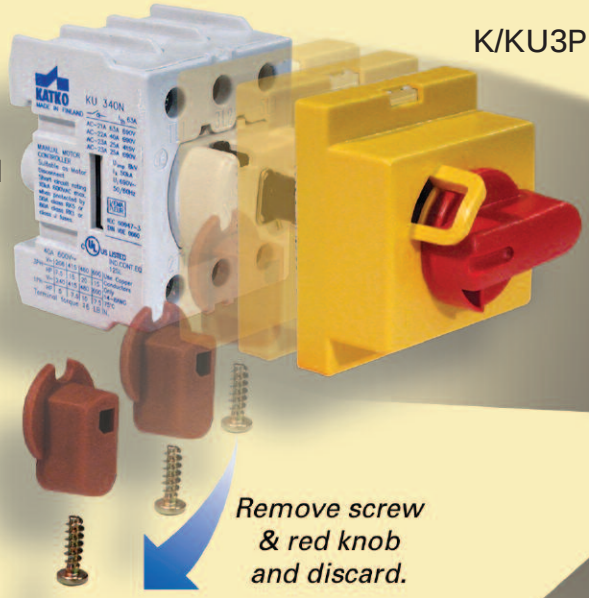

Toggle Handle
Motor Disconnect Switch

Used when a switch is required within a panel.

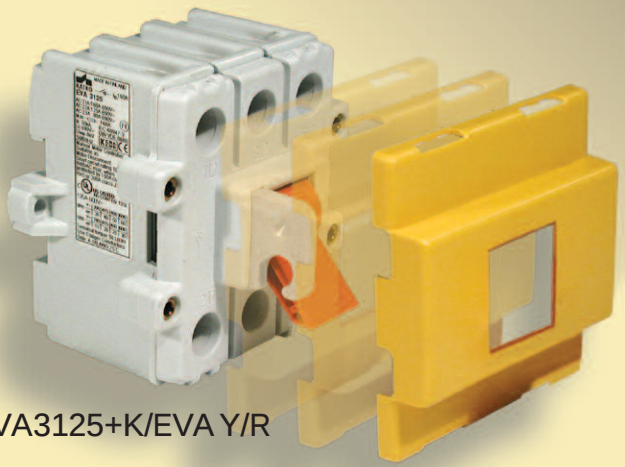

Altech is a leading supplier of circuit protection devices and terminal blocks.

Application Examples

Extended Handle Motor Disconnect Switch

Used when the door interlocking feature is required.

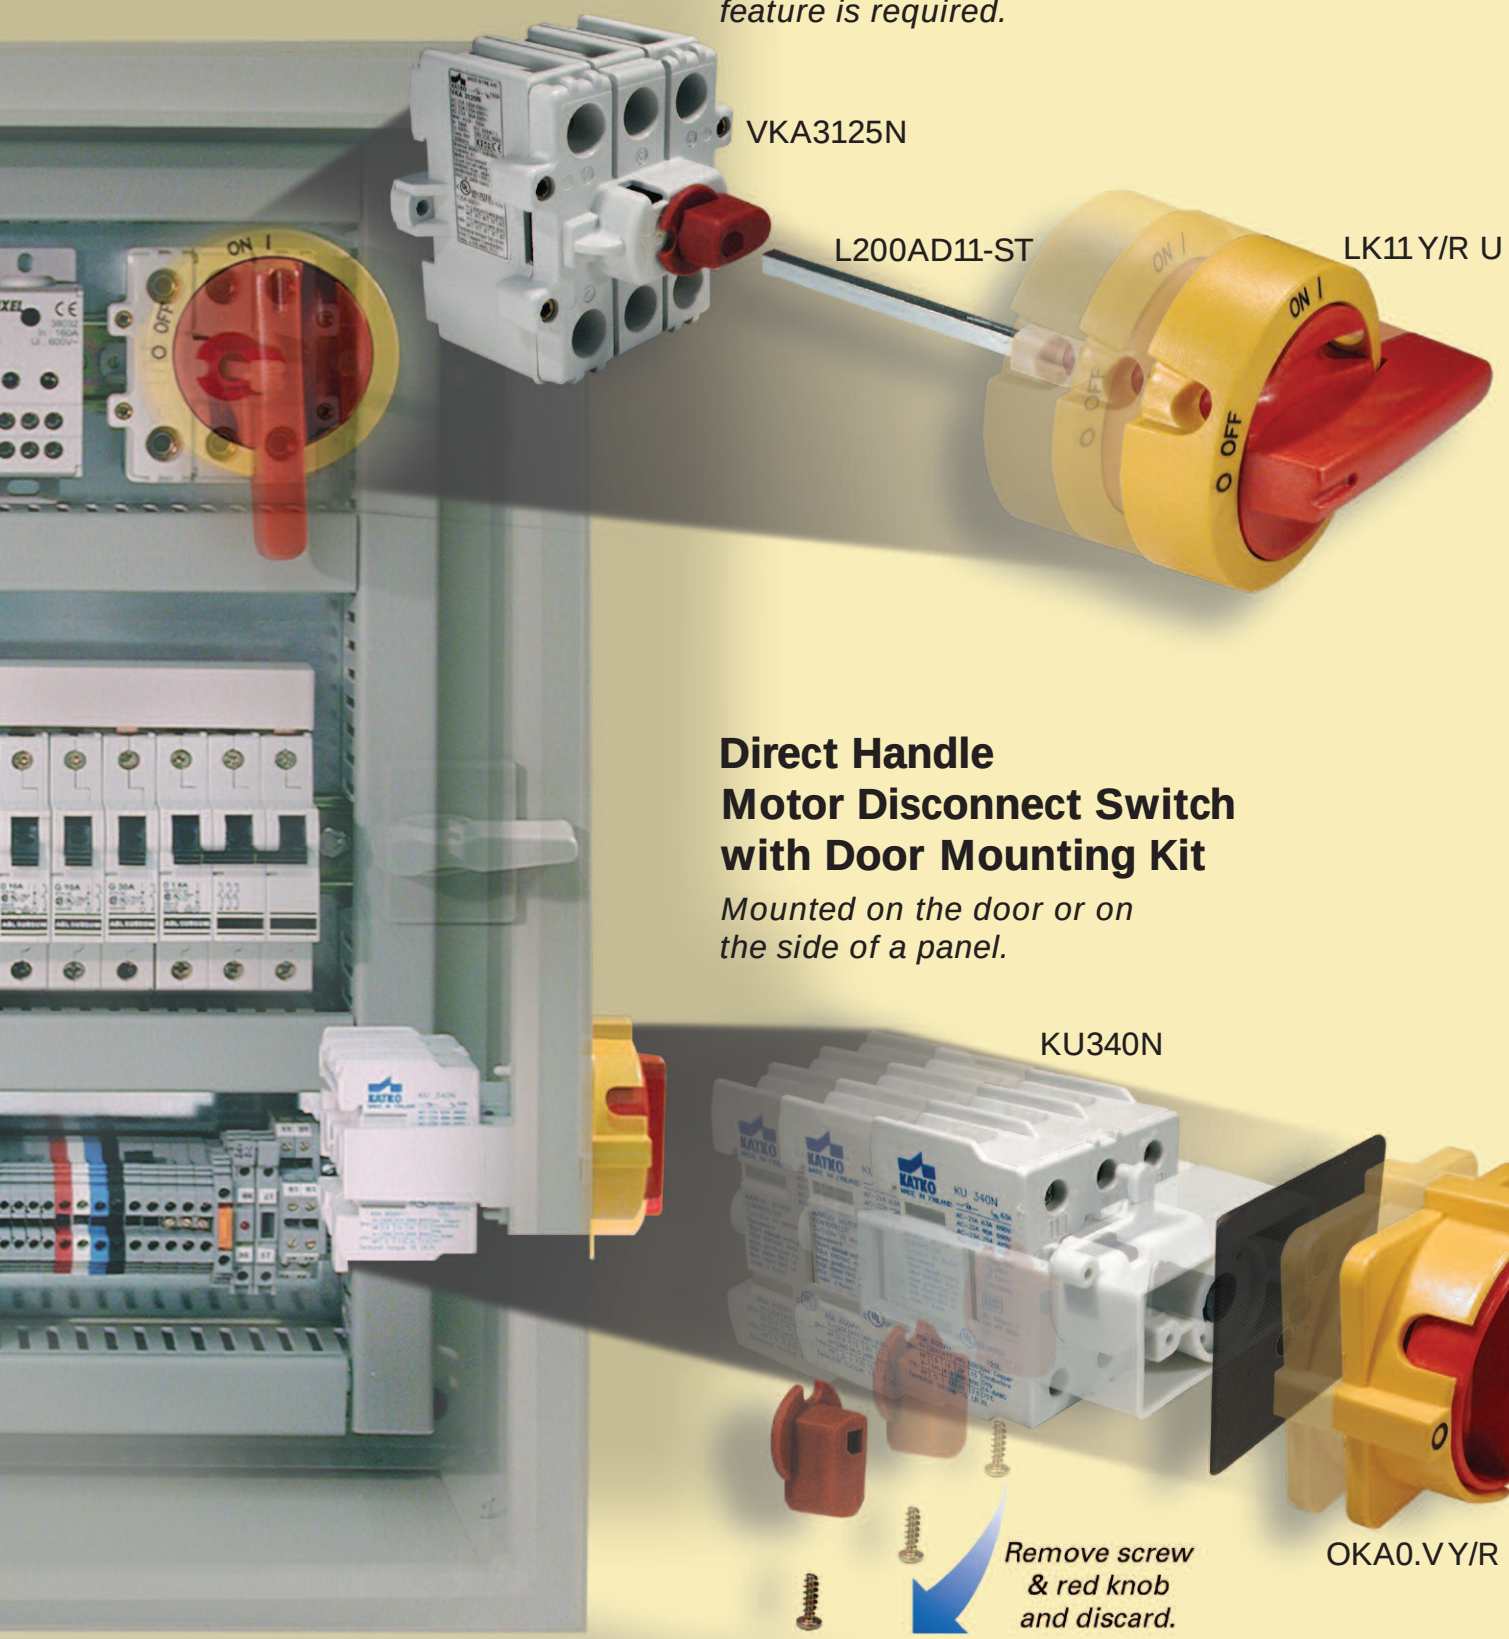

Direct Handle Motor Disconnect Switch with Door Mounting Kit

Mounted on the door or on the side of a panel.

Toggle Handle Motor Disconnect Switch

The KUE series only requires an additional cover plate (see below) which makes the switch IP20 touch proof.

Catalog Number	KUE325		KUE340		KUE363	
No. of Poles	3		3		3	
General Purpose Current	25A		40A		60A	
Maximum Voltage	600V AC		600V AC		600V AC	
Motor FLA @ 480V AC	17.5A		28A		34A	
Motor FLA @ 600V AC	11A		18A		27A	
Horsepower Rating /HP	1 Phase	3 Phase	1 Phase	3 Phase	1 Phase	3 Phase
110-120V AC	1	2	2	3	3	5
200V AC	2	5	3	7.5	5	10
208V AC	2	5	3	7.5	5	10
220-240V AC	3	7.5	5	10	5	10
265V AC	3	7.5	5	10	5	10
277V AC	3	7.5	5	10	7.5	10
380-415V AC	5	10	7.5	15	10	20
440-480V AC	7.5	15	10	20	15	25
550-600V AC	5	10	7.5	15	15	25
Short Circuit Withstand Rating at 600 V with Max. Fuse Size/Class:	10kA		10kA		10kA	
K5	50A		50A		60A	
RK5	50A		50A		60A (80A@480V AC)	
RK1	80A		80A		100A	
J	80A		80A		100A	
Terminal Size Acceptability (Cu Conductors only, 75°C)	14-8AWG		14-8AWG		12-4AWG	
Terminal Torque	16 lb. in.		16 lb. in.		16 lb. in.	

Dimensions

(to convert to inches multiply by 0.03937)

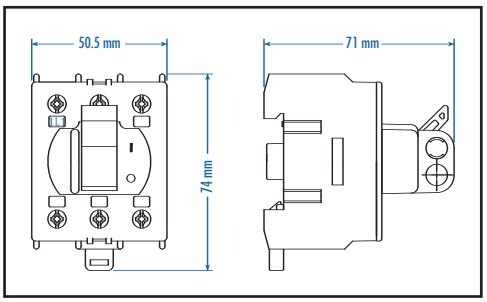

Weight	0.172Kg (0.379lb.)	0.172Kg (0.379lb.)	0.172Kg (0.379lb.)

Suitable Accessories

Cover Plate

Cat. No.	K/KUE	K/KUEY	R/KUE	R/KUEY
Color	Grey	Yellow	Grey	Yellow
Shape	Rectangular	Rectangular	Circular	Circular

Altech Corp.® • 35 Royal Road • Flemington, NJ 08822-6000 • Phone (908)806-9400 • FAX (908)806-9490 • www.altechcorp.com

Toggle Handle Motor Disconnect Switch

The EVA series includes a cover plate.

Catalog Number								
White Cover/ White Handle	EVA380 + K/EVA		EVA3100 + K/EVA		EVA3125 + K/EVA		EVA3160 + K/EVA	
Yellow Cover/ Red Handle	EVA380 + K/EVA Y/R		EVA3100 + K/EVA Y/R		EVA3125 + K/EVA Y/R		EVA3160 + K/EVA Y/R	
No. of Poles	3		3		3		3	
General Purpose Current	80A		100A		125A		150A	
Maximum Voltage	600V AC		600V AC		600V AC		600V AC	
Motor FLA @ 480V AC	—		–		–		–	
Motor FLA @ 600V AC	47A		54A		68A		83A	
Horsepower Rating /HP	1 Phase	3 Phase	1 Phase	3 Phase	1 Phase	3 Phase	1 Phase	3 Phase
110-120V AC	3	7.5	3	7.5	5	10	7.5	10
200V AC	7.5	10	7.5	15	10	20	10	25
208V AC	7.5	15	7.5	15	10	20	10	25
220-240V AC	7.5	15	10	20	15	25	15	30
265V AC	10	20	10	20	15	25	20	30
277V AC	10	20	10	20	15	30	20	30
380-415V AC	15	25	15	30	20	40	25	50
440-480V AC	20	30	20	40	25	50	30	60
550-600V AC	25	40	30	50	30	60	40	75
Short Circuit Withstand Rating at 600 V with Max. Fuse Size/Class:	10kA		10kA		10kA		10kA	
K5	150A		150A		150A		150A	
RK5	150A		150A		150A		150A	
RK1	—		–		–		–	
J	200A		200A		200A		200A	
Terminal Size Acceptability (Cu Conductors only, 75°C)	4-1/0AWG		4-1/0AWG		4-1/0AWG		4-1/0AWG	
Terminal Torque	50 lb. in.		50 lb. in.		50 lb. in.		50 lb. in.	

Dimensions

(to convert to inches multiply by 0.03937)

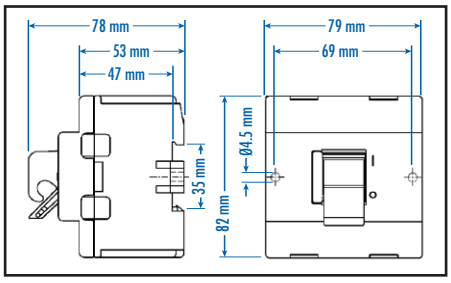

Weight	0.480Kg (1058lb.) (3 pole)	0.480Kg (1058lb.) (3 pole)	0.480Kg (1058lb.) (3 pole)	0.480Kg (1058lb.) (3 pole)

Enclosed Motor Disconnect Switch

These enclosed switches can be used locally at the motor.

Catalog Number

Black Handle Yellow/ Red Handle	KEM325UL KEM325ULY/R		KEM340UL KEM340ULY/R		KEM360UL KEM360ULY/R		KEM380UL KEM380ULY/R	
No. of Poles	3*		3*		3*		3*	
General Purpose Current	25A		40A		60A		80A	
Maximum Voltage	600V AC		600V AC		600V AC		600V AC	
Motor FLA @ 480V AC	17.5A		28A		34A		–	
Motor FLA @ 600V AC	11A		18A		27A		47A	
Horsepower Rating /HP	1 Phase	3 Phase	1 Phase	3 Phase	1 Phase	3 Phase	1 Phase	3 Phase
110-120V AC	1	2	2	3	3	5	3	7.5
200V AC	2	5	3	7.5	5	10	7.5	10
208V AC	2	5	3	7.5	5	10	7.5	15
220-240V AC	3	7.5	5	10	5	10	7.5	15
265V AC	3	7.5	5	10	5	10	10	20
277V AC	3	7.5	5	10	7.5	10	10	20
380-415V AC	5	10	7.5	15	10	20	15	25
440-480V AC	7.5	15	10	20	15	25	20	30
550-600V AC	5	10	7.5	15	15	25	25	40
Short Circuit Withstand Rating at 600 V with Max. Fuse Size/Class:	10kA		10kA		10kA		10kA	
K5	50A		50A		60A		150A	
RK5	50A		50A		60A (80A@480V AC)		150A	
RK1	80A		80A		100A		—	
J	80A		80A		100A		200A	
Terminal Size Acceptability (Cu Conductors only, 75°C)	14-8AWG		14-8AWG		12-4AWG		4-1/0AWG	
Terminal Torque	16 lb. in.		16 lb. in.		16 lb. in.		50 lb. in.	
Environmental Rating	NEMA Type 4X		NEMA Type 4X		NEMA Type 4X		NEMA Type 4X	
Enclosure Type Used	U2		U3		U3		U3	

Dimensions

(to convert to inches multiply by 0.03937)

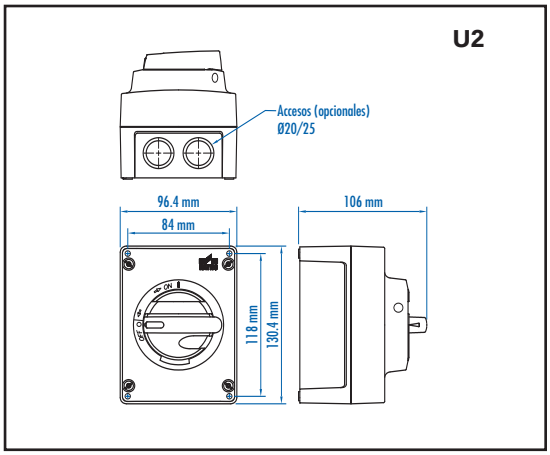

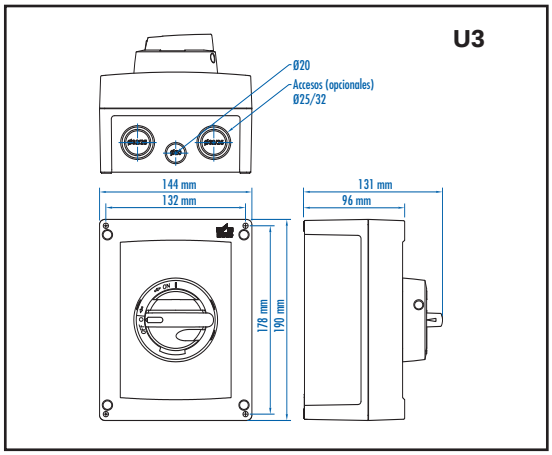

Weight	0.49kg (1.08 lb.)	0.72kg (1.587 lb.)	0.773kg (1.698 lb.)	1.021kg (2.249 lb.)

Suitable Accessories

Auxiliary Contacts	KU1V, KU2.V	KU1V, KU2.V	KU1V, KU2.V	VKA1V, VKA2.V

*Also available in 4 pole models. Contact Altech for part numbers.

Altech Corp.® • 35 Royal Road • Flemington, NJ 08822-6000 • Phone (908)806-9400 • FAX (908)806-9490 • www.altechcorp.com

KEM3100L
KEM3100L Y/R

3*	
100A	
600V AC	
–	
54A	

1 Phase	3 Phase
3	7.5
7.5	15
7.5	15
10	20
10	20
10	20
15	30
20	40
30	50

10kA
150A
150A
–
200A
4-1/0AWG
50 lb. in.
NEMA Type 4X
MF10

KEM3125L
KEM3125L Y/R

3*	
125A	
600V AC	
–	
68A	

1 Phase	3 Phase
5	10
10	20
10	20
15	25
15	25
15	30
20	40
30	50
30	60

10kA
150A
150A
–
200A
4-1/0AWG
50 lb. in.
NEMA Type 4X
MF10

KEM3150L
KEM3150L Y/R

3*	
150A	
600V AC	
–	
83A	

1 Phase	3 Phase
7.5	10
10	25
10	25
15	30
20	30
20	30
25	50
30	60
40	75

10kA
150A
150A
–
200A
4-1/0AWG
50 lb. in.
NEMA Type 4X
MF11UL

FUSED

KKVM332, KKVM332CC
KKVM332 Y/R, KKVM332CC Y/R

3	
30A	
600V AC	

Cat. No.	Fuse Type
KKVM 332 (Y/R)	10x38, Midget
KKVM 332CC (Y/R)	Class CC

10kA
50A
50A
80A
80A
14-8AWG
16 lb. in.
NEMA Type 4X
U3

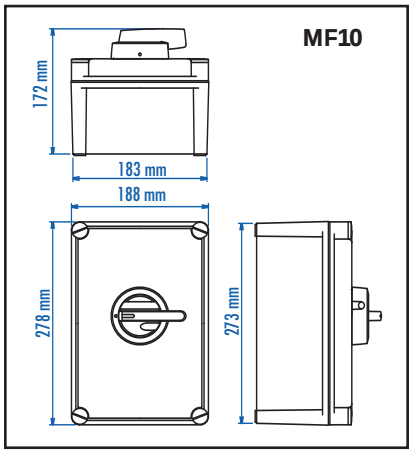

1.9051kg (4.2 lb.)

VKA1V, VKA2.V

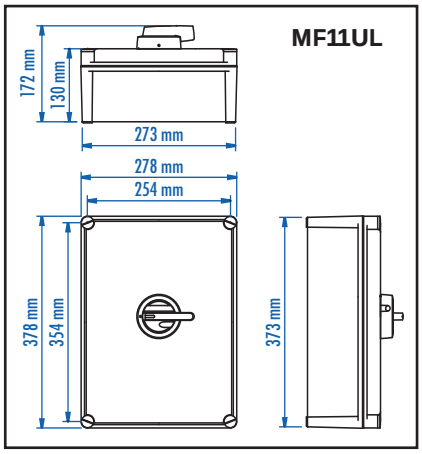

1.9051kg (4.2 lb.)

VKA1V, VKA2.V

2.8351kg (6.25 lb.)

VKA1V, VKA2.V

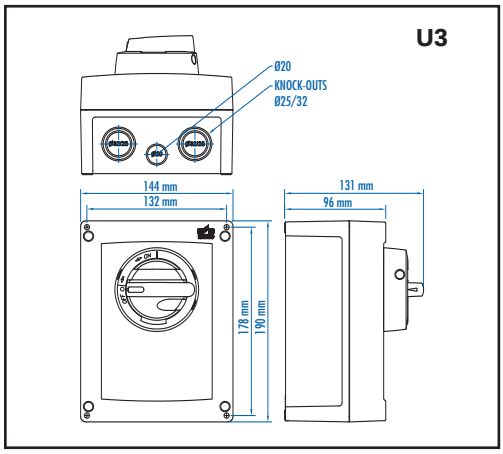

0.998kg (2.2 lb.)

KU1V, KU2.V

Stainless Steel Enclosed Motor Disconnect Switch

These enclosures are ideal where chemicals are used for cleaning and maintenance such as food processing plants and breweries. Mining is another application area. Their stainless steel construction is extremely resistant to corrosion, and the enclosure is also rated to IP66.

Catalog Number		
Black Handle	KER325UL	KER340UL
Yellow/ Red Handle	KER325UL Y/R	KER340UL Y/R
No. of Poles	3*	3*
General Purpose Current	25A	40A
Maximum Voltage	600V AC	600V AC
Motor FLA @ 480V AC	17.5A	28A
Motor FLA @ 600V AC	11A	18A

Horsepower Rating /HP	1 Phase	3 Phase	1 Phase	3 Phase
110-120V AC	1	2	2	3
200V AC	2	5	3	7.5
208V AC	2	5	3	7.5
220-240V AC	3	7.5	5	10
265V AC	3	7.5	5	10
277V AC	3	7.5	5	10
380-415V AC	5	10	7.5	15
440-480V AC	7.5	15	10	20
550-600V AC	5	10	7.5	15

Short Circuit Withstand Rating at 600 V with Max. Fuse Size/Class:	10kA	10kA
K5		
RK5	50A	50A
RK1	50A	50A
J	80A	80A
	80A	80A
Terminal Size Acceptability		
(Cu Conductors only, 75°C)	14-8AWG	14-8AWG
Terminal Torque		
Environmental Rating	16 lb. in.	16 lb. in.
Enclosure Type Used	NEMA Type 4X	NEMA Type 4X
	H23	H23

Dimensions

(to convert to inches multiply by 0.03937)

H23

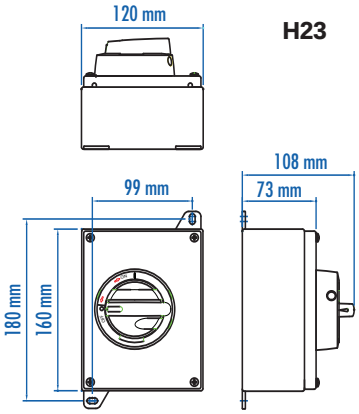

Weight	1.2kg (2.646 lb)	1.2kg (2.646 lb)

Suitable Accessories

Auxiliary Contacts	KU1V, KU2.V	KU1V, KU2.V

*Also available in 4 pole models. Contact Altech for part numbers.

Altech Corp.® • 35 Royal Road • Flemington, NJ 08822-6000 • Phone (908)806-9400 • FAX (908)806-9490 • www.altechcorp.com

KER360UL KER360UL Y/R
3*
60A
600V AC
34A
27A

1 Phase	3 Phase
3	5
5	10
5	10
5	10
5	10
7.5	10
10	20
15	25
15	25

10kA
60A
60A (80A@480V AC)
100A
100A

12-4AWG
16 lb. in.
NEMA Type 4X
H32

KER380UL KER380UL Y/R
3*
80A
600V AC
–
47A

1 Phase	3 Phase
3	7.5
7.5	10
7.5	15
7.5	15
10	20
10	20
10	20
15	25
20	30
25	40

10kA
150A
150A
—
200A

4-1/0AWG
50 lb. in.
NEMA Type 4X
H32

KER3100UL KER3100UL Y/R
3*
100A
600V AC
–
54A

1 Phase	3 Phase
3	7.5
7.5	15
7.5	15
10	20
10	20
10	20
15	30
20	40
30	50

10kA
150A
150A
–
200A

4-1/0AWG
50 lb. in.
NEMA Type 4X
H32

KER3125UL KER3125UL Y/R
3*
125A
600V AC
–
68A

1 Phase	3 Phase
5	10
10	20
10	20
15	25
15	25
15	30
20	40
30	50
30	60

10kA
150A
150A
–
200A

4-1/0AWG
50 lb. in.
NEMA Type 4X
H32

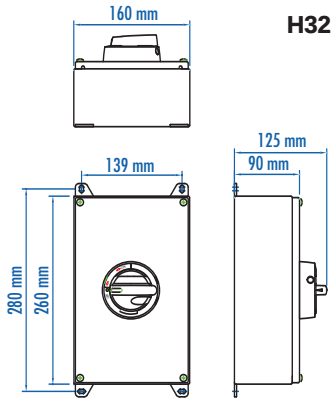

H32

2.3kg (5.071 lb..)
KU1V, KU2.V

1.021kg (2.249 lb.)
VKA1V, VKA2.V

1.9051kg (4.2 lb.)
VKA1V, VKA2.V

1.9051kg (4.2 lb.)
VKA1V, VKA2.V

Part Number	Page
EVA3100 + K/EVA	11
EVA3100 + K/EVA Y/R	11
EVA3125 + K/EVA	11
EVA3125 + K/EVA Y/R	11
EVA3160 + K/EVA	11
EVA3160 + K/EVA Y/R	11
EVA380 + K/EVA	11
EVA380 + K/EVA Y/R	11
K/KU3P	7
K/KU3P Y/R	7
K/KU4P	7
K/KU4P Y/R	7
K/KUE	10
K/KUE Y	10
K/VKA3-4P	7
K/VKA3-4P Y/R	7
KEM3100L	13
KEM3100L Y/R	13
KEM3125L	13
KEM3125L Y/R	13
KEM3150L	13
KEM3150L Y/R	13
KEM325UL	12
KEM325UL Y/R	12
KEM340UL	12
KEM340UL Y/R	12
KEM360UL	12
KEM360UL Y/R	12
KEM380UL	12
KEM380UL Y/R	12
KER325UL	14
KER325UL Y/R	14
KER340UL	14
KER340UL Y/R	14
KER360UL	15
KER360UL Y/R	15
KER380UL	15
KER380UL Y/R	15
KER3100UL	15
KER3100UL Y/R	15
KER3125UL	15
KER3125UL Y/R	15
KKVM322	13
KKVM322 Y/R	13
KKVM322CC	13
KKVM322CC Y/R	13
KU1.V	6
KU2.V	6
KU325N	4
KU340N	4
KU363N	4
KUE325	10
KUE340	10
KUE363	10
KV 10x38	6
KV 10x38 CC	6
L100AD11-ST	6
L200AD11-ST	6
L300AD11-ST	6
LK10 UL	6
LK10 Y/R UL	6
LK11 U	6
LK11 Y/R U	6
OKA 0.V	7
OKA 0.V Y/R	7
OKA/KU LK10	7
OKA/KU LK10 Y/R	7
OKA/V LK11	7
OKA/V LK11 Y/R	7
R/KUE	10
R/KUE Y	10
RKA 3P	7
RKA 4P	7
VKA1.V	6
VKA2.V	6
VKA3100N	5
VKA3125N	5
VKA3160N	5
VKA380N	5

OCEAN CHIPS
Океан Электроники
Поставка электронных компонентов

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «**JONHON**», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «**FORSTAR**».

AVIC JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).

FORSTAR®

Телефон: 8 (812) 309-75-97 (многоканальный)
Факс: 8 (812) 320-03-32
Электронная почта: ocean@oceanchips.ru
Web: http://oceanchips.ru/
Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А